

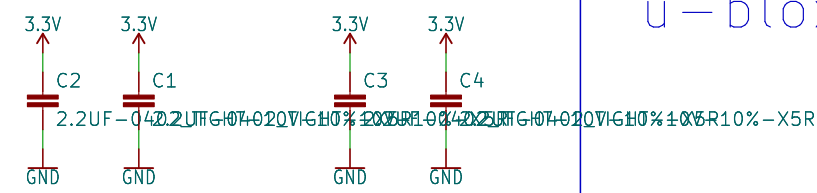


Power Switching

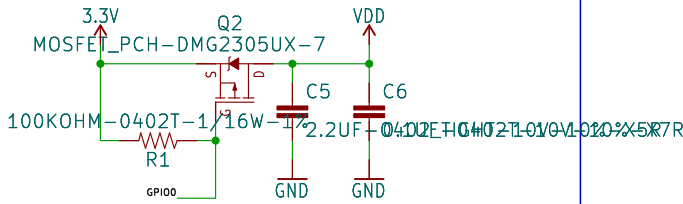

Back-Up Voltage

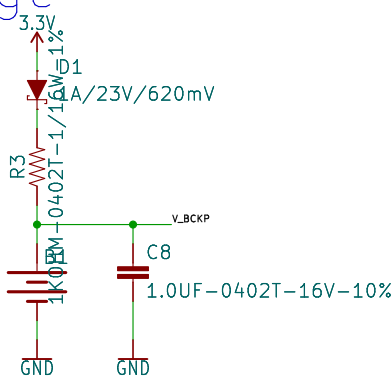


Antenna


RF Track Impedance: Coplanar Waveguide with Ground Calculations
<https://chemandy.com/calculators/coplanar-waveguide-with-ground-calculator.htm>

JLCPCB JLC7628 4-Layer 0.8mm Impedance Control Stackup (Er = 4.6)



Ground is on layer 2.
Prepreg thickness: 0.2mm
12 mil track with 4 mil gap = 49.5 Ohms

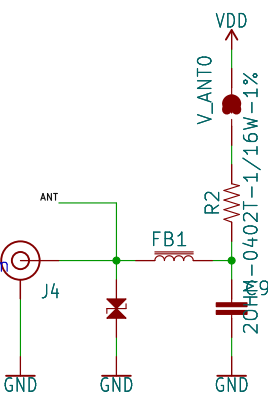

Test Points



smôl Connectors

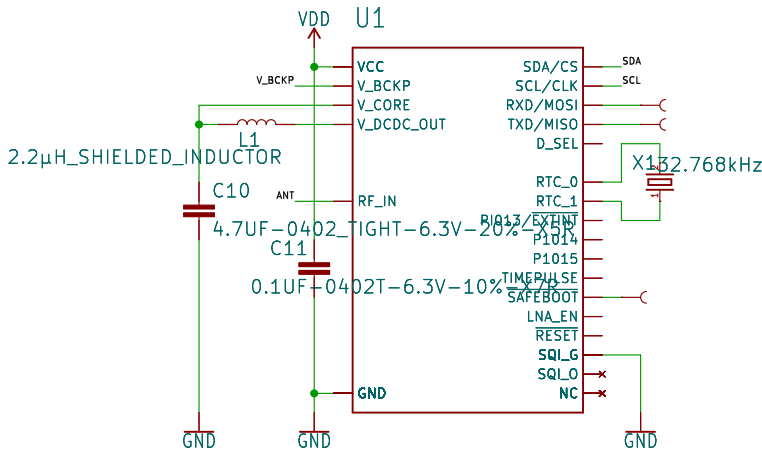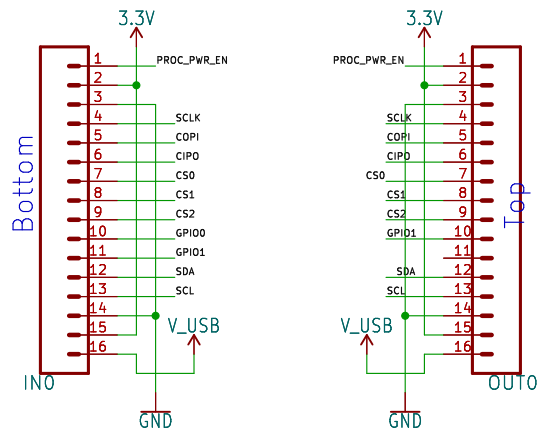

VCC Range: 1.89 – 3.6V
I2C Address: 0x42



Released under the Creative Commons Attribution Share-Alike 4.0 License https://creativecommons.org/licenses/by-sa/4.0/			Special Instructions
TITLE: \${PROJECTNAME}			
Design by: Paul Clark		REV:	
Date: \${CURRENT_DATE}		Sheet: \${#}/\${##}	
Size: User			Rev:
KiCad E.D.A. kicad-cli 7.0.6-7.0.6-ubuntu22.04.1			Id: 1/1