


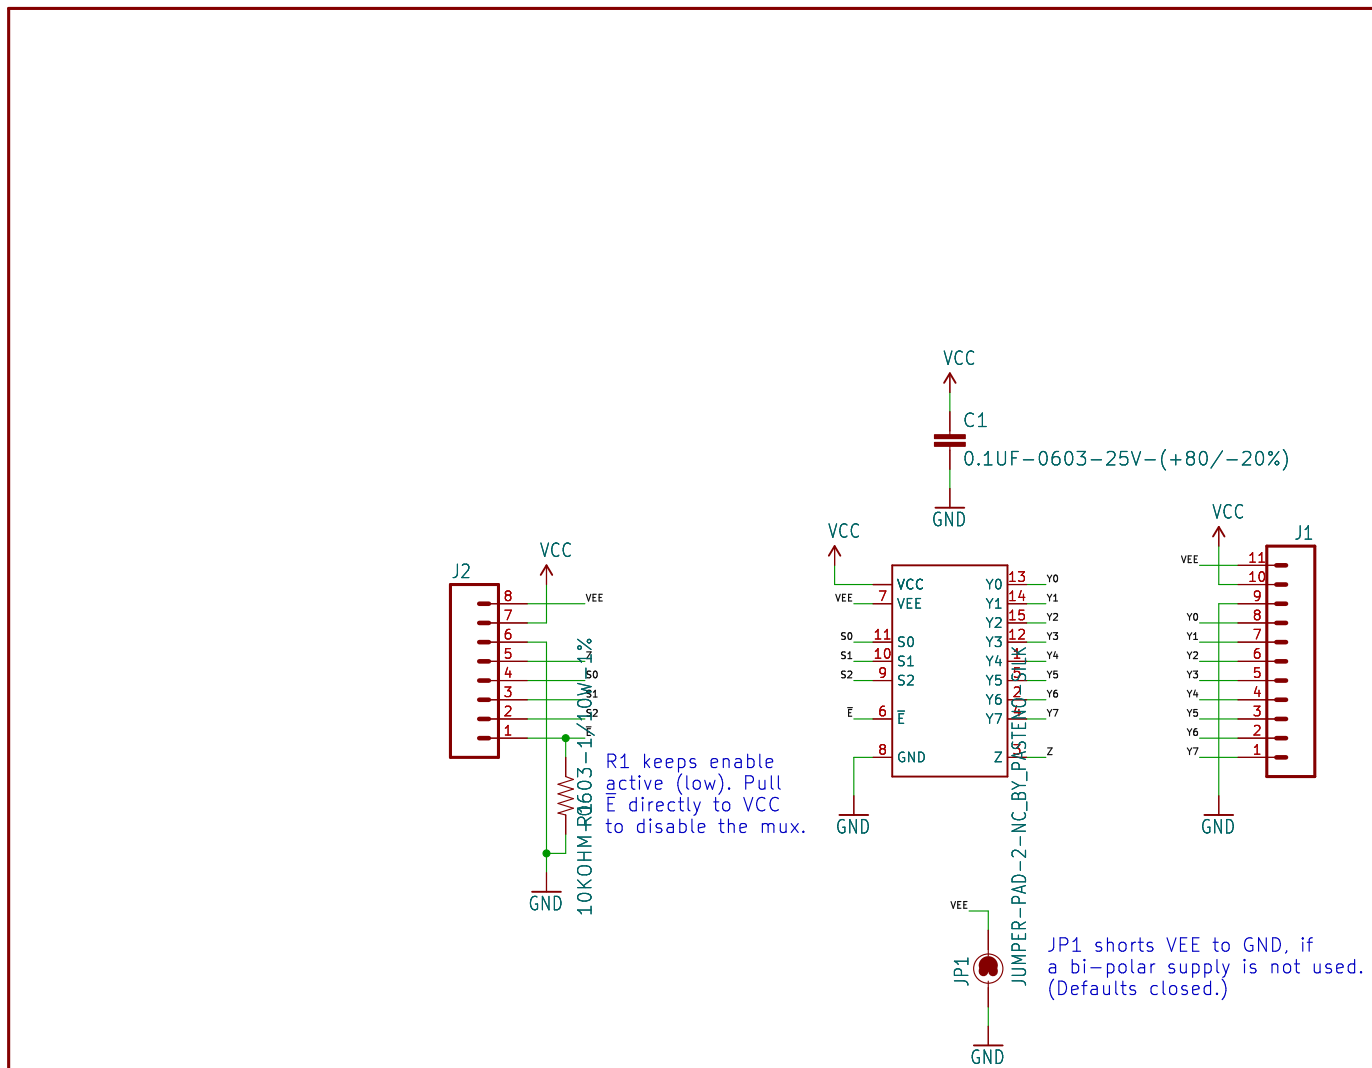

R1 keeps enable active (low). Pull E directly to VCC to disable the mux.

JP1 shorts VEE to GND, if a bi-polar supply is not used. (Defaults closed.)

VCC/VEE/GND Range

	Min	Typ	Max
VCC=GND	2.0	5.0	10.0
VCC=VEE	2.0	5.0	10.0

Example Supplies

VCC	VEE	GND
5V	0V	0V
10V	0V	0V
+5V	-5V	0V
+2V	-8V	0V



Released under the Creative Commons Attribution Share-Alike 4.0 License
<https://creativecommons.org/licenses/by-sa/4.0/>

TITLE: \${PROJECTNAME}

Design by: Jim Lindblom

REV: v1.0

Date: \${CURRENT_DATE}

Sheet: \${#}/\${##}

Size: User

Date:

Rev:

KiCad E.D.A.

eeschema 7.0.6

Id: 1/1