




SMD Header




PTH Header



LED

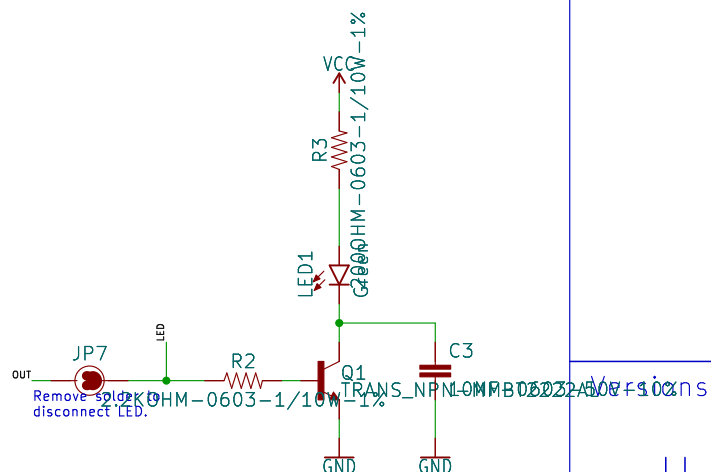

Capacitive Touch

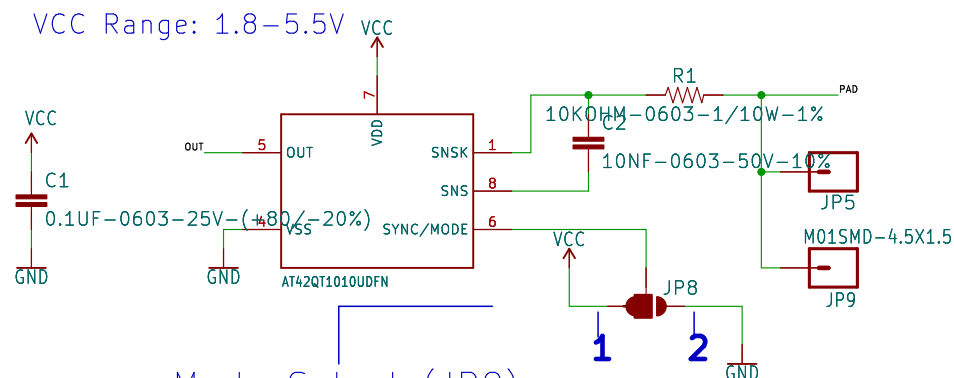

Mode Select (JP8):
AT42QT -1010/1011

1	Fast mode Fast response time: 1ms delay between samples. (200μA – 750μA draw)
2	Low power mode Slower response time: 80ms sleep at end of sample, temporarily switches to fast mode upon detection. (15μA – 75μA draw)



open hardware



Special Instructions

Released under the Creative Commons
Attribution Share-Alike 4.0 License
<https://creativecommons.org/licenses/by-sa/4.0/>

TITLE: \${PROJECTNAME}

Design by: Shawn Hymel
Revised by: Elias Santistevan

REV:
v20

Date: $\{\text{CURRENT_DATE}\}$

Sheet: $\$ \{ \# \} / \$ \{ \#\# \}$

Size: User	Date:
KiCad E.D.A. eeschema 7.0.6	

Rev:
Id: 1/1