


SAMD21G


RESET

MOMENTARY - SWITCH - SPST - SMD - RIGHT - ANGLE - 0603 - 1/10W - 1%

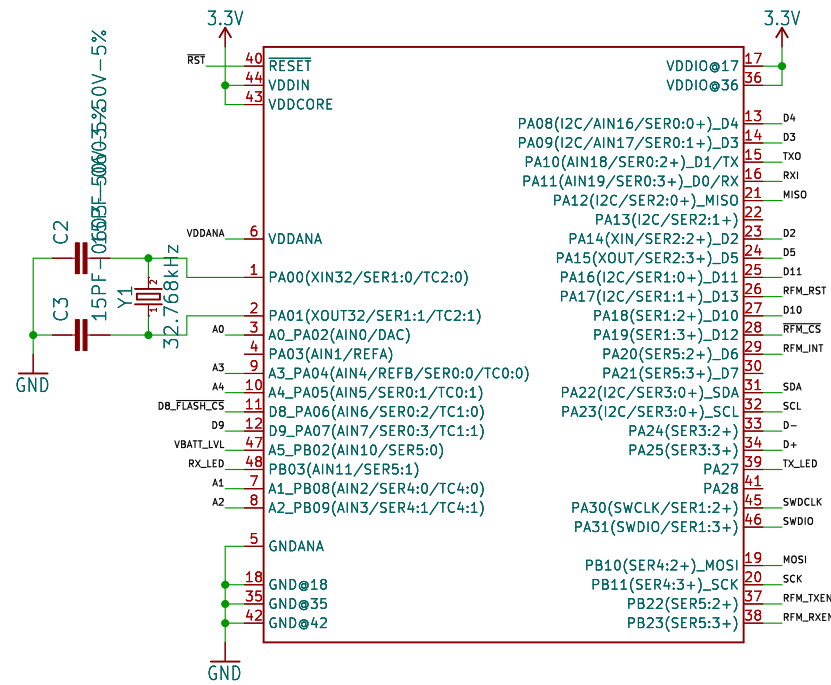


POWER


Max Voltage Input: 20VDC
Max Current Output: 800mA

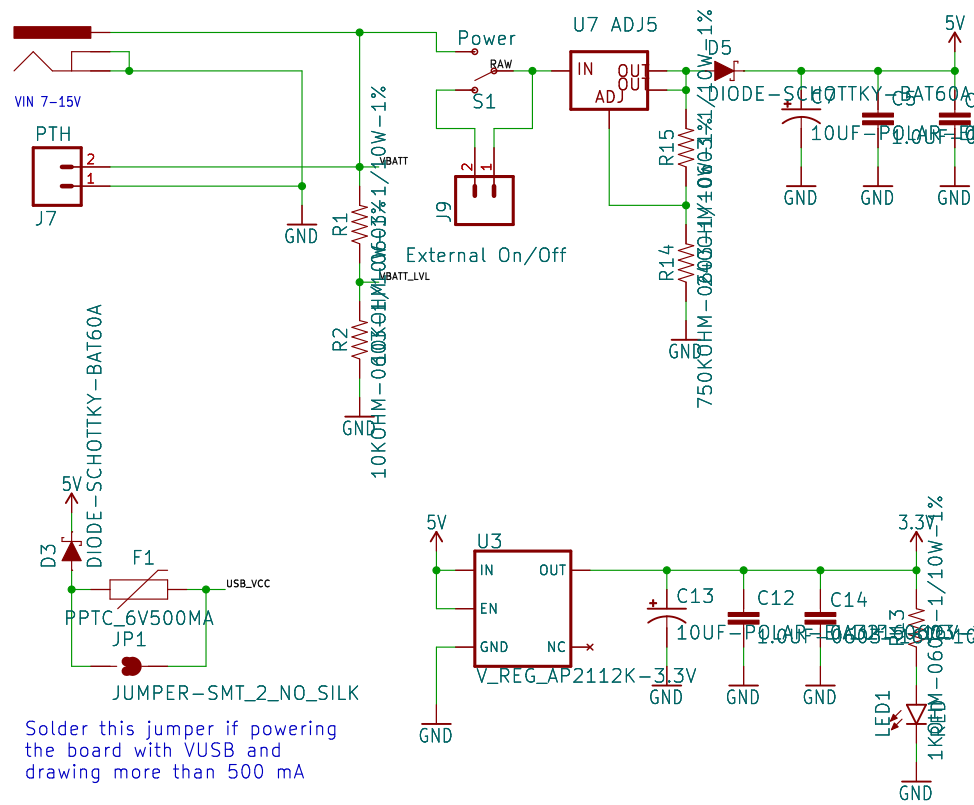


E19-915MS1W

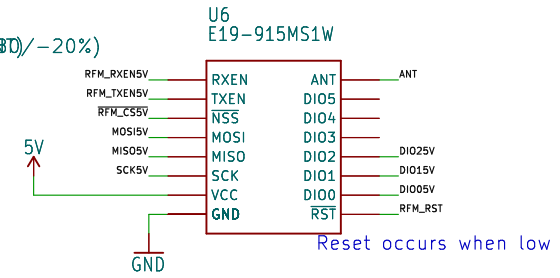


Level Shifters

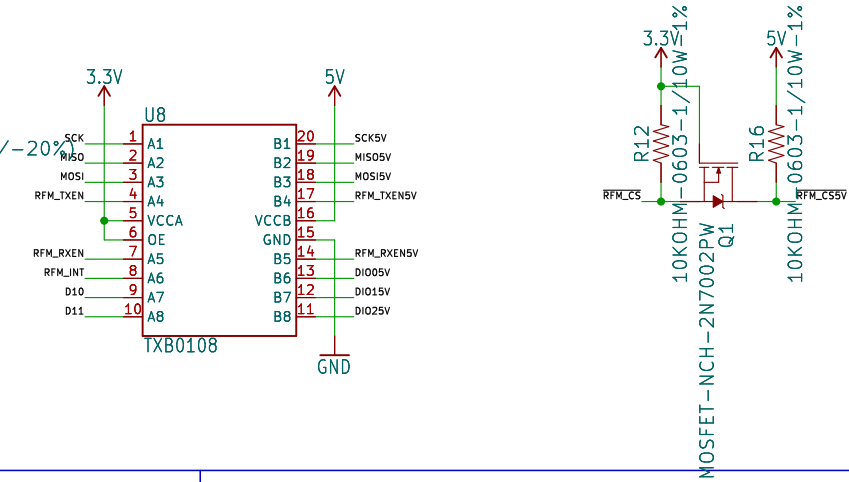


Decoupling

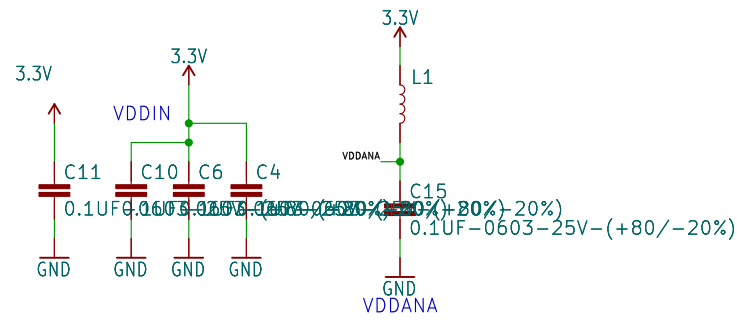


LIPO CHARGER

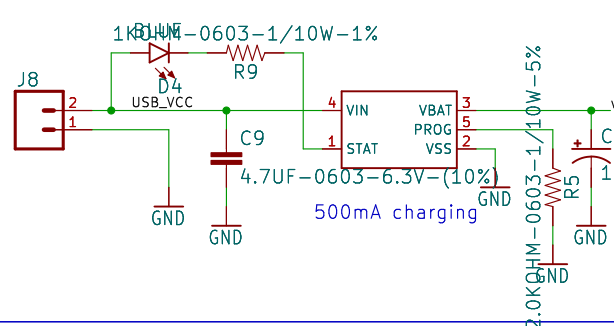


FLASH MEMORY

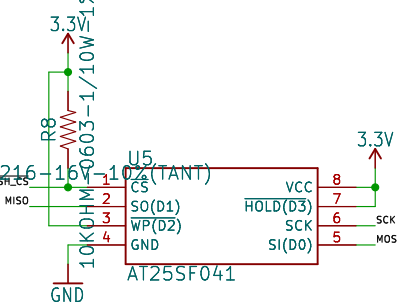


Antenna




USB




RX/TX LEDs



HEADERS/QWII

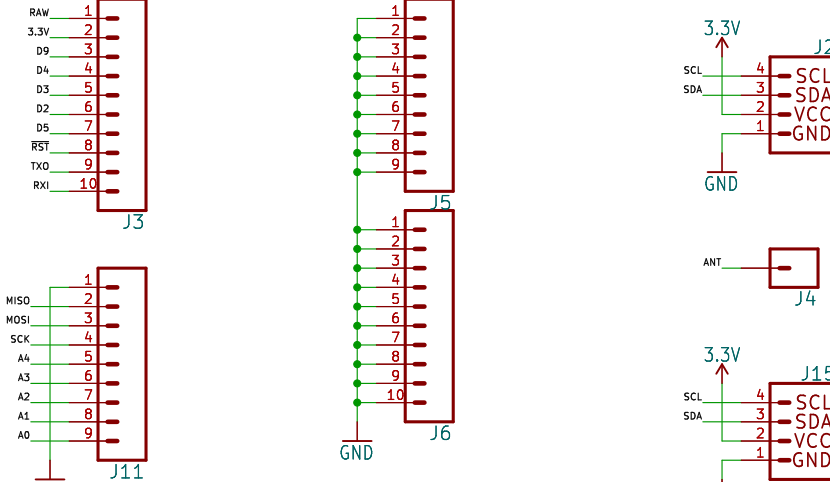

PROGRAMMING HEADER



SPARK X

Special Instructions

Released under the Creative Commons
Attribution Share-Alike 4.0 License
<https://creativecommons.org/licenses/by-sa/4.0/>

TITLE: \${PROJECTNAME}

Design by:
Elias Santistevan, Owen Lyke

Rev:
x01

Date: \${CURRENT_DATE}

Sheet: \${#}/\${##}

Size: User
KiCad E.D.A. eeschema 7.0.6

Rev:
Id: 1/1