System Regulator

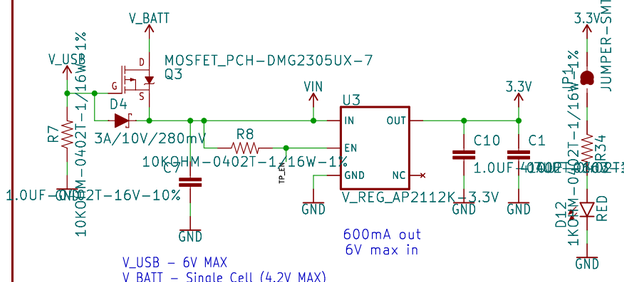

Lithium-Polymer Battery Charger

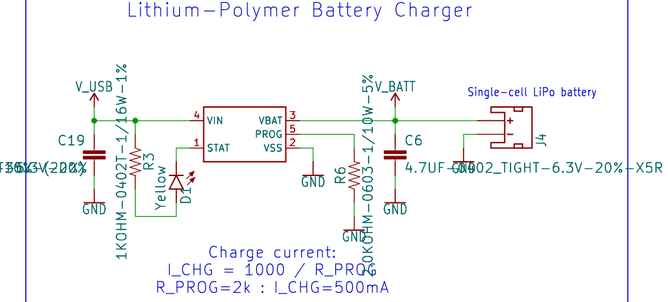

USB-to-Serial Converter

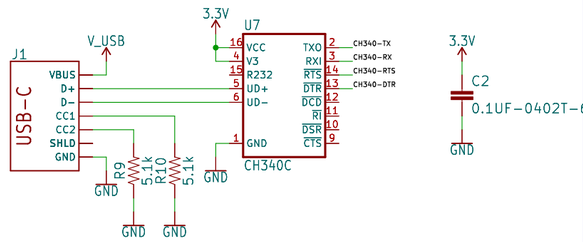

Fuel Gauge



Auto-Reset

Boot Mode Configuration

Pin	Run	Bootloader	Default
IO0	1	0	1
IO2	x	0	0
IO5	1	x	1
IO12	0	0	0
IO15	x	x	1

IO12 = MDTI, IO15 = MDTO



If DTR is LOW, toggling RTS from HIGH to LOW resets to run mode.
If RTS is HIGH, toggling DTR from LOW to HIGH resets to bootloader.

Espressif ESP32

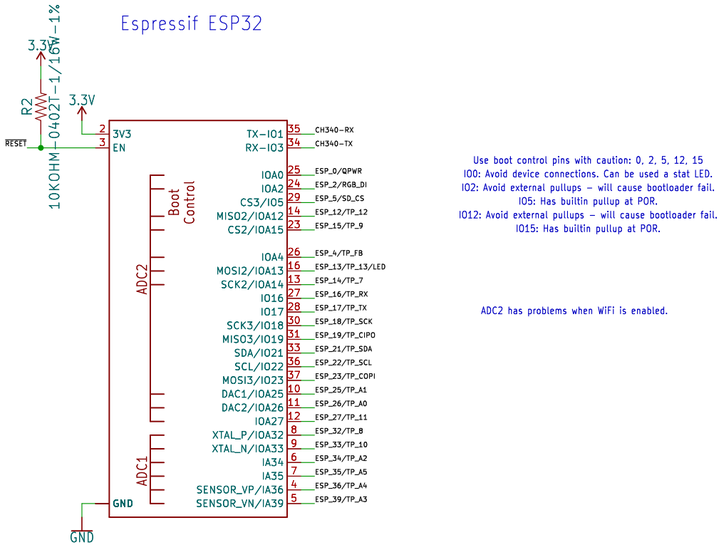

Use boot control pins with caution: 0, 2, 5, 12, 15
IO0: Avoid device connections. Can be used a stat LED.
IO2: Avoid external pullups - will cause bootloader fail.
IO5: Has builtin pullup at POR.
IO12: Avoid external pullups - will cause bootloader fail.
IO15: Has builtin pullup at POR.

ADC2 has problems when WiFi is enabled.

RGB Status LED



Qwiic Connector

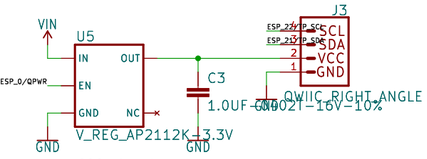

ThingPlus Form Factor

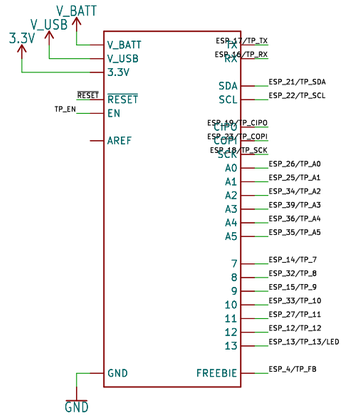

Status LED



GPIO0/Boot Button

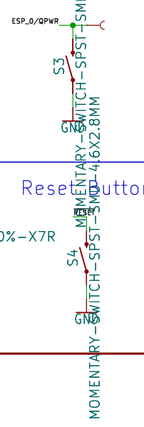

Reset Button

microSD Connector



Released under the Creative Commons
Attribution Share-Alike 4.0 License
https://creativecommons.org/licenses/by-sa/4.0/

TITLE: ${PROJECTNAME}

Design by: >DESIGNER

REV: >REV

Date: ${CURRENT_DATE}

Sheet: ${#}/${##}

Sheet: /
File: working.kicad_sch

Title:

Size: User | Date: | Rev:

KiCad E.D.A. eeschema 7.0.6 | Id: 1/1