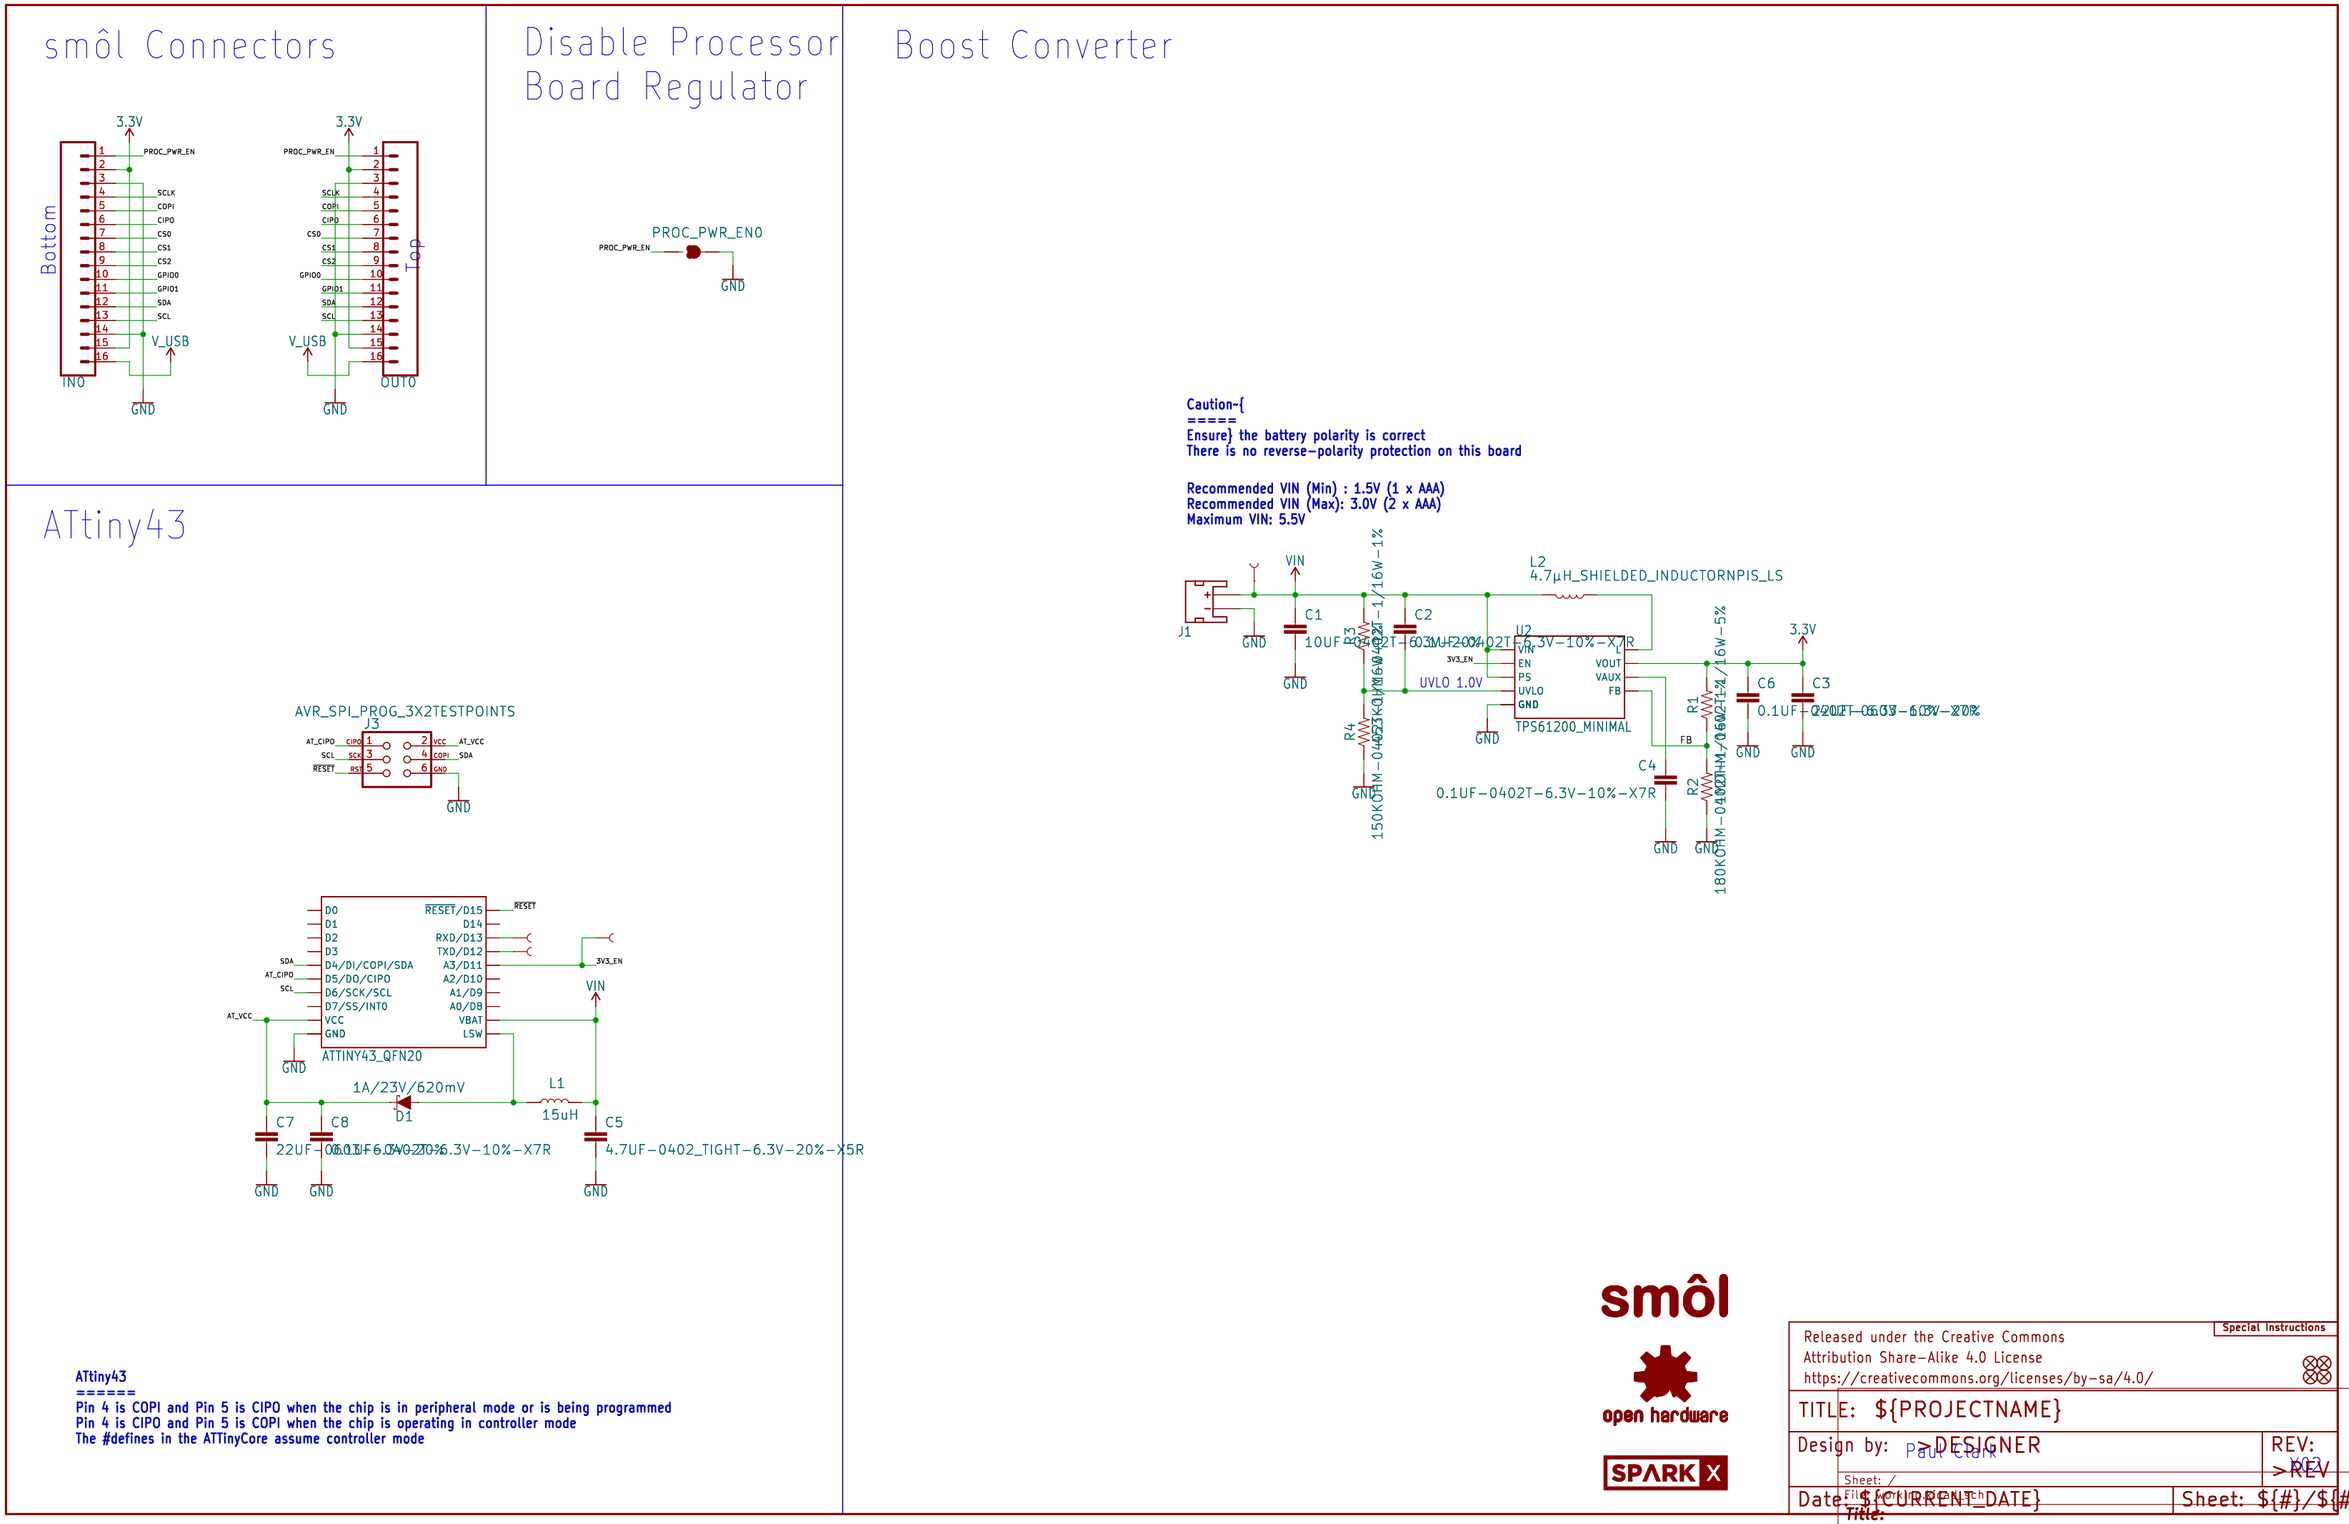

smôl Connectors
Disable Processor Board Regulator
Boost Converter
ATtiny43
3.3V
PROC_PWR_EN
SCLK
COPI
CIPO
CS0
CS1
CS2
GPIO0
GPIO1
SDA
SCL
V_USB
Bottom
Top
IN0
OUT0
GND
PROC_PWR_EN0
Caution~{
=====
Ensure} the battery polarity is correct
There is no reverse-polarity protection on this board
Recommended VIN (Min) : 1.5V (1 x AAA)
Recommended VIN (Max): 3.0V (2 x AAA)
Maximum VIN: 5.5V
VIN
J1
C1
C2
L2
4.7µH_SHIELDED_INDUCTORNPIS_LS
U2
TPS61200_MINIMAL
UVLO 1.0V
R3
R4
R1
R2
C4
0.1UF-0402T-6.3V-10%-X7R
C6
C3
3.3V
AVR_SPI_PROG_3X2TESTPOINTS
J3
ATTINY43_QFN20
1A/23V/620mV
D1
L1
15uH
C7
C8
C5
4.7UF-0402_TIGHT-6.3V-20%-X5R
ATtiny43
======
Pin 4 is COPI and Pin 5 is CIPO when the chip is in peripheral mode or is being programmed
Pin 4 is CIPO and Pin 5 is COPI when the chip is operating in controller mode
The #defines in the ATTinyCore assume controller mode
smôl
open hardware
SPARK X
Special Instructions
Released under the Creative Commons
Attribution Share-Alike 4.0 License
https://creativecommons.org/licenses/by-sa/4.0/
TITLE: ${PROJECTNAME}
Design by: >DESIGNER
Paul Clark
REV: >REV
Sheet: /
Date: ${CURRENT_DATE}
Sheet: ${#}/${##}
Title:
Size: User
Date:
Rev:
KiCad E.D.A. eeschema 7.0.6
Id: 1/1