

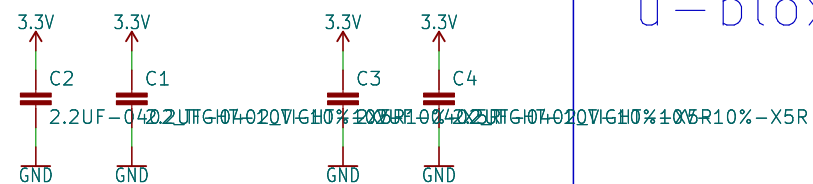


Power Switching

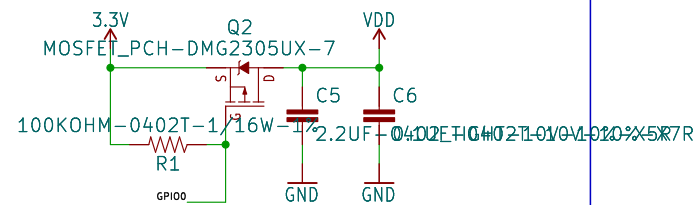

Back-Up Voltage

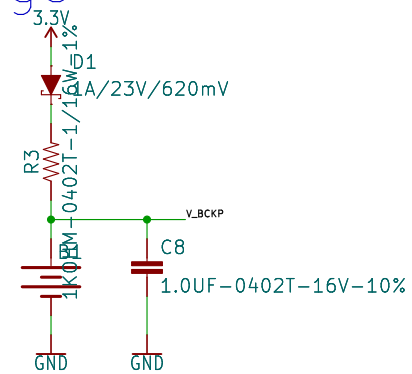


Antenna

RF Track Impedance: Coplanar Waveguide with Ground Calculations
<https://chemandy.com/calculators/coplanar-waveguide-with-ground-calculator.htm>

 JLCPCB JLC7628 4-Layer 0.8mm Impedance Control Stackup ($\epsilon_r = 4.6$)



 Ground is on layer 2.
 Prepreg thickness: 0.2mm
 12 mil track with 4 mil gap = 49.5 Ohms

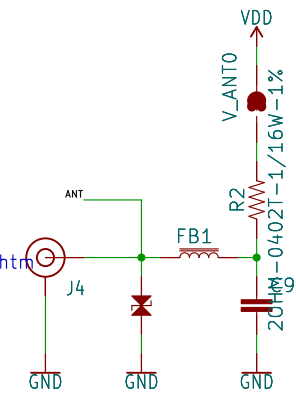

Test Points



smôl Connectors

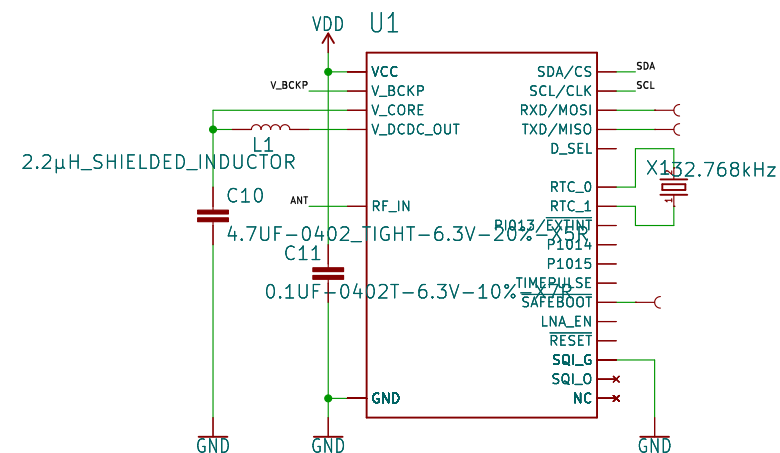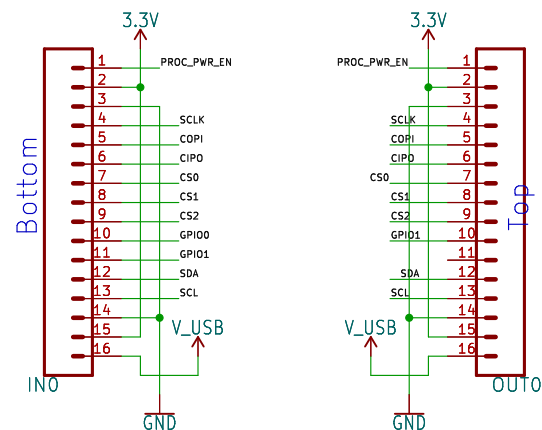

VCC Range: 1.89 – 3.6V
I2C Address: 0x42



Released under the Creative Commons Attribution Share-Alike 4.0 License https://creativecommons.org/licenses/by-sa/4.0/ 		Special Instructions	
TITLE: \${PROJECTNAME}			
Design by:  >DESIGNER 		REV:  	
Sheet: / File:  Workbench			
Date: \${CURRENT_DATE}		Sheet: \${#}/\${##}	
Title:			
Size: User	Date:	Rev:	
KiCad E.D.A.	eeschema 7.0.6	Id: 1/1	