




u-blox ZED-F9P

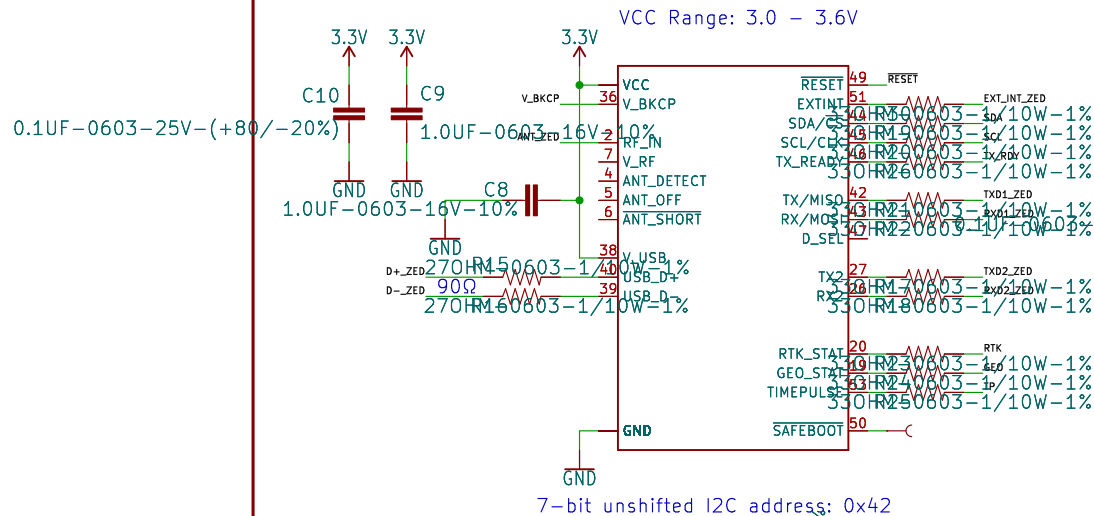


u-blox NEO-D9S

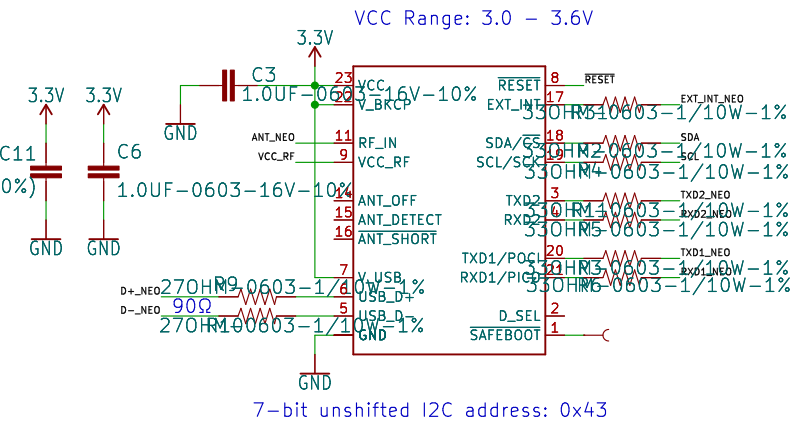


UART2 Link for PMP Corrections
ZED-F9P <-> NEO-D9S



Voltage Regulation

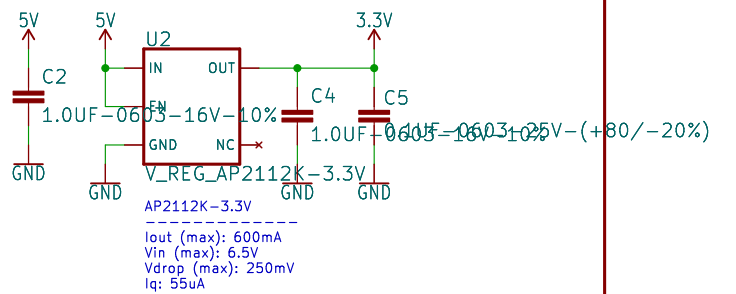


Antenna

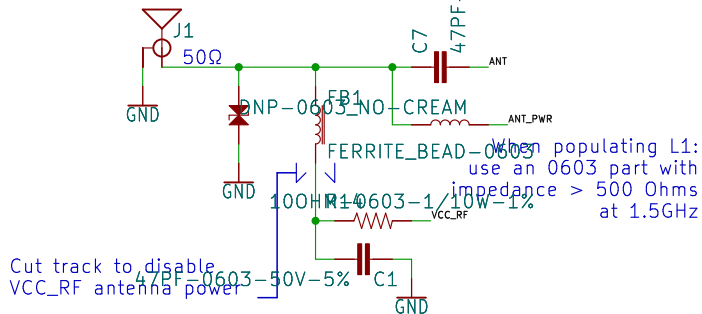


RF Track Impedance: Coplanar Waveguide with Ground Calculations
<https://chemandy.com/calculators/coplanar-waveguide-with-ground-calculator.htm>
Ground is on layer 2. Prepreg thickness: 0.2mm. Er = 4.6
12.5 mil track with 5 mil gap = 50 Ohms


Antenna Divider



Backup Battery

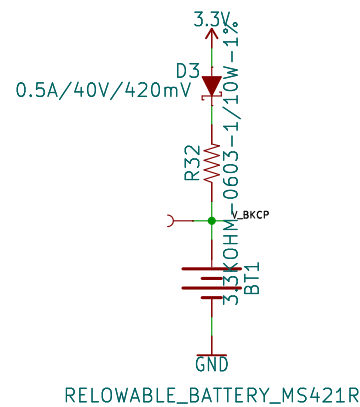


USB

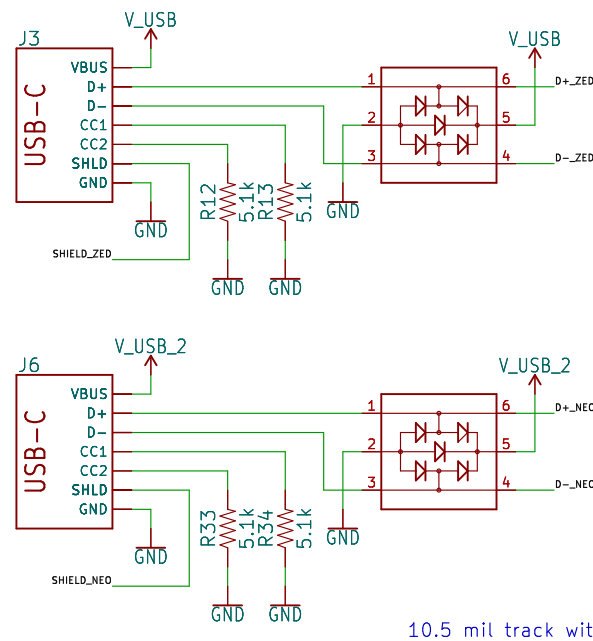


USB Track Impedance: Differential Pair
<https://saturnpcb.com/saturn-pcb-toolkit/>
Prepreg thickness: 0.2mm (7.87 mil). Er = 4.6
10.5 mil track with 9.5 mil gap (20 mil center to center) = 90 Ohms


LEDs

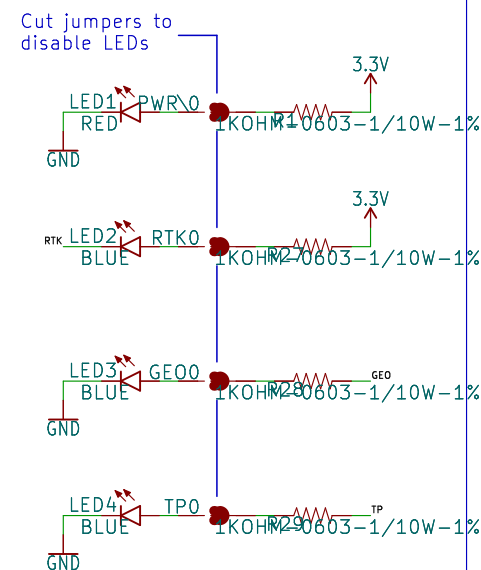

Jumpers

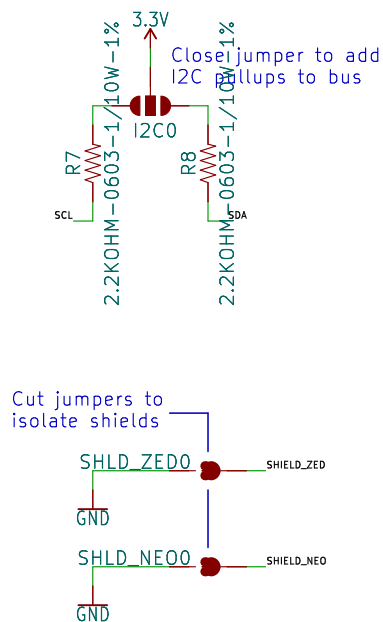

Headers

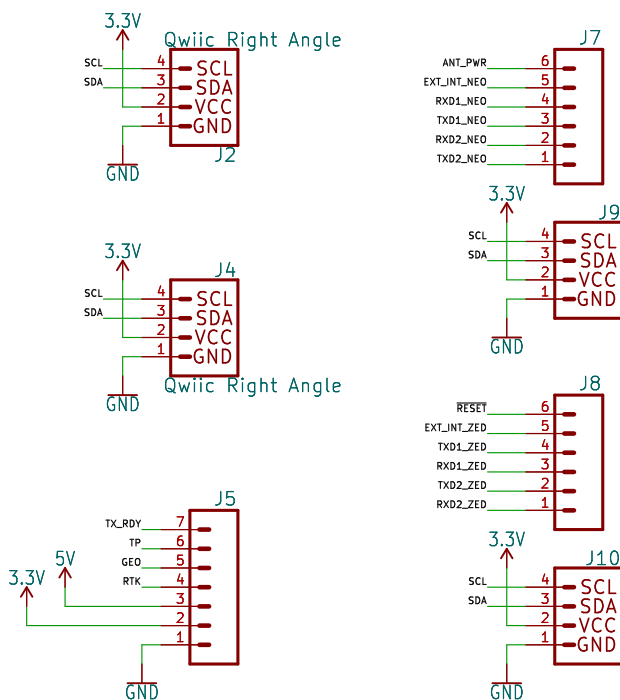

SPARK X



Released under the Creative Commons Attribution Share-Alike 4.0 License https://creativecommons.org/licenses/by-sa/4.0/		Special Instructions	
TITLE: \${PROJECTNAME}		REV: >REV	
Design by: >DESIGNER Paul Clark		Sheet: /	
Date: \${CURRENT_DATE}		Sheet: \${#}/\${##}	
Size: User KiCad E.D.A. eeschema 7.0.6		Date: Rev: Id: 1/1	