

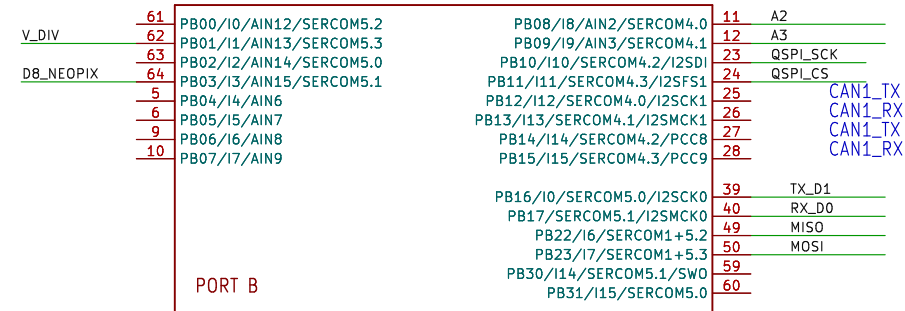
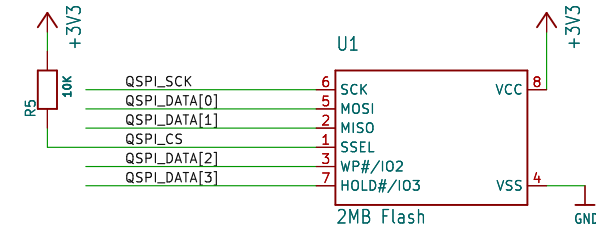
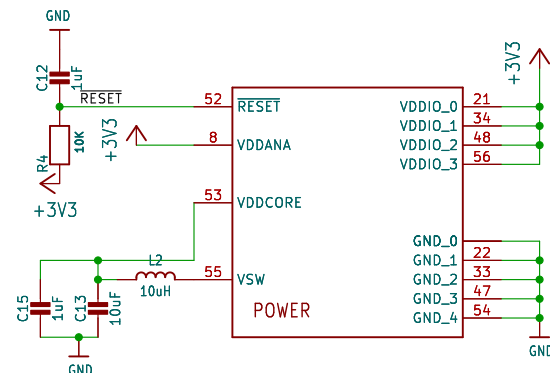

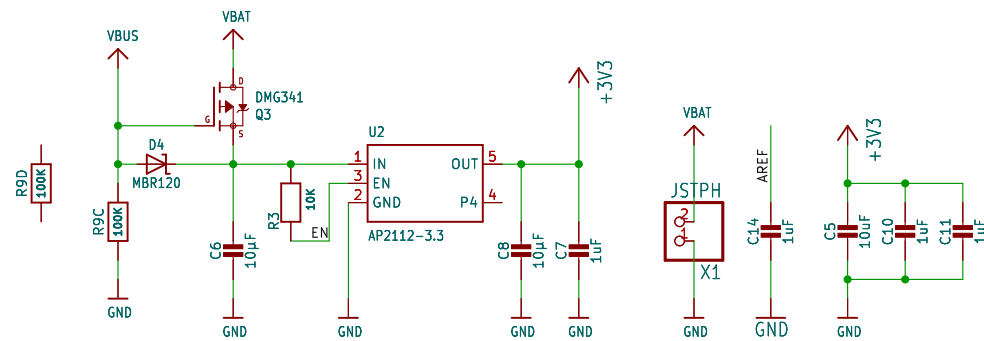





D5	PCCD0	
SCK	PCCD1	
D6	PCCD2	
D9	PCCD3	
D10	PCCD4	
D11	PCCD5	
D12	PCCD6	CANO_TX
D13	PCCD7	CANO_RX



Pinout diagram for the JP1 header of the ATmega328P microcontroller. The header has 16 pins. Pin 16 is labeled 'RESET' and is connected to +3V3. Pin 15 is labeled 'AREF' and is connected to GND. Pins 14 through 2 are labeled with their respective functions: A0, A1, A2, A3, A4, A5, SCK, MOSI, MISO, RX_D0, TX_D1, and D4. The pins are numbered 1 through 16 from top to bottom.

Sheet: $\$ \{ \# \} / \$ \{ \#\# \}$

Adafruit Industries

Rev:

	7	
--	---	--
