TODO: through hole gpio
through hole 2x3 conn
through hole 2.1mm barrel
right angle on/off
reroute grounds

USB Connection & Selection

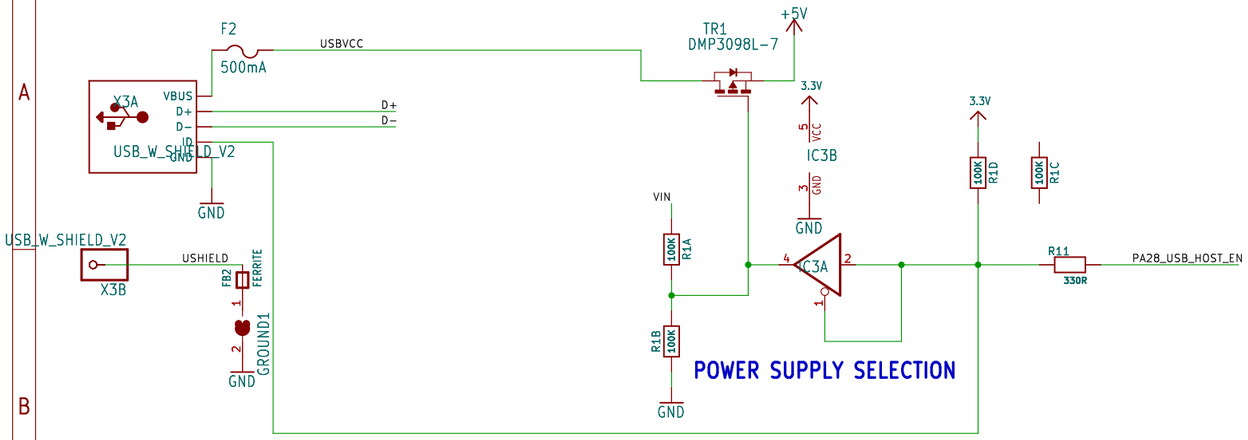

POWER SUPPLY: 5V

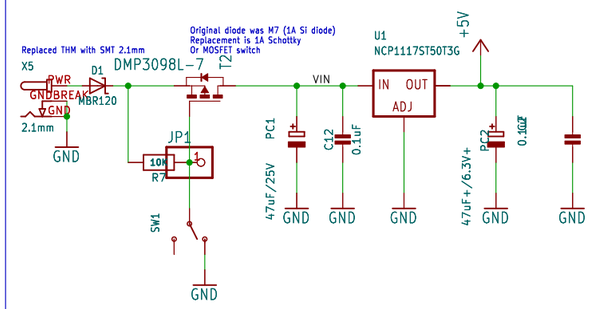

POWER SUPPLY: 3.3V



RX/TX LED

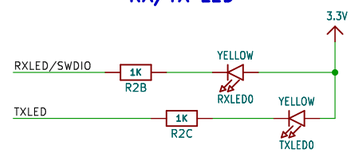

ATSAMD21G18

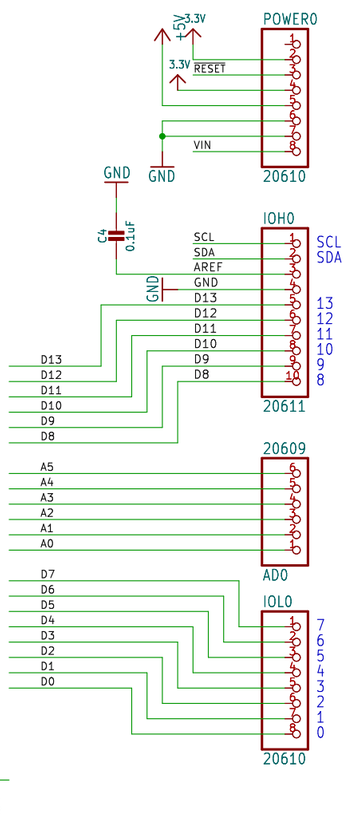

NEOPIXEL LED





SPI FLASH

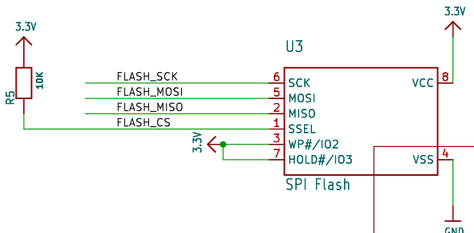

SWD Interface



Author:	Limor Fried & KTOWN
	${PROJECTNAME}
	${CURRENT_DATE}
	Sheet: ${#}/${##}

Sheet: /
File: working.kicad_sch

Title:

Size: User	Date:	**Rev:**
KiCad E.D.A. kicad-cli 7.0.6-7.0.6~ubuntu22.04.1		Id: 1/1