



## USB Connection & Selection

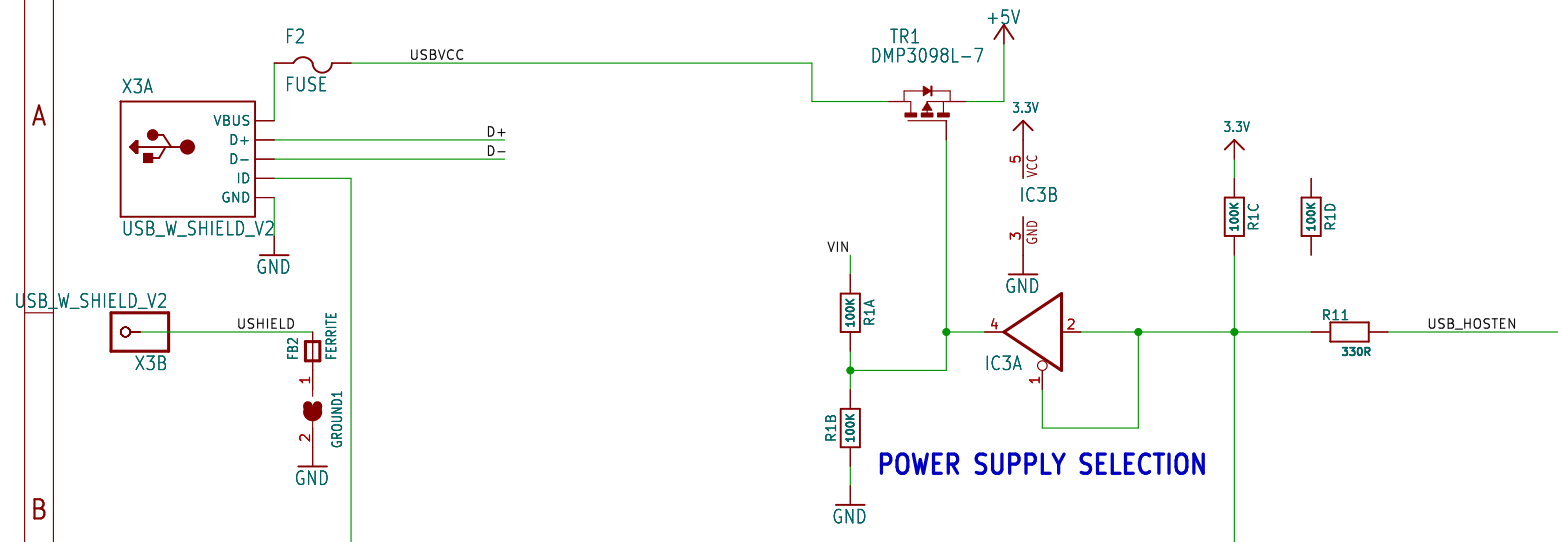


## POWER SUPPLY SELECTION


## POWER SUPPLY: 5V

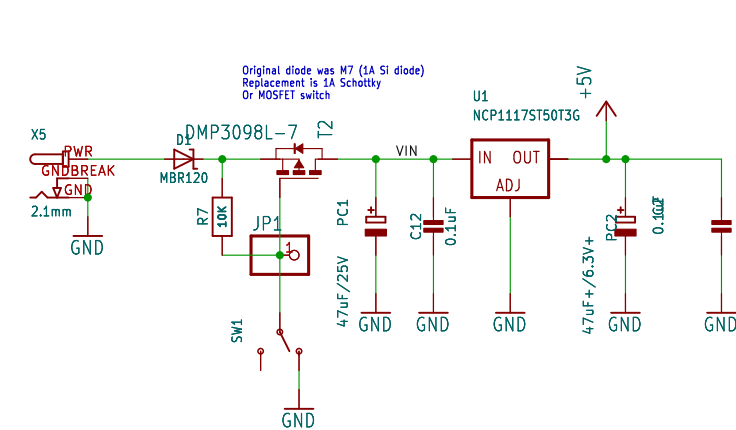

## POWER SUPPLY: 3.3V

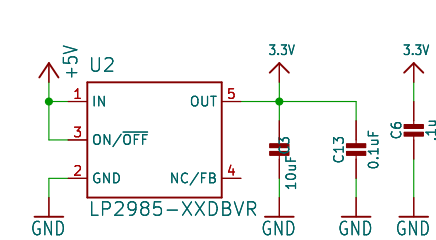


## RX/TX LED

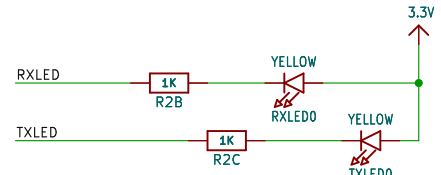


## POWER LED


## D13 LED




## NEOPIXEL LED



## QSPI FLASH

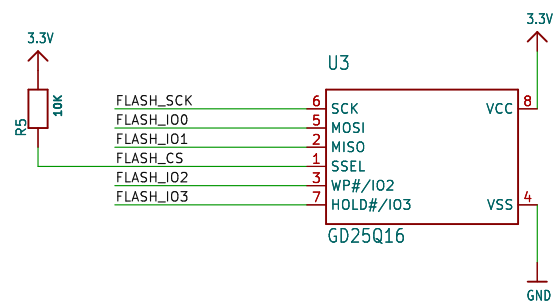


## SWD Interface



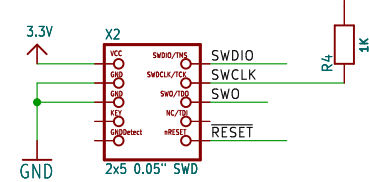


Author: Limor Fried & Dean M.  
 \${PROJECTNAME}  
 \${CURRENT\_DATE}  
 Sheet: \${#}/\${##}

## ATSAMD51J19

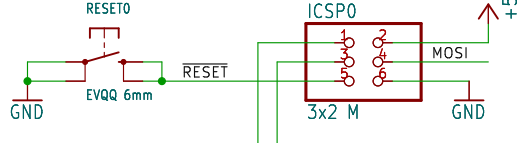

TODO: make sure we have I2S SCK[0], FS[0]

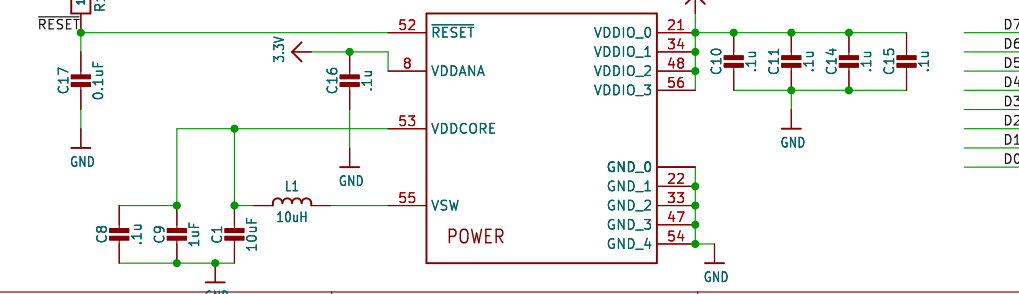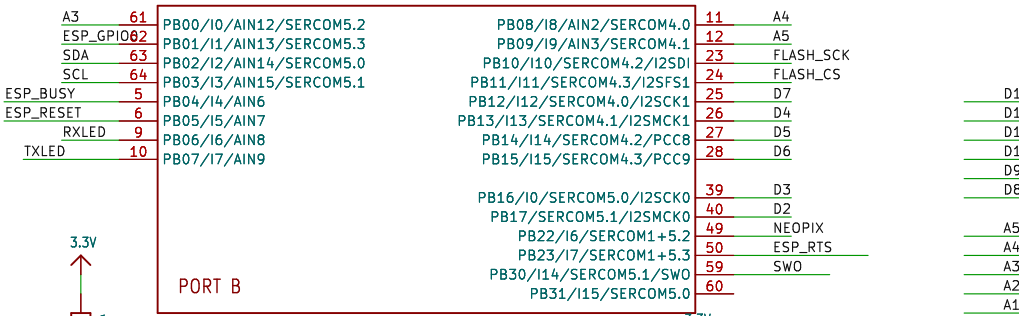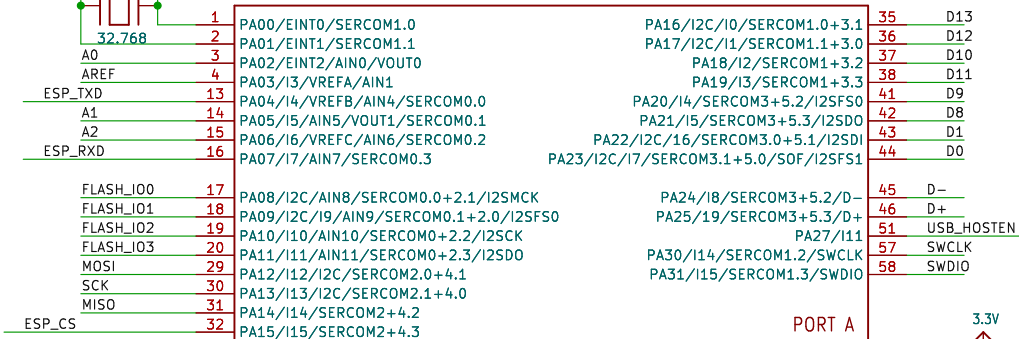

## ESP3212 MODULE + AUTORESET

