C1, C2 = 1 / (2*π*f*Xc)

16 ohm load at 20Hz cuttoff 1 / (6.2832*20hz*16) = 497µF

32 ohm load at 20Hz cuttoff 1 / (6.2832*20hz*32) = 249µF

Caps: UKA0J471MPD1TD

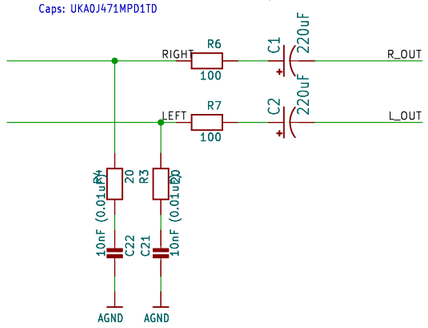

Enabling the IC too soon can cause transients during power up which can damage the earphones and causes 'clicks' ... this setup should minimize that. See section 8 of http://www.vlsi.fi/uploads/media/vs10XXan.pdf

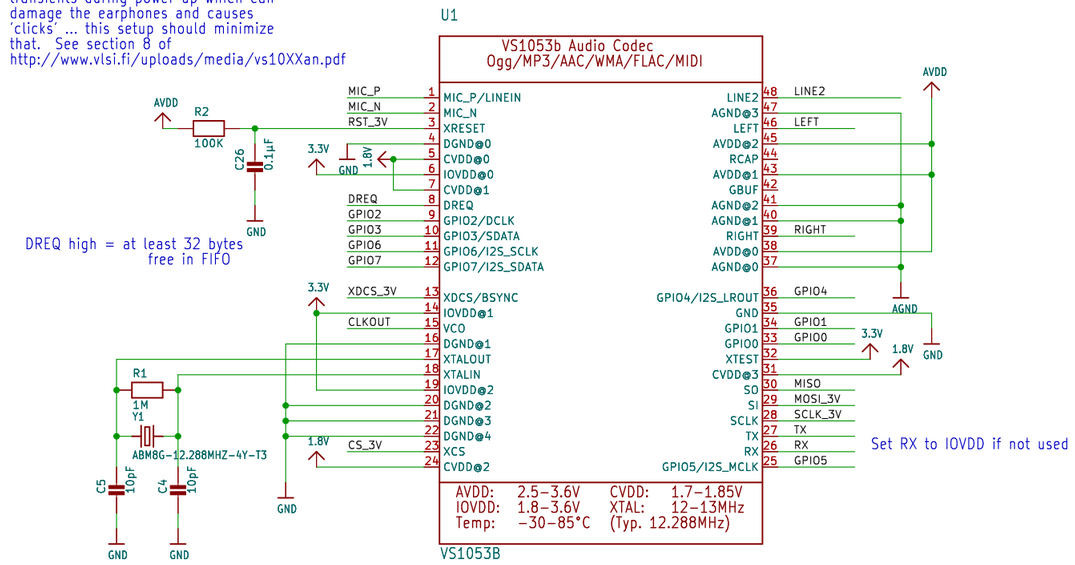

Disable SPI boot with GPIO0 low

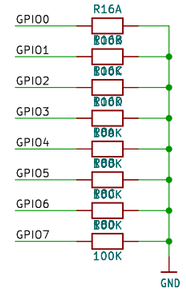

Power Supply/Decoupling

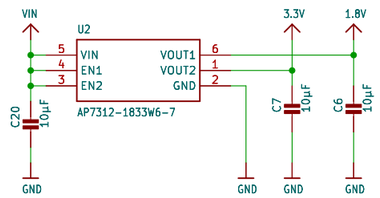

Analog Supply Filtering



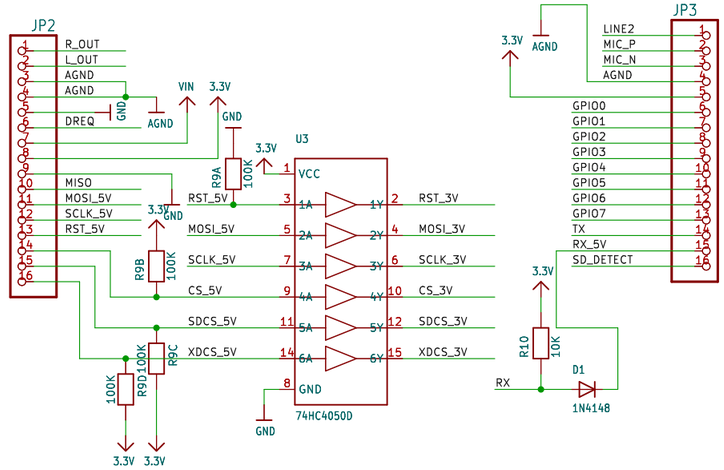



adafruit

${PROJECTNAME}	
${CURRENT_DATE}	Sheet: ${#}/${##}
Sheet: / File: working.kicad_sch	Adafruit Industries
Title:	
Size: User Date:	Rev:
KiCad E.D.A. kicad-cli 7.0.6-7.0.6-ubuntu22.04.1	Id: 1/1