



3.3V Voltage Regulator

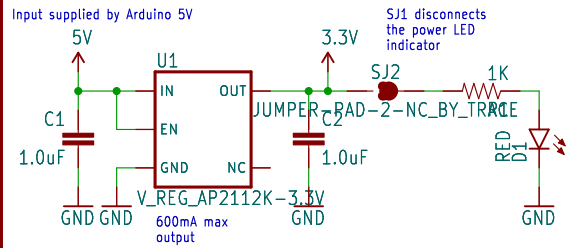


GPS Module




JUMPER-PAD-2-NC_BY_TRACE


Battery Supply

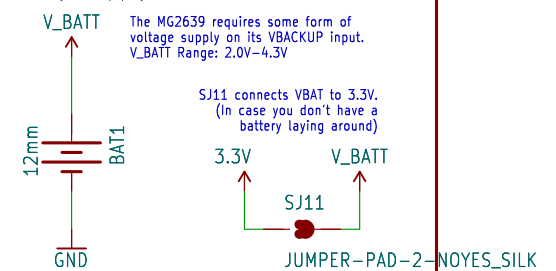

Arduino Shield

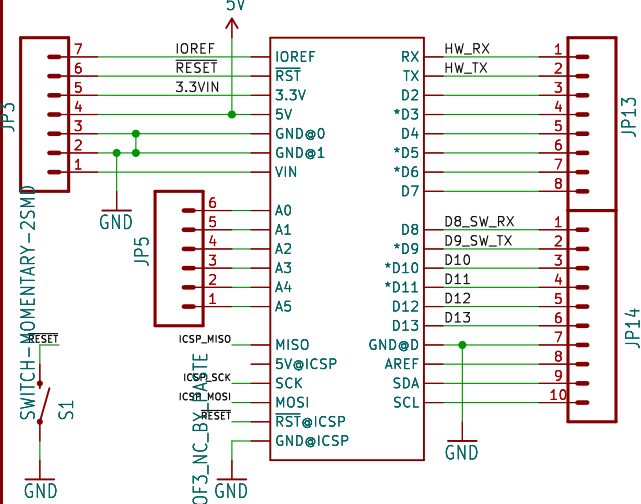


μSD Socket

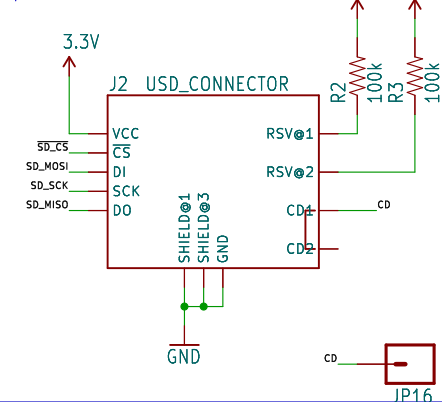


Level Shifting

IOREF should be 3.3V or 5V. If the Arduino doesn't have IOREF, it should be set with SJ3.

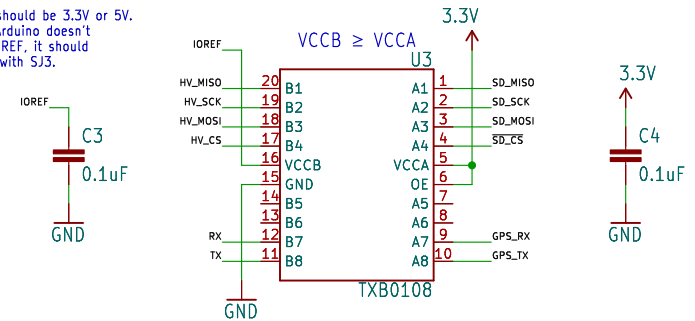

μSD SPI Interface Configuration

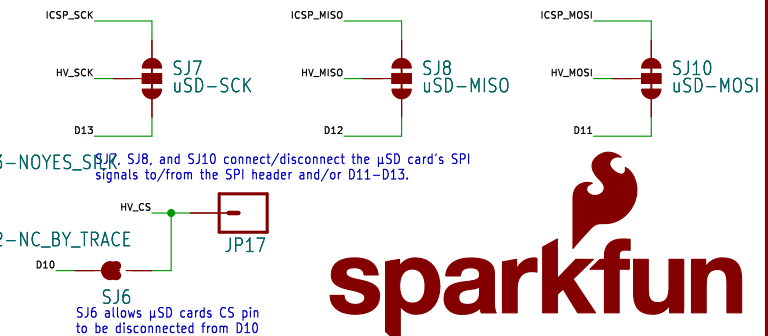

sparkfun

Released under the Creative Commons Attribution Share-Alike 4.0 License
<https://creativecommons.org/licenses/by-sa/4.0/>

TITLE: \${PROJECTNAME}

Design by: Jim Lindblom
 Based on a design by: Aaron Weiss

REV: v20

Date: \${CURRENT_DATE}

Sheet: \${#}/\${##}

Size: User Date: KiCad E.D.A. eeschema 7.0.6

Rev: Id: 1/1

open hardware