

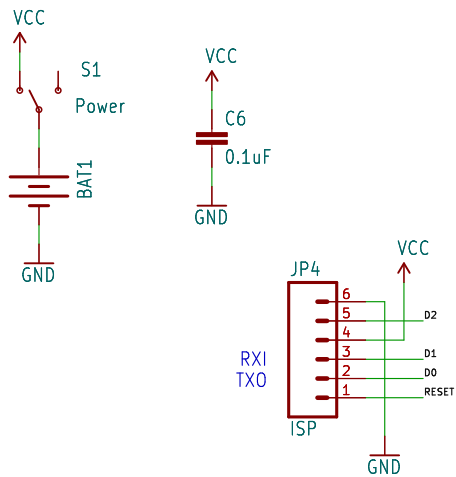



Changes to v1.2:
Corrected FP for CR2032 holder
Removed 10k pull up on RES



Special in-circuit programming ISP connection.
Works with Tiny AVR Programmer v1.3 and greater.
Pinout aligns with FTDI Basic for serial debugging.

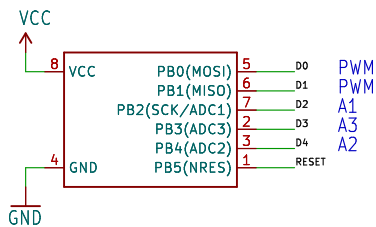

Released under the Creative Commons Attribution Share-Alike 3.0 License http://creativecommons.org/licenses/by-sa/3.0			☐	☐
TITLE: \${PROJECTNAME}		SFE	SFE	
Design by: N. Seidle			REV: v1.2	
Date: \${CURRENT_DATE}			Sheet: \${#}/\${##}	
Size: User			Rev:	
KiCad E.D.A. eeschema 7.0.6			Id: 1/1	