


The diagram shows the connection of an external display module to a microcontroller. The module's U1 chip has pins for VCC, IOVCC, LEDA, LEDK, P68, SPI4W, IM2, IM1, IM0, RD/E, and GND. It is powered by a 3.3V supply and has a 10KOHM resistor (R2) connected to its CS pin. The module is connected to the microcontroller's RST, TE, CS, DC/SCL, DB0/SDI, and WR/RW pins. The microcontroller is also powered by a 3.3V supply and has a 10KOHM resistor (R2) connected to its CS pin.



10kOhm-0603-1/10W-1%
VIN
R5
LED PWM
Q1 MOSFET-NCH-BS170
GND
R4
10kOhm-0603-1/10W-1%
LED
R3
10kOhm-0603-1/10W-1%

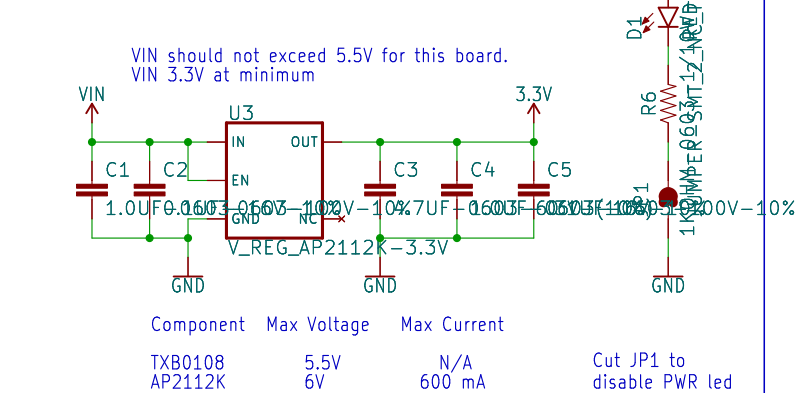

REV:
>REV

Sheet: /

Sheet: $\$ \{ \# \} / \$ \{ \#\# \}$

Title:

Rev:
Id: 1/1