
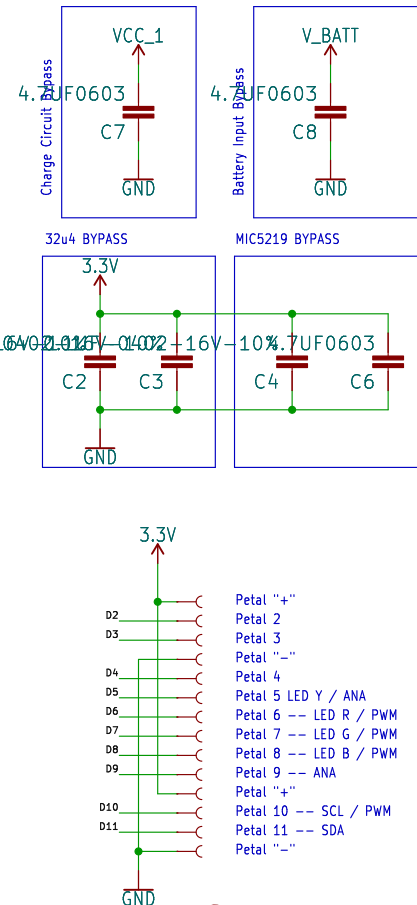
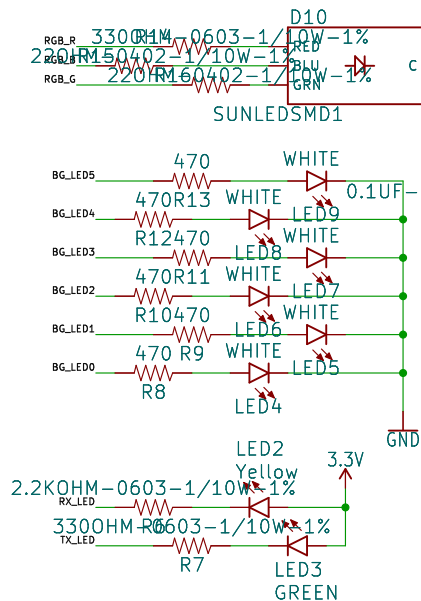



LilyPad USB Plus Standalone

Note: All GPIO have digital functionality and are labeled with a "D" convention. Check the product's documentation folder in this repository for more information on GPIO. This information is also in our hookup guide.

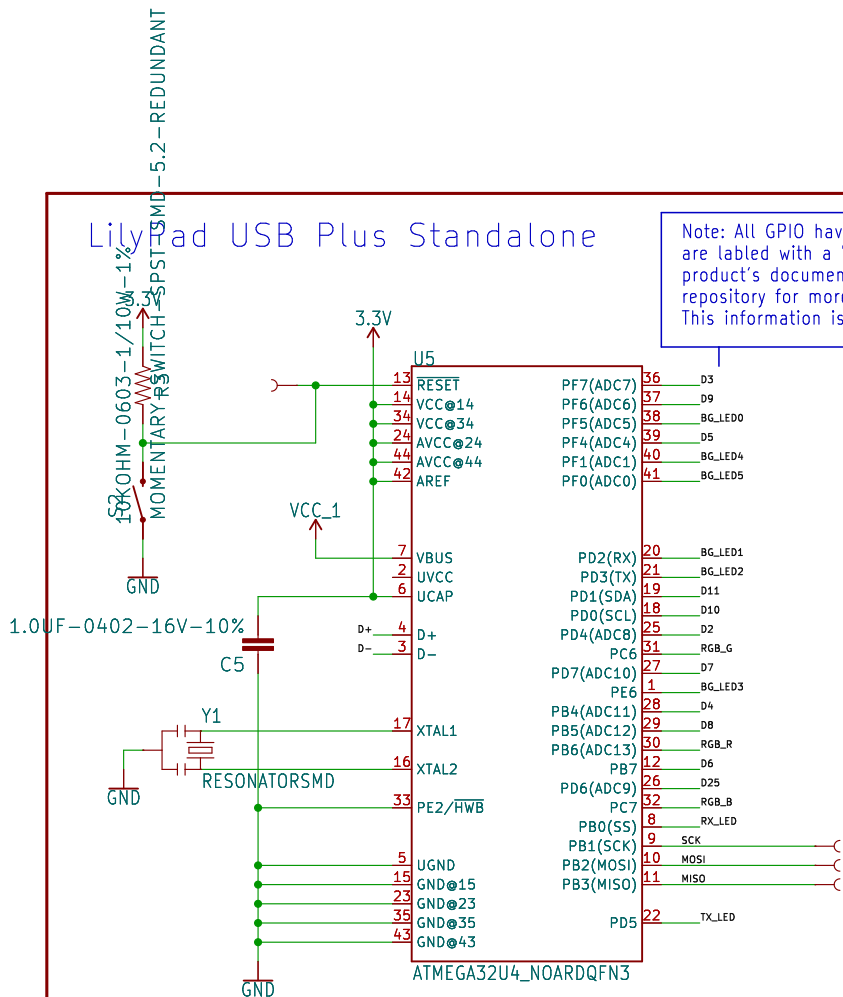

Battery Charger and Regulator

Charge current factory set to 100mA
I_CHG = 1000/R2

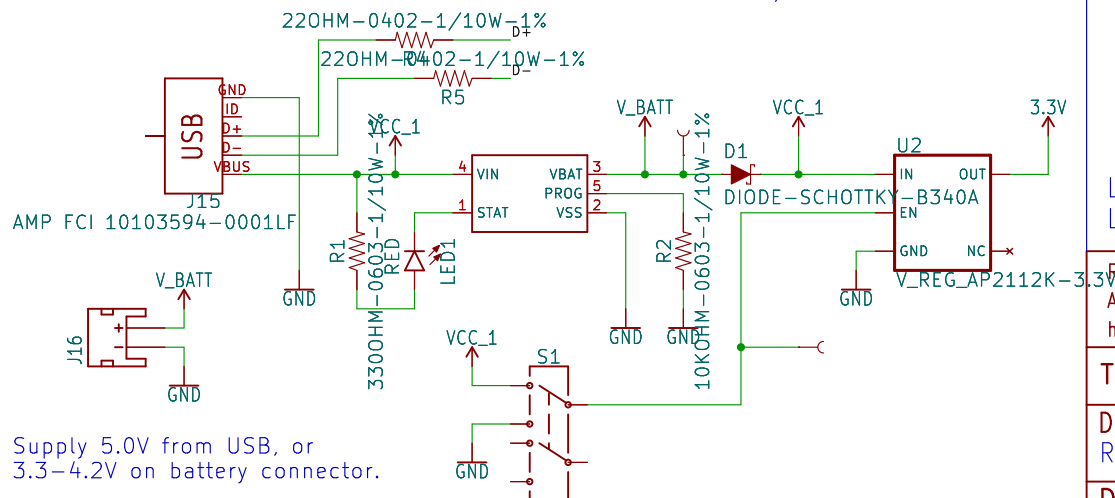

Supply 5.0V from USB, or 3.3-4.2V on battery connector.

LilyPad concept and shapes by:
L. Buechley and N. Seidle



Released under the Creative Commons
Attribution Share-Alike 4.0 License
<https://creativecommons.org/licenses/by-sa/4.0/>

TITLE: \${PROJECTNAME}

Design by: Marshall Taylor
Revised by: Elias Santistevan

REV:
v10

Date: \${CURRENT_DATE}

Sheet: \${#}/\${##}

Size: User
KiCad E.D.A. eeschema 7.0.6

Rev:
Id: 1/1