


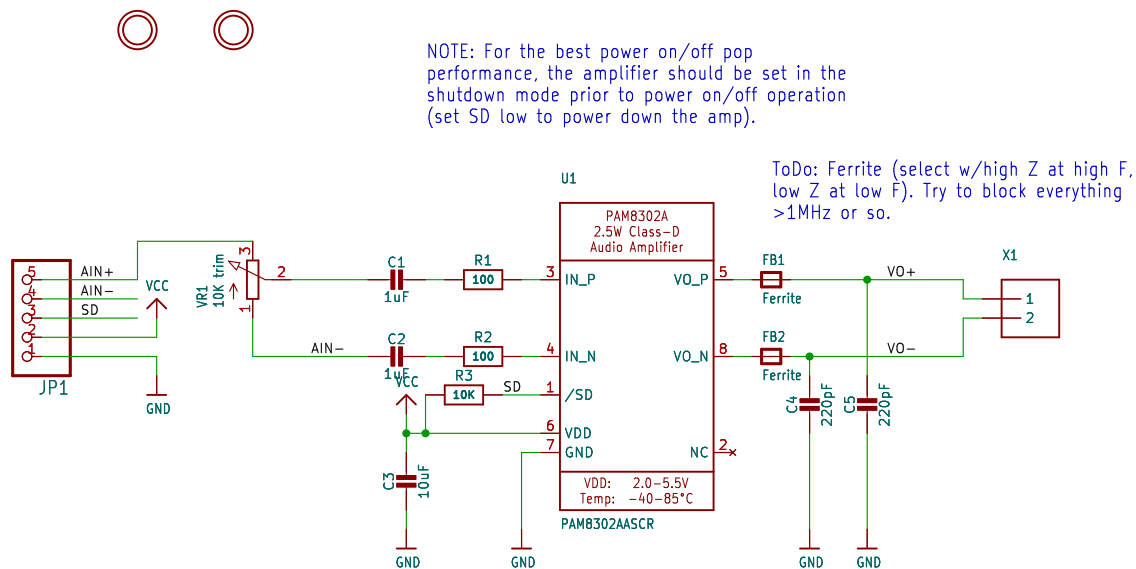

C3: Use 1uF to filter high frequency noise, or 10uF if lower frequency noise is present

ISSUE	\${COMPANY}		© 2014
DRAWN \${DRAWN}	TITLE		REV \${REV}
CHECKED \${CHECKED}	DATE	DRG No \${DRGNO}	
DATE \${DATE}	FILE: \${PROJECTNAME}	PAGE: \${#}/\${##}	

Title:		Date:		Rev:
KiCad E.D.A. kicad-cli 7.0.6-7.0.6-ubuntu22.04.1				Id: 1/1