


HARD RESET



GRAPHICS

- GR1 Anubis huge logo
- GR2 Anubis plated letters
- GR3 Anubis label

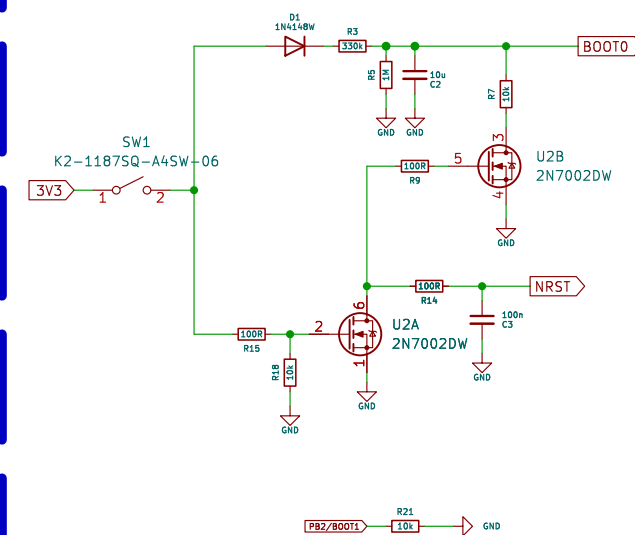

DB CONNS

WARNING: be sure to select the JST needed with the isolating resistors!




WTBO

J1
AL001WR-S-04P


ANDROMEDA

J2
AL001WR-S-04P

WARNING: be sure to select the JST needed with the isolating resistors!

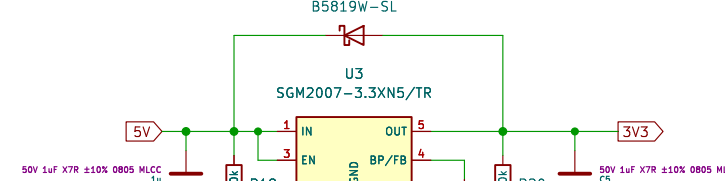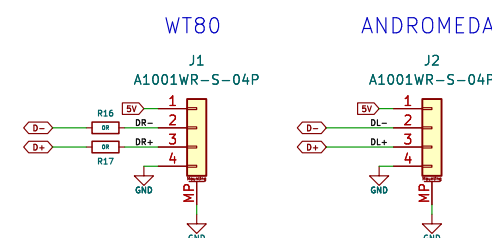





The diagram shows a 5V LED indicator board. It includes a 5V DC input, a 100Ω resistor (R1), a 100Ω resistor (R2), and a 100Ω resistor (R3). The board features three LEDs (Q1, Q2, Q3) and three LEDs (Q4, Q5, Q6). The LEDs are connected to a 5V supply through resistors. The board is labeled with 'CAPS_INDICATOR' and 'INDICATOR1', 'INDICATOR2', 'INDICATOR3'.

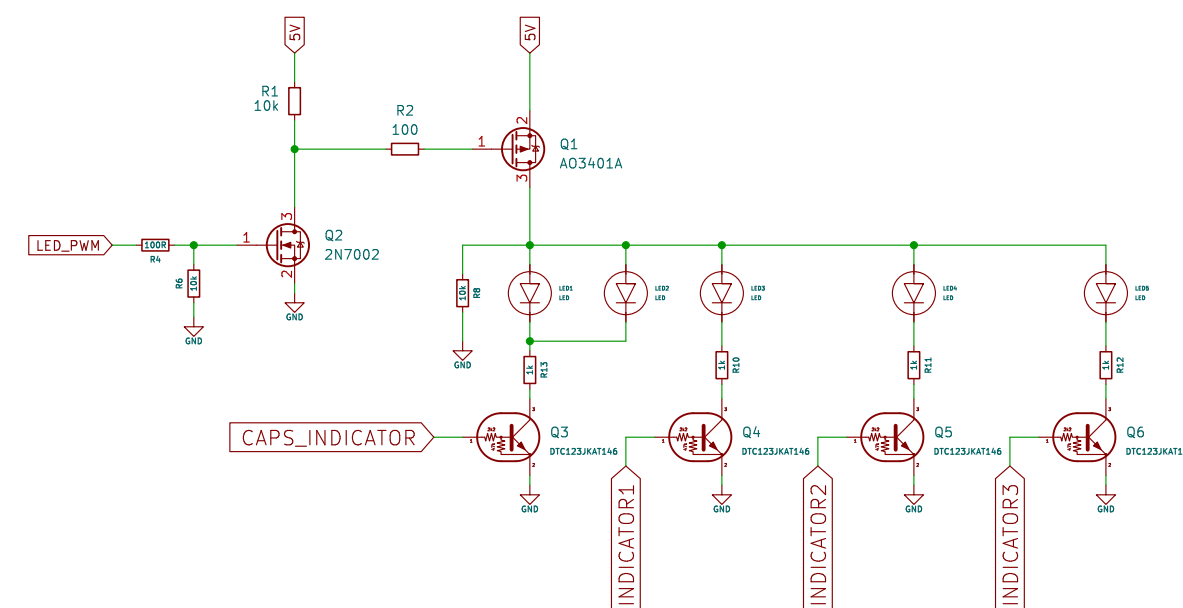

The image shows a detailed PCB layout for the STM32F401RCT6 microcontroller. The microcontroller is centrally located, with various pins connected to components. Key components include:

- Microcontroller (U4):** STM32F401RCT6, with pins labeled from 1 to 100.
- Capacitors:** C1, C2, C3, C4, C5, C6, C7, C8, C9, C10, C11, C12, C13, C14, C15, C16, C17, C18, C19, C20, C21, C22, C23, C24, C25, C26, C27, C28, C29, C30, C31, C32, C33, C34, C35, C36, C37, C38, C39, C40, C41, C42, C43, C44, C45, C46, C47, C48, C49, C50, C51, C52, C53, C54, C55, C56, C57, C58, C59, C60, C61, C62, C63, C64, C65, C66, C67, C68, C69, C70, C71, C72, C73, C74, C75, C76, C77, C78, C79, C80, C81, C82, C83, C84, C85, C86, C87, C88, C89, C90, C91, C92, C93, C94, C95, C96, C97, C98, C99, C100.
- Resistors:** R1, R2, R3, R4, R5, R6, R7, R8, R9, R10, R11, R12, R13, R14, R15, R16, R17, R18, R19, R20, R21, R22, R23, R24, R25, R26, R27, R28, R29, R30, R31, R32, R33, R34, R35, R36, R37, R38, R39, R40, R41, R42, R43, R44, R45, R46, R47, R48, R49, R50, R51, R52, R53, R54, R55, R56, R57, R58, R59, R60, R61, R62, R63, R64, R65, R66, R67, R68, R69, R70, R71, R72, R73, R74, R75, R76, R77, R78, R79, R80, R81, R82, R83, R84, R85, R86, R87, R88, R89, R90, R91, R92, R93, R94, R95, R96, R97, R98, R99, R100.
- Jumpers:** J1, J2, J3, J4, J5, J6, J7, J8, J9, J10, J11, J12, J13, J14, J15, J16, J17, J18, J19, J20, J21, J22, J23, J24, J25, J26, J27, J28, J29, J30, J31, J32, J33, J34, J35, J36, J37, J38, J39, J40, J41, J42, J43, J44, J45, J46, J47, J48, J49, J50, J51, J52, J53, J54, J55, J56, J57, J58, J59, J60, J61, J62, J63, J64, J65, J66, J67, J68, J69, J70, J71, J72, J73, J74, J75, J76, J77, J78, J79, J80, J81, J82, J83, J84, J85, J86, J87, J88, J89, J90, J91, J92, J93, J94, J95, J96, J97, J98, J99, J100.
- Extra Pins:** X1, X2, X3, X4, X5, X6, X7, X8, X9, X10, X11, X12, X13, X14, X15, X16, X17, X18, X19, X20, X21, X22, X23, X24, X25, X26, X27, X28, X29, X30, X31, X32, X33, X34, X35, X36, X37, X38, X39, X40, X41, X42, X43, X44, X45, X46, X47, X48, X49, X50, X51, X52, X53, X54, X55, X56, X57, X58, X59, X60, X61, X62, X63, X64, X65, X66, X67, X68, X69, X70, X71, X72, X73, X74, X75, X76, X77, X78, X79, X80, X81, X82, X83, X84, X85, X86, X87, X88, X89, X90, X91, X92, X93, X94, X95, X96, X97, X98, X99, X100.
- Power Supply:** VDD, VDDA, VDDIO, VDDIO1, VDDIO2, VDDIO3, VDDIO4, VDDIO5, VDDIO6, VDDIO7, VDDIO8, VDDIO9, VDDIO10, VDDIO11, VDDIO12, VDDIO13, VDDIO14, VDDIO15, VDDIO16, VDDIO17, VDDIO18, VDDIO19, VDDIO20, VDDIO21, VDDIO22, VDDIO23, VDDIO24, VDDIO25, VDDIO26, VDDIO27, VDDIO28, VDDIO29, VDDIO30, VDDIO31, VDDIO32, VDDIO33, VDDIO34, VDDIO35, VDDIO36, VDDIO37, VDDIO38, VDDIO39, VDDIO40, VDDIO41, VDDIO42, VDDIO43, VDDIO44, VDDIO45, VDDIO46, VDDIO47, VDDIO48, VDDIO49, VDDIO50, VDDIO51, VDDIO52, VDDIO53, VDDIO54, VDDIO55, VDDIO56, VDDIO57, VDDIO58, VDDIO59, VDDIO60, VDDIO61, VDDIO62, VDDIO63, VDDIO64, VDDIO65, VDDIO66, VDDIO67, VDDIO68, VDDIO69, VDDIO70, VDDIO71, VDDIO72, VDDIO73, VDDIO74, VDDIO75, VDDIO76, VDDIO77, VDDIO78, VDDIO79, VDDIO80, VDDIO81, VDDIO82, VDDIO83, VDDIO84, VDDIO85, VDDIO86, VDDIO87, VDDIO88, VDDIO89, VDDIO90, VDDIO91, VDDIO92, VDDIO93, VDDIO94, VDDIO95, VDDIO96, VDDIO97, VDDIO98, VDDIO99, VDDIO100.

The layout includes detailed callouts for extra pins (X1, X2, X3) and power supply connections (VDD, VDDA, VDDIO, VDDIO1, VDDIO2, VDDIO3, VDDIO4, VDDIO5, VDDIO6, VDDIO7, VDDIO8, VDDIO9, VDDIO10, VDDIO11, VDDIO12, VDDIO13, VDDIO14, VDDIO15, VDDIO16, VDDIO17, VDDIO18, VDDIO19, VDDIO20, VDDIO21, VDDIO22, VDDIO23, VDDIO24, VDDIO25, VDDIO26, VDDIO27, VDDIO28, VDDIO29, VDDIO30, VDDIO31, VDDIO32, VDDIO33, VDDIO34, VDDIO35, VDDIO36, VDDIO37, VDDIO38, VDDIO39, VDDIO40, VDDIO41, VDDIO42, VDDIO43, VDDIO44, VDDIO45, VDDIO46, VDDIO47, VDDIO48, VDDIO49, VDDIO50, VDDIO51, VDDIO52, VDDIO53, VDDIO54, VDDIO55, VDDIO56, VDDIO57, VDDIO58, VDDIO59, VDDIO60, VDDIO61, VDDIO62, VDDIO63, VDDIO64, VDDIO65, VDDIO66, VDDIO67, VDDIO68, VDDIO69, VDDIO70, VDDIO71, VDDIO72, VDDIO73, VDDIO74, VDDIO75, VDDIO76, VDDIO77, VDDIO78, VDDIO79, VDDIO80, VDDIO81, VDDIO82, VDDIO83, VDDIO84, VDDIO85, VDDIO86, VDDIO87, VDDIO88, VDDIO89, VDDIO90, VDDIO91, VDDIO92, VDDIO93, VDDIO94, VDDIO95, VDDIO96, VDDIO97, VDDIO98, VDDIO99, VDDIO100).

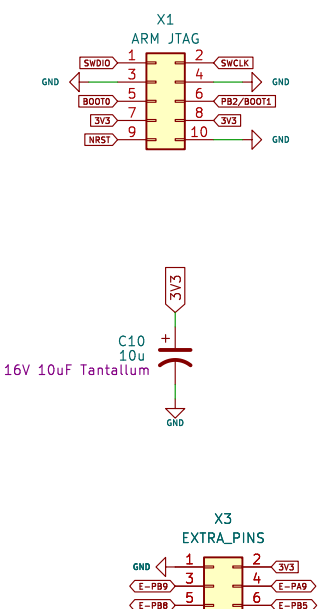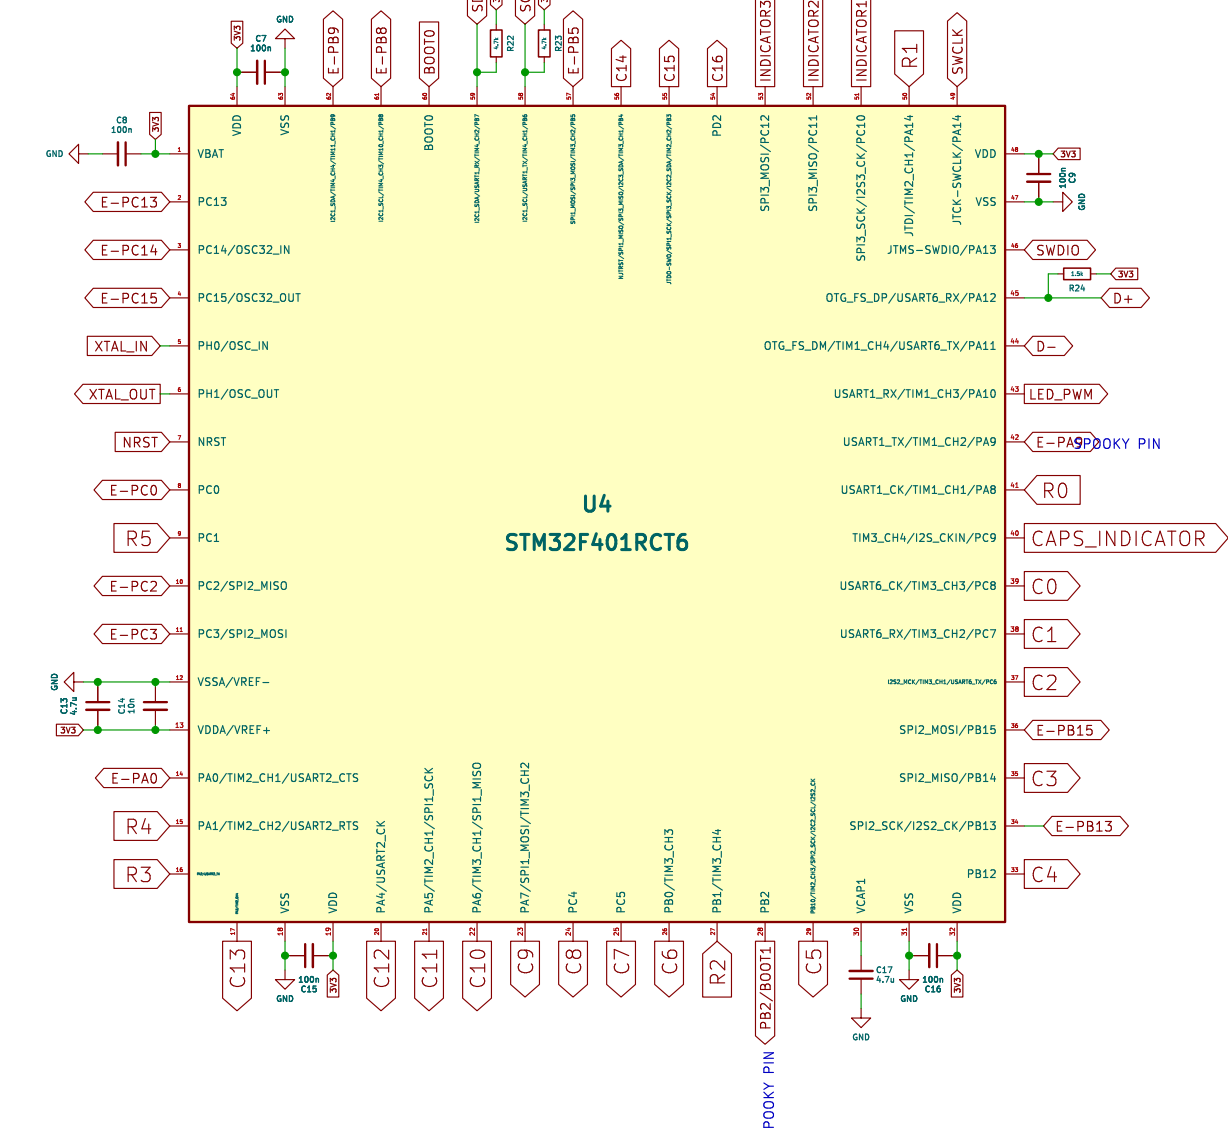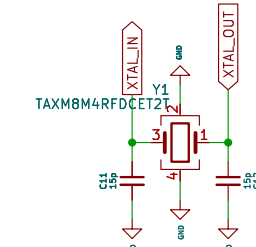

(*) "Spooky pins": on STM32F4xxL, pins A9 and B2 cannot be used for switch matrix:
 - A9 is meant to be used as a VBUS sensing; it has a undocumented internal pulldown resistor;
 - B2 is used as BOOT1 during bootup, so it needs an external pullup for successful bootup

(**) PA9 jumper: a solderable jumper used to tie PA9 to VBUS. It is disconnected by default, hence PA9 is left floating

_____ SWITCH MATRIX