


NOTE: For the best power on/off pop performance, the amplifier should be set in the shutdown mode prior to power on/off operation (set SD low to power down the amp).

ToDo: Ferrite (select w/high Z at high F, low Z at low F). Try to block everything >1MHz or so.

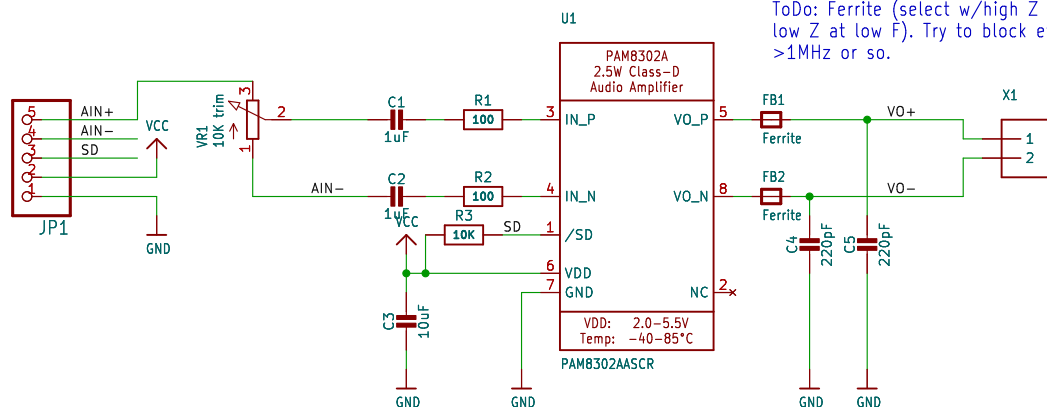

C3: Use 1uF to filter high frequency noise, or 10uF if lower frequency noise is present

ISSUE	<b>\${COMPANY}</b>		© 2014
DRAWN \${DRAWN}	TITLE		REV
CHECKED \${CHECKED}	DATE	<b>\${REV}</b>	
DATE \${DATE}	<b>DRG N°</b> \${DRGNO}		
FILE: <b>FILE: working.kicad_sch</b>		PAGE: <b>1/1</b>	

<b>Title:</b>			
Size: User	Date:		Rev:
KiCad E.D.A. eeschema 7.0.6		Id: 1/1	