


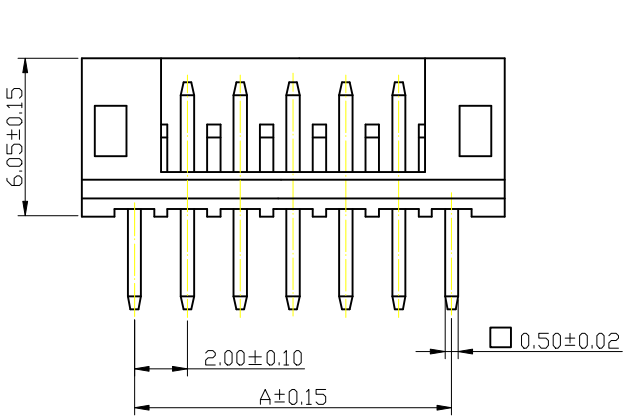





SPECIFICATION

1 Material:
Insulator: PA66 (UL94V-0)
Contacts: Brass,Tin-plated
2 Contact resistance: ＜10mΩ
3 Insulation resistance: ＞1000MΩ
4 Rated voltage: 100 V AC DC
5 Rated current: 2.0 A AC DC
6 Withstand Voltage: 800V AC/minute
7 Temperature Range:-25℃～ +85℃
8 Six deleterious substance content meet the environmental protection requirement

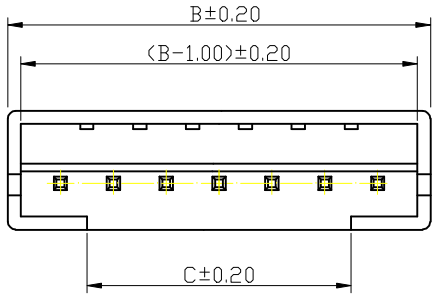

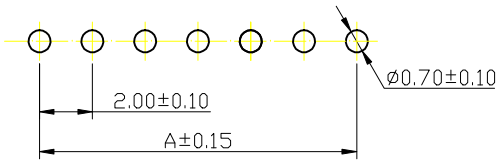

SUGGESTED PCB LAYOUT
(COMPONENT SIDE)

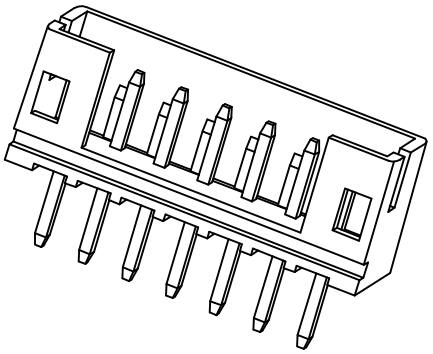

型号-规格 TYPE-Poles	尺寸Dimensions(mm)		
	A	B	C
PH-2A	2.00	6.00	1.20
PH-3A	4.00	8.00	2.05
PH-4A	6.00	10.00	4.00
PH-5A	8.00	12.00	6.00
PH-6A	10.00	14.00	8.00
PH-7A	12.00	16.00	10.00
PH-8A	14.00	18.00	12.00
PH-9A	16.00	20.00	14.00
PH-10A	18.00	22.00	16.00
PH-11A	20.00	24.00	18.00
PH-12A	22.00	26.00	20.00
PH-13A	24.00	28.00	22.00
PH-14A	26.00	30.00	24.00
PH-15A	28.00	32.00	26.00
PH-16A	30.00	34.00	28.00

REV	DESCRIPTION	REV. DRAWN	DATE
A	NEW RELEASE		

TOLERANCE	SCALE:
. ±0.25	UNIT: mm
*.** ±0.15	VIEW:
*.*** ±0.05	
DRAW	
CHECK	
APPRO	

TITLE: 2.00mm PITCH 180° WAFER

PART NO: PH直针

浙江博穆精密电子有限公司