CATALOGUE

D. S. FASTENERS LTD



THE SELF LOCKING NUT SPECIALISTS

we maintain a large stock of self locking nuts in all sizes and styles.

reduced lead times allow us to get your order delivered to you faster.

Established in 1976, we have built up a wealth of experience and knowledge in the fastener industry.

The Company has set out to maintain a large stock of self locking nuts in all sizes, thread pitches, grades and styles. This allows us to reduce lead times and get your order delivered to you faster.

Most stock items are available in standard finishes, zinc or zinc and yellow and also Dacromat or Deltatone, with other finishes available on request. Items not in stock are available quickly via our established supplier network.

If you need awkward sizes, ISO or DIN standards that you are not familiar with, please contact us.

We can supply ISIRs, Mechanical and Chemical Analysis certification, PPAP level 3, if specified at time of enquiry.


Our extensive knowledge, backed up by a wealth of technical data and experience, enables us to answer your questions and even advise on product selection.

We have supplied the major fastener groups in the UK for many years and continue to ship to customers worldwide. D. S. Fasteners has a reputation for honouring its delivery commitments.

Whatever your fastening requirements, the staff at D. S. Fasteners will be happy to help.

D. S. FASTENERS LTD

Grades 8, 10, 12 and Brass

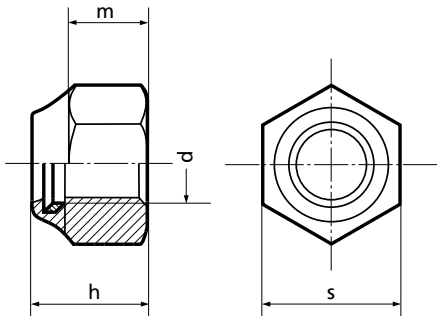


We also stock DIN 6924 and left hand thread. Contact us to check dimensions.

Size	Std Pitch	Fine Pitch 1	Fine Pitch 2	s	DIN 985			DIN 982		
					h	m	Wgt Kgs/1000	h	m	Wgt Kgs/1000
M2	0.4	–	–	4	2.5	1.8	0.2	–	–	–
M2.5	0.45	–	–	5	2.8	2.25	0.3	–	–	–
M3	0.5	–	–	5.5	4.0	2.4	0.4	–	–	–
M3.5	0.6	–	–	6	4.5	3.2	0.5	–	–	–
M4	0.7	–	–	7	5	2.5	1	–	–	–
M5	0.8	–	–	8	5	3.5	1.4	6.3	4	1.4
M6	1	–	–	10	6	4.5	2.4	8	5	2.5
M7	1	–	–	11	7.5	5.5	3	8.5	5.5	3.25
M8	1.25	M8x1	–	13	8	6	5.1	9.5	6.5	5.6
M10	1.5	M10x1.25	M10x1	17	10	7.5	10.6	11.5	8	12.5
M12	1.75	M12x1.5	M12x1.25	19	12	8.5	17.2	14	10	18
M14	2	M14x1.5	–	22	14	11.5	26	16	11	26.5
M16	2	M16x1.5	–	24	16	12.5	34	18	13	35
M18	2.5	M18x2	M18x1.5	27	18	14	45	20	15	47.5
M20	2.5	M20x2	M20x1.5	30	20	15	62	22	16	65
M22	2.5	M22x2	M22x1.5	32	22	16	75	25	18	78
M24	3	M24x2	M24x1.5	36	24	18	100	28	19	110
M27	3	M27x2	M27x1.5	41	27	21	162	30.5	23	182
M30	3.5	M30x2	M30x1.5	46	30	23	212	35	27	267
M33	3.5	M33x2	M33x1.5	50	33	25	317	–	–	–
M36	4	M36x2	M36x1.5	55	36	27	415	–	–	–
M39	4	M39x3	–	60	39	30	499	–	–	–
M42	4.5	M42x3	–	65	42	33	628	–	–	–
M45	4.5	M45x3	–	70	45	35	771	–	–	–
M48	5	M48x3	–	75	48	38	998	–	–	–
M52	5	M52x3	–	80	52	42	1265	–	–	–
M56	5.5	–	–	85	56	45	1510	–	–	–
M64	6	–	–	95	64	51	2000	–	–	–
Available in brass										
M4	0.7	–	–	7	4	2.5	1	–	–	–
M5	0.8	–	–	8	5	3.5	1.4	6.3	4	1.4
M6	1	–	–	10	6	4.5	2.4	8	5	2.5
M8	1.25	–	–	13	8	6	5.1	9.5	6.5	5.6
M10	1.5	–	–	17	10	7.5	10.6	11.5	8	12.5

UNF & UNC nylon insert nuts

Size	Threads per inch		s	P type			T type		
	UNF	UNC		h	m	Wgt Kgs/1000	h	m	Wgt Kgs/1000
4	48	40	0.187	0.149	0.100	0.45	–	–	–
6	40	32	0.250	0.180	0.127	0.70	0.133	0.083	0.54
8	36	32	0.312	0.245	0.193	2.25	0.180	0.128	1.13
10	32	24	0.312	0.245	0.189	2.25	0.180	0.124	1.13
¼	28	20	0.437	0.325	0.232	4.04	0.268	0.182	3.26
5/16	24	18	0.500	0.390	0.280	5.40	0.365	0.250	4.80
3/8	24	16	0.562	0.435	0.332	8.00	0.360	0.262	6.40
7/16	20	14	0.687	0.500	0.372	14.20	0.435	0.312	11.60
½	20	13	0.750	0.585	0.432	17.10	0.470	0.318	14.00
9/16	18	12	0.875	0.680	0.547	33.00	0.548	0.405	25.20
5/8	18	11	0.937	0.740	0.554	37.00	0.548	0.383	27.00
¾	16	10	1.125	0.860	0.641	61.00	0.640	0.427	50.00
7/8	14	9	1.312	0.995	0.766	100.00	0.731	0.501	75.00
1	12	8	1.500	1.085	0.806	125.00	0.773	0.507	100.00
1⅛	12	7	1.687	1.285	1.018	212.00	0.870	0.587	122.00
1¼	12	7	1.875	1.345	1.050	288.00	1.005	0.684	213.00
1½	12	6	2.250	1.604	1.262	480.00	1.169	0.808	321.00
	BA								
6	47.9	–	0.193	0.157	0.115	0.35	0.125	0.070	0.27
4	38.5	–	0.248	0.215	0.150	0.85	0.167	0.100	0.70
2	31.4	–	0.324	0.275	0.200	2.20	0.233	0.170	1.65
0	25.4	–	0.413	0.290	0.239	3.24	0.226	0.157	2.40
	BSW	BSF							
3/16	24	32	0.324	0.250	0.178	2.10	0.186	0.124	1.50
¼	20	26	0.445	0.320	0.247	4.35	0.270	0.192	3.42
5/16	18	22	0.525	0.400	0.300	7.60	0.325	0.220	4.60
3/8	16	20	0.600	0.455	0.362	9.75	0.380	0.288	7.20
7/16	14	18	0.710	0.525	0.421	17.00	0.445	0.341	11.90
½	12	16	0.820	0.640	0.502	27.20	0.495	0.345	19.60
9/16	12	16	0.920	0.658	0.511	38.00	0.500	0.353	24.60
5/8	11	14	1.01	0.757	0.606	46.00	0.572	0.398	34.00
¾	10	12	1.20	0.940	0.727	83.00	0.710	0.494	55.00
7/8	9	11	1.30	1.034	0.804	111.00	0.789	0.557	73.00
1	8	10	1.48	1.170	0.893	150.00	0.885	0.602	105.00
1⅛	7	9	1.67	1.275	1.00	173.00	0.940	0.672	140.00
1¼	7	9	1.86	1.420	1.104	280.00	1.045	0.714	214.00
1½	6	8	2.22	1.714	1.352	508.00	1.254	0.894	344.00

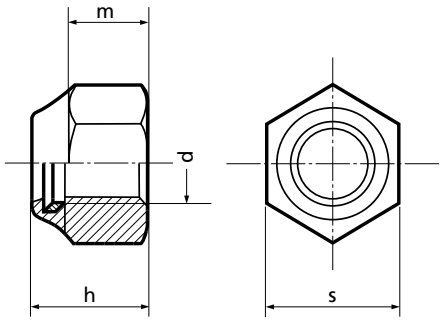


See page 10/11 for details of American products.

All metal self locking nuts – Stover

DIN 980V

Size	Std Pitch	Fine Pitch 1	Fine Pitch 2	s	h	m
M4	0.7	–	–	7	4	2.5
MS	0.8	–	–	8	5	3.5
M6	1	–	–	10	6	4.5
M8	1.25	M8x1	–	13	8	6
M10	1.5	M10x1.25	M10x1	17	10	7.5
M12	1.75	M12x1.5	M12x1.25	19	12	8.5
M14	2	M14x1.5	–	22	14	11 .5
M16	2	M16x1.5	–	24	16	12.5
M18	2.5	M18x2	M18x1.5	27	18	14
M20	2.5	M20x2	M20x1.5	30	20	15.4
M22	2.5	M22x2	M22x1.5	32	22	16.9
M24	3	M24x2	M24x1.5	36	24	18.5
M27	3	M27x2	M27x1.5	41	27	20.8
M30	3.5	M30x2	M30x1.5	46	30	23.1
M33	3.5	M33x2	M33x1.5	50	33	25.4
M36	4	M36x2	M36x1.5	55	36	27.2

Grades 8, 10 and 12

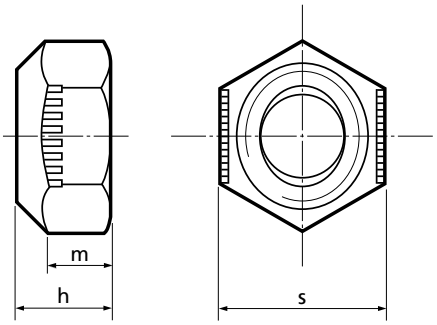

Fine pitch.

DIN 980V and DIN 6925.


Stock range M4 to M48.

Cleveloc style nuts

DIN 980V

Size	Std Pitch	Fine Pitch 1	Fine Pitch 2	h		s		m	Wgt Kgs/ 1000
				Max	Min	Max	Min		
M4	0.7	–	–	4.2	3.9	7	6.78	2.2	0.8
M5	0.8	–	–	5.1	4.8	8	7.78	2.75	1.3
M6	1	M6x0.75	–	6	5.7	10	9.78	3.3	2.6
M7	1	–	–	7	6.5	11	10.73	3.85	3.6
M8	1.25	M8x1	–	8	7.5	13	12.73	4.4	5.6
M10	1.5	M10x1.25	M10x1	10	9	17	16.73	5.5	12
M12	1.75	M12x1.5	M12x1.25	12	11	19	18.67	6.6	17.5
M14	2	M14x1.5	–	14	12	22	21.67	7.7	22
M16	2	M16x1.5	–	16	14	24	23.67	8.8	30.5
M18	2.5	M18x2	M18x1.5	18	16	27	26.16	9.9	52
M20	2.5	M20x2	M20x1.5	20	18	30	29.16	11	70.5
M22	2.5	M22x2	M22x1.5	22	20	32	31	12.2	85
M24	3	M24x2	M24x1.5	24	22	36	35	13.2	103
M27	3	M27x2	M27x1.5	27	25	41	40	14.8	178
M30	3.5	M30x2	M30x1.5	30	28	46	45	16.5	239

Grades 8, 10 and 12

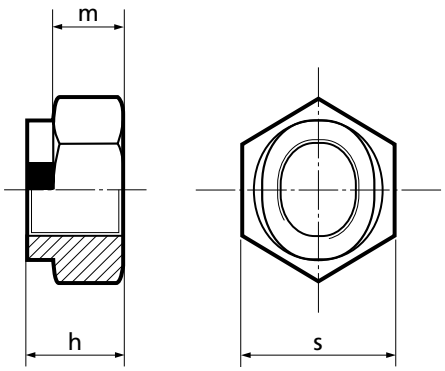


Fine pitch.

All metal self locking nuts – BIW

DIN 980

Size	Std Pitch	s	h
M5	0.8	8	4
M6	1	10	5
M8	1.25	13	6.5
M10	1.5	17	8
M12	1.75	19	10
M16	2	24	12

Centre lock Grade 8

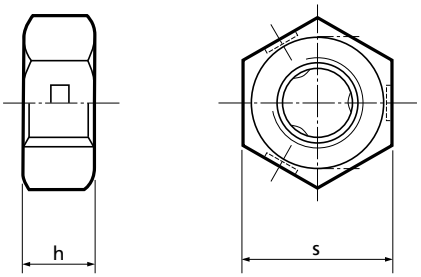


All metal self locking nuts – V3

DIN 980

Size	Std Pitch	s	h	m
M5	0.8	8	4.5	4
M6	1	10	5.5	5
M8	1.25	13	7	6.5
M10	1.5	17	8.6	8
M12	1.75	19	10.6	10
M16	2	24	13	12

Clinch lock Grade 8

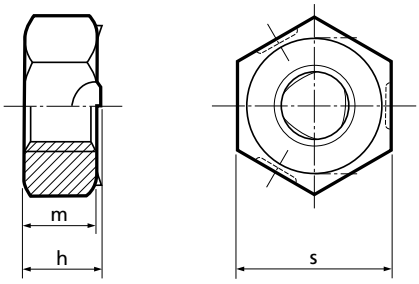


Available in stainless steel.


All metal self locking nuts – Vargal

Size	Std Pitch	s	h	m
M5	0.8	8	6.3	4
M6	1	10	8.2	4.5
M8	1.25	13	10.8	6.7
M10	1.5	17	12.6	8
M12	1.75	19	16	10.6
M14	2	22	18	12
M16	2	24	20.6	13.5
M18	2.5	27	22.5	14.5
M20	2.5	30	25.5	16.9
M22	2.5	32	29.8	20.5
M24	3	36	29.9	20.6
M27	3	41	33.7	24.3
M30	3.5	46	37	26.6
M33	3.5	50	40.5	28.8
M36	4	55	44.2	31.5

Grade 8 and 10

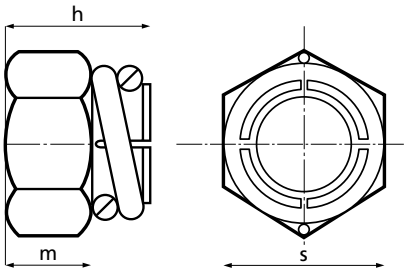

Industrial self locking nuts

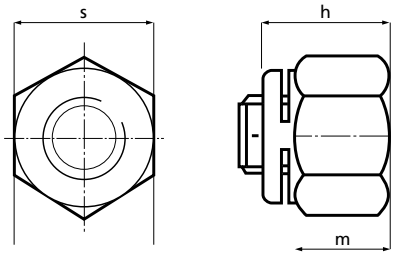


The most versatile self locking nut in the Philidas range is the Philidas Industrial which can be confidently recommended as the first choice for most industrial applications. The Philidas Industrial is an all-metal one piece nut with a collar above the hexagon. Two slots, in the same plane, are cut in the collar and the metal above the slots set to depitch the threads. When the nut is tightened on to a bolt, the thread is gripped on the flank – the point at which it is designed to take the thrust.

Size (mm)	s	h	m
5	8	6.5	4.3
6	10	7.5	5
8	13	8.5	5.7
10	17	11	8
12	19	13	9.5
14	22	15	11
16	24	17	12.8
18	27	20	15.5
20	30	22	17.5
22	32	23	18
24	36	25	19.5
27	41	28	22
30	46	31	24.5
33	50	33	26.2
36	55	36	28.6
39	60	39	31.1
42	65	42	33.5
45	70	45	36
48	75	48	38
52	80	52	41.5

Size (inch)	s	h		m	
	a/f	Standard	Thin	Standard	Thin
8 - 32	0.312	0.235	0.170	0.157	0.092
10 - 32	0.344	0.267	0.203	0.174	0.110
¼	0.437	0.270	0.203	0.175	0.108
5⁄16	0.500	0.330	0.246	0.225	0.141
3⁄8	0.562	0.400	0.296	0.285	0.183
7⁄16	0.687	0.480	0.340	0.345	0.205
½	0.750	0.546	0.404	0.395	0.253
9⁄16	0.875	0.600	0.433	0.438	0.266
5⁄8	0.937	0.672	0.493	0.503	0.319
¾	1.125	0.785	0.593	0.593	0.401
7⁄8	1.312	0.913	0.650	0.698	0.435
1	1.500	1.032	0.743	0.788	0.499
1⅛	1.687	1.160	0.881	0.897	0.618
1¼	1.875	1.280	0.990	1.000	0.711
1⅜	2.062	1.400	1.120	1.105	0.825
1½	2.250	1.530	1.250	1.210	0.930
1¾	2.625	1.780	1.500	1.410	1.130
2	3.000	2.020	1.740	1.620	1.340
2¼	3.375	2.215	1.940	1.745	1.470
2½	3.750	2.470	2.140	2.000	1.670
2¾	4.125	2.762	2.340	2.275	1.853
3	4.500	2.962	2.540	2.450	2.028

Turret self locking nuts

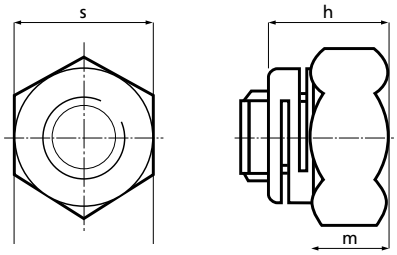

The all-metal Philidas Turret nut is suitable for use in high or low temperature conditions, and the locking performance is unaffected by oil, petrol or other liquids and vapours. It is easily assembled with hand or power tools, and will lock effectively either to a face or unsupported.

Size (mm)	s	h	m
2.5	5	4.5	2.4
3	5.5	4.75	2.45
3.5	7	5	2.5
4	7	5.6	3.3
5	8	6.8	3.9
6	10	8.5	5
8	13	10.5	6
10	17	13	7.6
12	19	15	8.5
14	22	17	10
16	24	19.5	12
18	27	22	14
20	30	24	15.5
22	32	26.5	17.5
24	36	29	19
27	41	33	22
30	46	39	26
33	50	43	30
36	55	47	32.5
39	60	50	35
42	65	54	37.5
45	70	58	41
48	75	62	42.5
52	80	67	46.5


Size (inch)	s	h		m	
	a/f	Standard	Thin	Standard	Thin
4 - 40	0.188	0.175	0.143	0.087	0.055
6 - 32	0.250	0.215	0.179	0.107	0.072
8 - 32	0.312	0.275	0.233	0.137	0.095
10 - 32	0.344	0.285	0.241	0.151	0.107
¼	0.437	0.340	0.273	0.182	0.115
5⁄16	0.500	0.410	0.326	0.232	0.148
3⁄8	0.562	0.490	0.386	0.292	0.190
7⁄16	0.687	0.570	0.445	0.357	0.232
½	0.750	0.660	0.514	0.420	0.274
9⁄16	0.875	0.725	0.558	0.483	0.316
5⁄8	0.937	0.810	0.623	0.545	0.358
¾	1.125	0.975	0.746	0.670	0.441
⅞	1.312	1.051	0.855	0.703	0.507
1	1.500	1.185	0.970	0.792	0.577
1⅛	1.687	1.358	1.145	0.870	0.655
1¼	1.875	1.498	1.85	0.960	0.747
1⅜	2.062	1.646	1.430	1.055	0.835
1½	2.250	1.799	1.585	1.150	0.938
1¾	2.625	2.101	1.890	1.365	1.150
2	3.000	2.226	2.000	1.425	1.199
2¼	3.375	2.340	2.100	1.510	1.270
2½	3.750	2.550	2.300	1.685	1.435
2¾	4.125	2.845	2.600	1.930	1.685
3	4.500	3.062	2.800	2.150	1.888

Flange nuts

DIN 6923

Size	Std Pitch	Fine Pitch	s	h	d
M3	0.5	–	5.5	4	7.9
M4	0.7	–	7	4.6	–
M5	0.8	–	8	5	11.8
M6	1	–	10	6	14.2
M8	1.25	M8x1	13	8	17.9
M10	1.5	M10x1.25	15	10	21.8
M12	1.75	M12x1.5	18	12	26
M14	2	M14x1.5	21	14	29.9
M16	2	M16x1.5	24	16	34.5
M20	2.5	–	30	20	42.8
M24	3	–	36	24	45

Grades 8, 10 and 12
Plain and serrated

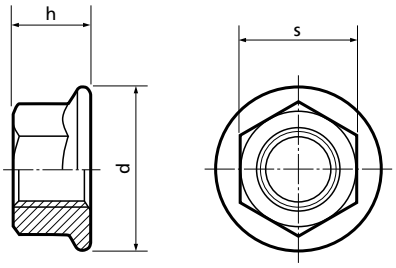


Available in stainless steel.

Stover flange nuts

DIN 6927

Size	Std Pitch	Fine Pitch	s	h	c	d
M4	0.7	–	7	4	–	–
M5	0.8	–	8	6.2	1	11.8
M6	1.0	–	10	7.3	1.1	14.2
M8	1.25	M8x1	13	9.4	1.2	17.9
M10	1.5	M10x1.25	15	11.4	1.5	21.8
M12	1.75	M12x1.5	18	13.8	1.8	26.0
M14	2.0	M14x1.5	21	15.9	2.1	29.9
M16	2.0	M16x1.5	24	18.3	2.4	34.5
M20	2.5	M20x1.5	30	22.4	3.0	42.8
M24	3.0	M24x2	36	30.0	6.8	45

Grades 8 and 10

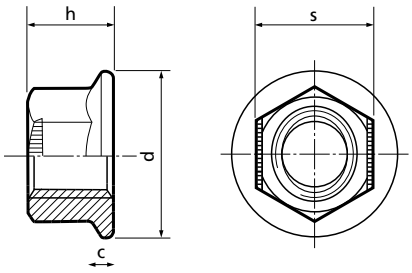


Nylon insert flange nuts

DIN 6926

Size	Std Pitch	Fine Pitch	s	h	c	d
M4	0.7	–	7	5.5	–	–
M5	0.8	–	8	7.1	1	11.8
M6	1.0	–	10	9.1	1.1	14.2
M8	1.25	M8x1	13	11.1	1.2	17.9
M10	1.5	M10x1.25	15	13.5	1.5	21.8
M12	1.75	M12x1.5	18	16.1	1.8	26
M14	2.0	M14x1.5	21	18.2	2.1	29.9
M16	2.0	M16x1.5	24	20.3	2.4	34.5
M20	2.5	M20x1.5	30	24.8	3	42.8
M24	3.0	M24x2	36	24	5	45

Grades 8 and 10

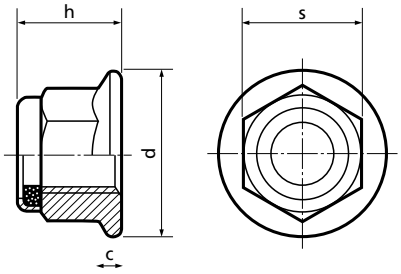


Available in stainless steel.

Serrated flange head set screws

DIN 6921

Size	Std Pitch	L1	L2	L3	L4	L5	L6	L7	s	c	k
M5	0.8	10	12	16	20	25	–	–	8	11.8	5.4
M6	1	12	16	20	25	30	–	–	10	14.2	6.6
M8	1.25	12	16	20	25	30	40	50	13	18	8.1
M10	1.5	25	30	35	40	50	–	–	15	2.3	9.2
M12	1.75	25	30	35	40	45	50	–	18	26.6	11.5
M14	2	35	40	50	75	90	–	–	–	30.5	12.8
M16	2	30	45	60	–	–	–	–	21	35	14.4

Grade 8.8 Zinc Yellow

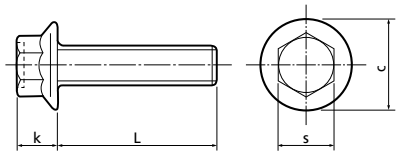

Some sizes now stocked in Grade 10.9, please contact us for details.


Plain flanged head sets available to order.

Full nuts

DIN 934

Size	Std Pitch	Fine Pitch 1	Fine Pitch 2	s	h	Wgt Kgs/1000
M4	0.7	–	–	7	2.4	0.36
M5	0.8	–	–	8	4	0.5
M6	1	0.75	–	10	5	0.8
M7	1	–	–	11	5.5	1.5
M8	1.25	M8x1	–	13	6.5	3.8
M10	1.5	M10x1.25	M10x1	17	8	8
M12	1.75	M12x1.5	M12x1.25	19	10	11
M14	2	M14x1.5	–	22	11	17
M16	2	M16x1.5	–	24	13	19.5
M18	2.5	M18x2	M18x1.5	27	15	28.5
M20	2.5	M20x2	M20x1.5	30	16	35.5
M22	2.5	M22x2	M22x1.5	32	18	41
M24	3	M24x2	M24x1.5	36	19	56
M27	3	M27x2	M27x1.5	41	22	87
M30	3.5	M30x2	M30x1.5	46	24	105
M33	3.5	M33x2	M33x1.5	50	26	155
M36	4	M36x2	M36x2	55	29	180
M39	4	M39x3	–	60	31	450
M42	4.5	M42x3	–	65	34	610
M45	4.5	M45x3	–	70	36	750
M48	5	M48x3	–	75	38	890

Grades 8, 10 and 12

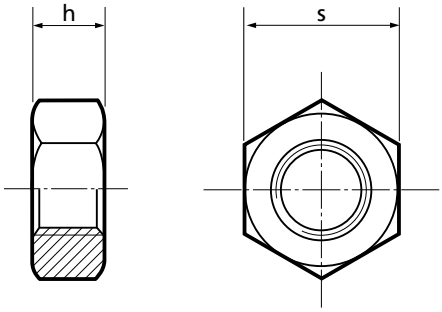

Grade 10 M4 – M56
Grade 12 M6 – M56

Also stocked in fine pitch and left hand thread.

We offer full nuts to ISO 4032, please contact us for details.


Available in stainless steel.

Castle nuts

DIN 935

Size	Std Pitch	Fine Pitch	m	s	w
M5	0.8	–	5.8	8	3.7
M6	1	–	7.5	10	4.5
M8	1.25	M8x1	9.5	13	6.5
M10	1.5	M10x1.25	12	17	8
M12	1.75	M12x1.25	15	19	10
M14	2	M14x1.5	16	22	11
M16	2	M16x1.5	19	24	13
M18	2.5	M18x1.5	21	27	15
M20	2.5	M20x1.5	22	30	16
M22	2.5	M22x1.5	26	32	18
M24	3	M24x2	27	36	19
M27	3	M27x2	30	41	22
M30	3.5	M30x2	33	46	24
M33	3.5	M33x2	35	50	26
M36	4	M36x3	38	55	29

Grades 8 and 10

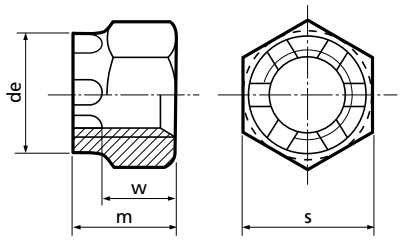

Below M12 nuts are slotted.


Thin castle nuts (DIN 979 & DIN 937) are also available. Contact us for details.

Lock nuts

DIN 936/439

Size	Std Pitch	Fine Pitch 1	Fine Pitch 2	s	h		Wgt Kgs/1000
					DIN 936	DIN 439	
M4	0.7	–	–	7	–	2.2	0.5
M5	0.8	–	–	8	–	2.7	0.8
M6	1	–	–	10	–	3.2	1.5
M8	1.25	M8x1	–	13	5	4	3.8
M10	1.5	M10x1.25	M1x1	17	6	5	8
M12	1.75	M12x1.5	M12x1.25	19	7	6	11
M14	2	M14x1.5	–	22	8	7	17
M16	2	M16x1.5	–	24	8	8	19.5
M18	2.5	M18x2	M18x1.5	27	9	9	28.5
M20	2.5	M20x2	M20x1.5	30	9	10	35.0
M22	2.5	M22x2	M22x1.5	32	10	11	41
M24	3	M24x2	M24x1.5	36	10	12	56
M27	3	M27x2	M27x1.5	41	12	13.5	87
M30	3.5	M30x2	M30x1.5	46	12	15	105
M33	3.5	M33x2	M33x1.5	50	14	16.5	155
M36	4	M36x2	M36x1.5	55	14	18	180
M39	4	M39x3	–	60	16	19.5	255
M42	4.5	M42x3	M42x1.5	65	16	21	300
M45	4.5	M45x3	–	70	18	22.5	390
M48	5	M48x3	–	75	18	24	450
M56	5.5	–	–	85	22	–	650

DIN 936 – Grade 17H & 22H
DIN 439 – Grade 04 and 05

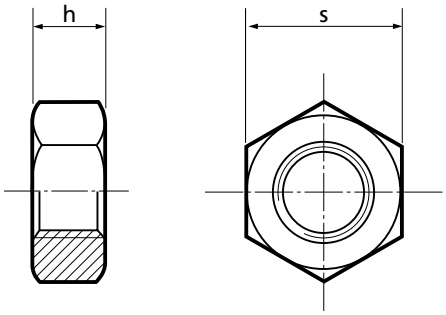

Grade 17H M8 – M56
Grade 22H M16 – M24

Grade 04 M6 – M24
Grade 05 M10 – M24


Both DIN 439 and DIN 936 parts are stocked in fine pitch and left hand thread.

We offer lock nuts to ISO 4035, please contact us for details.

Weld nuts – Square

DIN 928


Size	Std Pitch	s	m	h
M4	0.7	8	4	0.7
M5	0.8	9	4.2	0.8
M6	1	10	5	0.8
M8	1.25	14	6.5	0.8
M10	1.5	17	8.5	1.2
M12	1.75	19	9.5	1.4

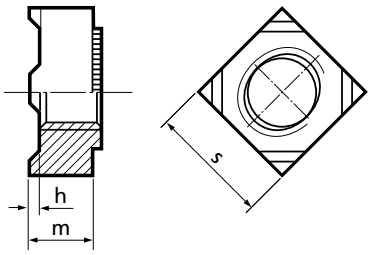

Weld nuts – Hexagon

DIN 929

Size	Std Pitch	s	m	h	dz
M3	0.5	7.5	3	0.55	4.5
M4	0.7	8	3.5	0.7	6
M5	0.8	9	4	0.8	7
M6	1	10	5	0.8	8
M8	1.25	14	6	0.8	10.5
M10	1.5	17	8	1.2	12.5
M12	1.75	19	10	1.4	14.8
M16	2	24	13	1.8	18.8

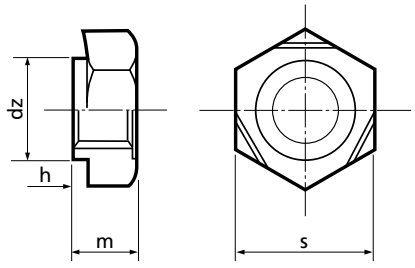


Available in stainless steel.

Dome nuts – Nylon insert

DIN 986

Grade 8 ZP

Size	Std Pitch	h2	h1	s	m
M4	0.7	9.6	5.6	–	2.9
M5	0.8	10.5	6	–	4.4
M6	1	12	7.5	10	4.9
M8	1.25	14	8.9	13	6.4
M10	1.5	18.1	10.5	17	8.4
M12	1.75	22.5	13.5	19	10.4
M16	2	27.5	16.5	24	14.1

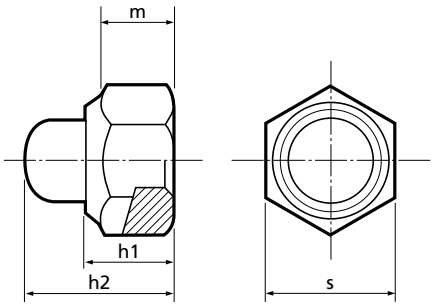


Dome nuts – 1 part steel

DIN 1587

Grade 8

Size	Std Pitch	h	L	s	m
M4	0.7	8	5.26	7	3.2
M5	0.8	10	7.21	8	4
M6	1	12	7.7	10	5
M8	1.25	15	10.6	13	5.5
M10	1.5	18	12.6	17	8
M12	1.75	22	15.6	19	10
M16	2	28	20.6	24	13
M20	2.5	34	25.6	30	16
M24	3	43	30.5	36	19
M30	3.5	–	–	–	–

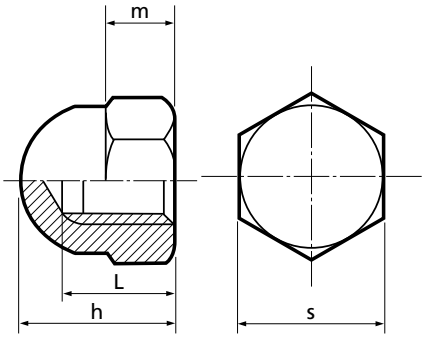


UNF & UNC nylon insert nuts

American Grade

Grade S.A.E. 8

Size	Threads per inch		s	h	m
	UNF	UNC			
¼	28	20	0.437	0.313	0.225
5/16	24	18	0.500	0.344	0.250
⅜	24	16	0.562	0.453	0.335
7/16	20	14	0.627	0.453	0.324
½	20	13	0.750	0.594	0.464
9/16	18	12	0.875	0.641	0.469
⅝	18	11	0.937	0.750	0.593
¾	16	10	1.064	0.875	0.742
⅞	14	9	1.250	0.984	0.790
1	12	8	1.440	1.047	0.825
1⅛	12	7	1.627	1.172	0.930
1¼	12	7	1.810	1.391	1.125
1½	12	6	2.195	1.609	1.313

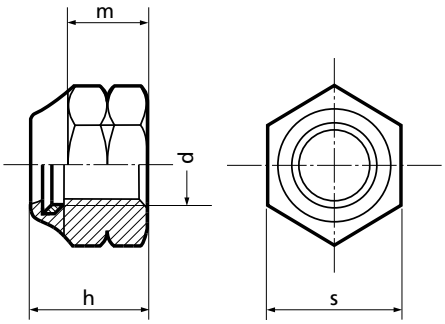


Nylon insert nuts are also available in Grades S.A.E. 2 and 5.

All metal self locking nuts – Stover Toplock

American Grade

Grade C (67 ton)
RC 26-34

Size	Threads per inch		s	h
	UNF	UNC		
¼	28	20	0.437 - 0.428	0.226
5/16	24	18	0.500 - 0.489	0.273
⅜	24	18	0.562 - 0.551	0.337
7/16	20	14	0.687 - 0.675	0.385
½	20	13	0.750 - 0.736	0.448
9/16	18	12	0.875 - 0.861	0.496
⅝	18	11	0.937 - 0.922	0.559
¾	16	10	1.125 - 1.088	0.665
⅞	14	9	1.312 - 1.269	0.776
1	12/14	8	1.500 - 1.450	0.887
1⅛	12	7	1.687 - 1.631	0.999
1¼	12	7	1.875 - 1.812	1.094
1⅜	12	6	2.062 - 1.994	1.206
1½	12	6	2.250 - 2.175	1.317

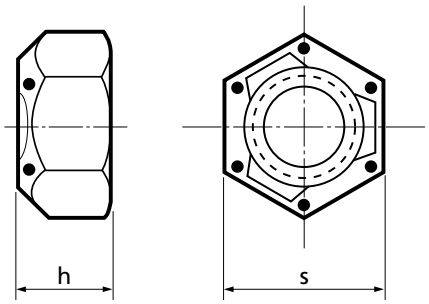


Serrated flange nuts

American Grade

Case hardened

Size	Threads per inch		s	h	c
	UNF	UNC			
¼	28	20	0.369	0.220	0.578
5⁄16	24	18	0.438	0.234	0.656
3⁄8	24	16	0.563	0.344	0.734
½	20	13	0.750	0.453	1.031

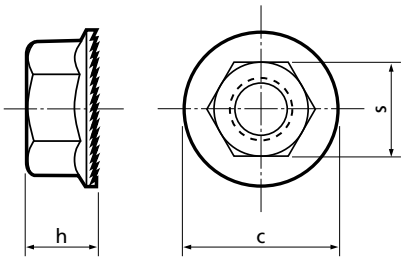


NTE series – Extra thin nylocs

American Grade

Grade S.A.E. 8

Size	Threads per inch		s	h
	UNF	UNC		
¼	28	20	0.439 - 0.430	0.203
5⁄16	24	18	0.502 - 0.492	0.260
3⁄8	24	18	0.564 - 0.553	0.266
7⁄16	20	14	0.627 - 0.615	0.313
½	20	13	0.752 - 0.741	0.313
9⁄16	18	12	0.877 - 0.865	0.359
5⁄8	18	11	0.940 - 0.928	0.391
¾	16	10	1.064 - 1.052	0.406
7⁄8	14	9	1.252 - 1.239	0.469
1	12/14	8	1.440 - 1.427	0.547

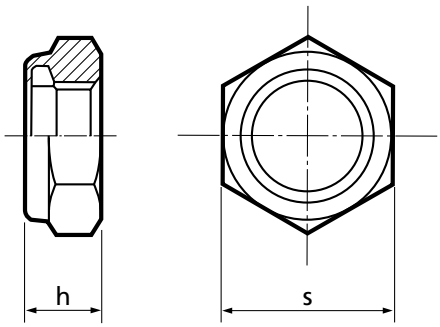

THE SELF LOCKING NUT SPECIALISTS



D. S. FASTENERS LTD

D. S. Fasteners Ltd

Caxton Way
Thetford
Norfolk
IP24 3RY

Tel: +44 01842 763000
Fax: +44 01842 764055
Email: nuts@dsfasteners.co.uk

www.dsfasteners.co.uk

May 2012