
摩图
MOTU



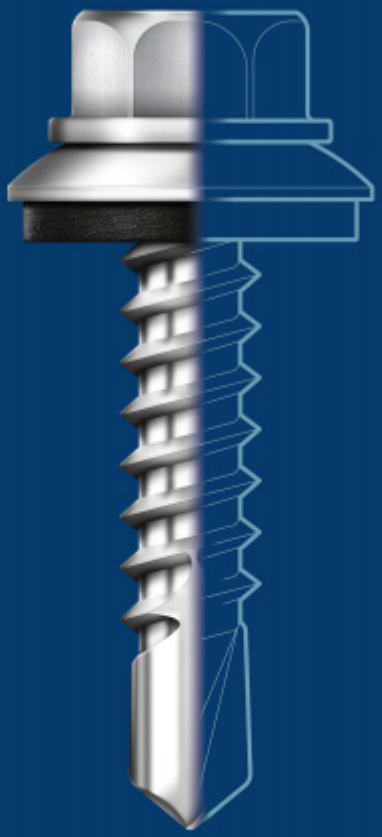

Self Drilling & Tapping Screws

Focused and Professional

Hebei Motu Metal Products Co.,Ltd.

HAVE CONFIDENCE, TAKE MOTU


CEO Mr. Gao



General Manager
Chuck Wu
Mob: 0086 18731973207
0086 15731933015
mail: chuck_wu@qq.com
export@cnmotu.cn



Sales Manager
Felix Lee
Mob: 0086 19131303015
0086 13613319931
mail: sales@cnmotu.cn
export@cnmotu.cn

Hebei Motu Metal Prodcuts Co., Ltd. was founded in 1990.One of Hebei's largest ,independent and fastest growing manufacturers to the construction industry.Motu has a strong technology team with over 30 years of industry experience. At Motu, we do whatever it takes to make it easier for you to delight your customers, every time and at anytime. We have combined everything we have learned about producing high quality screws, fixings and accessories with our understanding of what great service means for independent retailers.

Fasteners & Fixings










Phillips

Phillips Bugle Head Drywall Screw Twinfast Thread

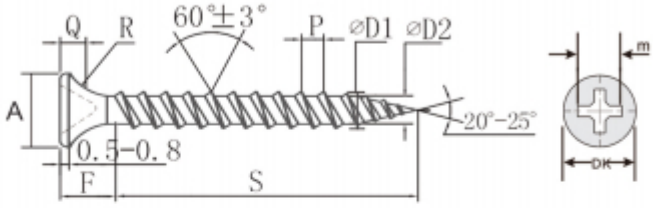



BP Black phosphate ZN Zinc YZ Yellow Zinc

Dimensions

Size	Wire Dia (ref.)	D1 min	D1 max	D2 min	D2 max	A min	A max	Q min	Q max	M	F min	F max	P min	P max	R min	R max	Torque Min(N*m)
3.5	2.65	3.40	3.60	2.27	2.42	7.90	8.50	2.64	3.0	PH2	5.0	6.5	1.4	17	4.5	5.0	2.2
3.9	2.90	3.70	3.90	2.40	2.60	7.90	8.50	2.64	3.0	PH2	6.5	6.5	1.6	16	4.5	5.0	3.0
4.2	3.20	4.05	4.30	2.80	3.00	7.90	8.50	2.64	3.0	PH2	6.5	6.5	1.7	15	4.5	5.0	2.7
4.8	3.70	4.70	4.90	3.20	3.40	8.50	9.40	2.87	3.0	PH2	6.5	6.5	2.1	12	4.5	5.0	5.8


Notes	Nominal Length L
Material: C1022A	13-19mm incl.+0/-0.50
Case hardness: Hv 550-800	25-30mm incl.+0/-0.80
Core Hardness: Hv 300-500	32-50mm incl.+0/-1.20
Bending Angle: ≥15°	55-90mm incl.+0/-1.50
L≤50 Full,L > 50,S≤50	100-152mm incl.+0/-2.50

Size (mm) (inch)

3.5× (#6×)	3.9× (#7×)	4.2× (#8×)	4.8× (#10×)
19 (3/4")	25 (1")	32 (1-1/4")	38 (1-1/2")
25 (1")	32 (1-1/4")	38 (1-1/2")	50 (2")
28 (1-1/8")	35 (1-3/8")	50 (2")	75 (3")
32 (1-1/4")	38 (1-1/2")	63 (2-1/2")	90 (3-1/2")
35 (1-3/8")	41 (1-5/8")	75 (3")	100 (4")
38 (1-1/2")	45 (1-3/4")	80 (3-5/32")	110 (4-5/16")
41 (1-5/8")	50 (2")	90 (3-1/2")	

Phillips

Phillips Bugle Head Drywall Screw Coarse Thread

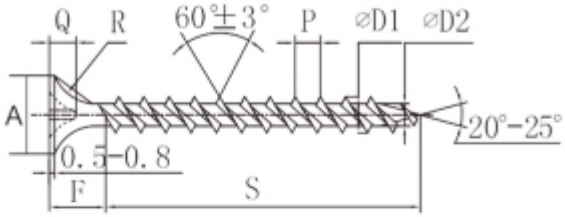





BP Black phosphate ZN Zinc YZ Yellow Zinc

Dimensions

Size	Wire Dia (ref.)	D1 min	D1 max	D2 min	D2 max	A min	A max	Q min	Q max	M	F min	F max	P min	P max	R min	R max	Torque Min(N*m)
3.5	2.65	3.65	3.60	2.25	2.45	7.90	8.50	2.64	3.0	PH2	5.0	6.5	2.8	9	4.5	5.0	2.2
3.9	2.90	3.90	4.20	2.35	2.50	7.90	8.50	2.64	3.0	PH2	5.0	6.5	2.8	9	4.5	5.0	3.0
4.2	3.20	4.30	4.60	2.80	3.00	7.90	8.50	2.64	3.0	PH2	5.0	6.5	2.8	9	4.5	5.0	2.7
4.8	3.70	4.90	5.30	3.20	3.50	8.50	9.40	2.87	3.0	PH2	5.0	6.5	3.1	8	4.5	5.0	5.8

Notes	Nominal Length L
Material: C1022A	13-19mm incl.+0/-0.50
Case hardness: Hv 550-800	25-30mm incl.+0/-0.80
Core Hardness: Hv 300-500	32-50mm incl.+0/-1.50
Bending Angle: ≥15°	55-90mm incl.+0/-1.50
L≤50 Full,L > 50,S≤50	100-152mm incl.+0/-2.50


Size (mm) (inch)

3.5× (#6×)	3.9× (#7×)	4.2× (#8×)	4.8× (#10×)
19 (3/4")	25 (1")	32 (1-1/4")	38 (1-1/2")
25 (1")	32 (1-1/4")	38 (1-1/2")	50 (2")
28 (1-1/8")	35 (1-3/8")	50 (2")	75 (3")
32 (1-1/4")	38 (1-1/2")	63 (2-1/2")	90 (3-1/2")
35 (1-3/8")	41 (1-5/8")	75 (3")	100 (4")
38 (1-1/2")	45 (1-3/4")	80 (3-5/32")	110 (4-5/16")
41 (1-5/8")	50 (2")	90 (3-1/2")	

Chipboard screw DIN 7505-A

Pozi Recess/Phillips

Pozi Drive Countersunk Head Chipboard Screws Flat Head （CSK / Double CSK）

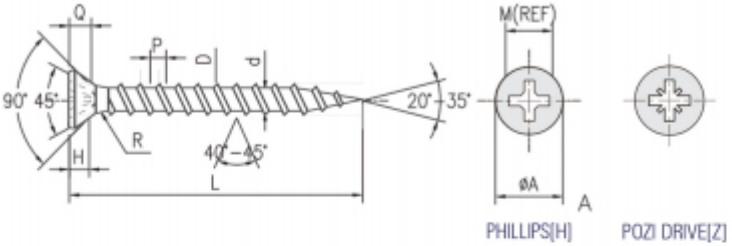



ZN Zinc　YZ Yellow Zinc

Dimensions

Size	A min	A max	H Ref.	L1 max	Q min	Q max	M Ref.	Drive No	R max	D min	D max	d min	d max	P Ref.	Wire Dia +0/-0.02	Case Depth Mm	Torsion Min(N*m)
2.5	4.70	5.05	1.40	2.10	1.22	1.57	2.51	1	1.5	2.30	2.50	1.40	1.60	1.10	1.80	0.05-0.10	1.1
3.0	5.70	6.05	1.80	2.35	1.60	2.11	3.00	1	1.5	2.80	3.00	1.75	1.90	1.35	2.10	0.08-0.18	1.5
3.5	6.64	7.05	2.00	2.60	1.76	2.16	4.00	2	1.8	3.25	3.50	2.00	12.25	1.60	2.45	0.08-0.18	2.0
4.0	7.64	8.05	2.35	2.80	2.05	2.51	4.40	2	2.0	3.75	4.00	2.30	2.50	1.80	2.78	0.12-0.23	3.0
4.5	8.64	9.05	2.55	3.00	2.46	3.02	4.80	2	2.2	4.25	4.50	2.50	2.70	2.00	3.10	0.12-0.23	4.3
5.0	9.64	10.05	2.85	3.20	2.99	3.55	5.30	2	2.5	4.75	5.00	2.90	3.10	2.20	3.45	0.12-0.23	6.0
6.0	11.57	12.05	3.35	3.60	2.99	3.55	6.60	3	2.5	5.75	6.00	3.60	3.80	2.60	4.20	0.15-0.28	10.8


Notes	Thread length L	Nominal length L
Material: C1022A	up to 60mm=fully	01-10mm incl.+0/0.75
Case hardness: Hv 550-800	70mm=42mm T.L±2.0	11-30mm incl.0/-1.00
Core Hardness: Hv 300-500	80mm=48mm T.L±2.0	31-50mm incl.+0/-1.50
Bending Angle: 15°	90mm=54mm T.L±2.0	51-80mm incl.+0/-2.00
	100mm≤60mm T.L±2.0	91-120mm incl.+0/-2.00
	Over 100mm≤72mm T.L±2.0	121-200mm incl.+0/-2.00

Size (mm) (inch)

3.0×	3.5×	4.0×	5.0×	6.0×
12	12	16	25	25
16	16	20	30	30
18	20	25	35	35
20	25	30	40	40
25	30	35	45	45
30	35	40	50	50
35	40	50	60	60
40	45	60	70	70
	50	70	80	80
		80		90
				100
				110

Phillips/MTS-Sharp

Modified Truss Head Self Tapping Screws,Twinfast Thread

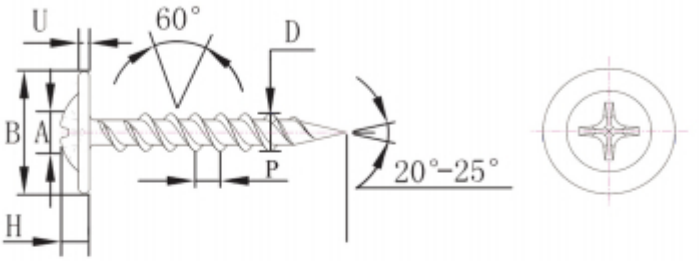



Truss head



Button head



ZN Zinc

YZ Yellow Zinc

Modified Truss Head Self Tapping Screws,Twinfast Thread


Size	A	B	U	H	D	P	Torque Min(N*m)
#8-15 (4,2-1,7)	#2Phil	11.5 / 10.0	1.35 / 0.80	3.5 / 2.00	4.35 / 4.05	Ref. / 1.70	3.7

Notes	Nominal Length L
Case Depth:0.10-2.23mm	10-19mm incl.+0/-0.76
Case Hardness:Hv 550-700	19-38mm incl.+0/-1.27
Core Hardness:Hv 320-420	41-76mm incl.+0/-1.52

Size (mm) (inch)			
4.2× #8×	13 (1/2")	4.8× #10×	19 (3/4")
	16 (5/8")		25 (1")
	19 (3/4")		32 (1-1/4")
	25 (2")		38 (1-1/2")
	32 (1-1/4")		
	38 (1-1/2")		

DIN 7981 Tapping Screw

Cross Recesseed Pan Head Tapping Screws

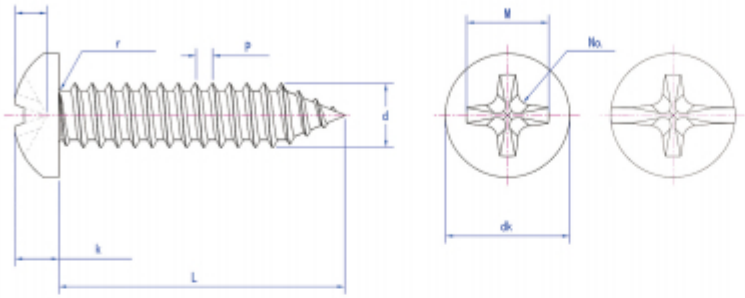



ZN Zinc

YZ Yellow Zinc

Dimensions


Mon	P	dk max	k max	No.	M
ST2.9	1.1	5.6	2.2	1	3
ST3.5	1.3	6.9	2.6	2	4.2
ST3.9	1.3	7.5	2.8	2	4.4
ST4.2	1.4	8.2	3.05	2	4.6
ST4.8	1.6	9.5	3.55	2	5
ST5.5	1.6	10.8	3.95	3	6.5
ST6.3	1.8	12.5	4.55	3	7.1

Size (mm) (inch)

2.9×	6.5 (1/4")	3.5×	9.5 (3/8")	3.9×	9.5 (3/8")	4.2×	13 (1/2")	4.8×	16 (5/8")	5.5×	25 (1")	6.3×	32 (1-1/4")
	9.5 (3/8")		13 (1/2")		13 (1/2")		16 (5/8")		19 (3/4")		32 (1-1/4")		38 (1-1/2")
#4×	13 (1/2")	#6×	16 (5/8")	#7×	16 (5/8")	#8×	19 (3/4")	#10×	25 (1")	#12×	38 (1-1/2")	#14×	45 (1-3/4")
	16 (5/8")		19 (3/4")		19 (3/4")		25 (1")		32 (1-1/4")		45 (1-3/4")		50 (2")
	19 (3/4")		25 (1")		25 (1")		32 (1-1/4")		38 (1-1/2")		50 (2")		75 (3")

DIN 7982 Tapping Screw

Cross recesseed flat countersunk head tapping screws

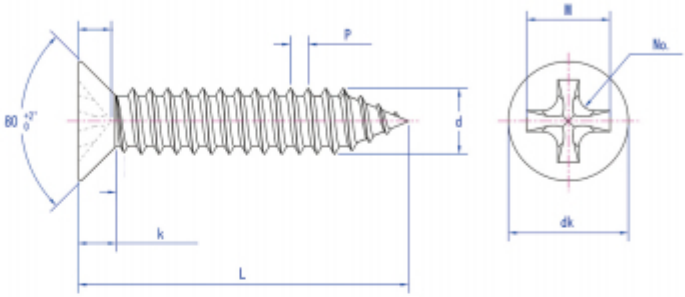



ZN Zinc

YZ Yellow Zinc

Dimensions


Mon	P	dk max	k	No.	M
ST2.9	1.1	5.5	1.7	1	3
ST3.5	1.3	6.8	2.1	2	4.2
ST3.9	1.3	7.5	2.3	2	4.6
ST4.2	1.4	8.1	2.5	2	4.7
ST4.8	1.6	9.5	3	2	5.1
ST5.5	1.8	10.8	3.4	3	6.8
ST6.3	1.8	12.4	3.8	3	7.1

Size (mm) (inch)

2.9× #4×	6.5 (1/4")	9.5 (3/8")	13 (1/2")	16 (5/8")	19 (3/4")	3.5× #6×	9.5 (3/8")	13 (1/2")	16 (5/8")	19 (3/4")	25 (1")	3.9× #7×	9.5 (3/8")	13 (1/2")	16 (5/8")	19 (3/4")	25 (1")	4.2× #8×	13 (1/2")	16 (5/8")	19 (3/4")	25 (1")	32(1-1/4")
4.8× #10×	16 (5/8")	19 (3/4")	25 (1")	32(1-1/4")	38(1-1/2")	5.5× #12×	25 (1")	32(1-1/4")	38(1-1/2")	45(1-3/4")	50 (2")	6.3× #14×	32(1-1/4")	38(1-1/2")	45(1-3/4")	50 (2")	75 (3")						

DIN 6928 Tapping Screw

Hex Washer Head tapping screws

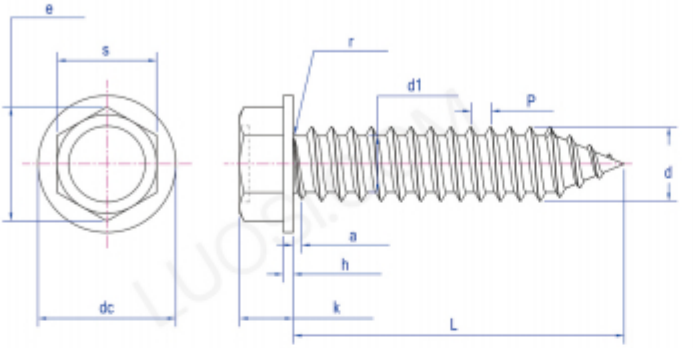



ZN Zinc
YZ Yellow Zinc
RS Ruspert

Dimensions


Mon	P	h min	dh max	dc min	k max	k min	s max	s min	d max	d min	d1 max	d1 min
ST2.9	1.1	0.4	6.3	5.8	2.8	2.5	4	3.82	2.9	2.76	2.18	2.08
ST3.5	1.3	0.6	8.3	7.6	3.4	3	5.5	5.32	3.53	3.35	2.64	2.51
ST3.9	1.3	0.6	8.3	7.6	3.4	3	5.5	5.32	3.91	3.73	2.92	2.77
ST4.2	1.4	0.8	8.8	8.1	4.1	3.6	7	6.78	4.22	4.04	3.1	2.95
ST4.8	1.6	0.9	10.5	9.8	4.3	3.8	8	7.78	4.8	4.62	3.58	3.43
ST5.5	1.8	1	11	10	5.4	4.8	8	7.78	5.46	5.28	4.17	3.99
ST6.3	1.8	1	13.5	12.2	5.9	5.3	10	9.78	6.25	6.03	4.88	4.7

Size (mm) (inch)

4.8× #10×	13 (1/2") 16 (5/8") 19 (3/4") 25 (1") 32 (1-1/4") 38 (1-1/2")	5.5× #12×	16 (5/8") 19 (3/4") 25 (1") 32 (1-1/4") 38 (1-1/2") 45 (1-3/4") 50 (2")
6.3× #14×	19 (3/4") 25 (1") 32 (1-1/4") 38 (1-1/2") 45 (1-3/4") 50 (2") 75 (3")		

Torx

Concrete Screw

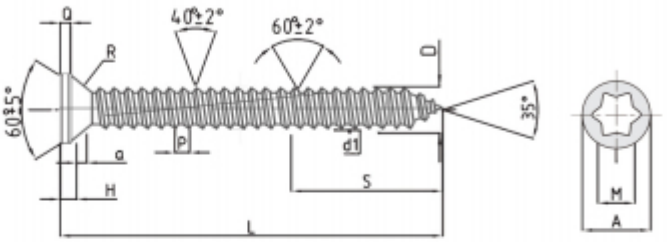




Torx Flat Head,Concrete Screws,Hi-low Thread

Size	Head Dia.	Head Hi	a max	r max	Pecess Width	Recess Depth.	Drive Size	Major Dia.		Minor Dia	pitch P	Torq, N·M
	A	H max			M	Q		D	d1	d	P	N·M
7,5	10,5 11,2	2,75	1	1,5	5,8	2 2,3	T30	7,2 7,5	6,5	5.1 5.5	2,4 2,8	16min

Pan Framing Head & Phillips Drive

Tapping Screw

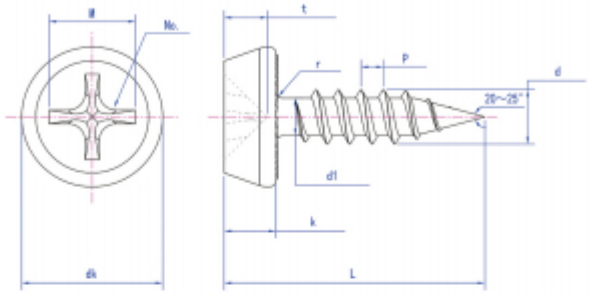




Dimensions

Mon	P	d max	k max	M	No.	d1 max	dk max
ST3.5	1.3	3.58	2.92	4.2	2	2.92	8

d (m/m)	L	d (inch)	L
M3.5	11	#6	7/16"
M3.9	11	#7	7/16"

DIN 7997 Wood Screw

Pozidrive countersunk flat head wood screws,Twinfast thread double leads

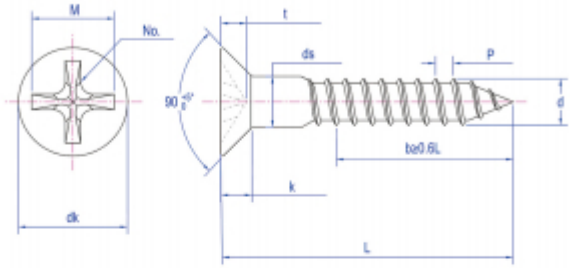



ZN Zinc YZ Yellow Zinc

Dimensions

Size	A min	A max	H Ref.	H max	Q min	Q max	M Ref.	Drive No	D min	D max	d ±0.3	P Ref.	da Wire Dia	Torsion Min(N*m)
#4-2.9	5.21	5.49	1.85	2.05	1.32	1.73	2.74	1	2.72	2.92	1.65	1.10	2.15-2.25	1.50
#5-3.2	5.89	6.20	2.08	2.28	1.14	1.80	3.50	2	3.05	3.25	1.88	1.27	2.35-2.40	1.50
#6-3.5	6.55	6.91	2.28	2.54	1.85	2.31	4.22	2	3.38	3.58	2.16	1.41	2.60-2.70	2.80
#7-3.9	7.24	7.62	2.51	2.76	1.85	2.31	4.22	2	3.74	3.94	2.41	1.59	2.80-2.90	3.80
#8-4.2	7.93	8.33	2.72	2.99	2.26	2.72	4.60	2	4.09	4.29	2.77	1.69	3.20-3.30	4.20
#10-4.8	9.27	9.75	3.17	3.45	2.64	3.10	4.98	2	4.73	4.93	3.15	1.95	3.65-3.75	6.20
#12-5.5	10.62	11.18	3.61	3.91	2.72	3.18	6.35	3	5.38	5.64	3.61	2.21	4.20-4.30	9.40
#14-6.3	11.99	12.60	4.04	4.34	3.00	3.45	6.60	3	6.17	6.45	4.19	2.54	4.95-5.05	10.80

Notes	Thread length LT (±1pitch)	Nominal length L
Material: C1022A	up to 1-1/4"=fully	01-10mm incl.+01/-0.75
Case hardness: 470-720 HV0.3	1-1/2"to1-3/4"=30	11-30mm incl.01/-1
Core Hardness: 300-420 HV0.3	2"to 2-1/4"=37	31-50mm incl.+01/-1.5
Case Depth: #4-#6:0.05-0.18mm	2-1/2"to3"=50	51-80mm incl.+01/-2.0
#8-#12:0.10-0.23mm	3-1/2"=67	81-120mm incl.+01/-2.0
#14:0.13-0.28mm	Over 4"=70	121-200mm incl.+01/-3.0


Size (mm) (inch)

M4×	M5×	M6×
16 (5/8")	16 (5/8")	25 (1")
20 (3/4")	20 (3/4")	30 (1-3/16")
25 (1")	25 (1")	35 (1-3/8")
30 (1-3/16")	30 (1-3/16")	40 (1-5/8")
35 (1-3/8")	35 (1-3/8")	45 (1-3/4")
40 (1-5/8")	40 (1-5/8")	50 (2")
45 (1-3/4")	45 (1-3/4")	60 (2-3/8")
50 (2")	50 (2")	70 (2-3/4")
60 (2-3/8")	60 (2-3/8")	80 (3-3/16")
	70 (2-3/4")	90 (3-1/2")
	80 (3-3/16")	

Slotted Wood Screws DIN 7504-K

Light duty


Hex Washer Head

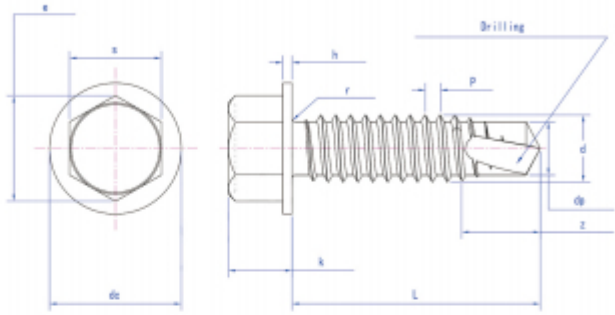



Plated: ZN YZ SS

Point: 2 3



Suggested application thickness
point#2 < 2mm

Dimensions


Mon	P	h min	dc max	dc min	e min	k max	k min	r max	s max	s min	dp max	z max
ST3.5	1.3	.0.6	8.3	7.6	5.96	3.45	3.2	0.5	5.5	5.32	2.8	6.65
ST3.9	1.3	0.6	8.3	7.6	5.96	3.45	3.2	0.5	5.5	5.32	3.1	7.2
ST4.2	1.4	0.9	8.8	8.2	7.59	4.25	4	0.6	7	6.78	3.6	8.7
ST4.8	1.6	0.9	10.5	9.8	8.71	4.45	4.15	0.7	8	7.78	4.1	8.3
ST5.5	1.8	1	11	10	8.71	5.45	5.15	0.8	8	7.78	4.8	11
ST6.3	1.8	1	13.2	12.2	10.95	6.45	6.15	0.9	10	9.78	5.8	12

Size	Length (inch)	Length (mm)	Drill Point (m/m)	Drill Capacity (m/m)
#6-20 M3.5	3/8"	10	#2	0.5-1.0
	1/2"	13	#2	0.5-1.0
	5/8"	16	#2	0.5-1.0
#8-18 M4.2	1/2"	13	#2	1.0-2.0
	5/8"	16	#2	1.0-2.0
	3/4"	19	#2	1.0-2.0
	1"	25	#2	1.0-2.0
	1-1/4"	32	#2	1.0-2.0
	1-1/2"	38	#2	1.0-2.0
#8 M4.2	1/2"	13	#2	1.0-2.0
	5/8"	16	#2	1.0-2.0
	3/4"	19	#2	1.0-2.0
	1"	25	#3	1.0-3.0
	1-1/4"	32	#3	1.0-3.0
	1-1/2"	38	#3	1.0-3.0
	2"	50	#3	1.0-3.0

Size	Length (inch)	Length (mm)	Drill Point (m/m)	Drill Capacity (m/m)
#12-14 M5.5	3/4"	19	#3	2.0-4.0
	1"	25	#3	2.0-4.0
	1-1/4"	32	#3	2.0-4.0
	1-1/2"	38	#3	2.0-4.0
	2"	50	#3	2.0-4.0
	2-1/2"	63	#3	2.0-4.0
	3"	75	#3	2.0-4.0
#14-14 M6.3	3/4"	19	#3	2.0-4.0
	1"	25	#3	2.0-4.0
	1-1/4"	32	#3	2.0-4.0
	1-1/2"	38	#3	2.0-4.0
	2"	50	#3	2.0-4.0
	2-1/2"	63	#3	2.0-4.0
	3"	75	#3	2.0-4.0
	4"	100	#3	2.0-4.0
	5"	125	#3	2.0-4.0

Phillips

Modified Truss Head Self Drilling Screw

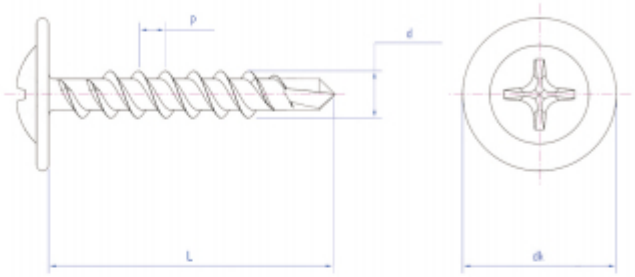



Truss head



Button head




Plated

ZN BP SS

Point

2



Suggested application thickness
point#2 < 2mm

Dimensions

Mon	P	d max	d min	dk max	dk min
4.2	1.7	4.3	4	11.5	11.07
4.8	2.2	5.1	4.8	11.5	11.07


Size	A	B	U	H	D	P	T	E	Torque Min(N*m)
#8-18 (4,2-1,4)	#2Phil	10.60	1.20	2.40	4.22	Ref.	5.80	3.45	4.2
		10.20	0.80	2.00	4.05	1.41	4.45	3.35	

Notes	Nominal Length L
Case Depth:0.10-2.23mm	10-19mm incl.+0/-0.76
Case Hardness:Hv 550-700	19-38mm incl.+0/-1.27
Core Hardness:Hv 320-420	41-76mm incl.+0/-1.52

Size	Length (inch)	Length (mm)	Drill Point (mm)	Drill Capacity (mm)
#8-18 M4.2	1/2"	13	#2	1.0-2.0
	5/8"	16	#2	1.0-2.0
	3/4"	19	#2	1.0-2.0
	1"	25	#2	1.0-2.0
	1-1/4"	32	#2	1.0-2.0
	1-5/8"	41	#2	1.0-2.0

Phillips

Phillips Flat Head Self-Drilling Screws

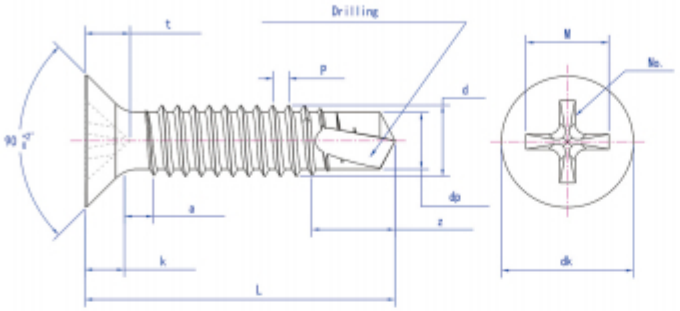



Plated: ZN BP SS

Point: 2 3



80° degree



100° degree



Suggested application thickness
point#2 < 2mm point#3 < 5mm

Dimensions


Mon	P	a max	dk max	dk min	k	No.	M	t min	t max	dp max	z max
ST3.5	1.3	1.3	6.8	6.44	2.1	2	4.2	1.62	2.12	2.8	6.65
ST3.9	1.3	1.3	7.5	7.14	2.3	2	4.6	2.03	2.53	3.1	7.2
ST4.2	1.4	1.4	8.1	7.74	2.5	2	4.7	2.11	2.62	3.6	8.7
ST4.8	1.6	1.6	9.5	9.14	3	2	5.1	2.59	3.1	4.1	8.3
ST5.5	1.8	1.8	10.8	10.37	3.4	3	6.8	2.95	3.53	4.8	11
ST6.3	1.8	1.8	12.4	11.97	3.8	3	7.1	3.33	3.91	5.8	12

Size	Length (inch)	Length (mm)	Drill Point (m/m)	Drill Capacity (m/m)
#6-20 M3.5	3/8"	10	#2	0.5-1.0
	1/2"	13	#2	0.5-1.0
	5/8"	16	#2	0.5-1.0
#8-18 M4.2	1/2"	13	#2	1.0-2.0
	5/8"	16	#2	1.0-2.0
	3/4"	19	#2	1.0-2.0
	1"	25	#2	1.0-2.0
	1-1/4"	32	#2	1.0-2.0
	1-1/2"	38	#2	1.0-2.0
#10-16 M4.8	1/2"	13	#2	1.0-2.0
	5/8"	16	#2	1.0-2.0
	3/4"	19	#2	1.0-2.0
	1"	25	#3	1.0-3.0
	1-1/4"	32	#3	1.0-3.0
	1-1/2"	38	#3	1.0-3.0
	2"	50	#3	1.0-3.0

Pan Drilling Screws
DIN 7504-N

Phillips

Pan Head Self-Drilling Screws

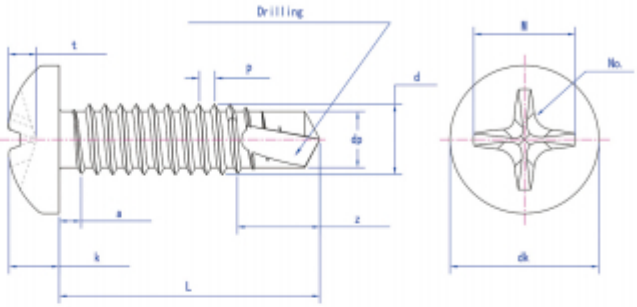



Plated: ZN SS

Point: 2 3





Suggested application thickness
point#2 < 2mm
point#3 < 5mm


Dimensions

Mon	P	a max	dk max	dk min	k max	k min	No.	M	t min	t max	dp max	z max
ST3.5	1.3	1.3	6.9	6.54	2.6	2.35	2	4.2	1.4	2.03	2.8	6.65
ST3.9	1.3	1.3	7.5	7.14	2.8	2.55	2	4.4	1.63	2.26	3.1	7.2
ST4.2	1.4	1.4	8.2	7.84	3.05	2.75	2	4.6	1.8	2.46	3.6	8.7
ST4.8	1.6	1.6	9.5	9.14	3.55	3.25	2	5	2.26	2.87	4.1	8.3
ST5.5	1.8	1.8	10.8	10.37	3.95	3.65	3	6.5	2.49	3.15	4.8	11
ST6.3	1.8	1.8	12.5	12.07	4.55	4.25	3	7.1	3	3.66	5.8	12

Size	Length (inch)	Length (mm)	Drill Point (m/m)	Drill Capacity (m/m)
#6-20 M3.5	3/8"	10	#2	0.5-1.0
	1/2"	13	#2	0.5-1.0
	5/8"	16	#2	0.5-1.0
#8-18 M4.2	1/2"	13	#2	1.0-2.0
	5/8"	16	#2	1.0-2.0
	3/4"	19	#2	1.0-2.0
	1"	25	#2	1.0-2.0
	1-1/4"	32	#2	1.0-2.0
	1-1/2"	38	#2	1.0-2.0
#10-16 M4.8	1/2"	13	#2	1.0-2.0
	5/8"	16	#2	1.0-2.0
	3/4"	19	#2	1.0-2.0
	1"	25	#3	1.0-3.0
	1-1/4"	32	#3	1.0-3.0
	1-1/2"	38	#3	1.0-3.0
	2"	50	#3	1.0-3.0

Phillips

Bugle Head

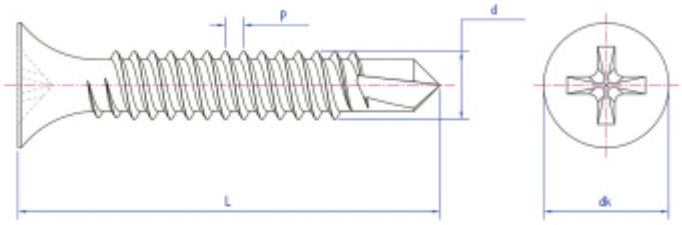




Plated

ZN YZ SS

Point

3




Suggested application thickness
point#2 < 2mm

Dimensions

Mon	P	d max	d min	dk max	dk min
3.5	1.4	3.53	3.35	8.5	8.14

Size	Length (inch)	Length (mm)	Drill Point (mm)	Drill Capacity (mm)
#6-20 M3.5	1"	25	#2	0.5-1.0
	1-1/8"	28	#2	0.5-1.0
	1-1/4"	32	#2	0.5-1.0
	1-5/8"	41	#2	0.5-1.0
	2"	50	#2	0.5-1.0
#8-18 M4.2	1"	25	#2	1.0-2.0
	1-1/4"	32	#2	1.0-2.0
	2"	50	#2	1.0-2.0
	2-3/8"	60	#2	1.0-2.0
	2-5/8"	65	#2	1.0-2.0
	3"	75	#2	1.0-2.0

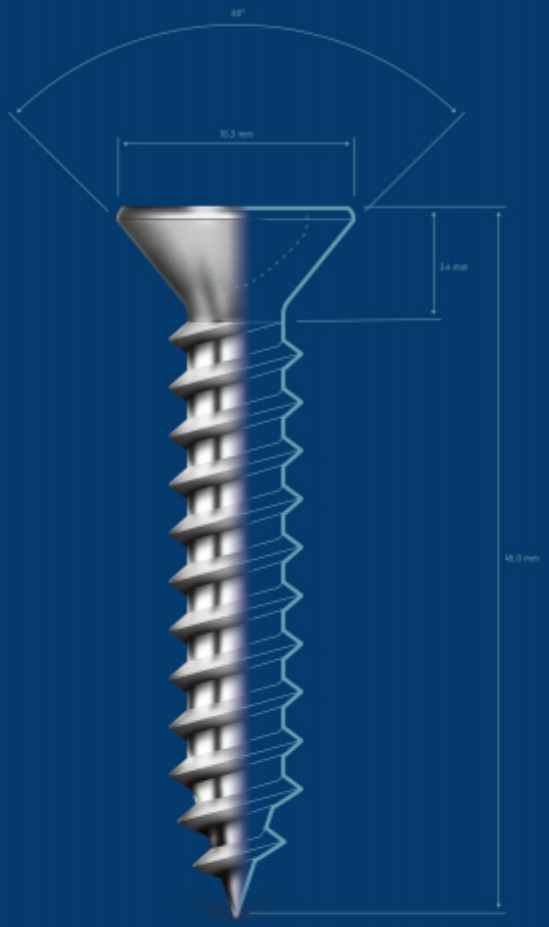

摩图 MOTU

Link and Fasten Your Life.

河北摩图金属制品有限公司
手机：15933196203（国内业务部）
13011954546（国内业务部）
电话：0319-8232032
邮箱：hbmotunail@163.com
export@cnmotu.cn
网址：http://www.cnmotu.cn
地址：河北省邢台市隆尧县魏庄镇工业区

Hebei Motu Metal Products CO., LTD
Mob: 0086 18731973207
0086 15731933015
Mail: hbmotunail@163.com
export@cnmotu.cn
Http: //en.cnmotu.cn
Add: Weizhuang industrial zone,
Longyao county, Xingtai city, Hebei province

Wechat