micro screws

japanese SCREWS




solving all those tiny application issues

a division of:

HEADS & THREADS

www.japanesescrews.com

micro screws

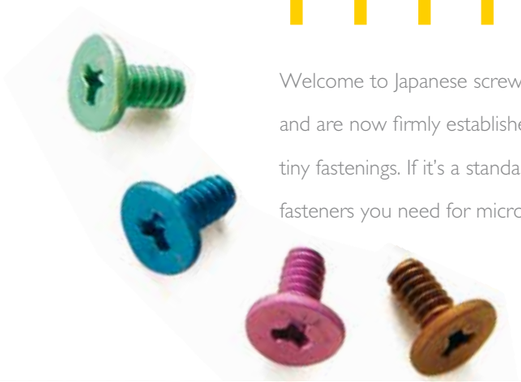

Welcome to Japanese screws. We supply JCIS standard micro screws and are now firmly established as one of the leading global suppliers of tiny fastenings. If it's a standard or special screw then we can offer the fasteners you need for micro manufacture.









Micro screws to JCIS standard.
Available in a range of Pan and Countersunk
JCIS head styles
1) Machine screws
2) Type S thread forming screws for metal applications
3) Type B thread forming screws for metal & plastic applications
4) Type P thread forming screws for plastic applications
These threads cover most application needs with normal cross recess. We do, however, offer QuaStix® and Micro stix® recess which offer "no cam out" for the volume user.

Screw and washer assemblies (SEMS)
Screws assembled with plain washers
Screws assembled with spring washers
Screws assembled with both spring and plain washers

Materials:
Steel, Stainless Steel, Titanium, Brass, Aluminium and Gunmetal. We also offer case hardened screws for extra strength.

Plating finishes:
Zinc Cr3 in clear, black, red, yellow, green and purple, Black nickel, Bright nickel & Chrome
All our plating finishes are REACH & RoHS compliant
Coloured screws can help stop your assembly staff using the wrong screw size.

Design and development back up available, with full engineering test centre in the UK.
Our trained engineers with many years experience we can help you design the correct screw for your application.

"Our commitment is to supply top quality micro screws in a short lead time, at a competitive price and on a global basis. Our engineers also offer the technical support and design services that our customers need such as ultra thin head styles with Micro stix® recess.
Need micro screws ?
Look no further than, **http://www.**japanesescrews.com"

QuaStix and MicroStix are a registered trademark of:
OSG SYSTEM PRODUCTS CO.,LTD.
オーエスジーシステムプロダクツ株式会社




www.japanesescrews.com





Cross recess No.0
Pan head machine screws

A precision machine screw, made in metric diameters, from as small as M0.8 & with thread lengths from 1.4 mm long, upwards.
Aso available in QuaStix® and Micro stix® 'no cam out recess'.

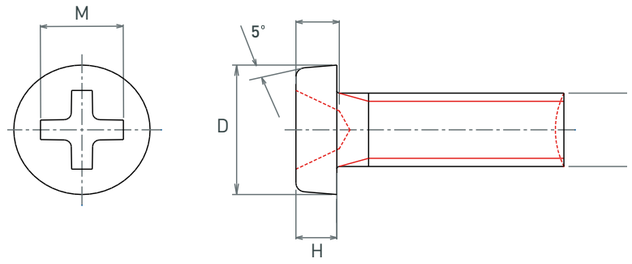

Head type	d	Pitch	D			H		M		Recess Penetration	
			Nom	Max	Min	Nom	Max	Min	Max	Min	Max
	M1.2	0.25	1.80	1.85	1.70	0.50	0.55	0.45	(1.30)	(1.25)	(0.39)
	M1.4	0.30	2.00	2.05	1.90	0.50	0.55	0.45	1.55	1.45	0.74
	M1.6	0.35	2.40	2.40	2.26	0.55	0.55	0.45	1.65	1.55	0.84
Type 1	**M1.7**	0.35	2.50	2.55	2.40	0.50	0.55	0.45	1.70	1.55	0.89
	M2.0	0.40	3.00	3.05	2.80	0.60	0.68	0.52	2.00	1.85	1.21
	M2.3	0.40	3.50	3.55	3.30	0.70	0.78	0.62	2.20	2.00	1.41
	M2.6	0.45	4.00	4.05	3.80	0.80	0.88	0.72	2.20	2.00	1.41
	M1.2	0.25	2.30	2.35	2.20	0.50	0.55	0.45	(1.30)	(1.25)	(0.39)
	M1.4	0.30	2.50	2.55	2.40	0.50	0.55	0.45	1.55	1.45	0.74
	M1.6	0.35	2.80	2.80	2.66	0.55	0.55	0.45	1.65	1.55	0.84
Type 2	**M1.7**	0.35	3.00	3.05	2.90	0.50	0.55	0.45	1.70	1.55	0.89
	M2.0	0.40	3.50	3.55	3.30	0.60	0.68	0.52	2.00	1.85	1.21
	M2.3	0.40	4.00	4.05	3.80	0.70	0.78	0.62	2.20	2.00	1.41
	M2.6	0.45	4.50	4.55	4.30	0.80	0.88	0.72	2.20	2.00	1.41
	M1.2	0.25	2.30	2.35	2.20	0.70	0.75	0.65	(1.50)	(1.45)	(0.58)
	M1.4	0.30	2.50	2.55	2.40	0.80	0.85	0.75	1.65	1.50	0.84
Type 3	**M1.6**	0.35	2.80	2.80	2.66	0.85	0.85	0.75	1.80	1.65	1.00
	M1.7	0.35	3.00	3.05	2.90	0.90	0.95	0.85	1.90	1.75	1.10
	M2.0	0.40	3.50	3.55	3.30	1.00	1.08	0.92	2.10	1.95	1.31
	M2.3	0.40	4.00	4.05	3.80	1.10	1.18	1.02	2.20	2.00	1.41
	M2.6	0.45	4.50	4.55	4.30	1.20	1.28	1.12	2.20	2.00	1.41

Note : Figures in bracket are for reference only.


Unit : mm

Cross recess No.0
Countersunk head machine screws

A precision machine screw, made in metric diameters, from as small as M0.8 & with thread lengths from 1.4 mm long, upwards.
Aso available in QuaStix® 'no cam out recess'.





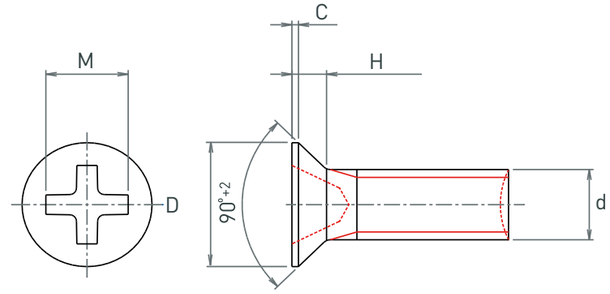

Head type	Dia.	Pitch	D			H			M		Recess Penetration	
			Nom	Max	Min	Nom	Max	Min	Max	Min	Max	Min
	M1.2	0.25	1.80	1.85	1.70	0.40	0.40	0.35	(1.30)	(1.25)	(0.39)	(0.26)
	M1.4	0.30	2.00	2.05	1.90	0.45	0.45	0.40	1.55	1.45	0.74	0.51
	M1.6	0.35	2.40	2.40	2.26	0.50	0.50	0.40	1.65	1.55	0.84	0.61
Type 1	**M1.7**	0.35	2.50	2.55	2.40	0.50	0.50	0.45	1.70	1.55	0.89	0.61
	M2.0	0.40	3.00	3.05	2.80	0.60	0.60	0.52	2.00	1.85	1.21	0.91
	M2.3	0.40	3.50	3.55	3.30	0.70	0.70	0.62	2.20	2.00	1.41	1.06
	M2.6	0.45	4.00	4.05	3.80	0.80	0.80	0.72	2.20	2.00	1.41	1.06
	M1.2	0.25	2.30	2.35	2.20	0.65	0.65	0.60	(1.50)	(1.45)	(0.58)	(0.48)
	M1.4	0.30	2.50	2.55	2.40	0.70	0.70	0.65	1.65	1.50	0.84	0.56
	M1.6	0.35	2.80	2.80	2.66	0.80	0.80	0.75	1.80	1.65	1.00	0.71
Type 3	**M1.7**	0.35	3.00	3.05	2.90	0.80	0.80	0.75	1.90	1.75	1.10	0.81
	M2.0	0.40	3.50	3.55	3.30	0.90	0.90	0.82	2.10	1.95	1.31	1.01
	M2.3	0.40	4.00	4.05	3.80	1.00	1.00	0.92	2.20	2.00	1.41	1.06
	M2.6	0.45	4.50	4.55	4.30	1.10	1.10	1.02	2.20	2.00	1.41	1.06

Note : Figures in bracket are for reference only.

Unit : mm


Production range of thread length
(Ref. fo Pan & Countersunk Machine screws)

Thread type	Tread Dia.	Min. length	Max. length
	M1.4	1.4	10
	M1.7	1.6	12
Metric	**M2.0**	1.8	14
	M2.6	2	16
	M3.0	2.2	18



www.japanesescrews.com

www.japanesescrews.com

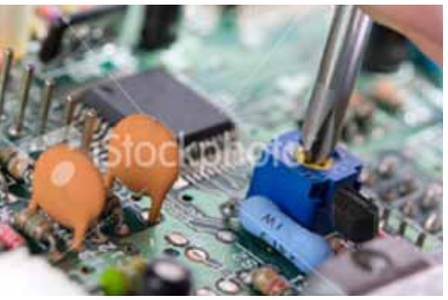




Tapping thread, triangular. Type P

Aso available in the same head sizes as Pan and Csk. machine screws.

This thread works well into most plastic applications, and is case hardened, to offer high strength at small diameters.

With JCIS cross recess No.0

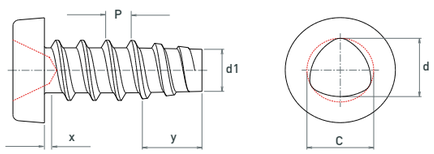

Production range of thread length


(Ref. for P Type Thread forming screws)

Thread type	Thread Dia.	Min. length	Max. length
Metric	M1.4	3.5	8
	M1.7	4	12
	M2.0	4.5	14
	M2.6	5.5	16
	M3.0	6.5	18

	Nominal	Pitch	C		d		d1
	Dia	(ref)	Max	Min	Max	Min	Max
Standard pitch	1.4	0.50	1.46	1.40	1.40	1.34	0.95
	1.6	0.64	1.66	1.60	1.60	1.54	1.08
	1.7	0.64	1.76	1.70	1.69	1.63	1.18
	2.0	0.79	2.12	2.02	2.04	1.94	1.57
Special wide pitch	1.4	0.61	1.46	1.40	1.40	1.34	0.95
	1.7	0.74	1.76	1.70	1.69	1.63	1.18
	2.0	0.84	2.12	2.02	2.04	1.94	1.57

X = max 2 pitch / y = max 2.5 pitch

With JCIS cross recess No.1

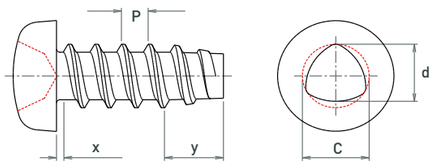

	Nominal	Pitch	Major dia.				Length of guide	
	Dia	(ref)	c		d		y	
			Max	Min	Max	Min	Max	Min
Standard pitch	2.0	0.79	2.12	2.02	2.04	1.94	1.99	1.59
	2.3	0.91	2.43	2.33	2.35	2.25	2.27	1.81
	2.5	1.06	2.63	2.53	2.54	2.44	2.65	2.12
	2.6	1.06	2.73	2.63	2.64	2.54	2.65	2.12
	3.0	1.27	3.15	3.03	3.05	2.93	3.18	2.54
Special wide pitch	2.0	0.84	2.12	2.02	2.04	1.94	1.99	1.59
	2.3	0.95	2.43	2.33	2.35	2.25	2.27	1.81
	2.5	1.12	2.63	2.53	2.54	2.44	2.65	2.12
	2.6	1.12	2.73	2.63	2.64	2.54	2.65	2.12
	3.0	1.34	3.15	3.03	3.05	2.93	3.18	2.54

www.japanesescrews.com


Tapping thread, triangular. Type B

Aso available in the same head sizes as Pan and Csk. machine screws.

This thread works well into most metal & plastic applications, and is case hardened, to offer high strength at small diameters.





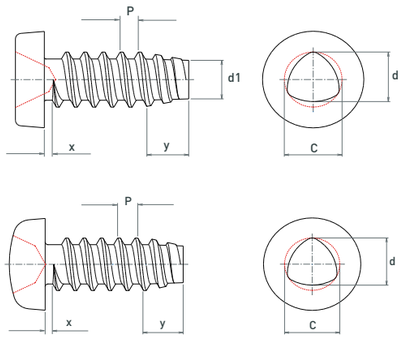

With JCIS cross recess No.0

Nominal dia	Pitch	c		d		d1
	(ref)	Max	Min	Max	Min	Max
1.4	0.45	1.43	1.37	1.37	1.31	1.06
1.6	0.50	1.63	1.57	1.56	1.50	1.19
1.7	0.50	1.73	1.67	1.66	1.60	1.29
2.0	0.64	2.04	1.96	1.96	1.88	1.54

X = max 2 pitch / y = max 2.5 pitch

Production range of thread length

(Ref. for B Type Thread forming screws)

Thread type	Thread Dia.	Min. length	Max. length
Metric	M1.4	2.6	8
	M1.7	2.8	12
	M2.0	3.4	14
	M2.6	4.5	16
	M3.0	5.2	18

With JCIS cross recess No.1

Nominal	Pitch	Major dia				Length of guide	
Dia	(ref)	c		d		y	
		Max	Min	Max	Min	Max	Min
2.0	0.64	2.04	1.96	1.96	1.88	1.59	1.27
2.3	0.79	2.34	2.26	2.26	2.18	1.98	1.59
2.6	0.91	2.64	2.56	2.55	2.47	2.28	1.82
3.0	1.06	3.05	2.95	2.95	2.85	2.65	2.12


Tapping thread, triangular. Type S

Aso available in the same head sizes as Pan and Csk. machine screws.

This thread taps a metric thread into a plain hole in metal, saving tapping costs and is case hardened, to offer high strength at small diameters.





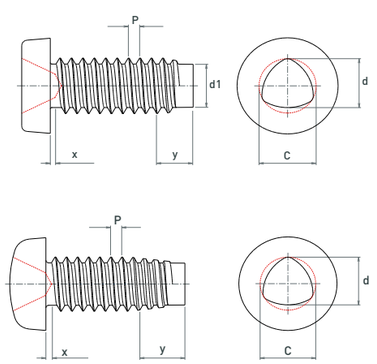

With JCIS cross recess No.0

Nominal dia	Pitch	c		d		d1
	(ref)	Max	Min	Max	Min	Max
1.4	0.30	1.43	1.37	1.37	1.31	1.06
1.6	0.35	1.63	1.57	1.56	1.50	1.19
1.7	0.35	1.73	1.67	1.66	1.60	1.29
2.0	0.40	2.04	1.96	1.96	1.88	1.54

X = max 2 pitch / y = max 4.5 pitch

Production range of thread length

(Ref. for S Type Thread forming screws)

Thread type	Thread Dia.	Min. length	Max. length
Metric	M1.4	2	8
	M1.7	2.2	12
	M2.0	2.4	14
	M2.6	2.6	16
	M3.0	2.8	18

With JCIS cross recess No.1

Nominal	Pitch	Major dia				Length of guide	
Dia	(ref)	c		d		y	
		Max	Min	Max	Min	Max	Min
2.0	0.40	2.04	1.96	1.96	1.88	1.60	0.80
2.3	0.40	2.34	2.26	2.26	2.18	1.60	0.80
2.5	0.45	2.55	2.47	2.46	2.38	1.80	0.90
2.6	0.45	2.65	2.57	2.56	2.48	1.80	0.90
3.0	0.50	3.05	2.97	2.95	2.87	2.00	1.00

www.japanesescrews.com

micro screws



japanese SCREWS
Division of Heads & All Threads

Heads & All Threads
United Kingdom
Kettles Wood Drive
Woodgate Business Park
Woodgate Valley
Birmingham
England
B32 3DB
t: +44 (0) 121 506 6300
e: stevewa@heads.co.uk
m: +44 (0) 7792 935508

Heads & All Threads
Poland
Ul. Hutnicza 53/C2
81-061 Gdynia
Poland
t: +48 517634787
e: sales@heads.net.pl

Heads & All Threads
Czech Republic
Zajecicka
1857
431 11 Jirkov
Czech Republic
t: +42 0 47462077 1
e: sales@heads.cz

Heads & All Threads
India
Sr. No. 279/1/2,
Off Hinjewadi Rd.
Shakharevasti,
Near Ganpati Temple,
Hinjewadi, Pune,
Maharastra 411 057
t: +91 (0) 2064734001
e: sales@heads.co.in