Watch Me

Microscope



义乌市英锐光学仪器有限公司


yi wu shi ju yuan guang xue yi qi chang




Eyebre

XSP-00 MICROSCOPE

XSP-00 显微镜





细节展示/Detail presentation

金属移动尺

Metal moving ruler



可调蓄电电光源

Adjustable storage electric light source



阿贝聚光器 N.A.1.25

Abbe condenser N.A.1.25



Eyebre



XSP-200X



XSP01-640X



XSP02-640X



XSP06-1600X

产品型号配置表

部件技术规格/Component specifications		产品型号/Product model				
部件名称 name of parts	技术规格(technical specifications)	XSP -200X	XSP01 -640X	XSP02 -640X	XSP02 -1000X	XSP06 -1600X
总放大倍数 Total magnification	200X	●				
	40X-640X		●	●		
	40X-1000X				●	
	100X-1600X					●
目镜 eyepiece	惠更斯：H10X	●				
	惠更斯：H10X，H16X		●	●		●
	惠更斯：H10X，WF25X				●	
观察镜筒 Viewing Head	单目直镜筒 Monocular Vertical Tube	●	●	●	●	●
转换器 Nosepiece	三孔外倾 Frontward Triple Nosepiece		●	●	●	●
185消色差物镜 185 achromatic objective	20X	●				
	4X,10X,40X（弹） 4X,10X,40X (elasticity)		●	●	●	
	10X,40X（弹），100X（弹&油） 10X,40X (elasticity)，100X (elasticity&oil)					●
载物台 Stage	固定单层方平台90*90mm,切片夹 Fixed single level square platform 90*90mm，Specimen clip	●	●			
	固定单层方平台110*120mm,切片夹 Fixed single level square platform 110*120mm，Specimen clip			●	●	
	固定单层方平台110*120mm，移动尺 Fixed single level square platform 110*120mm，Moving ruler					●
调焦系统 Focusing System	粗调范围：20mm Coarse Adjustment Range20mm	●	●			
	粗调范围：30mm Coarse Adjustment Range30mm			●	●	●
	微调范围：1.5mm 微调0.1mm/圈 FineAdjustment Range1.5mm Fine tuning grid value 0.1mm			●	●	●
旋转光阑板 Rotating light baffle	拨盘光阑（Rotating light baffle）5mm，8.5mm,9.5mm,13.5mm,16.5mm			●	●	
聚光镜 condenser	阿贝聚光镜，N.A.=1.25 Abbe condenser, N.A.=1.25					●
光源 Light source	平凹反光镜 42mm Plano-concave reflector 42mm	●	●			
	平凹反光镜 50mm Plano-concave reflector 50mm			●	●	
	平凹反光镜 50mm，可调蓄电电光源 Plano-concave reflector 50mm，Adjustable storage electric light source					●

※ “●”为标准配置 ； Note：“●” Standard Outfit

义乌市英锐光学仪器有限公司

yi wu shi ying rui guang xue yi qi you xian gong si



Eyebre

TN104A-HW（640X）

TN104-恒温显微镜





细节展示/Detail presentation

温控面板：25°~50°温度可调

Temperature control panel: The temperature is adjustable from 25° to 50°



内置发热模块

Built-in heating module



Eyebre



TN104A-HW（640X）
单目TV+单层平台

TN104A-HW（640X）
Monocular tubeTV
Single layer Mechanical Stage

产品型号配置表

部件技术规格/Component specifications			产品型号/Product model
部件名称 name of parts	技术规格(technical specifications)		TN104A-HW（640X）
总放大倍数 Total magnification	40X-640X		●
	40X-1600X		
目镜 eyepiece	H10X/10mm		●
	H16X/8mm		●
观察镜筒 Viewing Head	单目TV Monocular TV，30°倾斜 Inclined at 30°，360°旋转 Rotatable 360°		●
	铰链式双目，30°倾斜，瞳距55-75mm Seidentopf Binocular Viewing Head，Inclined at 30°，interpupillary 55mm-75mm		
	铰链式三目，30°倾斜，瞳距55-75mm Seidentopf Trinocular Viewing Head，Inclined at 30°，interpupillary 55mm-75mm		
转换器 Nosepiece	三孔外倾 Frontward Triple Nosepiece		●
	四孔外倾 Frontward Quadruple Nosepiece		
185消色差物镜 185 achromatic objective	4X/0.1-160		●
	10X/0.25/0.17-160		●
	40X/0.65/0.17-160（弹） 40X/0.65/0.17-160 (elasticity)		●
	100X/1.25/0.17-160 OIL（弹;油） 100X/1.25/0.17-160 OIL (elasticity oil)		
调焦系统 Focusing System	粗微调同轴 微调格值0.015mm Coaxial Coarse and Fine Adjustment,Fine tuning grid value 0.015mm		●
加热载物台载物台 Heating Stage	单层金属平台110*120mm 功率12V 4A，温控25°~50° Single-layer metal platform 110*120mm power 12V 4A, temperature control 25°~50°		●
移动尺 Moving rule	XY轴移动尺 X Y axis move ruler		●
聚光镜 Condenser	单透镜，N.A.=0.65 拨盘光阑 Single lens，N.A.0.65 Disc Diaphragm		●
	阿贝聚光镜，N.A.=1.25 可变光阑，齿盘升降 Abbe condenser, N.A.=1.25 Variable diaphragm disc lift		
光源 Light source	高亮度LED，亮度可调 High brightness LED,Brightness Adjustment		●
电源 Power supply	外置开关电源(适配器)，AC 95V-250V External switching power supply (adapter), AC 95V-250V		●
选购配件 Optional accessories	电子目镜 Electronic eyepiece	200万像素 1/2.9英寸 2 megapixels 1/2.9 inch	O
		500万像素 1/2.5英寸 5 megapixels 1/2.5 inch	O
	模拟信号显示屏 Analog signal display	7寸显示屏 7 "display screen	O
		9寸显示屏 9 inch display screen	O

※ “●”为标准配置 “O”为选购配置；Note：“●” Standard Outfit “O” Optional configuration

义乌市英锐光学仪器有限公司


yi wu shi ju yuan guang xue yi qi chang




Eyebre

TN104D（1600X）

TN104D-显微镜





细节展示/Detail presentation

双层机械平台：115mm*125mm

Double deck mechanical loading platform：115mm*125mm



185消色差物镜

185Achromatic objective



Eyebre



TN104A（640X）
单目TV+单层平台

TN104A（640X）
Monocular tubeTV
Single layer Mechanical Stage



TN104B（1600X）
单目TV+双层平台

TN104B（1600X）
Monocular tubeTV
Double Layers Mechanical Stage



TN104C（1600X）
双目+双层平台

TN104C（1600X）
Binocular tube
Double Layers Mechanical Stage



TN104D（1600X）
三目TV+双层平台

TN104D（1600X）
Trinocular tube TV
Double Layers Mechanical Stage

产品型号配置表

部件技术规格/Component specifications			产品型号/Product model			
部件名称 name of parts	技术规格(technical specifications)		TN104A (640X)	TN104B (1600X)	TN104C (1600X)	TN104D (1600X)
总放大倍数 Total magnification	40X-640X		●			
	40X-1600X			●	●	●
目镜 eyepiece	WF10X/16mm			●	●	●
	H10X/10mm		●			
	WF16X/16mm		●	●	●	●
观察镜筒 Viewing Head	单目TV Monocular TV，30°倾斜 Inclined at 30°，360°旋转 Rotatable 360°		●	●		
	铰链式双目，30°倾斜，瞳距55-75mm Seidentopf Binocular Viewing Head，Inclined at 30°，interpupillary 55mm-75mm				●	
	铰链式三目，30°倾斜，瞳距55-75mm Seidentopf Trinocular Viewing Head，Inclined at 30°，interpupillary 55mm-75mm					●
转换器 Nosepiece	三孔外倾 Frontward Triple Nosepiece		●			
	四孔外倾 Frontward Quadruple Nosepiece			●	●	●
185消色差物镜 185 achromatic objective	4X/0.1-160		●	●	●	●
	10X/0.25/0.17-160		●	●	●	●
	40X/0.65/0.17-160（弹） 40X/0.65/0.17-160 (elasticity)		●	●	●	●
	100X/1.25/0.17-160 OIL（弹;油） 100X/1.25/0.17-160 OIL (elasticity oil)			●	●	●
调焦系统 Focusing System	粗微调同轴，微调格值0.015mm Coaxial Coarse and Fine Adjustment,Fine tuning grid value 0.015mm		●	●	●	●
载物台 Stage	单层金属平台110*120mm Single-layer metal platform 110*120mm		●			
	双层机械移动平台 大小115mm*125mm Double Layer Mechanical Stage 115mm*125mm			●	●	●
聚光镜 Condenser	单透镜，N.A.=0.65 拨盘光阑 Single lens，NA0.65 Disc Diaphragm		●			
	阿贝聚光镜，N.A.=1.25 可变光阑，齿盘升降 Abbe condenser, N.A.=1.25 Variable diaphragm disc lift			●	●	●
光源 Light source	高亮度LED，亮度可调 High brightness LED,Brightness Adjustment		●	●	●	●
电源 Power supply	外置开关电源(适配器)，AC 95V-250V External switching power supply (adapter), AC 95V-250V		●	●	●	●
选购配件 Optional accessories	电子目镜 Electronic eyepiece	0.3X 内置缩小镜 0.3X built-in reduction mirror		O		O
		200万像素 1/2.9英寸 2 megapixels 1/2.9 inch	O	O	O	O
		500万像素 1/2.5英寸 5 megapixels 1/2.5 inch	O	O	O	O
	模拟信号显示屏 Analog signal display	7寸显示屏 7 "display screen	O	O	O	O
		9寸显示屏 9 inch display screen	O	O	O	O
	数字信号显示屏 Digital signal display	7寸显示屏 1024*600 IPS 7 "display screen	O	O	O	O
		9寸显示屏 1024*600 IPS 9 inch display screen	O	O	O	O
		10.1寸显示屏 1024*600 IPS 10.1 inch display	O	O	O	O

※ “●”为标准配置 “O”为选购配置；Note：“●” Standard Outfit “O” Optional configuration


yi wu shi ju yuan guang xue yi qi chang
义乌市聚远光学仪器有限公司




Eyebre

TN107B（1600X）

TN107B-显微镜






细节展示/Detail presentation


粗微调同轴，微调格值0.001mm

Coaxial Coarse and Fine Adjustment,Fine tuning grid value 0.001mm

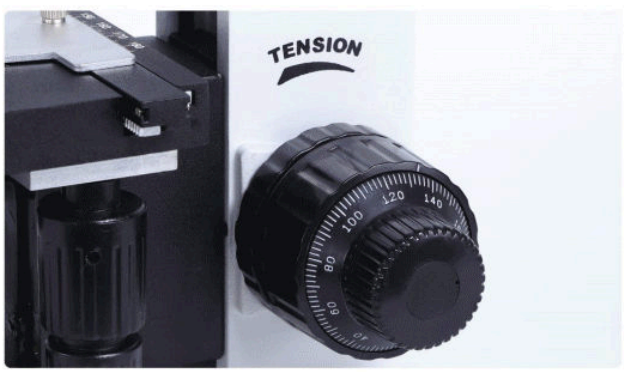

燕尾式升降阿贝聚光镜（N.A.1.25）

Dovetail lifting abbe condenser（N.A.1.25）

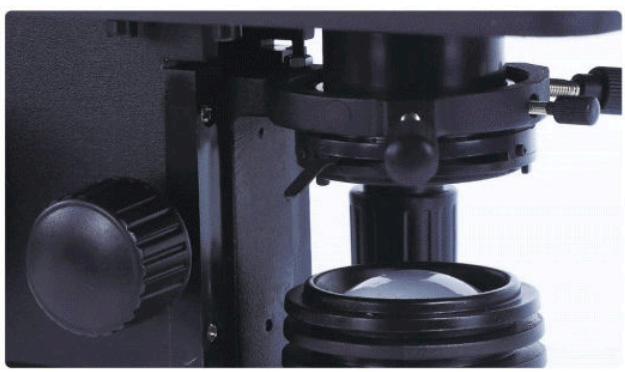

Eyebre



TN107A（1600X）
双目+双层平台

TN107A（1600X）
Binocular tube
Double Layers Mechanical Stage



TN107B（1600X）
三目TV+双层平台

TN107B（1600X）
Trinocular tube TV
Double Layers Mechanical Stage


产品型号配置表

部件技术规格/Component specifications			产品型号/Product model	
部件名称 name of parts	技术规格(technical specifications)		TN107A (1600X)	TN107B (1600X)
总放大倍数 Total magnification	40X-1000X			
	40X-1600X		●	●
目镜 eyepiece	WF10X/16mm*2		●	●
	WF16X/16mm*2		●	●
观察镜筒 Viewing Head	推板式双目，45°倾斜，瞳距55-75mm Push plate binocular，Inclined at 45°，interpupillary 55mm-75mm		●	
	推板式三目，45°倾斜，瞳距55-75mm Push plate ternary，Inclined at 45°，interpupillary 55mm-75mm			●
转换器 Nosepiece	三孔外倾 Frontward Triple Nosepiece			
	四孔外倾 Frontward Quadruple Nosepiece		●	●
195消色差物镜 195 achromatic objective	4X/0.1-160		●	●
	10X/0.25/0.17-160		●	●
	40X/0.65/0.17-160（弹）40X/0.65/0.17-160 (elasticity)		●	●
	100X/1.25/0.17-160 OIL（弹;油）100X/1.25/0.17-160 OIL (elasticity; oil)		●	●
调焦系统 Focusing System	粗微调同轴 微调格值0.001mm Coaxial Coarse and Fine Adjustment,Fine tuning grid value 0.001mm		●	●
载物台 Stage	双层机械移动平台 大小155mm*140mm Double mechanical mobile platform Size 155 mm * 140 mm		●	●
聚光镜 Condenser	单透镜，N.A.=0.65 拨盘光阑 Single lens，NA0.65 Disc Diaphragm			
	阿贝聚光镜，N.A.=1.25 可变光阑，独立燕尾升降 Abbe condenser, N.A.=1.25 variable stop, independent dovetail lifting		●	●
光源 Light source	3W高亮度LED，亮度可调,柯勒照明系统 3 w high brightness LED, brightness is adjustable, kohler illumination system		●	●
电源 Power supply	外置开关电源AC 95V-250V，DC5V1A&3.5\1.35 External switch power supply, AC 95 v to 250 v, DC5V1A \ 3.5 & 1.35		●	●
选购配件 Optional accessories	电子目镜 Electronic eyepiece	0.3X 内置缩小镜 0.3X built-in reduction mirror		O
		200万像素 1/2.9英寸 2 megapixels 1/2.9 inch		O
		500万像素 1/2.5英寸 5 megapixels 1/2.5 inch		O
	数字信号显示屏 Digital signal display	7寸显示屏 1024*600 IPS全视角 7 "display screen IPS Full perspective		O
		9寸显示屏 1024*600 IPS全视角 9 inch display screen IPS Full perspective		O
		10.1寸显示屏 1024*600 IPS全视角 10.1 inch display IPS Full perspective		O

※ "●"为标准配置 "O"为选购配置；Note："●" Standard Outfit "O" Optional configuration

yi wu shi ju yuan guang xue yi qi chang

义乌市英视光学仪器有限公司

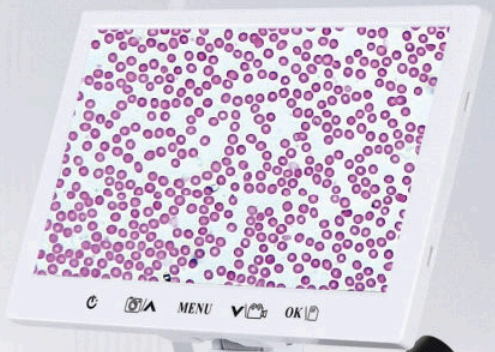





Eyebre

TN108B（1600X）

TN108B-显微镜





细节展示/Detail presentation

燕尾式升降阿贝聚光镜（N.A.1.25）

Dovetail lifting abbe condenser（N.A.1.25）



双层机械工作台：125mm*125mm

Double deck mechanical loading platform：125mm*125mm



Eyebre



TN108A（1600X）
双目+双层平台

TN108A（1600X）
Binocular tube
Double Layers Mechanical Stage



TN108B（1600X）
三目TV+双层平台+显示屏

TN108B（1600X）
trinocular tube TV
Double Layers Mechanical Stage
viewing screen



TN108C（1600X）
三目TV+双层平台+电子目镜

TN108C（1600X）
trinocular tube TV
Double Layers Mechanical Stage
Electronic eyepiece

产品型号配置表

部件技术规格/Component specifications			产品型号/Product model		
部件名称 name of parts	技术规格(technical specifications)		TN108A (1600X)	TN108B (1600X)	TN108C (1600X)
总放大倍数 Total magnification	40X-640X				
	40X-1600X		●	●	●
目镜 eyepiece	WF10X/16mm*2		●	●	●
	WF16X/16mm*2		●	●	●
观察镜筒 Viewing Head	单目TV Monocular TV，30°倾斜 Inclined at 30°，360°旋转 Rotatable 360°				
	铰链式双目，30°倾斜，瞳距55-75mm Seidentopf Binocular Viewing Head，Inclined at 30°，interpupillary 55mm-75mm		●		
	铰链式三目，30°倾斜，瞳距55-75mm Seidentopf Trinocular Viewing Head，Inclined at 30°，interpupillary 55mm-75mm			●	●
转换器 Nosepiece	三孔内倾 Backward Triple Nosepiece				
	四孔内倾 Backward Quadruple Nosepiece		●	●	●
195消色差物镜 195 achromatic objective	4X/0.1-160		●	●	●
	10X/0.25/0.17-160		●	●	●
	40X/0.65/0.17-160（弹）40X/0.65/0.17-160 (elasticity)		●	●	●
	100X/1.25/0.17-160 OIL（弹;油）100X/1.25/0.17-160 OIL (elasticity; oil)		●	●	●
调焦系统 Focusing System	粗微调同轴 微调格值0.001mm Coaxial Coarse and Fine Adjustment,Fine tuning grid value 0.001mm		●	●	●
载物台 Stage	双层机械移动平台 大小125mm*125mm Double Layer Mechanical Stage 125mm*125mm		●	●	●
聚光镜 Condenser	单透镜，N.A.=0.65　拨盘光阑 Single lens，NA0.65 Disc Diaphragm				
	阿贝聚光镜，N.A.=1.25　可变光阑，独立燕尾升降 Abbe condenser, N.A.=1.25 variable stop, independent dovetail lifting		●	●	●
光源　Light source	高亮度LED，亮度可调 High brightness LED,Brightness Adjustment		●	●	●
电源 Power supply	外置开关电源(适配器)，AC 95V-250V External switching power supply (adapter), AC 95V-250V		●	●	●
选购配件 Optional accessories	电子目镜 Electronic eyepiece	0.3X 内置缩小镜　0.3X built-in reduction mirror		O	O
		200万像素 1/2.9英寸　2 megapixels 1/2.9 inch	O	O	O
		500万像素 1/2.5英寸　5 megapixels 1/2.5 inch	O	O	O
	模拟信号显示屏 Analog signal display	7寸显示屏　7 "display screen	O	O	O
		9寸显示屏　9 inch display screen	O	O	O
	数字信号显示屏 Digital signal display	7寸显示屏 1024*600 IPS全视角　7 "display screen　IPS Full perspective	O	O	O
		9寸显示屏 1024*600 IPS全视角　9 inch display screen　IPS Full perspective	O	O	O
		10.1寸显示屏 1024*600 IPS全视角　10.1 inch display　IPS Full perspective	O	O	O

※ "●"为标准配置　"O"为选购配置；Note："●" Standard Outfit　"O" Optional configuration

义乌市英锐光学仪器有限公司


yi wu shi ju yuan guang xue yi qi chang




Eyebre

TN109B（1600X）

TN109B-显微镜






细节展示/Detail presentation

燕尾式升降阿贝聚光镜（N.A.1.25）

Dovetail lifting abbe condenser（N.A.1.25）

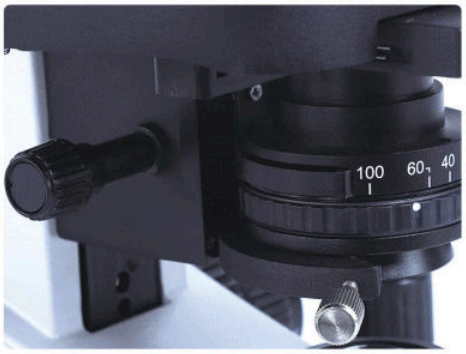

超大工作台 185*120mm

Oversized loading platform 185*120mm



粗微调同轴，微调格值0.001mm

Coaxial Coarse and Fine Adjustment
Fine tuning grid value 0.001mm



Eyebre



TN109A（1600X）
双目+双层平台

TN109A（1600X）
Binocular tube
Double Layers Mechanical Stage



TN109B（1600X）
三目TV+双层平台+显示屏

TN109B（1600X）
trinocular tube TV
Double Layers Mechanical Stage
viewing screen



TN109C（1600X）
三目TV+双层平台+电子目镜

TN109C（1600X）
trinocular tube TV
Double Layers Mechanical Stage
Electronic eyepiece

产品型号配置表

部件技术规格/Component specifications			产品型号/Product model		
部件名称 name of parts	技术规格(technical specifications)		TN109A (1600X)	TN109B (1600X)	TN109C (1600X)
总放大倍数 Total magnification	40X-640X				
	40X-1600X		●	●	●
目镜 eyepiece	WF10X/18mm*2		●	●	●
	WF16X/13mm*2		●	●	●
观察镜筒 Viewing Head	单目TV Monocular TV，30°倾斜 Inclined at 30°，360°旋转 Rotatable 360°				
	铰链式双目，30°倾斜，瞳距55-75mm Seidentopf Binocular Viewing Head，Inclined at 30°，interpupillary 55mm-75mm		●		
	铰链式三目，30°倾斜，瞳距55-75mm Seidentopf Trinocular Viewing Head，Inclined at 30°，interpupillary 55mm-75mm			●	●
转换器 Nosepiece	三孔内倾 Backward Triple Nosepiece				
	四孔内倾 Backward Quadruple Nosepiece		●	●	●
195消色差物镜 195 achromatic objective	4X/0.1-160		●	●	●
	10X/0.25/0.17-160		●	●	●
	40X/0.65/0.17-160（弹）40X/0.65/0.17-160 (elasticity)		●	●	●
	100X/1.25/0.17-160 OIL（弹;油）100X/1.25/0.17-160 OIL (elasticity; oil)		●	●	●
调焦系统 Focusing System	粗微调同轴 微调格值0.001mm Coaxial Coarse and Fine Adjustment,Fine tuning grid value 0.001mm		●	●	●
载物台 Stage	双层机械移动平台 大小185mm*120mm Double Layer Mechanical Stage 185mm*120mm		●	●	●
聚光镜 Condenser	单透镜，N.A.=0.65 拨盘光阑 Single lens，NA0.65 Disc Diaphragm				
	阿贝聚光镜，N.A.=1.25 可变光阑，独立燕尾升降 Abbe condenser, N.A.=1.25 variable stop, independent dovetail lifting		●	●	●
光源 Light source	1W高亮度LED，亮度可调 1WHigh brightness LED,Brightness Adjustment		●	●	●
电源 Power supply	外置开关电源(适配器)，AC 95V-250V External switching power supply (adapter), AC 95V-250V		●	●	●
选购配件 Optional accessories	电子目镜 Electronic eyepiece	0.3X 内置缩小镜 0.3X built-in reduction mirror		o	o
		200万像素 1/2.9英寸 2 megapixels 1/2.9 inch	o	o	o
		500万像素 1/2.5英寸 5 megapixels 1/2.5 inch	o	o	o
	模拟信号显示屏 Analog signal display	7寸显示屏 7 "display screen	o	o	o
		9寸显示屏 9 inch display screen	o	o	o
	数字信号显示屏 Digital signal display	7寸显示屏 1024*600 IPS全视角 7 "display screen IPS Full perspective	o	o	o
		9寸显示屏 1024*600 IPS全视角 9 inch display screen IPS Full perspective	o	o	o
		10.1寸显示屏 1024*600 IPS全视角 10.1 inch display IPS Full perspective	o	o	o

※ "●"为标准配置 "o"为选购配置；Note："●" Standard Outfit "o" Optional configuration


yi wu shi ju yuan guang xue yi qi chang
义乌市英锐光学仪器有限公司




Eyebre

TN208B（1600X）

TN208B-显微镜





细节展示/Detail presentation

柯勒照明系统
Kohler lighting system



超大工作台 220mm*150mm
Oversized loading platform 220mm*150mm



平场高眼点目镜/22mm
Flat field high point eyepiece /22mm



Eyebre



TN208A（1000X）
双目+双层平台

TN208A（1000X）
Binocular tube
Double Layers Mechanical Stage



TN208B（1000X）
三目TV+双层平台

TN208B（1000X）
Trinocular tube TV
Double Layers Mechanical Stage

产品型号配置表

部件技术规格/Component specifications			产品型号/Product model	
部件名称 name of parts	技术规格(technical specifications)		TN208A (1000X)	TN208B (1000X)
总放大倍数 Total magnification	40X-1000X		●	●
	40X-1600X		O	O
目镜 eyepiece	PL-WF10X/22mm*2		●	●
	PL-WF16X/13mm*2		O	O
观察镜筒 Viewing Head	铰链式双目，30°倾斜，瞳距55-75mm Seidentopf Binocular Viewing Head，Inclined at 30°，interpupillary 55mm-75mm		●	
	铰链式三目，30°倾斜，瞳距55-75mm Seidentopf Trinocular Viewing Head，Inclined at 30°，interpupillary 55mm-75mm			●
转换器 Nosepiece	三孔内倾 Backward Triple Nosepiece			
	四孔内倾 Backward Quadruple Nosepiece		●	●
195消色差物镜 195 achromatic objective	4X/0.1-160		●	●
	10X/0.25/0.17-160		●	●
	40X/0.65/0.17-160（弹）40X/0.65/0.17-160 (elasticity)		●	●
	100X/1.25/0.17-160 OIL（弹;油）100X/1.25/0.17-160 OIL (elasticity; oil)		●	●
调焦系统 Focusing System	粗微调同轴 微调格值0.001mm Coaxial Coarse and Fine Adjustment,Fine tuning grid value 0.001mm		●	●
载物台 Stage	双层机械移动平台 大小220mm*150mm（双拨片） Double mechanical mobile platform Size 220 mm * 150 mm (double dial)		●	●
聚光镜 Condenser	单透镜，N.A.=0.65 拨盘光阑 Single lens，NA0.65 Disc Diaphragm			
	阿贝聚光镜，N.A.=1.25 可变光阑，独立燕尾升降 Abbe condenser, N.A.=1.25 variable stop, independent dovetail lifting		●	●
光源 Light source	3W高亮度LED，亮度可调,柯勒照明系统 3 w high brightness LED, brightness is adjustable, kohler illumination system		●	●
电源 Power supply	内置开关电源，AC 95V-250V The built-in switching power supply, AC 95 v to 250 v		●	●
选购配件 Optional accessories	电子目镜 Electronic eyepiece	0.3X 内置缩小镜 0.3X built-in reduction mirror		O
		200万像素 1/2.9英寸 2 megapixels 1/2.9 inch		O
		500万像素 1/2.5英寸 5 megapixels 1/2.5 inch		O
	数字信号显示屏 Digital signal display	7寸显示屏 1024*600 IPS全视角 7 "display screen IPS Full perspective		O
		9寸显示屏 1024*600 IPS全视角 9 inch display screen IPS Full perspective		O
		10.1寸显示屏 1024*600 IPS全视角 10.1 inch display IPS Full perspective		O

※ "●"为标准配置 "O"为选购配置；Note："●" Standard Outfit "O" Optional configuration

电子目镜-教学演示装置

Electronic eyepiece - Teaching demonstration device

拍照 Take pictures	录像 Video recording	测量 measurement



图像处理软件
StrangeView

【支持Windows&MAC电脑操作系统】

【Support for Windows&MAC operating System】



插入式（23.2mm）
Insert type (23.2mm)

配置可选（Configuration optional）：

① 200万像素 2.0 M pixel
② 500万像素 5.0 M pixel



插入式+0.5X缩小镜
Insert +0.5X reduction mirror

配置可选（Configuration optional）：

① 200万像素 2.0 M pixel
② 500万像素 5.0 M pixel



螺旋式C口（M25.4*0.75）
Spiral C mouth (M25.4*0.75)

配置可选（Configuration optional）：

① 200万像素 2.0 M pixel
② 500万像素 5.0 M pixel

电子目镜详细参数表 Electronic eyepiece detailed parameter list

产品图片 Product picture	型号 model	像素 Pixel(Million)	传感器靶面 Optical Format	像素点尺寸 Pixel Size	分辨率 Active pixel@fps	图像软件 Image processing software
	TN2.0M-A	2.0M	1/2.9"	2.8um x2.8um	640*480@30fps 848*480@30fps 800*600@30fps 1024*768@30fps 1280*7208@30fps 1280*800@30fps 1920*1080@30fps	StrangeView
	TN2.0M-A-C	2.0M	1/2.9"	2.8um x2.8um		StrangeView
	TN2.0M-A-S	2.0M	1/2.9"	2.8um x2.8um		StrangeView
	TN2.0M-B	2.0M	1/4"	2.7um x2.7um	640*480@25fps 1280*720@25fps 1600*1200@25fps 1920*1080@25fps	StrangeView
	TN5.0M-A	5.0M	1/2.5"	2.2um x2.2um	640*480@30fps 800*600@30fps 1280*720@30fps 1280*960@25fps 1600*1200@25fps 1920*1080@25fps 2048*1536@25fps 2560*1440@25fps 2592*1944@25fps	StrangeView
	TN5.0M-A-C	5.0M	1/2.5"	2.2um x2.2um		StrangeView

超清智能显示屏

图像拍照
录音录像

尺寸测量
一键操控

USB连
接电脑



Super clear smart display

Image, photograph, sound recording and video recording

Size measurement one key control

USB connection to the computer



显示屏详细参数表 Display detailed parameter list

产品图片 Product picture	型号类型 Signal type	型号 model	液晶尺寸 LCD size	液晶分辨率 LCD resolution	传感器靶面 Optical Format	像素点尺寸 Pixel Size	传感器分辨率 Sensor resolution	电源 Power supply	其它 other
	HD-Analog	TN-L4.3MI-E	4.3" IPS	480*272	1/4"	2.8um x2.8um	1284(H) x 724(V)	DC5V-3.5/1.35	AHD signal TV
	Analog-CVBS	TN-L7MT-E	7" TFT	800*480	1/3"	5.0um x7.4um	968(H) x 488(V)		AV连接电视 (AV connected television)
		TN-L9MI-E	9" IPS	1024*600					
	Digital signal	TN-L7SI-E	7" IPS	1024*600	1/2.9"	2.8um x2.8um	1920(H) x 1080(V)	DC5V-3.5/1.35	拍照， 录音录像， USB接电脑， 数码放大； (Take pictures, record video, USB connection computer, digital amplification)
		TN-L7SI-C							
		TN-L9SI-E	9" IPS						
		TN-L9SI-C							
		TN-L10.1SI-E	10.1" IPS						
		TN-L10.1SI-C							

Eyebre

电光源系列产品

Electric light source series products

TN-DGY01




1. **适用于XSP00系列显微镜**
   Suitable for XSP00 series microscopes
2. **安装单节7号电池**
   Install a single No.7 battery
3. **可调节光源亮度**
   Adjustable light source brightness
4. **双夹孔** (200X ϕ42，XSP00 ϕ50)
   Double clamping hole

TN-DGY02

蓄电可调光

Accumulator adjustable electric light source



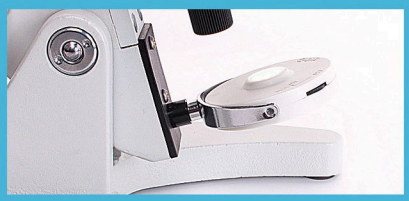


产品特点
product feature

1. **适用于XSP00系列显微镜**
   Suitable for XSP00 series microscopes
2. **两用光源（电光源+反光镜）**
   Dual purpose light source (lighting source + reflector)
3. **无极调光**
   stepless adjusted
4. **可充电** (DC5V,Micro USB)
   rechargeable battery (DC5V,Micro USB)
5. **充电指示**
   charge lamp
6. **安装孔夹** (ϕ50mm)
   Mounting hole clamp (φ50mm)

TN-DGY03

蓄电可调光

Accumulator adjustable electric light source

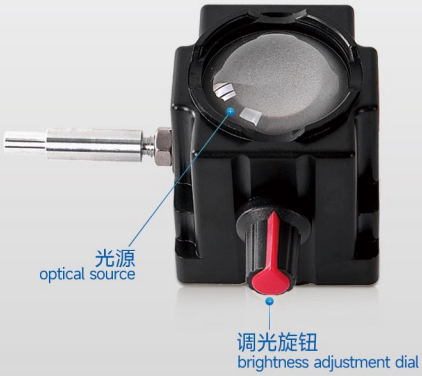

1. **适用于XSP00系列显微镜**
   Suitable for XSP00 series microscopes
2. **大功率光源0.75W**
   High power light source 0.75W
3. **无极调光**
   stepless adjusted
4. **内置大容量蓄电池**
   Built-in large capacity storage battery
5. **磨砂高聚光透镜 光源显色值好**
   Frosted high focus lens light source good color value
6. **充电** (DC5V 1A 接口 DC ϕ3.5/1.35)
   recharge (DC5V 1A connector DC3.5/1.35)

为客户提供产品定制研发设计

To provide customers with a full range of product design

客户需求
Customer demand

产品使用功能和应用场景
Product functions and application scenarios

产品需求立项
Project approval for product requirements

项目计划书
Project proposal

产品开发
Product development

外观设计
Appearance design

3D造型
3D modeling

电路设计
Circuit design

软件设计
Software design

光学成像
Optical imaging

迭代任务
Iterative task

开模试产
Trial production

产品验证
Product verification

批量生产
Mass production


产品设计阶段核心展示

Project design stage core presentation




产品ID设计

Product Industrial Design




产品结构设计

Product 3D structural design



产品光路设计

Product Optical Design



产品电路设计

PCB circuit design