THERMAL SCOPE

THERMA/NIGHT VISION
热成像/夜视仪

CATALOG
产品图册

Eyebre

Yiwu Inre Optical Instrument Co,. LTD.

TEL:+86 13906893397 EMAIL:SALES.EYEBREE GMAIL.COM
WECHAT:13906893397 WHATSAPP:+86 13906893397
WEBSITE:HTTPS://INRE.EN.ALIBABA.COM HTTPS://LINREOPTICAL.1688.COM

Eyebre®

THERMAL VISION

Eyebre®

Yiwu Inre Optical Instrument Co,. LTD.

TEL:+86 13906893397 EMAIL:SALES.EYEBREE GMAIL.COM
WECHAT:13906893397 WHATSAPP:+86 13906893397
WEBSITE:HTTPS://INRE.EN.ALIBABA.COM HTTPS://LINREOPTICAL.1688.COM

Leading Supplier of Vision Solution in China

BTI10

4 Palette Modes 4 режима палитры	5 Types Of Reticle 5 видов линий разметки	5 Levels Of Brightness 5 уровней регулировки яркости	8 X Magnification 8-кратное увеличение	FCC FCC	5-Level Contrast 5-ступенчатая регулировка контрастности

Yiwu Inre Optical Instrument Co,. LTD.
TEL:+86 13906893397 EMAIL:SALES.EYEBREE GMAIL.COM
WECHAT:13906893397 WHATSAPP:+86 13906893397
WEBSITE:HTTPS://INRE.EN.ALIBABA.COM HTTPS://LINREOPTICAL.1688.COM

Eyebre®

Leading Supplier of Vision Solution in China

BTI10 Technical specification

	Objective diameter	Φ 15mm
	Maganification (x)	1x 2x 4x 8x
	Detection range (meters)	More than 1000
Sensor	sensor type	Uncolded
	Resolution (pixels)	384x288
	Metaphysical size	12μm
	Frame rate (Hz)	50
	NETD	<35mk
Optical parameter	Objective diameter	15mm
	Eyepiece diameter	18mm
	Electronic amplification	1x 2x 4x 8x
Display	Types of	OLED HD
	Resolution (pixels)	1024x768
Detection distance	Detection range (meters)	More than 1000
Product Features	language	Chinese, English
	Image correction	Automatic
	Brightness adjustment	Yes
	Contrast adjustment	Yes
	Image details enhance	Yes
	Noise reduction	Yes
	Image mode	Black hot, white hot, red hot, fusion
Environmental parameters	Protection Class	IPX6 (waterproof)
	Operating temperature, ° C	-25 - +50
Power supply	Input voltage (V)	3.7 - 4.2V
	Battery Type	18650 lithium battery
	Capacity (mAh)	2600
	Battery operating time (at 22° C) (unit: hours)	More than 6 hours
	External power supply, V	Micro USB (5V)
Weight and Dimensions	House material	Aluminum alloy+ABS
	Dimensions (mm)	115*70*50mm
	Weight (g)	350g

Yiwu Inre Optical Instrument Co,. LTD.
TEL:+86 13906893397 EMAIL:SALES.EYEBREE GMAIL.COM
WECHAT:13906893397 WHATSAPP:+86 13906893397
WEBSITE:HTTPS://INRE.EN.ALIBABA.COM HTTPS://LINREOPTICAL.1688.COM

BTI10 热成像

探测器	传感器类型	非制冷
	响应波段	8-14 μm
	热灵敏度（NETD）	<35mk
	分辨率（像素）	384x288
	像元尺寸	12μm
	帧率（赫兹）	50
显示屏	类型	OLED HD
	分辨率（像素）	1024x768
性能	物镜直径	15mm
	目镜直径	18mm
	探测范围（米）	1000以上
	语言	中、英
	图像校正	自动
	亮度	支持
	对比度	支持
	图像细节增强	支持
	降噪	支持
	电子放大	1x 2x 4x 8x
	伪彩模式	黑热、白热、红热、融合
其他	防护等级（IP代码）（IEC60529）	IPX6 (waterproof)
	工作温度，° C	-25 - +50
	输入电压（V）	3.7 - 4.2V
	电池类型	18650 充电锂电池
	电池工作时间（在温度为22° C时）（单位：小时）	6小时以上
	壳体材料	增强ABS
	尺寸（毫米）	115*70*50mm
	重量（千克）	350g

Eyebre

Thermal Monocular

CE-19

12 μm | NETD < 50mK @25°C, F#1.0

Key Features

- 384x288, 12μm Vanadium Oxide Uncooled Sensor;
- Sensor Frame rate: 50fps, high quality imaging;
- Manual focus, 8x magnification;
- Cost performance, focus on the consumer market;
- Small & light weight, easy to carry;

Eyebre

Thermal Monocular

		CE-19	CE-19L
Lens			
Objective		19mm (25mm Optional)	19mm (25mm Optional)
View Range for	Detection	980m	950m
	Recognition	476m	406m
Sensor			
Sensor Type		Vanadium Oxide Uncooled Sensor	
Spectral Range		8 ~ 14 μm	
Resolution, Pixel Pitch		384×288 px, 12μm	384×288 px, 17μm
FOV (H*V)		13.8°x10.4°	14.5°x11.6°
NETD		< 50mK @25℃, F#1.0	
Frame Rate		⩽50fps	
Image Display			
Display		0.39" OLED, 1024×768 px, 50Hz	
Brightness/ Contrast		5 level adjustable	
Digital Zoom		X1, X2, X4, X8	
Hot Spot Tracking		Support	
Color Pallete		Black Hot, White Hot, Red Hot, Fusion	
Crusor		Support	
Functions			
Hotspot network		Support	
Video Record/ Screen Capture		Support	
Laser Positioning		Support	
CVBS Output		Support	
Power Supply			
External Power supply		Type-C, 5V 1A	
Consumption		0.85W (when CVBS output off)	
Battery Type, Battery range		Rechargeable Lithium Battery, ⩾8H	
General			
Storage		Built-in Memory Module (16G)	
Protection Level		IP67	
Dimension (mm) , Weight		58*62*215, 400g	

Eyebre

UR23 Series

Thermal Imaging Scope

The UR23 is an excellent infrared thermography. It adopts the most advanced infrared thermal imaging night vision system with excellent image quality. Meet the requirements of high-intensity shock vibration and can adapt to various harsh environments. A variety of aiming cursors are optional, and the long working time meets various applications in law enforcement patrols, outdoor hunting and other occasions.

Yiwu Inre Optical Instrument Co,. LTD.
TEL:+86 13906893397 EMAIL:SALES.EYEBREE GMAIL.COM
WECHAT:13906893397 WHATSAPP:+86 13906893397
WEBSITE:HTTPS://INRE.EN.ALIBABA.COM HTTPS://LINREOPTICAL.1688.COM

Eyebre®

Leading Supplier of Vision Solution in China

UR23	UR23-325	UR23-335	UR23-345	UR23-625	UR23-635	UR23-645
Lens	25mm	35mm	45mm	25mm	35mm	45mm
Detector	Uncooled vanadium oxide 384*288			Uncooled vanadium oxide 640*512		
Overall magnification	2.39~19.11×	3.34～26.75×	4.3～34.4×	1.43～11.47×	2.01～16.05×	2.58～20.64×
NETD	≤25mk					
Cell size	12μm					
Frame rate	50 Hz					
Display Resolution	1024*768 OLED					
Digital zoom	2×,4×,8×					
Field of View (HxV)	10.5°×7.9°	7.5°×5.7°	5.9°×4.4°	17.5°×14°	12.5°×10°	9.8°×7.8°
Eyerelief	48mm					
Dioptre adjustment, dpt	±5					
Compensation method	Shutter Calibration, scene Calibration, automatic Calibration					
Reticle	8 styles, 5 colors					
Pallet	White hot, Black hot, Red hot, Green hot, Iron red, Fusion					
Battery Type	Li-ion 18650 Rechargeable Battery Replaceable					
PIP	Yes					
Hot spot tracking	Yes					
Video output	Composite video output					
Battery Life (Operating)	>8 hours					
External power supply	TYPE-C interface					
Housing Materials	Aluminum Alloy					
Size (L × W × H) mm / inch	194mm*77.6mm *58mm	199.6mm*77.6mm *58mm	209.6mm*77.6mm *49mm	194mm*77.6mm	199.6mm*77.6mm	209.6mm*77.6mm
Weight (Without battery) Kg/ oz	515g	520g	545g	*58mm 515g	*58mm 520g	*49mm 545g
Protection rate	IP67					
Operating Temperature	-20℃...+60 ℃					

Eyebre

TR22 Series

Thermal Imaging Scope

TR22 is a good quality infrared thermal imaging device. It is compact,light weight and easy to carry, it was created by the design team that won the highest global design award“the Red Dot Award”based on a conception of sturdy,strength and technology. Using the most advanced infrared thermal imaging night vision system, the image quality is excellent with high shock resistance. A variety of reticles are optional.- Super long working time,It can meet various applications in law enforcement, outdoor hunting and other occasions.

Eyebre

Product Introduction

产品介绍

艾博睿热成像是一款优秀的热成像仪器。设计紧凑，体积小、重量轻，携带方便，由获得全球设计最高奖红点奖的设计团队，依照硬朗、强悍、肌肉、霸气、科技的设计理念倾力打造，2022年获得设计最高奖IF设计大奖。采用最先进的红外热成像夜视系统，图像质量优秀。满足高强度冲击振动的要求，可适应各种恶劣的环境。便捷设定多种瞄准光标，满足执法巡察、户外狩猎等场合的各类应用。

TR22 series is an excellent infrared thermal imager. Which is small size,compact, light weight and portable and it conforms to the ergonomic design .

- 轻、小、简洁
- 10小时超长待机
- 12μm像元，图像更清晰，观测更远
- 用户友好界面
- 画中画。

赠送

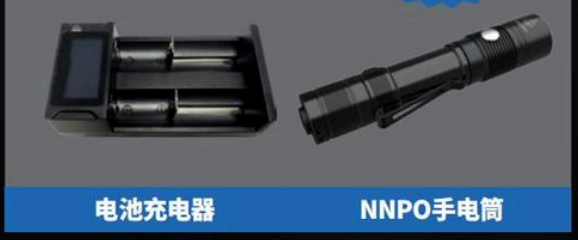

电池充电器　　NNPO手电筒

Eyebre

Technical Parameters

产品参数

TR22系列	TR22-325	TR22-335	TR22-350	TR22-625	TR22-635	TR22-650
探测器	非制冷氧化钒384*288			非制冷氧化钒640*512		
像元尺寸	12μm					
帧频	50Hz;					
目镜显示	1024*768 OLED					
放大模式	2×,4×,8×					
焦距	25mm	35mm	50mm	25mm	35mm	50mm
视场角	10.5°×7.9°	7.5°×5.7°	5.3°×4°	17.5°×14°	12.5°×10°	8.8°×7°
出瞳距离	48mm					
屈光度调校	±5					
补偿方式	快门补偿、场景补偿、自动补偿					
分划线	8种样式,5种颜色;					
极性	白热、黑热、红热、融合、铁红					
画中画	有					
视频输出	复合视频输出(TYPE-C接口)					
电池	单节18650					
工作时长	单节电池>8小时					
外部供电	TYPE-C接口					
外壳材质	航空硬质铝合金					
尺寸(mm)	194mm*77.6mm *58mm	199.6mm*77.6mm *58mm	209.6mm*77.6mm *49mm	194mm*77.6mm *58mm	199.6mm*77.6mm *58mm	209.6mm*77.6mm *49mm
重量(g)	515g	520g	545g	515g	520g	545g
防护等级	IP67					
工作温度	-30°C~60°C					

TR20 series is an excellent infrared thermal imager

Yiwu Inre Optical Instrument Co,. LTD.
TEL:+86 13906893397 EMAIL:SALES.EYEBREE GMAIL.COM
WECHAT:13906893397 WHATSAPP:+86 13906893397
WEBSITE:HTTPS://INRE.EN.ALIBABA.COM HTTPS://LINREOPTICAL.1688.COM

Eyebre®

Leading Supplier of Vision Solution in China

TR22	TR22-325-LRF	TR22-335-LRF	TR22-345-LRF	TR22-625-LRF	TR22-635-LRF	TR22-645-LRF
Lens	25mm	35mm	45mm	25mm	35mm	45mm
Detector	Uncooled vanadium oxide 384*288			Uncooled vanadium oxide 640*512		
Overall magnification	2.39~19.11×	3.34～26.75×	4.3～34.4×	1.43～11.47×	2.01～16.05×	2.58～20.64×
NETD	≤25mk					
Cell size	12μm					
Frame rate	50 Hz					
Display Resolution	1024*768 OLED					
Digital zoom	2×,4×,8×					
Field of View (HxV)	10.5°×7.9°	7.5°×5.7°	5.9°×4.4°	17.5°×14°	12.5°×10°	9.8°×7.8°
Eyerelief	48mm					
Dioptre adjustment, dpt	±5					
Compensation method	Shutter Calibration, scene Calibration, automatic Calibration					
Reticle	8 styles, 5 colors					
Pallet	White hot, Black hot, Red hot, Green hot, Iron red, Fusion					
Battery Type	Li-ion 18650 Rechargeable Battery Replaceable					
PIP	Yes					
Hot spot tracking	Yes					
Laser ranging	Yes					
Video output	Composite video output					
Battery Life (Operating)	>8 hours					
External power supply	TYPE-C interface					
Housing Materials	Aluminum Alloy					
Size (L × W × H) mm / inch	194mm*77.6mm *58mm	199.6mm*77.6mm *58mm	209.6mm*77.6mm *49mm	194mm*77.6mm *58mm	199.6mm*77.6mm *58mm	209.6mm*77.6mm *49mm
Weight (Without battery) Kg/ oz	515g	520g	545g	515g	520g	545g
Protection rate	IP67					
Operating Temperature	-30℃...+60 ℃					

Eyebre

Product Features 产品特点

可选十字瞄准线类型

- 优秀的成像性能,以12μm红外探测器可以探测更远距离、图像更清晰。
- 50赫兹高帧率,确保观察者在使用过程中捕捉物体的画面流畅,生动形象!。
- 1024 * 768分辨率AMOLED显示屏。

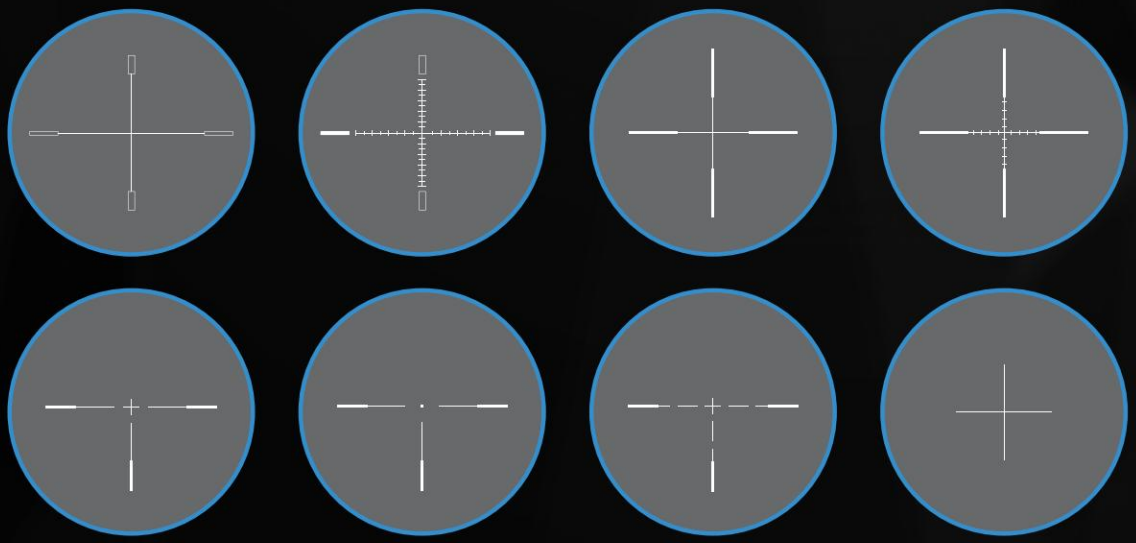

十字瞄准线颜色模式

黑色(Black) 白色(White) 红色(Red) 黄色(Yellow) 绿色(Green)

Eyebre

两种场景模式

- 两个场景之间的快速切换选择模式:丛林,识别
  将根据选中的场景模式调整图像,适应你在不同温度的环境。

The scope features a quick switch function for choosing between two scene modes: Jungles and recognition. The image will be adjusted according to the selected scene mode, allowing you toadapt to different environments.

校准模式

快门校准 **Shutter Calibration**

自动校准 **Automatic Calibration**

现场校准 **Scene Calibration**

超长待机

- 一节18650锂电池可以达到10小时的待机时间
  不用担心没电而频繁更换电池,产生焦虑

内置测距仪

- 可以检测到800米的目标

高质量的图像

- 高度敏感的热图像传感器
  ①12μm,≤35MK灵敏度热传感器,可以感知物体表面0.03度温差,即使温差对比不是特别大的情况下也能提供很好的热源突出对比。
  ②50 Hz的帧速率传感器确保动态捕捉能力强,无图传延迟,确保图像清晰且生动!

- 1024 * 768分辨率AMOLED显示屏,提供清晰和非常细节的图像。

Eyebre

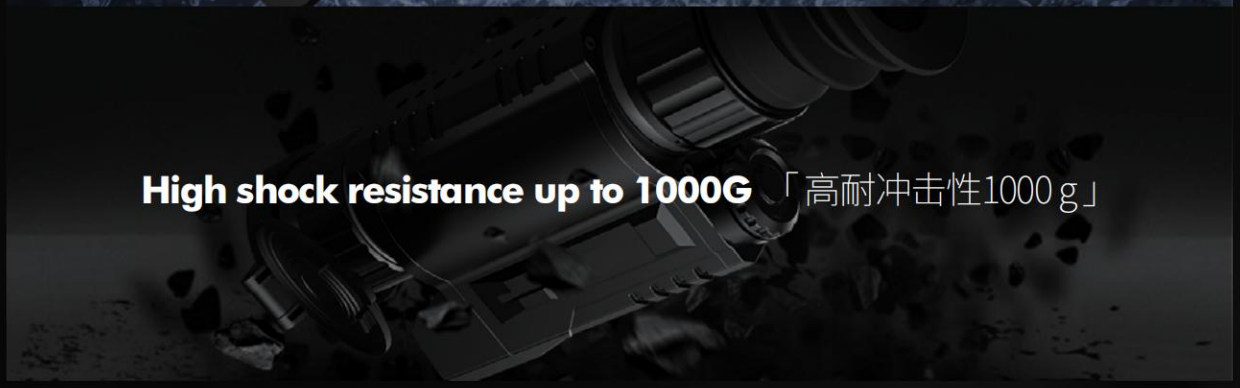

坚固耐用

- IP67防水防尘和高强度冲击
  不用担心恶劣的天气

应用领域

01 Search Rescue
搜索救援

02 Law Enforment
夜间巡逻

03 Hunting Observation
户外运动

04 Personal Security
个人安保

Eyebre

Tube TC23 Series

Thermal Imaging Scope

NNPO TC23 has been developed a ergonomic design to put all of the major controls within easy reach. It combines the traditional style and feel of a day scope and the advanced technology of thermal .uses a conventional 30mm tube Rifle Scope classis allowing you to attach it to your Rifle using standard scope rings. This makes it easy to mount and achie-vethe perfect eye relief while also maintaining the traditional appearance of your Rifle. offers solid performance and extensive features.

The design of this scope accommdoates long-term operating habits of hunters.and its 10 sets of zero calibration configuration make it convenient to switch between diferent instruments

INNPO

Product Parameters

Model	TC23-335	TC23-335-LRF	TC23-345	TC-345-LRF	TC23-635	TC23-635-LRF	TC23-645	TC23-645-LRF
Lens	35mm	35mm	45mm	45mm	35mm	35mm	45mm	45mm
Resolution	384x288	384x288	384X288	384x288	640X512	640X512	640X512	640X512
Pixel	12μm							
NETD,mk	⩾35							
Optical magnification	3.34		4.3		1.96		2.52	
Display Resolution	1024*768 OLED							
Digital zoom	2×,4×, 8×							
Field of View (HxV)	7.5°×5.7°	7.5°×5.7°	5.9°×4.4°	5.9°×4.4°	12.5°×10°	12.5°×10°	9.8°×7.8°	9.8°×7.8°
Eyerelief	48mm							
Dioptre adjustment, dpt	±5							
Calibration	Shutter Calibration, scene Calibration, automatic Calibration							
Reticle Type	8-Pattern optional, or "NO reticle"							
Reticle Color	5 colors: White, Black, Red , yellow,green							
Image Palettes	White Hot / Black Hot/ Red hot /Iron red/Fusion							
PIP	Yes							
Battery Type	Li-ion 18650 Rechargeable Battery Replaceable							
Battery Life (Operating)	>8hours							
External power supply	TYPE-C interface							
Housing Materials	Aluminum Alloy							
Detection distance rabbit(0.2×0.3)m	700	700	800	800	700	700	800	800
Detection distance Human(1.8×0.5)m	1500	1500	1700	1700	1500	1500	1700	1700
Detection distance deer(1.5×0.9)m	2000	2000	2300	2300	2000	2000	2300	2300
Detection distance Vehicle(2.3×2.3)m	3000	3000	3700	3700	3000	3000	3700	3700
Recognition distance rabbit(0.2×0.3)m	180	180	200	200	180	180	200	200
Recognition distance Human(1.8×0.5)m	750	750	850	850	750	750	850	850
Recognition distance deer(1.5×0.9)m	1000	1000	1100	1100	1000	1000	1100	1100
Recognition distance Vehicle(2.3×2.3)m	1500	1500	1700	1700	1500	1500	1700	1700
Size (L × W × H),mm	396.4x813x70	396.4x813x70	402x813x70	402x813x70	396.4x813x70	396.4x813x70	402x813x70	402x813x70
Weight (Without battery),g	685	730	695	740	685	730	695	740
Protection rate	IP67							
Operating Temperature	-30℃ ~ +60 ℃							

Eyebre

RD23S Series

Thermal monocular

RD23S thermal imaging monocular is light,easy to carry and comfortable to operate with one hand.It is widely used for hunting ,searching and positioning under various outdoor conditions.No matter it is day or night and no matter how bad weather conditions are.It can observe the targets hidden behind obstacles.

Product parameters

Model	Lens	Lens	Lens	Lens	Lens	Lens
RD23S	19mm/19mmLRF	25mm/25mmLRF	35mm/35mmLRF	19mm/19mmLRF	25mm/25mmLRF	35mm/35mmLRF
Detector	Uncooled vanadium oxide 384*288			Uncooled vanadium oxide 640*512		
NETD	⩽25mk					
Cell size	12μm					
Frame rate	50 Hz					
Display Resolution	1024*768 OLED					
Digital zoom	2×,4×,8×			2×,4×,8×,16×		
Field of View (HxV)	13.8°×10.4°	10.5°×7.9°	7.5°×5.7°	22.9°×18.4°	17.5°×14°	12.5°×10°
Eyerelief	48mm					
Dioptre adjustment, dpt	±5					
Compensation method	Shutter Calibration, scene Calibration, automatic Calibration					
Pallet	White hot, Black hot, Red hot, Green hot, Iron red, Fusion					
Battery Type	Li-ion 18650 Rechargeable Battery Replaceable					
PIP	Yes					
WIFI	Yes					
Electronic compass	Yes					
Accelerometer	Yes					
Hot spot tracking	Yes					
Photograph	Yes					
Video	Yes（Recordable）					
Laser ranging	Optional					
Video output	Composite video output					
Battery Life (Operating)	>4hours					
External power supply	TYPE-C interface					
Housing Materials	Aluminum Alloy					
Size (L × W × H) mm / inch	194mm*77.6mm *58mm	199.6mm*77.6mm *58mm	209.6mm*77.6mm *49mm	194mm*77.6mm *58mm	199.6mm*77.6mm *58mm	209.6mm*77.6mm *49mm
Weight (Without battery) Kg/ oz	330g	340g	360g	330g	340g	360g
Protection rate	IP67					
Operating Temperature	-20℃...+60 ℃					

产品参数

模型	镜头	镜头	镜头	镜头	镜头	镜头
RD23S	19mm/19mmLRF	25mm/25mmLRF	35mm/35mmLRF	19mm/19mmLRF	25mm/25mmLRF	35mm/35mmLRF
探测器	Vox 384*288			Vox 640*512		
NETD	≤25mk					
像元尺寸	12μm					
帧频	50 Hz					
目镜显示	1024*768 OLED					
放大模式	2×,4×,8×			2×,4×,8×,16×		
视场角	13.8°×10.4°	10.5°×7.9°	7.5°×5.7°	22.9°×18.4°	17.5°×14°	12.5°×10°
屈光度调校	±5					
补偿方式	快门补偿、场景补偿、自动补偿					
极性	白热、黑热、红热、绿热、铁红、融合					
电池	单节18650					
画中画	有					
WIFI	有					
光标	有					
加速度计	有					
热点追踪	有					
拍照	有					
录像	有（可录音）					
激光测距	可选					
视频输出	复合视频输出（TYPE-C接口）					
工作时长	单节电池＞4小时					
外部供电	TYPE-C接口					
外壳材质	航空硬质铝合金					
尺寸(mm)	194mm*77.6mm *58mm	199.6mm*77.6mm *58mm	209.6mm*77.6mm *49mm	194mm*77.6mm *58mm	199.6mm*77.6mm *58mm	209.6mm*77.6mm *49mm
重量	330g	340g	360g	330g	340g	360g
防护等级	IP67					
工作温度	-20℃...+60℃					

Multi-functional button area

The combination of keys makes it easy to operate with one hand.

Diopter adjustment knob

For people with slight myopia or presbyopia who can view the viewfinder directly without glasses.

Fixed Focus Lens

15mm classic lens, infrared effect more clearly.

S25X series thermal monocular

Item	S252	S252H	S253	S253H	S256
Detector					
Detector type	Uncooled FPA				
Resolution	256×192	256×192	384×288	384×288	640×480
Pixel pitch	12μm	12μm	17μm	17μm	17μm
Image					
FOV	17.9*13.2°	11.7*8.8°	14°*10.5°	10.7°*8.0°	17.7°*13.3°
Focal length	10mm	15mm	25mm	35mm	35mm
Magnification	1.4x	2.0x	1.64x	2.3x	1.38x
NETD	<40mk@30°C				
Frame rate	25HZ	25HZ	50HZ	50HZ	50HZ
Focus	Fixed focus lens		Manual focus lens		
Digital zoom	2X，4X				
Picture-in-Picture	Yes				
Distance estimate	Yes				
Image transmission	WiFi image transmission, support real-time browsing, photograph, video recording functions etc.				
Cross cursor	Yes				
Hot spot tracking	Yes				
Laser indication	Yes				
Photo and video	Yes				
Image display					
Display	OLED 1440*1080 (Eyepiece adjustable)				
Image polarity	Black-hot, White-hot, Red-hot, Enhanced mode				
Diopter Adjustment	-5D~+5D				
Power supply					
Battery type	Li-Ion battery, Rechargeable				
Operation time	5.5 hours continuous		4 hours continuous		
Charging	USB charging and power bank support				
External power	DC5V/2A（Type-c USB）				
Environment					
Working temp.	-20°C- +50°C				
Storage temp.	-40°C- +60°C				
Protection class	IP66				
Drop resistance	1 M				
Physical characteristics					
Weight	≤0.39kg		≤0.46kg		
Dimension	185*71*71mm		200*71*71mm		
Storage	Build-in，32GB				
Power interface	Yes				
Video output	PAL				
USB	External charging				
Data Transfer	Connectable to PC for data copy and product upgrade				
Tripod interface	1/4"-20-UNC				
Detection distance					
Human 1.8*0.5m	395m	570m	700m	1000m	1000m
Car 2.3*2.3m	640m	925m	1100m	1500m	1500m
Recognition distance					
Human 1.8*0.5m	200m	285m	350m	500m	500m
Car 2.3*2.3m	320m	460m	560m	790m	790m

Multi-functional button area

The combination of keys makes it easy to operate with one hand.

Diopter adjustment knob

For people with slight myopia or presbyopia who can view the viewfinder directly without glasses.

Fixed Focus Lens

25/35mm classic lens, infrared effect more clearly.

S236 series thermal monocular

Items	S236E	S236	S236P
Detector			
Detector type	VOx		
Pixels	384×288	384×288	640×512
Array size	12μm		
Image function			
FOV	10.5°x7.9°	7.5°x5.7°	12.5°x10°
Lens focal length	25mm	35mm	35mm
Magnification	2.3x	3.25x	1.95x
NETD	≤30mk		
Frame rate	50HZ		
Focus	Manual focus		
Digital zoom	1.0~4.0X continuously		
LRF	Distance range 10~1000m		
Storage			
Storage	Build-in，32GB		
photo	Take more than 10,000 pictures		
recording	support		
Power system			
Battery type	Lithium battery (removable battery)		
Battery working time	＞6h		
External power supply	DC5V/2A（Type-C interface）		
Environmental parameters			
Operating temperature	-20°C～ +50°C		
Storage temperature	-40°C～ +70°C		
Encapsulation	IP66		
Drop test	1 m		
Physical features			
Weight	＜550g		
Dimension	＜220x105x65mm		
Detection distance			
Human 1.8*0.5m	1000m	1400m	
Car 2.3*2.3m	1600m	2200m	
Recognition distance			
Human 1.8*0.5m	500m	700m	
Car 2.3*2.3m	800m	1100m	

Multi-functional button area

The combination of keys makes it easy to operate with one hand.

Diopter adjustment knob

For people with slight myopia or presbyopia who can view the viewfinder directly without glasses.

Fixed Focus Lens

15mm classic lens, infrared effect more clearly.

S243W Thermal Monocular

Item	S243W
Detector	
Type	VOx /12μm
Resolution	384×288
NETD	≤ 35mk
Image	
FOV	17.6°x13.2° (±5%)
Focal length	15mm
Frame rate	50HZ
Focus	Fixed lens
Digital zoom	1.0~4.0X
Spectral range	8~14μm
Image transmission	With wifi real-time image transmission
Crosshair cursor	yes
Recording	Photo and video
Storage	Build-in, 32GB
Hot-pot tracking	yes
Laser indicator	yes
Display	
Display	Color screen 800 x 600
Palette	Black hot, white hot, red hot and Pseudo-color
Diopter adjustment	Adjust by knob
Power	
Battery	Li-ion rechargeable
Working time	10 hours continuous
Charging	Support USB charging and power bank
External power	DC5V/2A (type-c)
Environment	
Operating temp.	-20℃~ +50℃
Storage temp.	-40℃~ +60℃
Protection class	IP66
Drop resistance	1 M
Physical	
Weight	<330g
Dimension	<185*60*60mm
Interface	
Power interface	Type-C for external charging
Video output	PAL
Detection distance	
Human (1.8×0.5) m	1000m
Car (2.3×2.3) m	1400m
Recognition distance	
Human (1.8×0.5) m	350m
Car (2.3×2.3) m	500m

MS715
THERMAL
BINOCULAR

Yiwu Inre Optical Instrument Co,. LTD.
TEL:+86 13906893397 EMAIL:SALES.EYEBREE GMAIL.COM
WECHAT:13906893397 WHATSAPP:+86 13906893397
WEBSITE:HTTPS://INRE.EN.ALIBABA.COM HTTPS://LINREOPTICAL.1688.COM

Eyebre®

Leading Supplier of Vision Solution in China

Multi-functional button area

The combination of keys makes it easy to operate with two hands.

Laser Ragefinder

Ranging from 10 to 1000m.

Fixed Focus Lens

Classic lens, infrared effect more clearly.

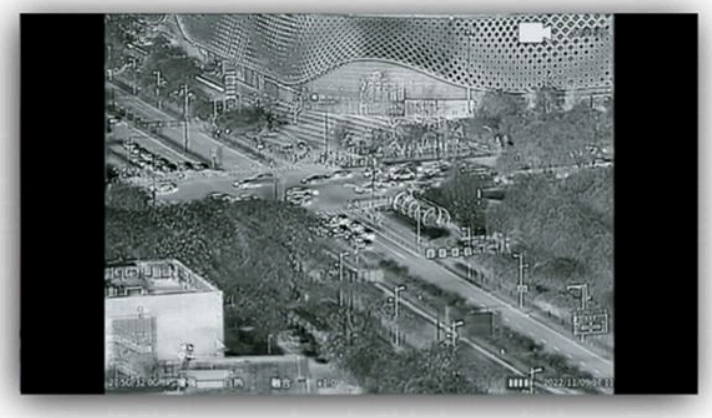

Eyebre®

Yiwu Inre Optical Instrument Co,. LTD.

TEL:+86 13906893397 EMAIL:SALES.EYEBREE GMAIL.COM
WECHAT:13906893397 WHATSAPP:+86 13906893397
WEBSITE:HTTPS://INRE.EN.ALIBABA.COM HTTPS://LINREOPTICAL.1688.COM

Leading Supplier of Vision Solution in China

Items	MS715E	MS715	MS715P
Detector type	VOx		
Spectral range	8 ~14 μm		
Resolution	384×288		640×512
Pixel pitch	12μm		
NETD	≤35mk@30°C		
IR lens			
Focal length	35mm	50mm	50mm
FOV	7.5°*5.7° (±5%)	5.3°*4.0° (±5%)	8.8°*7.0° (±5%)
Focusing method	Manual focus		
Low-light lens			
Resolution	1920 (H) ×1080 (V)		
Minimum illumination	Color DSS:0.0002LUX, BW DSS: 0.0001 LUX		
Image display			
Monitor	Binocular 0.39-inch color OLED, resolution 1440*1080		
Interpupillary distance	56~71mm adjustable		
Diopter adjustment	-5D~+5D adjustable		
Image storage			
Storage card	Built-in memory		
Storage method	Photo/Video		
File format	JPG/MP4		
Capacity	Standard 32G		
Function			
Brightness/ Gainess	Auto/manual		
Image correction	Auto/manual		
E-zoom	1.0~8.0x		
Picture-in-picture	Yes		
Hotspot Tracking	Yes		
Laser Ranging	/	1000m±1m	
Distance display	/	Real-time display of ranging distance	
Laser pointer	/	Yes	
GPS positioning	/	Yes	
Electronic compass	Yes		
Wifi transmission	Yes		
Scene mode	Natural, enhanced, highlighted		
Image mode	Low light mode, infrared thermal imaging mode, dual light fusion mode		
Image color code	White hot, black hot, iron red, red hot, ocean, desert, forest, etc.		
Power system			
Battery type	2*18650 batteries		
Battery continuous working time	>5h		
Charging method	Support online charging and dedicated charger		
External power supply	DC5V/2A (USB Type-C)		
Sleep function	Yes		
Environment			
Working temperature	-30°C~55°C		
Storage temperature	-40°C~70°C		
Humidity	≤95% (non-condensing)		
Impact resistance	30g, GB/T2423.5 (IEC60068-2-27)		
Anti-vibration	2g, GB/T2423.10 (IEC60068-2-6)		
Encapsulation	IP66		
Physical			
Weight	≤0.6Kg (without battery)		
Color	Black		
Dimension	211 (L) mm×145 (W) mm× 74 (H) mm		
External interface			
Data interface	Yes		
External video	HDMI		
USB	Yes		
Installation interface	1/4"-20-UNC		
Detection distance			
Human (1.8×0.5) m	Low light: 3200m IR: 1400m Fusion: 1400m	Low light: 3200m IR: 2000m Fusion: 2000m	Low light: 3200m IR: 2000m Fusion: 2000m
Vehicle (2.3×2.3) m	Low light: 5100m IR: 2300m Fusion: 2300m	Low light: 5100m IR: 3200m Fusion: 3200m	Low light: 5100m IR: 3200m Fusion: 3200m
Recognition distance			
Human (1.8×0.5) m	Low light: 1600m IR: 700m Fusion: 700m	Low light: 1600m IR: 1000m Fusion: 1000m	Low light: 1600m IR: 1000m Fusion: 1000m
Vehicle (2.3×2.3) m	Low light: 2500m IR: 1100m Fusion: 1100m	Low light: 2500m IR: 1600m Fusion: 1600m	Low light: 2500m IR: 1600m Fusion: 1600m



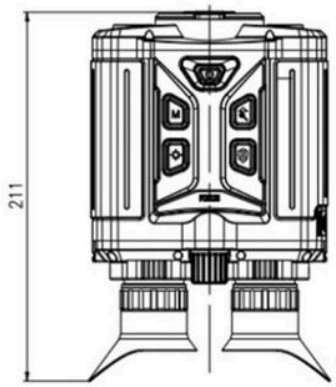

Feature

- *Large size high resolution (1440*1080 pixels), high-performance OLED display.*
- *Can be customized to adjust the interpupillary distance between 56~71mm, and the observation comfort is better.*
- *Support low-light mode, infrared thermal imaging mode, and dual-light fusion mode to meet the needs of day and night observation and law enforcement.*
- *Built-in high-resolution (1920*1080 pixel) low-light camera, WIFI camera, and video function, more convenient on-site forensics and video recording.*
- *Built-in GPS positioning, precise positioning of longitude, latitude, and altitude.*
- *Built-in three-dimensional electronic compass can display the azimuth angle, horizontal roll, and pitch angle parameters in real time.*
- *1000m accurate laser ranging with an independent switch laser indicator is more convenient for target positioning.*
- *IP66 encapsulation is suitable for various environments.*

Eyebre

Multi-spectral & Multi-functional thermal imaging Binocular

MS735 series

一. Product Photo

二. Specs

Items		Technical parameters	
		MS735MH	MS735
Sensor	Type	Uncooled focal plane Array micro bolometer (VOx)	
	Pixel Array	640*512	
	Pixel pitch	12μm	
	Spectrum	8～14um	
	NETD	≤35mk	
Thermal Imaging Camera Channel	Focal length	25/80mm dual field of view	
	Relative Aperture	F1.0	
	FOV	17.5° * 14° / 5.5° * 4.4° (±5%)	
	Focus range	5m/20m~∞	
	Focusing method	Auto/Motorized	
Visible light Camera Channel	Resolution	5 megapixels	
	Field of view	59.4° ×35.7° -2.3° ×1.3° (±5%) zoom	
	Fog Penetration function	Visible light Camera with penetrate Fog function	
	Focusing method	Motorized focus	
	Digital zoom	32x	

Eyebre

Low light Camera Channel	Resolution	2MP	
	Field of view	8.1° ×4.5° （±5%）	
	Illumination	≤0.0005lux	
Display	Resolution	Color OLED, resolution 1024 * 768	
	Frame rate	50Hz	
	Pupil distance	64mm	
	Diopter	-4D~+4D adjustable	
Functions	Laser rangefinder	Ranging range:50~6000m, accuracy:±2m, laser wavelength: 1535nm.	
	Laser Pointer	Visible laser: 1mW/635nm; Non-visible laser: 50mW/830nm.	Visible laser: 1mW/635nm
	Positioning Module	Support BeiDou (BD) and GPS positioning	None
	Positioning Accuracy	Self-positioning accuracy: horizontal 5m, elevation 10m; Target positioning accuracy: horizontal 20m, elevation 30m	None
	Target Guidance	Support	None
	Electronic compass	Support 1.Compass calibration: automatic/manual; 2.Accuracy: 0.5° ; 3.Range: azimuth 0~360° , pitch angle -90~+90° , roll angle -90~+90° .	None
	WiFi	Support, image display and remote control.	

Eyebre

	Digital zoom	1.0~8.0X, center area picture-in-picture zoom display (2x)
	Hot Spot Tracking	Support, Crosshair cursor tracking the point with the highest temperature in the scene.
	Distance Display	Display laser distance measurement results in meters (m) / yards (yard)
	Crosshair	Support
	Infrared Mode	White heat, black heat, iron red.
	Fusion Mode	Black and white fusion, desert fusion, jungle fusion, ocean fusion
	Visible light mode	Two modes :Fog Penetration function on/off
	Image Mode	Infrared, low Visible light, Visible light, fusion.
	Light leakage protection	With proximity sensor, the screen automatically display or off.
	Video Output	HDMI high-definition video output
	Image Transmission	WiFi real-time image transmission, support cell phone APP image browsing, photo, video, remote control, for IOS & Android system.
Memory	Memory	Built-in 128GB.
	Photo	Support, ≥80,000 JPG, support local playback browsing and deletion
	Video	Support, ≥ 24 hours MP4, support for local playback browsing and deletion
Power Supply System	Battery Type	18650 rechargeable lithium battery
	Battery operating time	≥13.5h

Eyebre

	External Power Supply	DC12V	
Interface	Communication Interface	RS232	
	Video Interface	HDMI	
	Memory Interface	USB	
	Power supply interface	DC 12V	
	Tripod Hole	1/4”-20-UNC	
Physical Characteristics	color	Black	
	Dimension	238*230*117mm	
	Weight	≤2.7Kg	≤2.6Kg
Others	Lens Cap	Yes	
	Eyeshade	Yes	
	Both Hand Stamp	Yes	
	Housing Material	Alloy with soft rubber protection.	
Environmental parameters	Working Temperature	-30℃~ +60℃	
	Storage Temperature	-40℃~ +70℃	
	Vibration	GB/T2423.10	
	Shock	GB/T2423.5	
	EMC	Comply with CE/FCC requirements	
Detection distance	Human （1.8*0.5m）	3700m	
	Car （2.3*2.3m）	5100m	
Recognition distance	Human（1.8*0.5m）	1850m	
	Car（2.3*2.3m）	2600m	

RS3

Thermal Riflescopes

Thermal

RS3 Riflescopes

12um VOx detector

384×288 Pixels

1280×960 Large Screen

1280×960 large-size display screen makes the display and observation clearer .

Lens & Tube

Lens: 25/35/50mm
Tube 30mm

WIFI Live Image by APP

WIFI image transmission function, mobile APP real-time browsing, recording, photographing, playback, control and other operations.

IPX6

Alloy shell, no fear of harsh environment

> Observation distance

Meteorological conditions: 25°C, 1atm, visibility 10Km, 60%RH, Human (1.8×0.5m) Car (2.3×2.3m)

Detection distance	Human1.8×0.5m	1000m(25mm)	1400m(35mm)	1900m(50mm)
	Car 2.3×2.3m	1600m(25mm)	2200m(35mm)	3200m(50mm)
Recognition distance	Human1.8×0.5m	500m(25mm)	700m(35mm)	1000m(50mm)
	Car 2.3×2.3m	800m(25mm)	1100m(35mm)	1600m(50mm)

Actual range may vary depending on target size and radiation degree, lens specification and environmental conditions. Above approximate distances are for reference only.

Lision II Intelligent Algorithm

Hot-spot Tracking

P-I-P Function

Black hot,White hot,Red hot,Red hot Iron

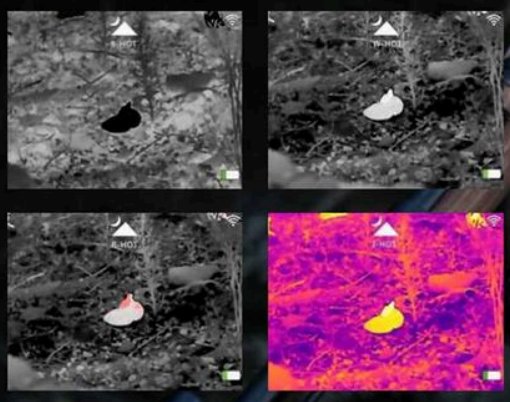

Yiwu Inre Optical Instrument Co,. LTD.
TEL:+86 13906893397 EMAIL:SALES.EYEBREE GMAIL.COM
WECHAT:13906893397 WHATSAPP:+86 13906893397
WEBSITE:HTTPS://INRE.EN.ALIBABA.COM HTTPS://LINREOPTICAL.1688.COM

Technical Specifications

Item	RS325-384	RS335-384	RS350-384
Detector type	VOx Uncooled FPA		
Pixel	384×288	384×288	384×288
Pixel pitch	12μm		
NETD	≤40mk		
Focal length	25mm	35mm	50mm
Field of view(±5%)	10.6°×7.9°	7.5°×5.7°	5.3°×4.0°
Frame rate	50Hz		
Focus	Manual		
Screen	Lcos 1280×960,Color lcos 1280×960 resolution		
Out-pupil distance	55mm		
Eyepiece magnification	10X		
Base magnification	X2.3	X3.25	X4.65
Visual degree	Adjustable		
Brightness/contrast	Adjustable		
Polarity reversal	Black hot/white hot		
Electronic zoom	X2, X3, X4		
Picture in Picture	Yes		
Division	Yes		
WIFI	Yes		
Storage	32G		
Storage method	Video, take photos		
Battery type	Built-in lithium battery		
Working hours	＞Five hours		
Impact resistance	800G		
Anti-vibration	2g, GB/T2423.10 (IEC60068-2-6)		
Protection level	IPX6		
Electromagnetic compatibility	Meet CE requirements		
Humidity	0~95%		
Working temperature	-20℃~+50℃		
Storage temperature	-40℃~+70℃		
Shell color	Black		
Connector	Can be equipped with rifle sight standard fixture (30 standard mounting ring)		
Size	320×75×65mm (Without eye mask)		
Weight	＜900g		
Power input	Type-C Connector (Charging, data transmission)		

Yiwu Inre Optical Instrument Co,. LTD.
TEL:+86 13906893397 EMAIL:SALES.EYEBREE GMAIL.COM
WECHAT:13906893397 WHATSAPP:+86 13906893397
WEBSITE:HTTPS://INRE.EN.ALIBABA.COM HTTPS://LINREOPTICAL.1688.COM

Eyebre®

Leading Supplier of Vision Solution in China

Feature

- ◆384*288 / 640*512 Pixels.
- ◆OLED (1440*1080), a High-performance display.
- ◆1000m accurate laser distance measurement.
- ◆Equipped with electronic compass and motion sensors.
- ◆Compact and lightweight, easy to carry around.

- ◆Multiple cross-hatching and customisable memory calibration parameters can be set.
- ◆With the latest Lison II detail enhancement algorithm for a clearer picture.
- ◆WIFI transmission of images and built-in video and photo functions.
- ◆Protection class IP66, weatherproof.
- ◆Available with universal Picatinny rail.

Items	Technical parameter			
	RS519-384L	RS535-384L	RS535-640L	RS550-640L
Detector				
Type	VOx			
Pixel	384x288		640x512	
Pixel spacing	12um			
Wavelength range	8～14um			
NETD	≤35mk			
IR lens				
Focus	19mm/F1.0	35mm/F1.0	35mm/F1.0	50mm/F1.0
FOV	13.8°x10.4°	7.5°x5.7°	12.5°x10.0°	8.8°x7.0°
Focusing method	Manual			
Image display				
Monitor	OLED, 0.39", 1440x1080			
Eyepiece Parameter	40mm			
Magnification	1.77x~7.08x	3.26x~13.04x	1.91x~7.64x	2.72x~10.88x
Diopter Adjustment	-5D~+5D			
Laser rangefinder	can be extended (optional), ranging from 10 to 1000m			
Electronic compass/ motion sensor	support			
Wi-Fi	support			
Image performance				
Frame Rate	50Hz			
Image Correction	auto/manual			
E-zoom	,2x.4x			
Hot spot tracking	support			
Cross Reticle	support			
Palette	White heat, black heat, iron red, red heat, forests.			
Image transmission	WiFi real-time image transmission, photography, and video.			
Image storage				
Memory	32GB			
Photos	support			
Video	support			
Power system				
Battery Type	Single standard 26500 rechargeable lithium battery, replaceable.			
Battery working time	>5h			
Charging method	Support online charging			
External power supply	DC5V/2A			
Interface				
Data interface	Type-C			
Installation interface	Three standard fixing screw holes, and different optional mounting brackets			
Physical characteristic				
Dimension （mm）	≤165*80*65mm/ ≤165*110*65mm （With laser）	≤190*80*65mm/ ≤190*110*65mm （With laser）	≤190*80*65mm/ ≤190*110*65mm （With laser）	≤200*80*65mm/ ≤200*110*65mm （With laser）
Weight （g）	≤470g/ ≤532g （With laser）	≤520g/ ≤582g （With laser）	≤525g/ ≤587g （With laser）	≤570g/ ≤632 （With laser）
Environment parameter				
Working temperature	-30°C~ +55°C （-22°F ~ 131°F）			
Storage temperature	-40°C~ +70°C			
Max. Recoil Power	800g/ms			
Capsulation	IP66			
Detection distance				
Human （1.8×0.5） m	750m	1400m	1400m	1900m
Car （2.3×2.3） m	1800m	2200m	2200m	3200m
Recognition distance				
Human （1.8×0.5） m	376m	700m	700m	1000m
Car （2.3×2.3） m	910m	1100m	1100m	1600m

PTS Series Monocular Thermographic Telescope

The PTS series thermal scope is equipped with a 384x288 or 640x512 infraed detetor with NETD ＜50mK. The PTS series is available with three lens configurations, 35mm/50mm/75mm focal lengths for excellent imaging quality for different situations.
The product is small and light in design, strong and durable. It is suitable for outdoor observation, police enforcement, anti-terrorism reconnaissance, personal security and other scenes.

- 35mm, 50mm, 75mm focal length options
- Highlight the target easily with IR detector with NETD ＜50mK and image enhancement
- Selection of color palettes
- Long battery life
- Built-in photo capture function

Product model	PTS335A	PTS350A	PTS375A	PTS650A	PTS675A
IR Detector					
Detector type	uncooled infrared focal plane				
resolution	384x288			640x512	
Pixel pitch	17μm				
NETD	⩽50mK				
Frame rate	50Hz				
Spectral range	8-14μm				
IR Lens					
Focal Length	35mm	50mm	75mm	50mm	75mm
FOV	10.7°x8°	7.5°x5.6°	5°x3.7°	12.5°x10°	8.3°x6.7°
Focusing mode	Manual				

Function	
Brightness Contrast	10 levels adjustment
Color palettes	rainbow, hot metal, white heat, black heat, yellow saturation, bird watching mode
Electron doubling	2x/4x
Hot spot tracking	Supported
Cross cursor	7 Types
Cursor distance calibration	Supported
Photo	Supported

Image	
NUC	Supported
Smooth	Supported
Enhancement	Supported
Filter/Noise	Supported

©Copyright INRE

PTS单目热像望远镜

Eyebre

PTS单目热像望远镜系列采用384x288/640x512高灵敏度红外探测器，搭配35mm/50mm/75mm三款不同镜头，成像画质优异。整机设计小巧轻便，结实耐用，无惧恶劣环境，适合户外观察、警用执法、反恐侦察、个人安保等领域应用。

- 可选35mm/50mm/75mm镜头，满足用户多样性需求
- 高NETD，搭配图像增强和伪彩模式，凸显观测目标
- 长效续航，户外使用无忧
- 内置拍照，存储精彩瞬间

型号	TWS335A	TWS350A	TWS375A	TWS650A	TWS675A
探测器性能					
探测器类型	非制冷红外焦平面				
探测器分辨率	384×288			640×512	
像元间距	17μm				
NETD	≤50mK				
帧频	50Hz				
波长范围	8-14μm				
物镜					
焦距	35mm	50mm	75mm	50mm	75mm
视场角	10.7°×8°	7.5°×5.6°	5°×3.7°	12.5°×10°	8.3°×6.7°
对焦方式	手动				

功能	
亮度/对比度调整	10档亮度/对比度调整
调色板	彩虹、热金属、白热、黑热、黄色饱和、观鸟模式
电子放大	2x/4x
热点追踪	支持
十字光标	支持7种类型
光标距离标定	支持
拍照	支持

图像处理	
非均匀性校正	支持
图像平滑功能	支持
图像细节增强	支持
数字滤波降噪	支持

义乌英锐光学仪器有限公司

©Copyright INRE

PTS Series Monocular Thermographic Telescope

DRI (target: 1.8m × 0.5m)

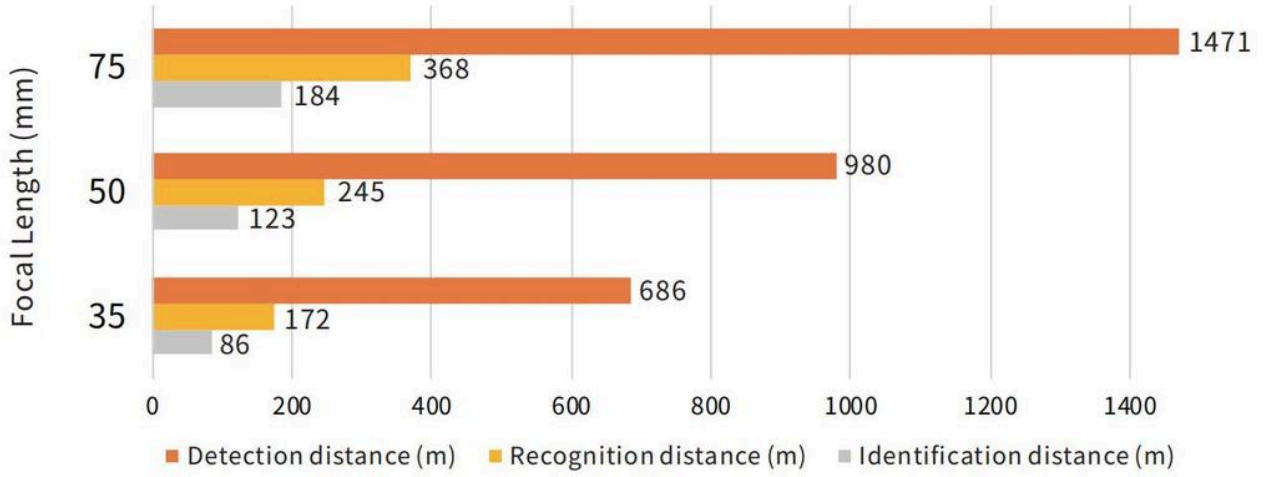

Power system	
Battery type	Removable 2040mAH lithium battery
Battery life	6 hours

Storage	
Storage capacity	16GB
Image type	BMP

Environment	
Shock resistance	800G
Encapsulation	IP66
Operating Temperature	0°C ~+45°C
Storage Temperature	-20°C ~+60°C

Physical	
USB	TYPE-C (battery charging/ data access)
Power consumption	1w
Weight	500g
Dimension	180x72x62mm

©Copyright INRE

PTS单目热像望远镜

Eyebre

DRI(目标:1.8m x 0.5m)

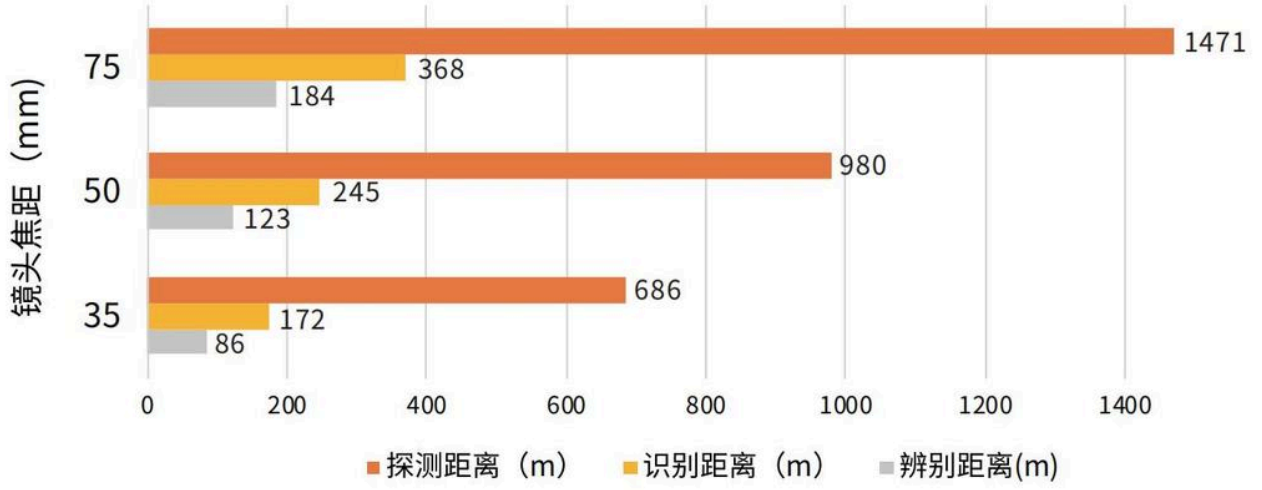

电源系统	
电池类型	可提取现场更换锂电池
续航时长	6小时

存储	
存储容量	16G
图像类型	BMP

环境参数	
抗冲击	800G
防护等级	IP66
工作温度	0℃ ~+45℃
存储温度	-20℃ ~+60℃

物理特性	
USB	Type C(充电/数据传输)
功耗	1w
重量	500g
尺寸	180x72x62mm

义乌英锐光学仪器有限公司

©Copyright INRE

Eyebre

C2 Mobile 热成像瞄准镜

热探测器

探测器类型	非制冷型氧化钒焦平面阵列探测器
最大分辨率	256x192
等效噪声温度差	<50mK @25°C, F#1.0,
帧率	<25Hz
相机镜头焦距	3.2 mm
视场角	56° × 42°
对焦	自动对焦
镜头外观	镜头红色环

温度测量

温度范围	-15°C~150°C（低） 50°C~550°C（高）
精度	±3°C 或读数的3%
点、线、框数量	6
功能特性	温度、距离、发射率、点、线和帧的最大值温度和最小值温度

网络

协议	IPV4, RTSP, RTCP RTP, TCP, UDP
安全模式	授权用户及密码

图像

流媒体格式	H.264/H.265
主流	768x576,<25HZ
图像调整	Auto adjustment, Auto gain
图像增强	3D噪音降噪技术
调色板	提供7种颜色配色方案，包括黑色炽热色、白色炽热色、铁红色、彩虹色等。

视频播放

存储形式	64G TF Card

电源

能源支持	电池供电/Type-c
能源浪费	≤1.5W

环境参数

防护等级	IP66
工作温度	-10°C~75 °C
存储温度	-45°C~85°C
尺寸	145x35x33mm
重量	144g
材料	Plastic + Aluminum

警报

警报功能	全屏温度报警，中心温度报警，高低温报警

其他

SDK	Open SDK

义乌英锐光学仪器有限公司
yinyuan-optics.com

C2 Mobile Thermal Imaging Scope

Eyebre

Detector

Detector type:	Vanadium Oxide Uncooled Focal Plane Detector
Resolution:	256x192
Equivalent Noise:	<50mK @25°C, F#1.0,
Frame rate:	<25Hz
Camera:	3.2 mm
Field of view:	56° × 42°
Focusing:	Auto Focus
Lens Exterior:	Lens Red Ring

Temperature measurement

Temperature range:	-15°C to 150°C (low) 50°C to 550°C (high)
Accuracy:	+3°C or 3% of reading
Dots, lines, frames:	6
Environment Variable Correction:	Temperature,distance,emissivitu Point,line and frame maximun and minimun temperature

Network

Past:	IPV4, RTSP, RTCP RTP, TCP, UDP
Safety mode:	Authorized Users and Passwords

Image

Streaming format:	H.264/H.265
Main stream:	768x576,<25HZ
Image adjustment:	Auto adjustment, Auto gain
Image Enhancements:	3D Noise Reduction
Palette:	Supports7 color palettes including black hot,white hot,iron red,rainbow etc

Video playback

Forms of storage:	64G TF Card

Power

Power supply:	Battery-powered / Type-C
Power wastage:	⩽1.5W

Environmental parameters

Protection level:	IP66
Working temperatures:	-10°C~75 °C
Storage temperature:	-45°C~85°C
Sizes:	145x35x33mm
Weights:	144g
Material:	Plastic + Aluminum

Alarm

Alarm function:	Full screen temperature alarm.center temperature alarm,high and low temperature

Other

SDK:	Open SDK

义乌英锐光学仪器有限公司
yinyuan-optics.com

Eyebre

OrionS2 热成像瞄准镜

图像显示	OrionS2	Orion X3
显示屏	1024x768,0.39英寸，OLED	
亮度调整	是	
伪彩	黑热、白热、红热、融合	
FFC(平坦场校正)模式	自动、手动、外部校正	
出瞳距离	6mm	
视距	48mm	
屈光度(范围)	-5D至5D	
色调调整	冷、暖	

系统	OrionS2	Orion X3
录制视频	是	
拍摄快照	是	
热点	是	
待机模式	是	
储存	内置EMMC(32 GB)	
画中画	是	
热点追踪	是	
距离测量	是	
音频录制	是	
反冲激活录像	是	
教练模式	是	
最大后坐力	1000g/0.4ms	
归零配置文件	5	
内置wifi	是	

Sensor模块	OrionS2	Orion X3
图像传感器	未冷却焦平面阵列	
最大分辨率	256x192	384x288
刷新率	50Hz	
像素间隔	12μm	
噪声等效温差	小于20mK(25℃，F#=1.0)	
镜头(焦距)	25mm,F1.0	35mm, F1.0
探测范围	1200m	1800m
视场(HxV) 度数/m@100m	9.2°x6.9° 16.2mx12.1m	7.0° x5.3° 12.3mx9.2m
最小聚焦距离	2m	
放大倍数	3.6x-28. 8x(8x)	

电源系统	OrionS2	Orion X3
电池类型	可更换和可充电锂离子电池组	
电池工作时间	>10小时(25℃， 热点关闭)	>8小时(25℃， 热点关闭)
Type-C电源	5V DC, 2A支持外部电源	

常规	OrionS2	Orion X3
保护级别	IP67	
重量	580g，无电池	620g，无电池
尺寸	217.0x75.0x66.0(mm)	217.0x75.0x70.0(mm)
工作温度	-30℃至+55℃(-22°F至131°F)	
湿度采集	是	

激光测距仪	OrionS2	Orion X3
激光器的安全等级	1级	
波长	905nm	
最大测量范围	700m	100m
测量精度	±1m	
最小测量范围	10m	
弹道校正	是	

义乌英锐光学仪器有限公司
yinyuan-optics.com

OrionS2
Thermal Imaging Scope

Eyebre

Sensor module	OrionS2	Orion X3
Image sensor	Uncooled focal plane array	
Maximum resolution	256x192	384x288
Refresh rate	50Hz	
Pixel spacing	12μm	
Noise equivalent temperature difference	Less than 20 mK (25°C, F# = 1.0)	
Lens (focal length)	25mm,F1.0	35mm, F1.0
Detection range	1200m	1800m
Field of view (HxV) Degrees/meter @ 100 meters	9.2°x6.9° 16.2mx12.1m	7.0° x5.3° 12.3mx9.2m
Minimum focusing distance	2m	
Magnification factor	3.6x-28. 8x(8x)	

Power system	OrionS2	Orion X3
Battery type	Replaceable and rechargeable lithium-ion battery pack	
Battery operating time	Less than 10 hours (25°C, hotspot off)	Less than 8 hours (25°C, hotspot off)
Type-C电源	5V DC, 2A - Supports external power supply	

Laser rangefinder	OrionS2	Orion X3
The safety level of the laser device	Level 1	
Wavelength	905nm	
Maximum measurement range	700m	100m
Measurement accuracy	±1m	
Minimum measurement range	10m	
Ballistic correction	Yes	

Image display	OrionS2	Orion X3
Display screen	1024x768, 0.39 inches, OLED	
Brightness adjustment	Yes	
Pseudo-color	Black heat, white heat, red heat, fusion	
FFC (Flat Field Correction) mode	Automatic, Manual, External Correction	
Eye-to-eye distance	6mm	
Visual range	48mm	
Power (range)	-5D to 5D	
Tone adjustment	Cold, warm	

System	OrionS2	Orion X3
Record a video	Yes	
Take a snapshot	Yes	
Hot topic	Yes	
Standby mode	Yes	
Storage	Built-in EMMC (32 GB)	
Picture within a picture	Yes	
Hotspot Tracking	Yes	
Distance measurement	Yes	
Audio recording	Yes	
Backfire activation video	Yes	
Coach Mode	Yes	
Maximum recoil force	1000g/0.4ms	
Zero configuration file	5	
Built-in Wi-Fi	Yes	

Conventional	OrionS2	Orion X3
Protection level	IP67	
Weight	580g, without battery	620g, without battery
Size	217.0x75.0x66.0(mm)	217.0x75.0x70.0(mm)
Working temperature	-30°C to +55°C (-22°F to 131°F)	
Humidity measurement	Yes	

义乌英锐光学仪器有限公司
yinyuan-optics.com

S2pro 热成像瞄准镜

Eyebre

产品详细参数

型号	S2 PRO	热点追踪	支持
探测器分辨率	256x192	Wi-Fi AP/STA	支持
AI超分辨率	384x288	待机模式	支持
像元间距	12μm	贮存	内置 32 GB
热灵敏度	≤40mk	录制视频	支持
红外波段	8μm~14μm	拍照	支持
镜头(焦距)	10 mm/15 mm	CVBS输出	支持(通过 USB-C)
光圈	F=0.95	HDMI输出	支持(通过 USB-C)
视场角	18.00°*13.55°/ 11.69°* 8.78°	连续工作时长	超过 8小时(@25°°C，Wi-Fi 关闭)
帧率	50Hz	电池容量	3.7V 3200mAh
数码变焦	1x、2x、4x、8x	工作温度	-20°C~60°C
屏幕	1.43 英寸 AMOLED 显示屏	防护等级	IP66
场景模式	普通、轮廓、城市、森林、雨林、观鸟	尺寸	170*80*61.5mm
色彩模式	黑热、白热、红热、绿热、铁红	重量	约238g

义乌英锐光学仪器有限公司
yinyuan-optics.com

S2pro
Thermal Imaging Scope

Eyebre

Product detailed parameters

Model number	S2 PRO	Hotspot Tracking	Support
Detector resolution	256x192	Wi-Fi AP/STA	Support
AI Super-Resolution	384x288	Standby mode	Support
Pixel spacing	12μm	Storage	Built-in 32 GB
Thermal sensitivity	⩽40mk	Record a video	Support
Infrared band	8μm~14μm	Take a photo	Support
Lens (focal length)	10 mm/15 mm	CVBS output	Support (via USB-C)
Aperture	F=0.95	HDMI output	Support (via USB-C)
Field of view	18.00°*13.55°/ 11.69°* 8.78°	Continuous working hours	More than 8 hours (@25°C, Wi-Fi turned off)
Frame rate	50Hz	Battery capacity	3.7V 3200mAh
Digital zoom	1x、2x、4x、8x	Working temperature	-20°C~60°C
Screen	1.43-inch AMOLED display screen	Protection level	IP66
Scene Mode	Ordinary, outline, city, forest, rainforest, birdwatching	Size	170*80*61.5mm
Color mode	Black heat, white heat, red heat, green heat, iron red	Weight	Approximately 238 grams

义乌英锐光学仪器有限公司
yinyuan-optics.com

Z5Mini
Plug-in Thermal Imager

Eyebre

Parameter information

Product Name	Plug-in thermal imagerZ5Mini
Detector Type	Uncooled infrared focal plane detector
Resolution	256x192
Cell Spacing	12μm
Thermal sensitivity	⩽50mk
Spectral range	8μm~14μm

performance

Frame frequency	⩽25Hz
Power consumption	＜0.5W
Operating temperature	-10°C~55°C
Storage temperature	-45°C~85°C

Lens

Focal length	3.2mm
Aperture	F1.1
FOV	56°x 42°
Lens type	Non-thermalized fixed-focus lens

Temperature

Measurement range	-15°C~150°C(L)& 50°C~550 °C(H)
Accuracy	±3°C or ±3% of reading

Software Support

Measurement	Dots,Lines,Boxes(Max 9)
Environment Variables	Emissivity,distance,temperature
Color	10 colors in all
Temperature bar	Filtering of specified temperature ranges
Analysis	Photo Temperature Analysis
Systems	Support Android 6.0/Harmony 2.0 and above
Update	Online Updates

Shape

Sizes	35x25x9mm
Color	Grey
Weights	10.2g
Material	Aluminum
Connector	Type-C

义乌英锐光学仪器有限公司
yinyuan-optics.com

Z5Mini 插件式热成像仪

Eyebre

产品详细参数

产品名称	插件式热成像仪Z5Mini
探测器类型	非制冷型红外焦平面探测器
分辨率	256x192
像元间距	12μm
热灵敏度	≤50mk
红外波段	8μm~14μm

性能

帧率	≤25Hz
电力消耗	＜0.5W
工作温度	-10°C~55°C
存储温度	-45°C~85°C

镜头

焦距	3.2mm
光圈	F1.1
视场角	56°x 42°
镜头类型	非热化定焦镜头

温度

测量范围	-15°C~150°C(L)& 50°C~550 °C(H)
准确性	±3°C or ±3% of reading

软件支持

测量	点、线、框（最多9）
环境变量	发射率、距离、温度
颜色	总共10种颜色
温度条	指定温度范围的过滤操作
分析	照片温度分析
系统	支持Android 6.0/鸿蒙2.0及更高版本
更新	在线更新

外形

尺寸	35x25x9mm
颜色	灰色
重量	10.2g
材质	铝
连接器	Type-C

义乌英锐光学仪器有限公司
yinyuan-optics.com

Product specifications

Model	MLT350
Probe type	UNCOOLED vanadium oxide detector
Response Band	8~14 μm
NETD	<35mk (@25*℃, F#=1.0)
Resolution	384*288
Frame rate	50fps
Pixel size	12 μm
Focal length	50mm
Angle of view	5.3° x4.0°
Base Rate	X4
Focus	Manual focusing
Display screen	Color 0.39-inch OLED screen, 1024x768
Video output standard	CVBS
External video	Support
Calibration method	Background correction
Non-uniformity correction	Shutter calibration technology
Image detail enhancement	Support
Noise reduction	Support
Electronic amplification	x1, x2, x4, x8
False color mode	Black heat, white heat, red heat, fusion

Video output interface	Type-C
Laser Ranging	NO
Trajectory calculations	NO
Menu	Support
Take photos	Support
Video	Support
Cross ruler	Support
WIFI	NO
Gyroscope	Support
Batteries	18650, rechargeable
Working hours	Single battery continuous working time ≥5 hours, the battery can be replaced
Operating temperature	-30°C-70°C, ≤90%RH
Dustproof/ waterproof	IP67
Weight	≤485g
Size	190mmx78mmx52mm
Standard configuration	Host, guide rail, portable bag, Clean the components, 18650 battery
Detect distance/identify distance	
People	Detection: 1900m Identification: 760m
Pig/deer	Detection: 1672m Identification: 669m
Rabbit	Detection: 487m Identification: 195m
Chickens	Detection: 356m Identification: 142m
Sparrow	Detection: 195m Identification: 78m

Eyebre®

DIGITAL RIFLE SCOPE

Eyebre®

Yiwu Inre Optical Instrument Co,. LTD.

TEL:+86 13906893397 EMAIL:SALES.EYEBREE GMAIL.COM

WECHAT:13906893397 WHATSAPP:+86 13906893397

WEBSITE:HTTPS://INRE.EN.ALIBABA.COM HTTPS://LINREOPTICAL.1688.COM

Leading Supplier of Vision Solution in China

MS32

Magnification: 放大倍数：	3.5x
Objective Lens Diameter: 物镜直径	32mm
Maximum Distance in Dim condition: 昏暗环境观测距离	5-1000m
Maximum Distance in Tota Darkness: 全黑环境观测距离	5-200m
Sensor Resolution: 传感器分辨率	1280x720
Display Resolution: 屏幕分辨率	640x480HDIPS
Auxiliary Infrared Illumination: 红外补光灯	850nm
Voltage: 额定电压	3.7V DC
Battery: 电池	18350 Lithium
Charger: 充电器	5.0V/2A
Material: 材质	Metal
Dimensions 尺寸	150x60x70
Weight 重量	370g
Protection Grade 防护等级	IPX6

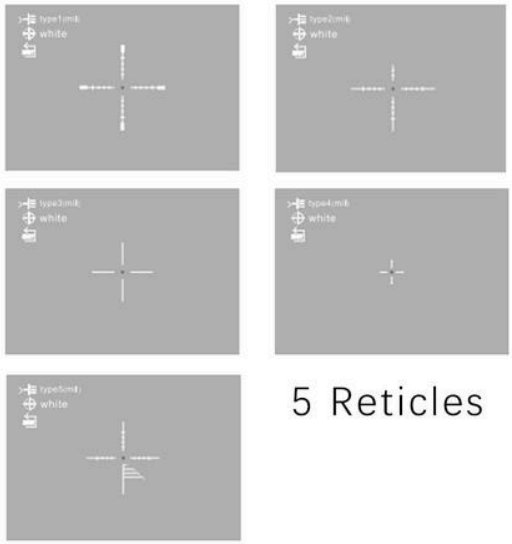

5 Reticles

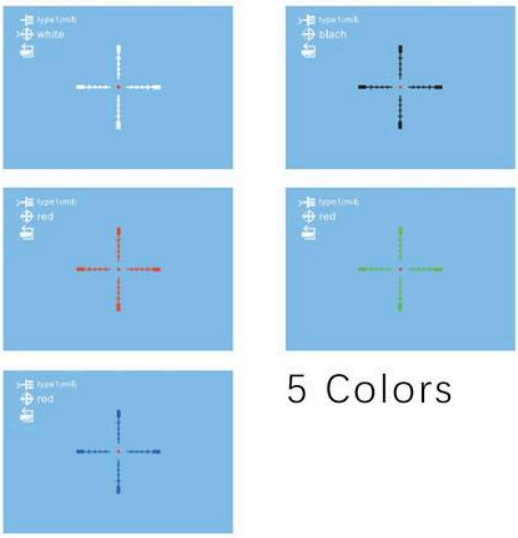

5 Colors

Yiwu Inre Optical Instrument Co,. LTD.
TEL:+86 13906893397 EMAIL:SALES.EYEBREE GMAIL.COM
WECHAT:13906893397 WHATSAPP:+86 13906893397
WEBSITE:HTTPS://INRE.EN.ALIBABA.COM HTTPS://LINREOPTICAL.1688.COM

Eyebre®

Leading Supplier of Vision Solution in China

DGS 6-12X Color Night Vision Scope

DGS 6-12X 全彩夜视瞄准镜

Yiwu Inre Optical Instrument Co,. LTD.
TEL:+86 13906893397 EMAIL:SALES.EYEBREE GMAIL.COM
WECHAT:13906893397 WHATSAPP:+86 13906893397
WEBSITE:HTTPS://INRE.EN.ALIBABA.COM HTTPS://LINREOPTICAL.1688.COM

ID	Catalog	Function Description
1	Optiacal performance	Magnification power 6-12
2		Digital Zoom magnification, Max 2x
3		Angle Of View 7.8°
4		Objective Aperture 68mm
5		Exit Pupil Distance 60mm
6		F# for Objective lens 1.0
7		Full color day and night
8		Telescopic distance：5m-∞
9	Video Output	1920X1080 resolution OLED
10		OSD menu display
11	Imager	CMOS High-sensitivity Sensor
12		Size 1/1.8"
13		Resolution 2560X1440
14	Reticle	Reticle of different styles and colors
15	Ranger Finder	905nm Laser
16		Resolution：0.1m
17		Measuring distance：3m~500m
18	Micro SD Card	Support 4GB~128GB TF Card
19	Hardware Buttons	Power on/off
20		UP
21		Left/SNAP
22		Right/REC
23		Down/MODE
24		OK
25		Scroll Wheel/Zoom In(Out)
26	Operation	Preview
27		Record MP4 file in TF storage
28		Capture JPEG file in TF storage
29		Playback media file from TFstorage
30	Power	External power supply - TypeC 5V/2A
31		2 pcs 18650 Li battery 3.7V/5200mah
32		Battery life: 10 hours working time
33		Low battery warning

34	System	4 modes (Preview, Playback,Menu)
35		Single frame Image Capture
36		Video image Record
37		Playback image
38		Reticle adjustment
39		Distance measurement
40		Auto Power Off (Off/5min/ 10min/15min)
41		Language: English
42		Light Freq. 50/60HZ
43		Format
44		OLED Brightness adjustment
45		Version
46	Size	size 392mmx71mm
47		Weight 1200g
48	package	USB cable/ Micro SD card/ Bag/Manual

黑光全彩单目望远镜 DGS 系列

DGS 6-12×68

DGS 5-10×55

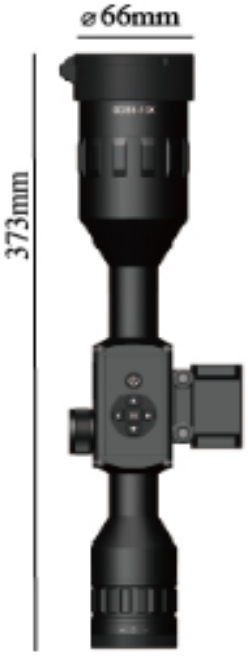

DGS 3.5-7×40

※ 放大率 / Magnification power	6-12倍	5-10倍	3.5-7倍
※ 角度 / Angle Of View	4.8度	6.2度	7.8度
※ 物镜口径 / Objective Aperture	68mm	55mm	40mm
※ 尺寸/ Size	394x72mm	373x66mm	342x53mm
※ 重量 / Weight	1390克	1385克	1090克

项目	参 数
光学参数	电子放大 2倍
	目镜角度 30度
	出瞳距离 60mm
	光圈F1.0
	全天候全彩模式
	观测距离 5米到无穷远
输出	OLED 分辨率 1920X1080
图像	高感光、低照度图像传感器
	大小 1/1.8"
	分辨率 2688X1520
十字丝	可选不同样式和颜色
测距仪	波长905纳米激光
	分辨率 0.1米
	测量距离 3米-600米
内存	支持 4GB-512GB TF内存卡
电源	外部充电 电源DC 5V/2A
	内置锂电池 3.7V/5200Ma
	电池工作时间 6小时
	低电量警告
包装	USB线/TF内存卡/工具箱/轨道夹/说明书

Catalog	Function Description
Optical performance	Digital Zoom magnification, Max 2x
	Angle Of Eyepiece 30°
	Exit Pupil Distance 60mm
	F# for Objective lens 1.0
	Full color day and night
	Telescopic distance: 5m-∞
Video Output	1920X1080 resolution OLED
	OSD menu display
Imager	CMOS High-sensitivity Sensor
	Size 1/1.8"
	Resolution 2688X1520
Reticle	Reticle of different styles and colors
Ranger Finder	905nm Laser
	Resolution: 0.1m
	Measuring distance: 3m~600m
Storage	Support 4GB~512GB TF Card
Power	External power supply - TypeC 5V/2A
	Built in Li-ion battery 3.7V/5200ma
	Battery life: 6 hours working time
	Low battery warning
package	USB cable/TF card/ Bag/Manual

Eyebre®

Yiwu Inre Optical Instrument Co,. LTD.

TEL:+86 13906893397 EMAIL:SALES.EYEBREE GMAIL.COM

WECHAT:13906893397 WHATSAPP:+86 13906893397

WEBSITE:HTTPS://INRE.EN.ALIBABA.COM HTTPS://LINREOPTICAL.1688.COM

Leading Supplier of Vision Solution in China

3-24x 9002 Digital Scope

3-24x 9002 数码瞄准镜

Specification	Day/Night HD Digital Scope
Field of view at 1000 yds	250ft(4.8°)
Sensor	Sony 4K Sensor , 3840 (H) X 2160 (V)
CPU performance	14nm Quad-Core Processer
Micro Display	1280x720 HD Display
Eye relief	60mm
Video Recording Resolution	4k@30/60fps、1080p@30/60/120/200fps、720p@200fps
Ballistic Calculator	Yes
WiFi(Streaming, Gallery & Controls)	iOS and Android
Bluetooth	Yes
3D Gyroscope	Yes
3D Accelerometer	Yes
RVA (Recoil Activated Video)	Yes
Electronic Compass	Yes
Smooth Zoom	Yes
Mil Dot	Multiple Patterns & Color Options
Crosshair	1.0-13.0MOA
Microphone	Yes
Mico SD card	64G to 256G
USB , type C	Yes
Mount	30mm Standard Rings
IR Illuminator	Included(850nm)
Night Vision	Yes
Battery life(Li-ion)	Up to 6hrs
Battery type	Internal Lithium Ion Battery
Waterproof rating/IP rating	Weather Resistant
Dimensions(body only)	325x126x49mm
Weight	883.80g
Warranty	2 years

目录	4K高清数码瞄
1000码的视场	250英尺(4.8°)实测
传感器	索尼4K传感器，3840(H)X2160(V)
CPU性能	14nm四核处理器
微型显示器	1280x720高清显示屏
瞳距	60毫米
录像分辨率	4k@30/60fps、1080p@30/60/120/200fps、720p@200fps
弹道计算器	是
WiFi传输接收终端系统	iOS和Android
蓝牙	是
电子陀螺仪	是
电子加速度计	是
开枪触发自动录像	是
电子罗盘	是
平滑缩放	是
密点	多种图案和颜色自由搭配
十字线	1.0-13.0MOA
麦克风	是
微型SD卡	64G至256G
USB，C型	是
安装	30毫米标准环
红外灯	有(850nm)
夜视	支持
电池寿命 (锂离子电池)	长达6小时
电池类型	内置锂离子电池
防水等级/IP等级	防雨淋
尺寸 (仅机身)	325x126x49mm
重量	883.80g
质保	2年

Yiwu Inre Optical Instrument Co., LTD.
TEL:+86 13906893397 EMAIL:SALES.EYEBREE GMAIL.COM
WECHAT:13906893397 WHATSAPP:+86 13906893397
WEBSITE:HTTPS://INRE.EN.ALIBABA.COM HTTPS://LINREOPTICAL.1688.COM

Eyebre®

Leading Supplier of Vision Solution in China

Eyebre

Shark Series

Day and Night Digital Scope

The Shark is a high-performance digital night vision rifle scope . The Shark is the perfect digital night vision optic for the discerning hunter with excellent low-light sensor sensitivity. Featuring a 12+ hour run time and an IP67 rating, It can last all night in any hunting conditions.

CE RoHS FC

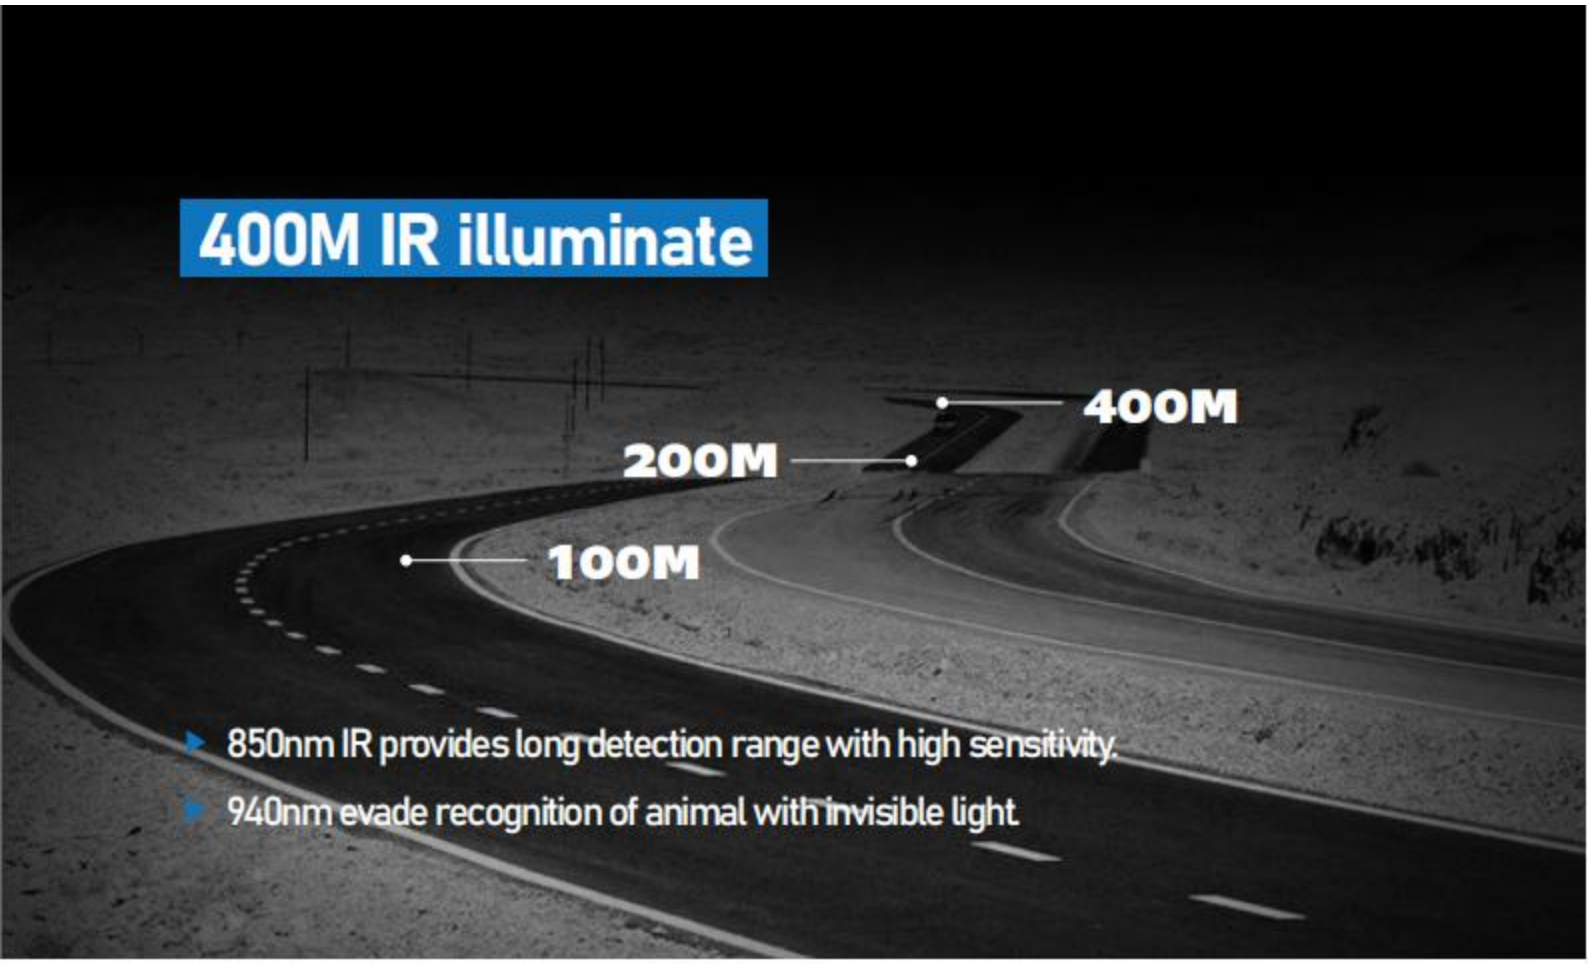

40x

5x

5-40x

Magnifying power

Magnification 5-40x
search and observe quickly switch

Video Resolution
1920 x 1080

Multi exposure
DOL wide dynamic function

Yiwu Inre Optical Instrument Co,. LTD.
TEL:+86 13906893397 EMAIL:SALES.EYEBREE GMAIL.COM
WECHAT:13906893397 WHATSAPP:+86 13906893397
WEBSITE:HTTPS://INRE.EN.ALIBABA.COM HTTPS://LINREOPTICAL.1688.COM

Eyebre®

Leading Supplier of Vision Solution in China

Product Parameters

Model	Shark
Lens	75mm
Ranging range	5-1000m
Size	240*95*50
Weight	710g
IR Illuminator	850nm/940nm optional
Video format	MP4
Storage type	support 4-128G（FAT32）
Battery working time	Up to 12hrs
Voltage	5V Type-C
Focus range	3m - ∞
Transfer method	WIFI
Video recording resolution	1080P
Magnification	5-40x

Eyebre

DC23 Series

Digital night vision device

- Excellent imaging performance, @1024*768 OLED crisper images.
- 50Hz high frame rate, ensuring capture smooth and vivid image during fast motion of observer or obiect of observation.
- 1024*768 resolution AMOLED eyepieces,colorfuland detailed images
- can reach 10 hours of stand by time You don't worry about changing the battery frequently
- IP67 degree ofprotection, water proof and dust proof high shock resistance, no fears of harsh weather

Yiwu Inre Optical Instrument Co,. LTD.
TEL:+86 13906893397 EMAIL:SALES.EYEBREE GMAIL.COM
WECHAT:13906893397 WHATSAPP:+86 13906893397
WEBSITE:HTTPS://INRE.EN.ALIBABA.COM HTTPS://LINREOPTICAL.1688.COM

Eyebre®

Components ofnight vision

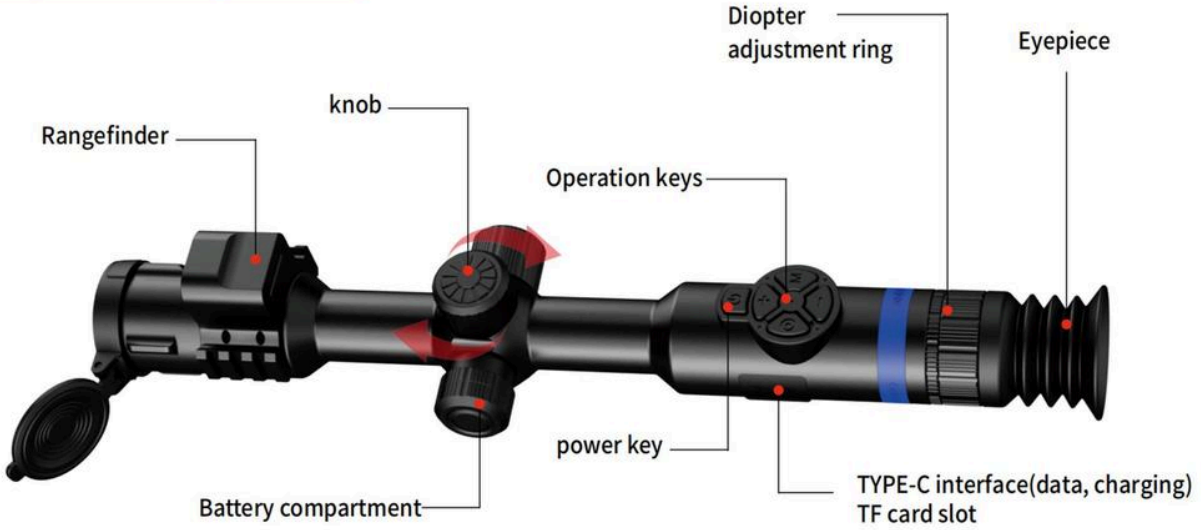

Product parameters

Model	DC23
Lens	50mm
Ranging range	3-1000m
Size	240*95*50
Weight	710g
IR Illuminator	850nm/940nm
Photo	JPG
Video format	MP4
Battery working time	＞10hrs
Voltage	DC 5V Type-C
Focus range	3m - ∞
Transfer method	WIFI
Video recording resolution	QVGA/VGA/1400P/1080P
Magnification	5-40x
IR irradiation range	350m
Frame rate	30fps
Battery type	Lithium Ion Battery
Laser ranging	Optional

Yiwu Inre Optical Instrument Co,. LTD.
TEL:+86 13906893397 EMAIL:SALES.EYEBREE GMAIL.COM
WECHAT:13906893397 WHATSAPP:+86 13906893397
WEBSITE:HTTPS://INRE.EN.ALIBABA.COM HTTPS://LINREOPTICAL.1688.COM

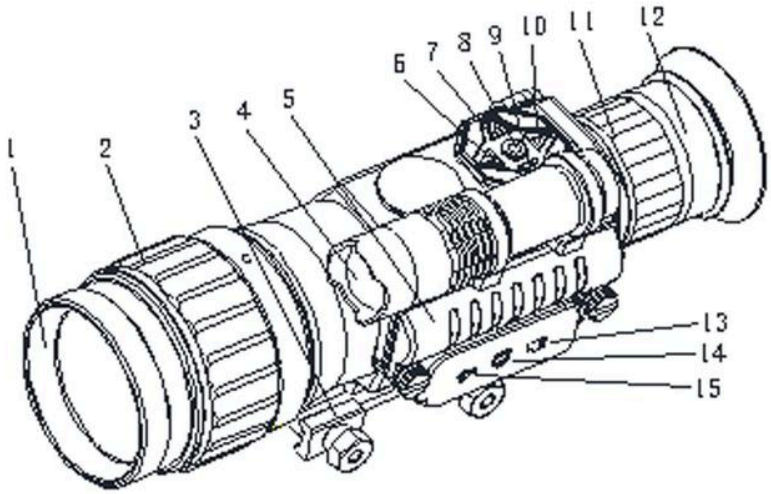

1 – Objective Lens
2 – Objective Focus Wheel
3 –Picatinny adaptor
4 –Auxiliary IR illuminator
5 –Battery Cover
6 – Adjustment Button
7 – Adjustment Button
8 – On/Off & Confirm
9 – Adjustment Button
10 – Adjustment Button
11 – Eyepiece Focus Wheel
12 – Eyepieces
13–TF Card Slot
14 –Audio/Video Output

PQ1-4550 Digital Scope

PQ1-4550 数码瞄准镜

Yiwu Inre Optical Instrument Co,. LTD.
TEL:+86 13906893397 EMAIL:SALES.EYEBREE GMAIL.COM
WECHAT:13906893397 WHATSAPP:+86 13906893397
WEBSITE:HTTPS://INRE.EN.ALIBABA.COM HTTPS://LINREOPTICAL.1688.COM

PQ1-4550

PQ1-4550 digital night vision riflescope is a precision optical electronics equipment which is used to observe or aim at a target. It can be used in extremely low light environment.

OPTICS	Magnification	4.5
	Dia. of objective lens	Φ50mm
	Field of View	4.6° x 3.7°
	Range of eye relief	±5 diopter
	Visual distance in low light environment	5m～∞
	Visual distance	250-300m
	Anti-impact force	600G

POWER SUPPLY	Operating voltage	3.7V DC
	Battery	Rechargeable lithium battery
	Charging adaptor	5V/2A Adaptor
OTHER	Dimension (LxWxH)	220x80x75mm
	Weight	1102g

Eyebre®

NIGHT VISION BINOCULAR

Yiwu Inre Optical Instrument Co,. LTD.
TEL:+86 13906893397 EMAIL:SALES.EYEBREE GMAIL.COM
WECHAT:13906893397 WHATSAPP:+86 13906893397
WEBSITE:HTTPS://INRE.EN.ALIBABA.COM HTTPS://LINREOPTICAL.1688.COM

NV 200C

ID	Catalog	Function Description
1	Optiacal performance	Magnification power 3.5~7X21
2		Digital Zoom magnification, Max 2x
3		Angle Of View 9°
4		Objective Aperture 21mm
5		Exit Pupil Distance 30mm
6		F# for Objective lens 1.3
7		3m~∞ in daytime (color); Viewing in the darkness up to 300M (monochrome)
8		
9	Video Output	320x240 resolution TFT LCD
10		OSD menu display
11		CVBS always output with VGA resolution
12	Imager	CMOS High-sensitivity Sensor
13		Size 1/4"
14		Resolution 640X480
15	IR LED	3W Infared LED with 850nm
16	Micro SD Card	Support SDHC 4GB~32GB SD Card
17	Hardware Buttons	Power on/off
18		Snap
19		Mode selection
20		Zoom
21		IR switch

22	**Operation**	Preview
23		Record AVI file in SD storage
24		Capture JPEG file in SD storage
25		Playback media file from SD storage
26	**Power**	External power supply - USB 5V/1A
27		4 pcs AA battery 4.5V-6V
28		Battery life: 6 hours working time with IR off
29		Low battery warning
30	**System**	4 modes (Capture, Video, Playback,Menu)
31		Single frame Image Capture
32		Video image Record
33		Playback image
34		Delete image
35		5 levels IR switch for USB power,3 levels IR switch for battery.
36		Auto Power Off (Off/1 min/ 3min/5 min)
37		Language: English /French/ Spanish/Portuguese/Deutsch/9 LANGUAGES
38		TV mode(PAL/NTSC)
39		Light Freq. 50/60HZ
40		Format
41		LCD Brightness 4 Levels
42		Version
43	**Size**	size 144mmx85mmx46mm
44		Weight 400g (without battery)
45	**package**	USB cable/ AV cable/ Micro SD card/ Bag/Manual

Yiwu Inre Optical Instrument Co,. LTD.
TEL:+86 13906893397 EMAIL:SALES.EYEBREE GMAIL.COM
WECHAT:13906893397 WHATSAPP:+86 13906893397
WEBSITE:HTTPS://INRE.EN.ALIBABA.COM HTTPS://LINREOPTICAL.1688.COM

NV 400B

Magnification: 放大倍数：	3.5-7x
Objective Lens Diameter: 物镜直径	31mm
Maximum Distance in Dim condition: 昏暗环境观测距离	5-400m
FOV: 视角	9°
CMOS Size: 传感器大小	0.34 "
Display Resolution: 屏幕分辨率	320x240
Auxiliary Infrared Illumination: 红外补光灯	3W Infrared LED
Voltage: 额定电压	5V
Battery: 电池	8X AA Battery
Eyepiece Magnification: 目镜放大倍数	2X
Material: 材质	TEP
Input 输入	USB
Weight 重量	950g
Storage 储存	TF Card

Yiwu Inre Optical Instrument Co,. LTD.
TEL:+86 13906893397 EMAIL:SALES.EYEBREE GMAIL.COM
WECHAT:13906893397 WHATSAPP:+86 13906893397
WEBSITE:HTTPS://INRE.EN.ALIBABA.COM HTTPS://LINREOPTICAL.1688.COM

Eyebre®

Leading Supplier of Vision Solution in China

NV 300E

Magnification: 放大倍数：	3.6-10.8x
Objective Lens Diameter: 物镜直径	31mm
Focal ratio: 焦比	f1.3
FOV: 视角	9°
View in the dark: 夜视距离	300m
Display Resolution: 屏幕分辨率	640x360
Auxiliary Infrared Illumination: 红外补光灯	5W Infrared LED
Voltage: 额定电压	12V
Battery: 电池	8X AA Battery
Eyepiece Magnification: 目镜放大倍数	2X
Material: 材质	TEP
Input 输入	USB
Weight 重量	830g
Storage 储存	TF Card

Yiwu Inre Optical Instrument Co,. LTD.
TEL:+86 13906893397 EMAIL:SALES.EYEBREE GMAIL.COM
WECHAT:13906893397 WHATSAPP:+86 13906893397
WEBSITE:HTTPS://INRE.EN.ALIBABA.COM HTTPS://LINREOPTICAL.1688.COM

NV 130-PRO

Magnification: 放大倍数：	7.2-14.4X
Objective Lens Diameter: 物镜直径	31mm
Maximum Distance in Dim condition: 昏暗环境观测距离	5-500m
FOV: 视角	7 °
CMOS Size: 传感器大小	0.34 "
Display Resolution: 屏幕分辨率	1280x960
Auxiliary Infrared Illumination: 红外补光灯	5W Infrared LED
Voltage: 额定电压	8.4V
Battery: 电池	8X AA Battery
Eyepiece Magnification: 目镜放大倍数	2X
Material: 材质	TEP
Input 输入	USB
Weight 重量	760g
Storage 储存	TF Card

Yiwu Inre Optical Instrument Co,. LTD.
TEL:+86 13906893397 EMAIL:SALES.EYEBREE GMAIL.COM
WECHAT:13906893397 WHATSAPP:+86 13906893397
WEBSITE:HTTPS://INRE.EN.ALIBABA.COM HTTPS://LINREOPTICAL.1688.COM

Eyebre®

Leading Supplier of Vision Solution in China

NV 380 Series

NV 380G

NV 380R

NV 380B

1	**Optiacal performance**	Magnification (3.6-10.8) X31
2		Digital Zoom Max 3x
3		Angle Of View 9.2°
4		Objective Aperture 31mm
5		Exit Pupil Distance 30mm
6		F# for Objective lens 1.3
7		IR ZOOM 2X
8		5m~∞ in daytime; Viewing in the darkness up to 300M (monochrome)
9	**Video Output**	TFT LCD
10		OSD menu display
11		CVBS always output with VGA resolution
12	**Imager**	High-sensitivity CMOS Sensor
13		Size 1/2.7"
14		Resolution 1920X1080
15	**Speaker**	2W/8R
16	**MIC**	Omnidirectional
17	**IR LED**	5W Infared 850nm LED
18	**TF Card**	Support SDHC 4GB~128GB TF Card
19	**Hardware Buttons**	Power on/off
20		Snap
21		Mode selection
22		Zoom
23		IR switch

24	**Operation**	Preview
25		Record JPEG file in TF storage
26		Capture AVI file in TF storage
27		Playback media file from SD storage
28	**Power**	External power supply - DC 5V/2A
29		2 pcs 18650 battery 7-8.4V
30		Battery life: 10 hours working time with IR off
31		Low battery warning
32	**System**	4 modes (Capture, Video, Playback Memu)
33		Single frame Image Capture
34		Video image Record
35		Playback image
36		Delete image
37		7 level IR switch
38		SD card format
39		Power save (Off/5 min/ 15min/30 min)
40		Language: English / Français / Español / Deutsch / Italiano/ اللغة العربية/ 简体中文 /Polski/Режим
41		System Rest
42		Light Freq. 50/60HZ
43		RTC setting
44		Version
45	**Size**	size 190mmx148mmx58mm
46		720g
47	**package**	USB(type-C） cable/ AV cable/ TF card/ Bag/Manual

Yiwu Inre Optical Instrument Co,. LTD.
TEL:+86 13906893397 EMAIL:SALES.EYEBREE GMAIL.COM
WECHAT:13906893397 WHATSAPP:+86 13906893397
WEBSITE:HTTPS://INRE.EN.ALIBABA.COM HTTPS://LINREOPTICAL.1688.COM

Eyebre®

Leading Supplier of Vision Solution in China

NVG-G1

Optiacal performance	Magnification power 1~4.5X15
	Digital Zoom magnification, Max 4.5x
	Angle Of View 30°
	Objective Aperture 15mm
	Exit Pupil Distance 40mm
	F# for Objective lens 1.2
Video Output	240x536 resolution AMOLED
	OSD menu display
Imager	CMOS High-sensitivity Sensor
	Size 1/2.9"
	Resolution 1920X1080
IR LED	3W Infared LED with 850nm
Micro SD Card	Support SDHC 4GB~32GB SD Card
Hardware Buttons	Power on/off or ZOOM
	Snap
	MODE selection/MENU
	IR switch or Down
Operation	Preview
	Record MOV file in SD storage
	Playback media file from SD storage
Power	External power supply - TypeC 5V/2A
	2pcs CR123 battery 4V-6V
	Battery life: 6 hours working time with IR off
	Low battery warning

System	3modes (Video, Playback,Menu)
	Video image Record
	Playback image
	Delete image
	5 levels IR switch for USB power,3 levels IR switch for battery.
	Auto Power Off (Off/3min/ 5min/10min)
	Language: English /French/ Spanish/Portuguese/Deutsch/9 LANGUAGES
	Light Freq. 50/60HZ
	Format
	OLED Brightness 4 Levels
	Version
Size	size 140mmx75mmx58mm
	Weight 350g (without battery)
package	USB cable/ AV cable/ Micro SD card/ Bag/Manual

Eyebre®

MONOCULAR NIGHT VISION

Yiwu Inre Optical Instrument Co,. LTD.
TEL:+86 13906893397 EMAIL:SALES.EYEBREE GMAIL.COM
WECHAT:13906893397 WHATSAPP:+86 13906893397
WEBSITE:HTTPS://INRE.EN.ALIBABA.COM HTTPS://LINREOPTICAL.1688.COM

PJ20

Category	Item	Parameter
Optic properties	magnification	5
	Objective lens diameter	ϕ32mm
	File of view	5° ×3.75°
	Ocular lens adjustment scope	±1
	Viewing distance in low light	2m～∞
	Viewing distance in total darkness	～200m
Power	Operating voltage	4.2V DC
	Replaceable battery	5# (AA)
Others	Dimension (L×W×H)	190×83×56mm
	weight	345g

类别	项目	参数值
光学性能	放大倍率	5
	物镜口径	ϕ32mm
	视场	5° x3.75°
	目镜调节范围	±1 屈光度
	弱光观察距离	2m～∞
	无光全黑观察距离	～200m

电源	工作电压	4.2V DC
	可更换电池	5 号电池（AA）
其它	尺寸（长×宽×高）	190 x 83 x 56 mm
	重量	345g

Yiwu Inre Optical Instrument Co,. LTD.
TEL:+86 13906893397 EMAIL:SALES.EYEBREE GMAIL.COM
WECHAT:13906893397 WHATSAPP:+86 13906893397
WEBSITE:HTTPS://INRE.EN.ALIBABA.COM HTTPS://LINREOPTICAL.1688.COM

Eyebre®

Leading Supplier of Vision Solution in China

5x40-B

5x40-C

【基本参数】

项 目		参数值	
放大倍率	Magnifcation	5	5
物镜口径	Objective Lens	Ø40mm	Ø40mm
视场	FOV	5°x3.75°	5°x3.75°
目镜调节范围	Diopretre	±0.6屈光度	±0.6 Diopretre
弱光观察距离	Viewing Distance(Dim)	2m~∞	2m~∞
无光全黑观察距离	Viewing Distance(Totally Dark)	~200m	~200m

工作电压	Voltage	3.7V DC	3.7V DC
可更换电池	Optional Battery	可充电锂电池	lithium Battery
充电电源	Adapter	5.0V/1000mA适配器	5.0V/1000mA Adapter
尺寸(长X宽X高)	Dimension	200X86X56mm	200X86X56mm
重量	Weight	400g	400g

【标准配置】

名 称		数 量
AV视频接线	AV Cable	1
USB连接线	USB Cable	1
便携软包	Bag	1
外接电源适配器	Adapter	1
使用说明书	User Manual	1
手带	Hand Band	1
电池	Battery	1
擦镜布	Cleaning Cloth	1

Yiwu Inre Optical Instrument Co,. LTD.
TEL:+86 13906893397 EMAIL:SALES.EYEBREE GMAIL.COM
WECHAT:13906893397 WHATSAPP:+86 13906893397
WEBSITE:HTTPS://INRE.EN.ALIBABA.COM HTTPS://LINREOPTICAL.1688.COM

P4-0118

类别	项目	参数值
光学性能	放大倍率	1
	物镜口径	Φ18mm
	视场	22° x16.5°
	目镜调节范围	±5 屈光度
	弱光观察距离	2m～∞
	无光全黑观察距离	～100m

	Specifications	
OPTIC SPECIFICATIONS	Magnification	1
	Obj. Lens Diameter	Φ18mm
	Field of View	22° x16.5°
	Diopter	±5
	Detection Distance in Low Light Condition	2m～∞
	Detection Distance in Complete Dark Condition	～100m

电源	工作电压	3.7V DC
	可更换电池	可充电锂电池
	充电电源	5.0V/1000mA 适配器
其它	尺寸（长×宽×高）	102 x 76 x 49 mm
	重量	170g

POWER SOURCE SPECIFICATIONS	Operating Voltage	3.7V DC
	Battery	Rechargeable lithium Ion battery
	Battery	5.0V / 1000mA Adaptor
OTHER SPECIFICATIONS	Dimension (L × W × H)	102 ×76× 49 mm
	Weight	170g

Yiwu Inre Optical Instrument Co,. LTD.
TEL:+86 13906893397 EMAIL:SALES.EYEBREE GMAIL.COM
WECHAT:13906893397 WHATSAPP:+86 13906893397
WEBSITE:HTTPS://INRE.EN.ALIBABA.COM HTTPS://LINREOPTICAL.1688.COM

Eyebre®

Leading Supplier of Vision Solution in China

535-B

535-C

【基本参数】

项 目		参数值	
放大倍率	Magnifcation	5	5
物镜口径	Objective Lens	35mm	35mm
视场	FOV	7° x5.25°	7° x5.25°
目镜调节范围	Diopretre	±0.6屈光度	±0.6 Diopretre
弱光观察距离	Viewing Distance(Dim)	2m~∞	2m~∞
无光全黑观察距离	Viewing Distance(Totally Dark)	~200m	~200m

工作电压	Voltage	3.7V DC	3.7V DC
可更换电池	Optional Battery	可充电锂电池	Lithium Battery
充电电源	Adapter	5.0V/700mA Adapter	5.0V/700mA Adapter
尺寸(长X宽X高)	Dimension	178x72x78mm	178x72x78mm
重量	Weight	300g	300g

【标准配置】

名 称		数 量
物镜罩	Objective Lens Shelter	1
USB连接线	USB Cable	1
便携软包	Bag	1
外接电源适配器	Adapter	1
使用说明书	User Manual	1
手带	Hand Band	1
电池	Battery	1
擦镜布	Cleaning Cloth	1

Yiwu Inre Optical Instrument Co,. LTD.
TEL:+86 13906893397 EMAIL:SALES.EYEBREE GMAIL.COM
WECHAT:13906893397 WHATSAPP:+86 13906893397
WEBSITE:HTTPS://INRE.EN.ALIBABA.COM HTTPS://LINREOPTICAL.1688.COM

HW2x20 Series

类别	项目	参数值	Features	Values
光学性能	放大倍率	3X	Magnification	3X
	物镜直径	Φ20	Dimeision cf Cbjeatives	Φ20
	目镜直径	Φ12	Dimension of evepiece	Φ12
	视场	10°	FOV	10°
	弱光观察距离	2m～o	Observing Distance(Low Light Environment)	2m~
	无光全黑观察距离	2m～200m	Observing Distance(Full Dark Environment)	2m～200m
电于性能	传感器分辩率	300W	CMOS of Pixel	300W
	显示屏分辩率	960X340pixel	LCD of Pixel	960X540 pixel
	辅助光源	IRLED	Infrared 111uminator	IR LED
	波长	850MR	Spectrum	850MR
其它	工作电压	3.7VDC	Operating Voltage	3.7V DC
	内置电源	1节18650号电池	Replaceable Battery	one 18650 model
	尺寸(长X宽X高)	130mmX48mmX57mm	Measurement(L*W*H)	130mmX48mmX57mm
	重量	200	Weight	

Yiwu Inre Optical Instrument Co,. LTD.
TEL:+86 13906893397 EMAIL:SALES.EYEBREE GMAIL.COM
WECHAT:13906893397 WHATSAPP:+86 13906893397
WEBSITE:HTTPS://INRE.EN.ALIBABA.COM HTTPS://LINREOPTICAL.1688.COM

Eyebre®

Leading Supplier of Vision Solution in China

0542Series

类别	项目	参数值
光学参数	镜头口径	Φ42MM
	镜头类型	中长焦镜头
	镜头焦距	50MM
	镜头镀膜	近红外增透膜
	镜头视场	9°
	镜头光圈	固定光圈
	像面尺寸	1/1.8

Type	Items	Index
Optical Performance	Dimension of Objectives	Φ42mm
	Lens Type	Medium and Far Focus Lens
	Focus	50mm
	Coating	Near-Infrared Anti reflection Film
	FOV	9°
	Aperture	Fixed Aperture
	Image Plane Size	1/1.81

核心电子参数	基组型号	YS-2022-1.0
	Sensor靶面	1、1/2英寸
	分辨率	1920X1080
	尺寸	16X20mm
	彩色	RGB Binning
	图像处理分辨率	5MP MAX
	图像处理帧率	90HZ MAX
	显示分辨率	480X6400P
	显示帧率	50HZ
	视频帧率	60帧

Type	Items	Index
Core Electronic Paparameters	Electronic Model	YS-2022-1.0
	Sensor Target Surface	1寸/1/2
	Resolving Power	1920X1080
	SIZE	16X20mm
	Colour	RGB Binning
	Image Processing Resolution	5MP MAX
	Image Processing Frame Rate	90HZ MAX
	Display Resolution	480X640P
	Display Frame Rate	50HZ
	Video Frame Rate	60 frames

Yiwu Inre Optical Instrument Co,. LTD.
TEL:+86 13906893397 EMAIL:SALES.EYEBREE GMAIL.COM
WECHAT:13906893397 WHATSAPP:+86 13906893397
WEBSITE:HTTPS://INRE.EN.ALIBABA.COM HTTPS://LINREOPTICAL.1688.COM

PSV 14

Specifications

Image Intensifier	**U.S. Generation 3, Green (P43) or White (P45)**
Range Focus	**25 cm to infinity**
Diopter Focus	**-6 to +2**
Field of View	**40˚**
Operating Temperature	**-51˚ C to +50˚C**
Storage Temperature	**-51˚ C to +85˚C**
Weight (w/out battery)	**320 g/ 11.3 oz**
Size	**4.5 L x 2 W x 2.25 H (inches)**
Battery	**1 AA**

NVG30头戴夜视仪

NIGHT VISION GOGGLES

1-4X放大，超大40°视场；

0.001 lux 环境全彩2K夜视；

2K 40HZ无延迟画面；

3代白磷管图像；

WIFI共享实时视野；

适配Wilcox支架,组合为双目；

1-4X magnification,Extra large 40% field of view;
0.001 lux Ambient full color 2k night vision;
2K 40HZ lag-free picture;
3rd generation white phosphorus tube images;
WiFi sharing real-time view;
Adapted to wilcox bracket, combined into binoculars;



超大40°视场
Extra large 40% field of view

2K成像
2K imaging

1+1 双目夜视仪
1+1 binocular night vision device

IPX7防水
IPX7 waterpoof

Yiwu Inre Optical Instrument Co,. LTD.
TEL:+86 13906893397 EMAIL:SALES.EYEBREE GMAIL.COM
WECHAT:13906893397 WHATSAPP:+86 13906893397
WEBSITE:HTTPS://INRE.EN.ALIBABA.COM HTTPS://LINREOPTICAL.1688.COM

图像模式/Image mode

产品主要参数/parameters	
传感器类型/sensor	低照度 CMOS/low light cmos
显示屏类型/Display	OLED
探测器分辨率/Detector resolution	2560X1440
物镜直径/Objective lens diameter	20mm
视场/field of view	40°
观察距离（米）/Observation distance (meters)	0.2-∞
星光下最大有效观察距离（米）Maximum effective observation distance under starlight (meters)	250-300
数字+光学放大/Digital + Optical Magnification	1x、2x、3x、4x
语言/language	9种/nine language
录像/Video	支持/yes
回放/record	支持/yes
WIFI	支持/yes
画中画（PIP）	支持/yes
十字线开关/Reticle	支持/yes
双目使用/Binocular use	支持/yes
色彩模式/color mode	彩色、黑白、荧光绿、白磷/Color, black and white, fluorescent green, white phosphorus
USB接口/usb interface	Type-C
尺寸（毫米）/Dimensions (mm)	125x53x72
重量（克）/Weight(ke)	237g

Yiwu Inre Optical Instrument Co,. LTD.
TEL:+86 13906893397 EMAIL:SALES.EYEBREE GMAIL.COM
WECHAT:13906893397 WHATSAPP:+86 13906893397
WEBSITE:HTTPS://INRE.EN.ALIBABA.COM HTTPS://LINREOPTICAL.1688.COM

Eyebre®

Leading Supplier of Vision Solution in China

DSJ6-12

ID	Catalog	Function Description
1	Optiacal performance	Magnification power 5-15X
2		Digital Zoom magnification 3X
3		Angle Of View 16°
4		Objective Aperture 40mm
5		Exit Pupil Distance 35mm
6		F# for Objective lens 1.0
7		Full color day and night
8		Telescopic distance：3m-∞
9	Video Output	454X454 resolution AMOLED
10		OSD menu display
11	Imager	CMOS High-sensitivity Sensor
12		Size 1/1.8"
13		Resolution 2688X1520

Yiwu Inre Optical Instrument Co,. LTD.
TEL:+86 13906893397 EMAIL:SALES.EYEBREE GMAIL.COM
WECHAT:13906893397 WHATSAPP:+86 13906893397
WEBSITE:HTTPS://INRE.EN.ALIBABA.COM HTTPS://LINREOPTICAL.1688.COM

18	**Micro SD Card**	Support 4GB~256GB TF Card
19	**Hardware Buttons**	Power on/off
20		UP/SNAP
21		Left/ZOOM IN
22		Right//ZOOM OUT
23		Down/MODE
24		OK/REC
26	**Operation**	Preview
27		Record H264 file in TF storage
28		Capture JPEG file in TF storage
29		Playback media file from TFstorage
30	**Power**	External power supply - TypeC 5V/2A
31		Li-Po battery 3.7V/2000mah
32		Battery life: 3 hours working time
33		Low battery warning
34	**System**	modes (Preview, Playback,Menu)
35		Single frame Image Capture
36		Video image Record
37		Playback image
40		Auto Power Off (Off/5min/ 10min/15min)
41		Language: English
43		Format
44		OLED Brightness adjustment
45		Version
46	**Size**	size 175mmx68X50mm
47		Weight TBD
48	**package**	USB cable/ Micro SD card/ Bag/Manual

Yiwu Inre Optical Instrument Co,. LTD.
TEL:+86 13906893397 EMAIL:SALES.EYEBREE GMAIL.COM
WECHAT:13906893397 WHATSAPP:+86 13906893397
WEBSITE:HTTPS://INRE.EN.ALIBABA.COM HTTPS://LINREOPTICAL.1688.COM

Eyebre®

Leading Supplier of Vision Solution in China

NV4-8X40

项目	参 数
光学参数	放大率 4-8倍
	电子放大 2倍
	角度 7.6度
	物镜口径 40mm
	目镜角度 34度
	出瞳距离 35mm
	光圈 F1.0
	全天候全彩模式
	观测距离 3米到无穷远
输出	OLED 分辨率 1920 x 1080
图像	高感光、低照度图像传感器
	大小 1/1.8"
	分辨率 2688 x 1520
十字丝	不同样式和颜色
红外照明	5瓦，中心波长 850纳米
内存	支持 4GB-512GB TF内存卡
电源	外部充电 电源DC 5V/2A
	1个21700锂电池 3.7V 5200mAH
	电池工作时间 6小时
	低电量警告
尺寸	尺寸 200mm x 86mm x 49mm
	重量 650克
包装	USB线/TF内存卡/说明书/轨道夹
选配件	测距仪：精度0.1米 最大测距600米

Catalog	Function Description
Optical performance	Magnification power 4-8X
	Digital Zoom magnification, Max 2X
	Angle Of View 7.6°
	Objective Aperture 40mm
	Angle Of Eyepiece 34°
	Exit Pupil Distance 35mm
	F# for Objective lens 1.0
	Full color day and night
	Telescopic distance: 3m-∞
Video Output	1920X1080 resolution OLED
	OSD menu display
Imager	CMOS High-sensitivity Sensor
	Size 1/1.8"
	Resolution 2688X1520
Reticle	Reticle of different styles and colors
IR LED	5W Infared 850nm LED
Storage	Support 4GB~512GB TF Card
Power	External power supply - TypeC 5V/2A
	1 pcs 21700 Li battery 3.7V/5000ma
	Battery life: 6 hours working time
	Low battery warning
Size	size 200mm x 86mm x 49mm
	Weight 650g
package	USB cable / TF card / Manual
Optional Parts	Ranger finder: LRF 0.1m Detection distance 600m

Yiwu Inre Optical Instrument Co,. LTD.
TEL:+86 13906893397 EMAIL:SALES.EYEBREE GMAIL.COM
WECHAT:13906893397 WHATSAPP:+86 13906893397
WEBSITE:HTTPS://INRE.EN.ALIBABA.COM HTTPS://LINREOPTICAL.1688.COM

LG66

系统菜单	录像分段	System Menu	Video Segments 5 /10 /15 Mins
	录音		Mic
	自动补光		Automatic Fill Light Manual/Automatic
	光源频率		Frequency :50/60Hz
	日期标签		Watermark
	曝光补偿		Exposure: -3/-2/-1/0/1/2/3
	自动关机		Auto Shutdown: Off / 3 /10 / 30Mins
	循环录像		Video Prompt
	屏幕保护		Protection: Off / 5 /10 / 30Mins
	屏幕亮度		Screen Brighness :Low / Medium / High
	日期/时间		Set Date Time
	语言		Language: 10 languages in total
	格式化存储卡		Format SD
	恢复出厂设置		Factory Reset
	系统讯息		System Message
产品尺寸/重量	尺寸 172mm X 77mm X47mm	Size /Weight	size 172mm X 77mm X 47mm
	重量： 280g		280g
包装	彩盒/ 配件盒/ EVA盒/ USB 数据线/ TF卡/ 说明书/ 擦镜布/ 头戴配件	package	Gift box/ Accessory box/ EVA box USB cable/ TF card/ Manual /Wipe cloth/ Headwear accessories

目录	产品参数	Catalog	**Function Description**
光学性能	光学放大倍数 2倍	Optiacal performance	Optical Magnification 2X
	数码变焦最大值 8倍		Digital Zoom Max 8X
	视角 36.21°×29.08°×21.86°		Angle Of View36.21°×29.08°×21.86°
	物镜孔径 28mm		Objective Aperture 28mm
	出瞳距离 20mm		Exit Pupil Distance 20mm
	物镜光圈 f1.6		Lens aperture f1.6
	红外LED镜头		IR LED LENS
	白天 1m ~ 无穷远 / 全黑高达300m		1m~∞ in daytime; Viewing in the darkness up to 300M (full dark)
图像	1.3英寸 TFT-LCD	Imager	1.3inl TFT LCD
	OSD菜单显示		OSD menu display
	图像质量最高3840x2128		Image quality 3840x2128
像传感器	1080P 高灵敏度CMOS传感器	Image sensor	1080P High-sensitivity CMOS Sensor
	尺寸大小1/3"		Size 1/3"
	分辨率1920*1080		Resolution 1920*1080
红外灯	可调3W红外850nm LED (7档）	IR LED	3W Infared 850nm LED （7 grades)
SD卡	支持 8GB-256GB TF卡	TF Card	Support 8GB~256GB TF Card
机器按钮	电源开/关	Button	Power on/off
	确认键		Enter
	模式选择		Mode selection
	放大/缩小 /长按屏上会出现‘十’字光标		Zoom / A 'cross' cursor appears when you long press the screen
	红外灯		IR switch
功能	拍照	Function	Taking pictures
	录像/录音		video/The recording
	图片预览		Preview picture
	回放视频		Video playback
电源	外部电源-DC 5V/2A	Power	External power supply - DC 5V/2A
	1个2200毫安18650可反复充电锂电池		1 pcs 18650#
	电池寿命： 在红外关闭及开屏幕保护的情况下大约工作12小时		Battery life: Work for approximately 12 hours with infrared-off and open screen protection
	低电量警告		Low battery warning
	录像分辨率 1920x1080P (30FPS) 1280x720P (30FPS) 864x480P (30FPS)		Video Resolution 1920x1080P (30FPS) 1280x720P (30FPS) 864x480P (30FPS)
	拍照分辨率 2M 1920x1200 3M 2400x1456 5M 3024x1760 8M 3840x2120		Photo Resolution 2M 1920x1200 3M 2400x1456 5M 3024x1760 8M 3840x2120
	白平衡		White Balance Auto/Sunlight/Cloudy/Tungsten/Fluoresent

NVG-G2T 规格说明

ID	项目	参数
1	相机光学参数	放大倍率X口径 1~3.5X15
2		最大数字放大倍率 3.5x
3		物镜视场角 22°
4		物镜口径 15mm
5		F# 1.3
6	热成像	焦距 15mm(F# 1.0)
7		视场角（HXV） 11.7°X8.8°
8		分辨率 256*192
9		像元尺寸 12um
10		帧频 30Hz
11		响应波段 8~14um
12		噪声等效温差≤ 40mK@25℃

13	目镜	出瞳距离 40mm
14	输出	AMOLED 分辨率240x536
15		OSD menu display
16	图像传感器	高感度图像传感器
17		芯片大小 1/2.8"
18		分辨率1920X1080
19	视频文件	文件类型： MOV
20		相机视频分辨率：1856X848 热成像图像分辨率：640X480
21	红外LED	3W 红外LED,中心波长: 940nm
22	无线遥控	频率：433M
23		功能：红外灯控制、拍摄、缩放、模式
24	内存	支持4G-128G TF 卡
25	按钮	电源开关/ 菜单选择
26		拍摄
27		红外灯控制/ 热成像和相机预览切换（长按）
28		缩放/热成像电子开关（长按）
29	功能	预览
30		视频拍摄
31		回放
32	电源	外接电源 5V-2A
33		1个18650 锂电池
34		工作时间 ， 4小时
35		低电压警告
36	系统	3种模式 (视频, 回放,菜单)
37		显示模式：相机、热成像、画中画（相机和热成像同时显示）
38		多种热成像模式
39		视频录制
40		视频回放
41		视频删除
42		红外强度 5段
43		自动关机（3分钟/5分钟/10分钟）
44		语言:9种语言
45		夜晚模式（绿色/黑白/红色)
46		格式化
47		背光亮度
48	尺寸	尺寸140mmx75mmx58mm
49		重量 350g (without battery)
50	包装	USB 线/ TF卡/ EVA包/头戴绑绳

Yiwu Inre Optical Instrument Co,. LTD.
TEL:+86 13906893397 EMAIL:SALES.EYEBREE GMAIL.COM
WECHAT:13906893397 WHATSAPP:+86 13906893397
WEBSITE:HTTPS://INRE.EN.ALIBABA.COM HTTPS://LINREOPTICAL.1688.COM

Eyebre®

Leading Supplier of Vision Solution in China

LG67

系统菜单	音量大小：关/低/中/高	System Menu	Volume Size:Off/Low / Medium / High
	按键声音：关/开		Keying Sound:Off/On
	按鍵灯：关/开		Press Light:Off/On
	日期标签		Watermark
	曝光补偿: -3/-2/-1/0/1/2/3		Exposure: -3/-2/-1/0/1/2/3
	自动关机: 关 / 3 /10 / 30分钟		Auto Shutdown: Off / 3 /10 / 30Mins
	循环录像：关/开		Video Prompt：Off/On
	屏幕保护上：关 / 3 /10 / 30分钟		Protection: Off / 3 /10 / 30Mins
	屏幕亮度：低/中/高		Screen Brighness :Low / Medium / High
	日期/时间		Set Date Time
	语言：11种语言		Language: 11 languages in total
	缩时录影：关/开		Time Lapse Record:Off/On
	连拍 ：1张/2张/3张		Continuous:1Sheet/2Sheet/3Sheet
	延时拍照：关/3秒/5秒/10秒		Delayed Capture:Off/3Seconds/5Seconds/10Seconds
	格式化存储卡		Format SD
	恢复出厂设置		Factory Reset
	系统讯息		System Message
产品尺寸/重量	尺寸 140mm X 110mm X60mm	Size /Weight	size 142mm X112mm X60mm
	重量：395g		Weight:395g
包装	彩盒/ USB 数据线/ TF卡/ 说明书/ 擦镜布/软包/肩带	package	Gift box/ USB cable/ TF card/ Manual /Wipe cloth/Soft Roll

型号	LG67 双筒夜视仪	Model	LG67 Night Vision Binoculars
目录	产品参数	Catalog	Function Description
	数码变焦最大值 8倍		Digital Zoom Max 8X
	视角 5°x3.75		Angle Of View 5°x3.75
	物镜孔径 28mm		Objective Aperture 28mm
	出瞳距离 20mm		Exit Pupil Distance 20mm
	物镜光圈 f1.6		Lens aperture f1.6
	红外LED镜头		IR LED LENS
	白天 1m ~ 无穷远 / 全黑高达300m		1m~∞ in daytime; Viewing in the darkness up to 300M (full dark)
图像	3.0英寸 TFT-LCD	Imager	3.0inl TFT LCD
	OSD菜单显示		OSD menu display
	图像质量最高3840x2128		Image quality 3840x2128
像传感器	1080P 高灵敏度CMOS传感器	Image sensor	1080P High-sensitivity CMOS Sensor
	尺寸大小1/3"		Size 1/3"
	分辨率4K		Resolution 4K
红外灯	可调3W红外850nm LED (7档）	IR LED	3W Infared 850nm LED （7 grades)
SD卡	支持 8GB-256GB TF卡	TF Card	Support 8GB~256GB TF Card
机器按钮	电源开/关	Button	Power on/off
	确认键		Enter
	模式选择		Mode selection
	放大/缩小		Zoom
	红外灯		IR switch
功能	拍照	Function	Taking pictures
	录像/录音		video/The recording
	图片预览		Preview picture
	回放视频		Video playback
电源	外部电源-DC 5V/2A	Power	External power supply - DC 5V/2A
	1个2200毫安18650可反复充电锂电池		1 pcs 18650#
	电池寿命： 在红外关闭及开屏幕保护的情况下大约工作12小时		Battery life: Work for approximately 12 hours with infrared-off and open screen protection
	低电量警告		Low battery warning
	录像分辨率:4K /1080P /720P /480P		Video Resolution :4K /1080P /720P /480P
	拍照分辨率 2M 1920x1200 3M 2400x1456 5M 3024x1760 8M 3840x2128		Photo Resolution 2M 1920x1200 3M 2400x1456 5M 3024x1760 8M 3840x2128
	光源频率:50/60Hz		Frequency :50/60Hz
	白平衡 自动 / 日光 / 阴天 / 钨丝灯 / 荧光灯		White Balance Auto/Sunlight/Cloudy/Tungsten/Fluoresent
	录像分段 5 /10 /15 /30分钟		Video Segments 5 /10 /15 /30 Mins
	录音 关/开		Mic Off/On

LG68

系统菜单	光源频率:50/60Hz	System Menu	Frequency :50/60Hz
	日期标签		Watermark
	曝光补偿: -3/-2/-1/0/1/2/3		Exposure: -3/-2/-1/0/1/2/3
	自动关机: 关 / 3 /10 / 30分钟		Auto Shutdown: Off / 3 /10 / 30Mins
	循环录像：关/开		Video Prompt：Off/On
	屏幕保护上：关 / 5 /10 / 30分钟		Protection: Off / 5 /10 / 30Mins
	屏幕亮度：低/中/高		Screen Brighness :Low / Medium / High
	按鍵灯：关/开		Press Light:Off/On
	按键声音：关/开		Keying Sound:Off/On
	音量大小：关/低/中/高		Volume Size:Off/Low / Medium / High
	日期/时间		Set Date Time
	语言：10种语言		Language: 10 languages in total
	缩时录影：关/开		Time Lapse Record:Off/On
	连拍 ：1张/2张/3张		Continuous:1Sheet/2Sheet/3Sheet
	延时拍照：关/3秒/5秒/10秒		Delayed Capture:Off/3Seconds/5Seconds/10Seconds
	格式化存储卡		Format SD
	恢复出厂设置		Factory Reset
	系统讯息		System Message
产品尺寸/重量	尺寸 170mm X 65mm X74mm	Size /Weight	size 170mm X 65mm X 74mm
	重量：286g		286g
包装	彩盒/ 配件盒/ 软包/ USB 数据线/ TF卡/ 说明书/ 擦镜布	package	Gift box/ Accessory box/ Soft bag/ USB cable/ TF card/ Manual /Wipe cloth

LG68手持单筒夜视仪

型号	LG68	Model	LG68
目录	产品参数	Catalog	Function Description
	数码变焦最大值 8倍		Digital Zoom Max 8X
	视角 36.21°×29.08°×21.86°		Angle Of View36.21°×29.08°×21.86°
	物镜孔径 28mm		Objective Aperture 28mm
	出瞳距离 20mm		Exit Pupil Distance 20mm
	物镜光圈 f1.6		Lens aperture f1.6
	红外LED镜头		IR LED LENS
	白天 1m ~ 无穷远 / 全黑高达300m		1m~∞ in daytime; Viewing in the darkness up to 300M (full dark)
图像	2.0英寸 TFT-LCD	Imager	2.0inl TFT LCD
	OSD菜单显示		OSD menu display
	图像质量最高3840x2128		Image quality 3840x2128
像传感器	1080P 高灵敏度CMOS传感器	Image sensor	1080P High-sensitivity CMOS Sensor
	尺寸大小1/3"		Size 1/3"
	分辨率4K		Resolution 4K
红外灯	可调3W红外850nm LED (7档）	IR LED	3W Infared 850nm LED （7 grades)
SD卡	支持 8GB-256GB TF卡	TF Card	Support 8GB~256GB TF Card
机器按钮	电源开/关	Button	Power on/off
	确认键		Enter
	模式选择		Mode selection
	放大/缩小		Zoom
	红外灯		IR switch
功能	拍照	Function	Taking pictures
	录像/录音		video/The recording
	图片预览		Preview picture
	回放视频		Video playback
电源	外部电源-DC 5V/2A	Power	External power supply - DC 5V/2A
	1个2200毫安18650可反复充电锂电池		1 pcs 18650#
	电池寿命： 在红外关闭及开屏幕保护的情况下大约工作12小时		Battery life: Work for approximately 12 hours with infrared-off and open screen protection
	低电量警告		Low battery warning
	录像分辨率:4K /1080P /720P /480P		Video Resolution :4K /1080P /720P /480P
	拍照分辨率 2M 1920x1200 3M 2400x1456 5M 3024x1760 8M 3840x2128		Photo Resolution 2M 1920x1200 3M 2400x1456 5M 3024x1760 8M 3840x2128
	白平衡 自动 / 日光 / 阴天 / 钨丝灯 / 荧光灯		White Balance Auto/Sunlight/Cloudy/Tungsten/Fluoresent
	录像分段 5 /10 /15 分钟		Video Segments 5 /10 /15 Mins
	录音 关/开		Mic Off/On

LG64手持红外数码夜视仪

图片	

目录	产品参数	Catalog	**Function Description**
光学性能	光学放大倍数 2倍	Optiacal performance	Optical Magnification 2X
	数码变焦最大值 8倍		Digital Zoom Max 8X
	视角 10.77°		Angle Of View 10.77°
	物镜孔径 25mm		Objective Aperture 25mm
	物镜光圈 f1.6		Lens aperture f1.6
	红外LED镜头		IR LED LENS
	白天 2m ~ 无穷远 / 全黑高达300m		2m~∞ in daytime; Viewing in the darkness up to 300M (full dark)
图像	1.54英寸 TFT-LCD	Imager	1.54 inl TFT LCD
	OSD菜单显示		OSD menu display
	图像质量最高3840X2352		Image quality 3840X2352
像传感器	100W 高灵敏度CMOS传感器	Image sensor	100W High-sensitivity CMOS Sensor
	尺寸大小1/3"		Size 1/3"
	分辨率1920X1080		Resolution 1920X1080
红外灯	可调3W红外850nm LED (7档）	IR LED	3W Infared 850nm LED （7 grades)
SD卡	支持 8GB-128GB TF卡	TF Card	Support 8GB~128GB TF Card
机器按钮	电源开/关	Button	Power on/off
	确认键		Enter
	模式选择		Mode selection
	放大/缩小		Zoom
	红外灯/屏幕亮度		IR switch
功能	拍照	Function	Taking pictures
	录像/录音		video/The recording
	图片预览		Preview picture
	回放视频		Video playback
电源	外部电源-DC 5V/2A	Power	External power supply - DC 5V/2A
	1个2200毫安18650可反复充电锂电池		1 pcs 18650# Rechargeable lithium battery
	电池寿命： 在红外关闭及开屏幕保护的情况下大约工作12小时		Battery life: Work for approximately 12 hours with infrared-off and open screen protection
	低电量警告		Low battery warning

系统菜单	录像分辨率 1920x1080P (30FPS) 1280x720P (30FPS) 864x480P (30FPS)	System Menu	Video Resolution 1920x1080P (30FPS) 1280x720P (30FPS) 864x480P (30FPS)
	拍照分辨率 2M 1920x1088 3M 2368x1328 8M 3712x2128 10M 3840x2352		Photo Resolution 2M 1920x1088 3M 2368x1328 8M 3712x2128 10M 3840x2352
	白平衡 自动/日光/阴天/钨丝灯/荧光灯		White Balance Auto/Sunlight/Cloudy/Tungsten/Fluoresent
	录像分段 5 /10 /15 /30分钟		Video Segments 5 /10 /15 /30Mins
	录音		Mic
	自动补光 手动/自动		Automatic Fill Light Manual/Automatic
	补光阈值 低/中/高		Fill Light Threshold Low/Medium/High
	光源频率 50/60Hz		Frequency 50/60Hz
	日期标签		Watermark
	曝光补偿 -3/-2/-1/0/1/2/3		Exposure -3/-2/-1/0/1/2/3
	自动关机 关闭/3分钟/10分钟/30分钟		Auto Shutdown Off / 3 /10 / 30Mins
	循环录像		Video Prompt
	屏幕保护 关闭/5分钟/10分钟/30分钟		Protection / Off / 5 /10 / 30Mins
	屏幕亮度 低/中/高		Screen Brightness Low/ Medium/ High
	日期/时间		Set Date Time
	语言/ 10种语言		Language/ 10 languages in total
	格式化存储卡		Format SD
	恢复出厂设置		Factory Reset
	系统讯息		System Message
产品尺寸/重量	尺寸 160mm X 70mm X55mm	Size /Weight	size 160mm X 70mm X55mm
	重量： 265g		265g
包装	彩盒/ USB数据线/ TF卡/ 说明书/ 擦镜布/ 手腕带/布袋/18650#电池	package	Gift box/USB cable/ TF card/ Manual /Wipe cloth/ Wrist strap/ Bag/ 18650# Battery

Product specifications

Model	MLT-400		
Detector resolution(pixel)	2576*1452 (4 megapixels) 2K	Sensitivity(lux)	4800mV/lux.s
Objective(mm)	50(F1.8)/60(F1.8)	Optical magnification(x)	5/2
Magnification (X)	1-2-4-8-16	Focus Range(m)	3-400
Eye relief(mm)	40mm	Diameter of exit pupil(mm)	30mm
dioptre(D)	±5	Angle of view(DVH)	D/12.36°
			V/7.45°
			H/9.92°
IR Fill light intensity	4Station	IR Power(W)	5
Identify the distance(M)	400	Display resolution(pixel)	1024*768
Display type	OLED	Video resolution(pixel)	2576*1452
Display color mode	Colour/black and white	Storage space(GB)	TF(max 128)
Video format	.mp4	Physical buttons	Yes
Electronic amplification	Yes	Gyroscope	Yes
Automatic video recording		Type of external power supply	Type-C

Output voltage(V)	3.7	Laser Ranging	NO
Waterproof grade	IP67	Trajectory calculations	NO
Operating temperature	-30° ℃~+80℃	Shock resistance(J)	8000J
USB Type-C	Yes	CVBS	Yes
WiFi	NO	Software support	Linux
Battery type	Rechargeable lithium battery 18650(standard with 1 Section)3500MAH	Charger	Standard with one, 4.2V/2A
NET weight(No batteries, g)	445g	Duration(H)	≤8
Menu language	Chinese+English+Customizable language	Driver software	Yes

Eyebre®

TEL:
+86 13906893397

EMAIL:
SALES.EYEBREE GMAIL.COM

WECHAT:
13906893397

WHATSAPP:
+86 13906893397

WEBSITE:
HTTPS://INRE.EN.ALIBABA.COM
HTTPS://LINREOPTICAL.1688.COM