Eyebre

THERMAL
IMAGING

DIGITAL
NIGHT VISION

BOW
SIGHT

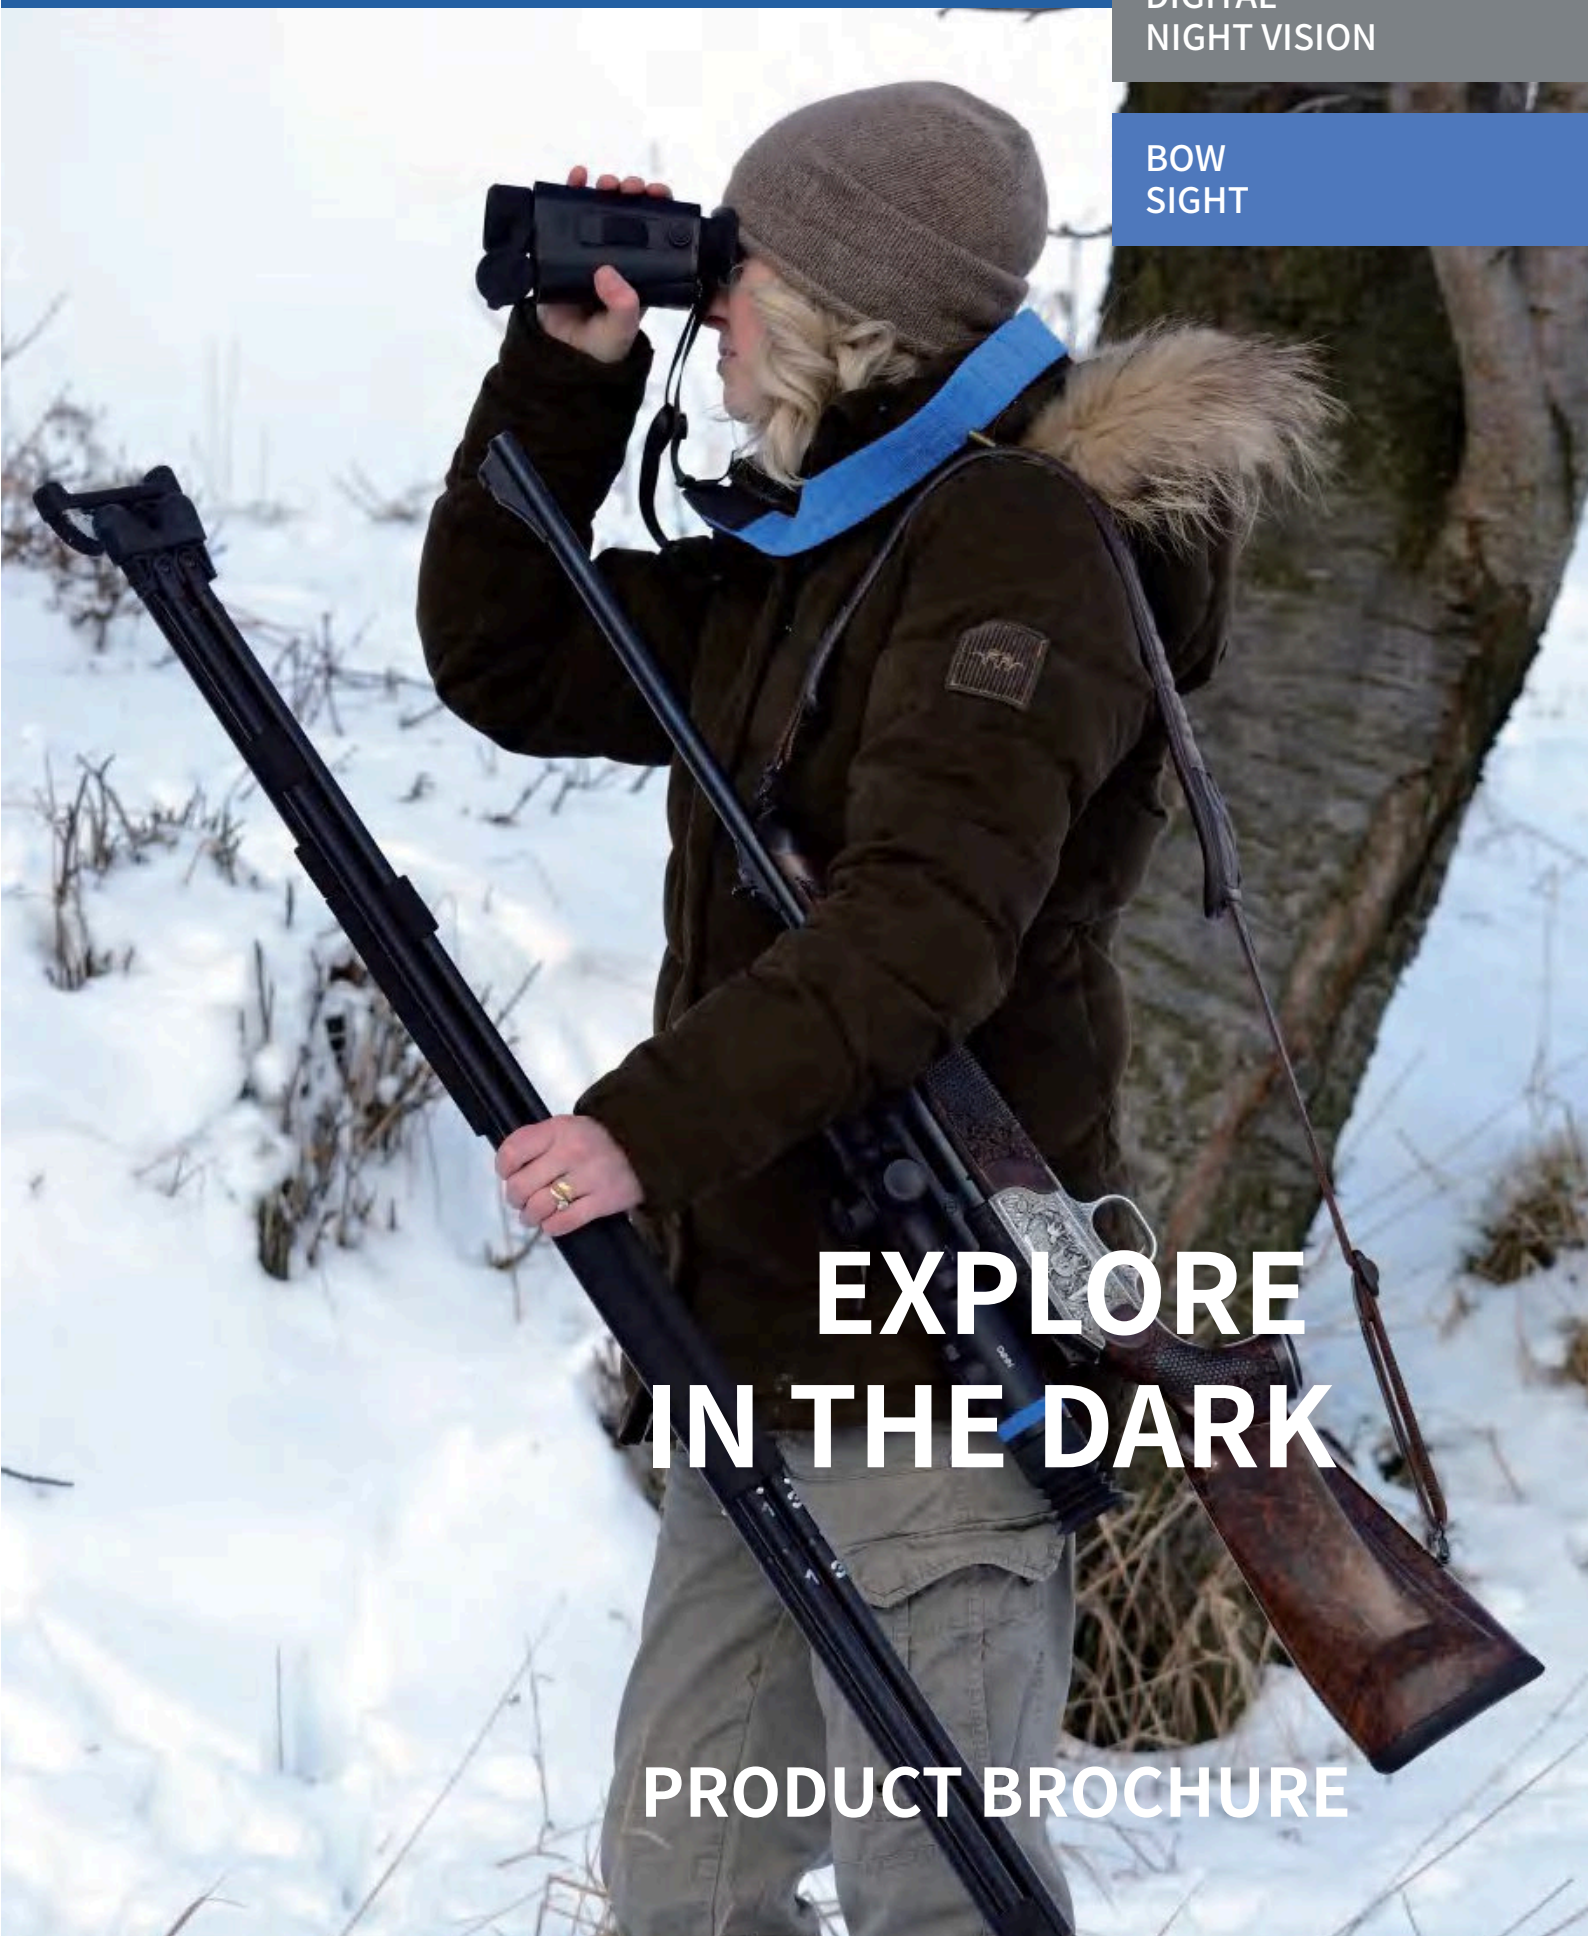

EXPLORE IN THE DARK

PRODUCT BROCHURE

Thermal Imaging Scope

SPEAR

Light as Shadow, Sharp as Steel

Scope

WHY CHOOSE US

- OEM.Quickly open up the market and have your own full category platform.
- ODM.Match your ideas and broaden your product line.
- Deep customization from branding to functionality for all your needs.

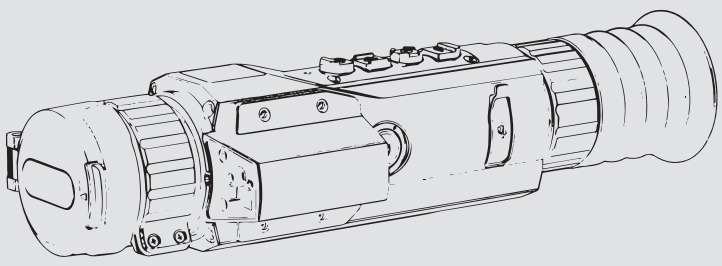

FEATURE

NETD⩽15mK

New temperature sensing chip, faster and more sensitive temperature sensing

6 PALETTES

White Hot, Black Hot, Red Hot, Green Hot, Iron Red, Fusion, change colors to match your environment and hunt with ease.

8X ZOOM

8X Electronic Zoom, Zoom In and Out Without Losing Focus.

Model	SP-219 SP-225 SP-219L SP-225L	SP-325 SP-335 SP-345 SP-325L SP-335L SP-345L	SP-625 SP-635 SP-645 SP-625L SP-635L SP-645L
Detector			
Material	Uncooled Vanadium Oxide		
Resolution	256×192	384×288	640×512
Pixel Size	12μm		
NETD	≤20mK		
Frame Frequency	50Hz		
Lens			
Focal Length	19mm/25mm	25mm/35mm/45mm	25mm/35mm/45mm
Field of View	19mm@9.2°×6.9° 25mm@7°×5.3°	25mm@10.5°×7.9° 35mm@7.5°×5.7° 45mm@5.9°×4.4°	25mm@17.6°×14.1° 35mm@12.6°×10.1° 45mm@9.8°×7.8°
Optical Magnification	19mm 2.72～21.78× 25mm 3.58～28.66×	25mm 2.39～19.11× 35mm 3.34～26.75× 45mm 4.3～34.4×	25mm 1.43～11.47× 35mm 2.01～16.05× 45mm 2.58～20.64×
Digital Zoom	1x, 2×, 4×,8×		
Display			
Diopter	±6D		
PIP	Yes		
Eye Relief	50mm		
Luminance	1~10		
Contrast	1~10		
Eyepiece Display	0.39 Inch 1024*768（OLED）		
Reticles	5 Types With 5 Colors		
Scene Mode	Jungle Mode, Recognition Mode		
Image Calib	Calibration Shutter Calibration, Scene Calibration, Automatic Calibration		
Palettes	White Hot, Black Hot, Red Hot, Green Hot, Fusion, Iron Red		
System			
SAR	Yes		
Capture Snapshot	Yes		
Video Recording	Yes		
Hot Track	Yes		
Audio Sound	Yes		
Recoil Video	Yes		
Zeroing	Yes		
Firmware Upgrade	OTA Upgrade		
CVBS Output	UVC Video Output (TYPE-C Connector)		
Local Storage	8G	64G	64G
SIR	Yes		
Laser Rangefinder	Selectable		
Ballistic Caculation	Yes		
Hardware			
WIFI	Yes		
Gyroscope	Yes		
Laser Distance Meter	Selectable		
Connector	USB Type-C Connector		
Environment			
Protection Leve	IP67		
Working Temperature	-20℃ ~ 50℃		
Power			
External Power Supply	TYPE-C Interface		
Battery Type	Single 18650 Replaceble		
Operating Time	Single Battery > 4 Hours		
Physical Property			
Dimension(mm)	215×45×50		
Weight(g)	19MM 580/660 LRF	25MM 600/680 LRF	35MM 610/690 LRF / 45MM 630/710 LRF
Housing	Aviation Aluminum Alloy		

Thermal Imaging Scope

TRS

See Heat, Sync Shot

Scope

WHY CHOOSE US

- OEM.Quickly open up the market and have your own full category platform.
- ODM.Match your ideas and broaden your product line.
- Deep customization from branding to functionality for all your needs.

ABOUT NNPO

NNPO has maintained an 80% growth rate, and continues to provide thermal imaging, night vision , professional technical services to 20000 + users in 30 + countries.

FEATURE

NETD⩽20mK

New temperature sensing chip, faster and more sensitive temperature sensing

6 PALETTES

White Hot, Black Hot, Red Hot, Green Hot, Iron Red, Fusion, change colors to match your environment and hunt with ease.

4X ZOOM

4X Electronic Zoom, Zoom In and Out Without Losing Focus.

Model	TRS-325L	TRS-335L	TRS-345L	TRS-625L	TRS-635L	TRS-645L
Detector						
Material	Uncooled Vanadium Oxide					
Resolution	Vox 384×288			Vox 640×512		
Pixel Size	12μm					
NETD	≤20mK					
Frame Frequency	50Hz					
Lens						
Focal Length	25mm	35mm	45mm	25mm	35mm	45mm
Field of View	10.5°×7.9°	7.5°×5.7°	5.9°×4.4°	17.5°×14°	12.5°×10°	9.8°×7.8°
Optical Magnification	2.39~19.11×	3.34～26.75×	4.3～34.4×	1.43～11.47×	2.01～16.05×	2.58～20.64×
Diopter	±5D					
Digital Zoom	1×,2×,4×					
Display						
PIP	Yes					
Eye Relief	48mm					
Eyepiece Display	1024*768（OLED）					
Scene Mode	Jungle，Recognition					
Reticles	8 Types（reticle 1-5 has ffp function） With 5 Colors					
Palettes	White Hot, Black Hot, Red Hot, Green Hot, Iron Red, Fusion					
Calibration	Shutter Calibration, Scene Calibration, Automatic Calibration					
System						
Video Recording	Yes					
Capture Snapshot	Yes					
WIFI	Yes					
Hot Track	Yes					
Ballistic Caculation	Yes					
Firmware Upgrade	Yes					
CVBS Output	UVC Video Output (TYPE-C Connector)					
Hardware						
E-compass	Yes					
Gyroscope	Yes					
Laser Rangefinder	Yes					
Connector	USB Type-C Connector					
Environment						
Protection Level	IP67					
Working Temperature	-20℃ ~ 60℃					
Power						
Battery	Single 18650					
External Power Supply	TYPE-C Interface					
Operating Time	Single Battery > 4 Hours					
Physical Property						
Dimension(mm)	189×58×75	196×58×75	205×58×75	189×58×75	196×58×75	205×58×75
Weight(g)	570	570	585	570	570	585
Housing	Aviation Aluminum Alloy					

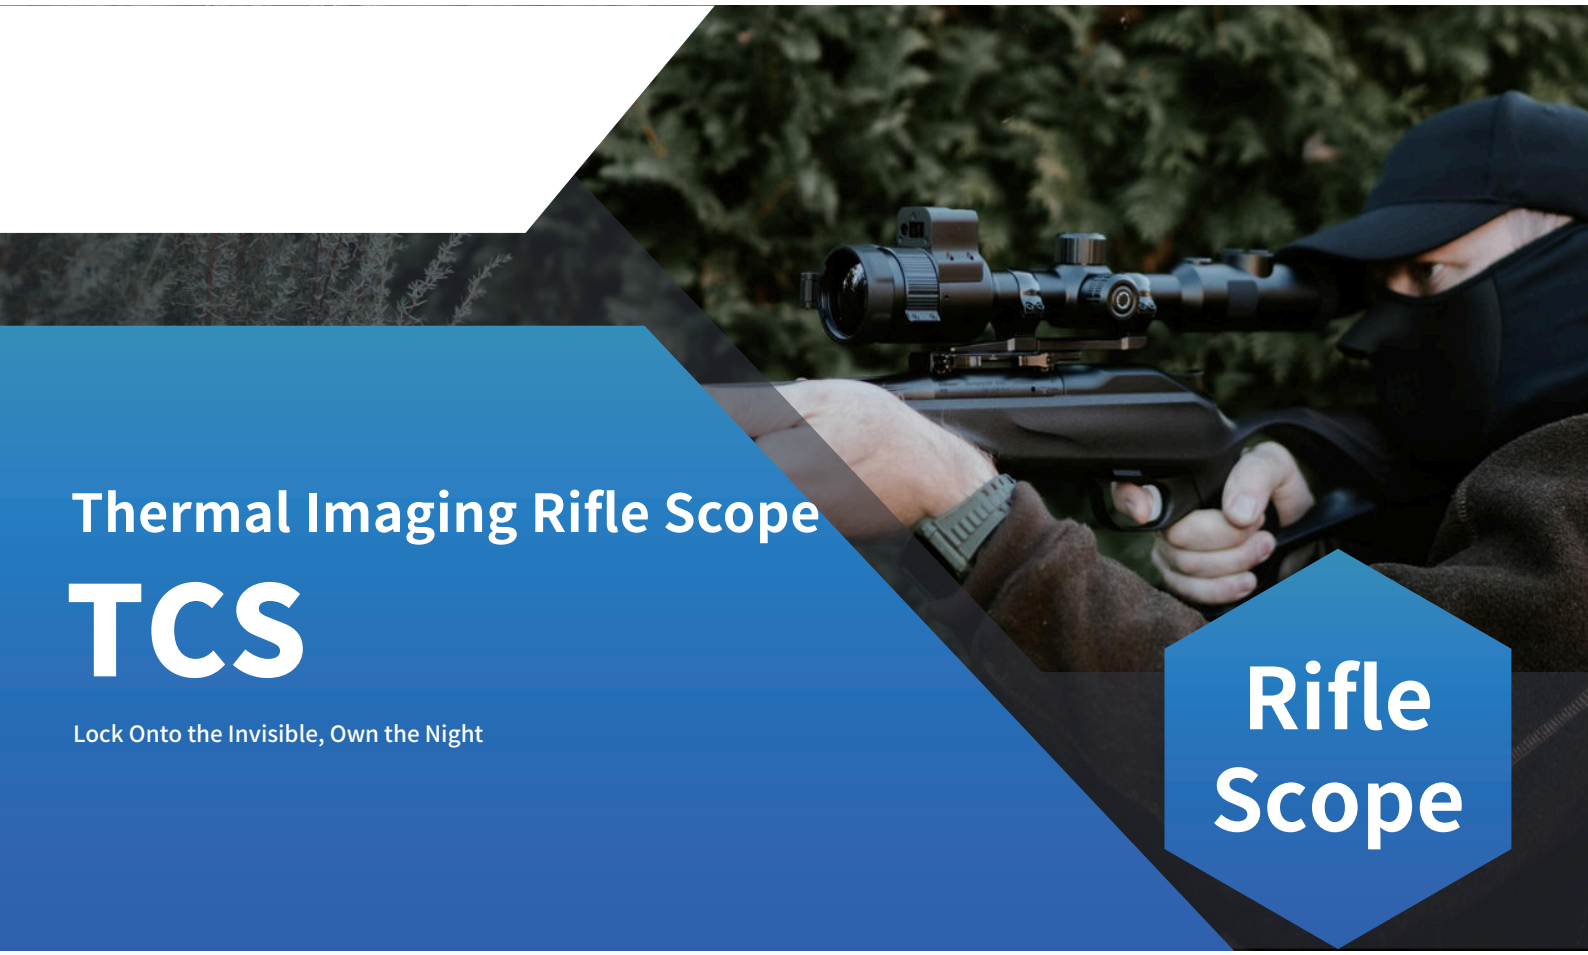

Thermal Imaging Rifle Scope

TCS

Lock Onto the Invisible, Own the Night

Rifle Scope

WHY CHOOSE US

- OEM.Quickly open up the market and have your own full category platform.
- ODM.Match your ideas and broaden your product line.
- Deep customization from branding to functionality for all your needs.

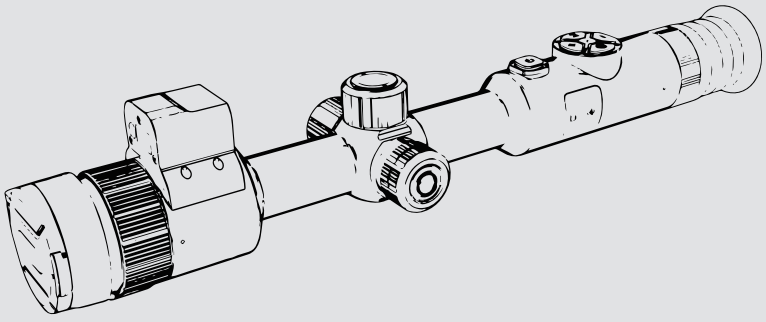

FEATURE

NETD⩽20mK

New temperature sensing chip, faster and more sensitive temperature sensing

6 PALETTES

White Hot, Black Hot, Red Hot, Green Hot, Iron Red, Fusion, change colors to match your environment and hunt with ease.

4X ZOOM

4X Electronic Zoom, Zoom In and Out Without Losing Focus.

Model	TCS-335L	TCS-345L	TCS-635L	TCS-645L
Detector				
Material	Uncooled Vanadium Oxide			
Resolution	VOX 384×288		VOX 640×512	
NETD	≤20mK			
Pixel Size	12μm			
Frame Frequency	50Hz			
Lens				
Focal Length	35mm	45mm	35mm	45mm
Field of View	7.5°×5.7°	5.3°×4.4°	12.5°×10°	9.8°×7.8°
Optical Magnification	3.34～26.75×	4.3～34.4×	2.01～16.05×	2.58～20.64×
Digital Zoom	1×,2×,4×			
Diopter	±5D			
Display				
PIP	Yes			
Eye Relief	48mm			
Eyepiece Display	1024×768（OLED）			
Scene Mode	Jungle,Recognition			
Reticles	8 Types（reticle 1-5 has ffp function） With 5 Colors			
Palettes	White Hot, Black Hot, Red Hot, Green Hot, Iron Red, Fusion			
Calibration	Shutter Calibration, Scene Calibration, Automatic Calibration			
System				
Ballistic Caculation	Yes			
Capture Snapshot	Yes			
WIFI	Yes			
Hot Track	Yes			
Firmware Upgrade	Yes			
Video Recording	Yes			
CVBS Output	UVC Video Output (TYPE-C Connector)			
Hardware				
E-compass	Yes			
Gyroscope	Yes			
Laser Rangefinder	Yes			
Connector	USB Type-C Connector			
Environment				
Protection Level	IP67			
Working Temperature	-20°C ~ 60°C			
Power				
External Power Supply	TYPE-C Interface			
Battery	Single 21700 or 18650			
Operating Time	Single Battery > 5 Hours			
Physical Property				
Dimension(mm)	400×86×81	410×86×81	400×86×81	410×86×81
Weight(g)	759	856	759	856
Housing	Aviation Aluminum Alloy			

Thermal Imaging Scope

THRONE RS

Light as Shadow, Sharp as Steel

Scope

WHY CHOOSE US

- OEM.Quickly open up the market and have your own full category platform.
- ODM.Match your ideas and broaden your product line.
- Deep customization from branding to functionality for all your needs.

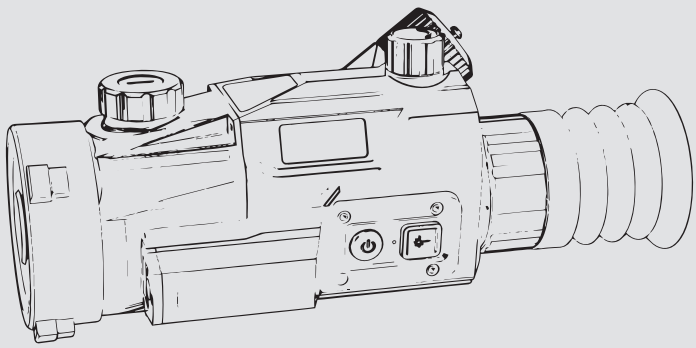

FEATURE

NETD⩽15mK

New temperature sensing chip, faster and more sensitive temperature sensing

5 PALETTES

White Hot, Black Hot, Red Hot, Green Hot, Sepia, change colors to match your environment and hunt with ease.

Reticle

7 Types（Reticle 1-4 has ffp function） With 5 Colors

Detector	Uncooled Vanadium 640x512
Pixel Size	12μm
NETD	⩽15mk
Frame Frequency	60Hz
Frame Frequency	640x512: 35mm 1.89×～15.12× /640x512: 45mm 2.60×～20.80×
Field Of View (HxV)	640x512: 35mm @12.6 °x10.1° 640x512: 50mm @8.8°x7°
Focal Length	35mm / 50mm
Eyepiece Display	0.49 Inch 1920x1080（OLED）
Calibration Mode	Shutter Calibration, Scene Calibration, Automatic Calibration
Eye Relief	48mm
Scene Mode	Jungle Mode, Recognition Mode
Luminance	1~10
Contrast	1~10
Sharpening	1~10
Reticle	7 Types（Reticle 1-4 has ffp function） With 5 Colors
Snapshot Capture / Video Recording	Yes
Palettes	White Hot, Black Hot, Red Hot, Green Hot, Fusion, Iron Red
Compass	Yes
PIP	Yes
Hot Track	Yes
Audio Sound	Yes
SAR	Yes
Laser Rangefinder	Selectable
Zeroing	Yes
Ballistic Calculation	Yes
CVBS Output	Composite Video Output (TYPE-C Connector)
Local Storage	64G
Firmware Upgrade	OTA Upgrade
Language	Support for 13 languages
Screen Brightness	Yes
Auto Shutdown	Yes
Time Setting	Yes
Factory Restore	Yes
Formatting	Yes
Laser Distance Meter	Selectable
WIFI	Yes
Connector	USB Type-C Connector
Working Temperature	-20°C ~ 60°C
Impact	1000g/0.4ms
Protection Level	IP67
Battery Type	Single 18650 Replaceble
Operating Time	Single Battery > 6 Hours
External Power Supply	TYPE-C Interface
Dimension(mm)	201*87*78
DWeight(g)	627
Housing	Magnesium Alloy
Zoom	1x/2x/4x/8x

Thermal Imaging Clip-on

HOGHUNTER

Light as Shadow, Sharp as Steel

Clip-on

WHY CHOOSE US

- OEM.Quickly open up the market and have your own full category platform.
- ODM.Match your ideas and broaden your product line.
- Deep customization from branding to functionality for all your needs.

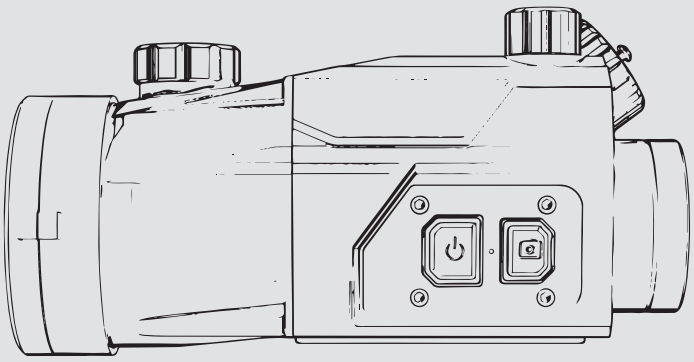

FEATURE

NETD⩽15mK

New temperature sensing chip, faster and more sensitive temperature sensing

5 PALETTES

White Hot, Black Hot, Red Hot, Green Hot, Sepia, change colors to match your environment and hunt with ease.

5 Configurations

5 types of display position compensation

	HO-635	HO-635L	HO-650	HO-650L
Detector				
Material	Uncooled Vanadium Oxide			
Resolution	Vox 640×512			
Pixel Size	12μm			
Response Band	8~14μm			
NETD	≤15mK			
Frame Frequency	60Hz			
Lens				
Focal Length	35mm		50mm	
Field of View	12.5 °×10°		8.8°×7°	
Display				
Eye Relief	20mm			
Contrast	1~10			
Brightness	1~10			
Sharpness	1~10			
Reticles	1 type			
Picture-in-Picture	Yes			
Scene Mode	Jungle Mode, Recognition Mode			
Eyepiece Display	0.49 inches 1920*1080 (OLED)			
Palettes	White Hot, Black Hot, Red Hot, Green Hot, Sepia			
System				
Snapshot Capture /Video Recording	Yes			
Hot Track	Yes			
Audio Sound	Yes			
Local Storage	64G			
Laser Rangefinder	Optional			
Firmware Upgrade	OTA Upgrade			
Display Position Compensation	5 Configurations			
CVBS Output	UVC Video Output (TYPE-C connector)			
Hardware				
Laser Distance Meter	Selectable			
WIFI	Yes			
Connector	USB Type-C Connector			
Environment				
Working Temperature	-20℃ ~ 60℃			
Protection Level	IP67			
Power				
Battery Type	Single 18650			
Operating Time	Single Battery > 4 Hours			
External Power Supply	Type-C Connector			
Physical Property				
Dimensio	154×75×70mm	154×95×70mm	154×75×70mm	154×95×70mm
Weight	450g	450g	492g	528g
Housing	Magnesium Alloy			

THERMAL TUBE SCOPE
TC SERIES

Eyebre

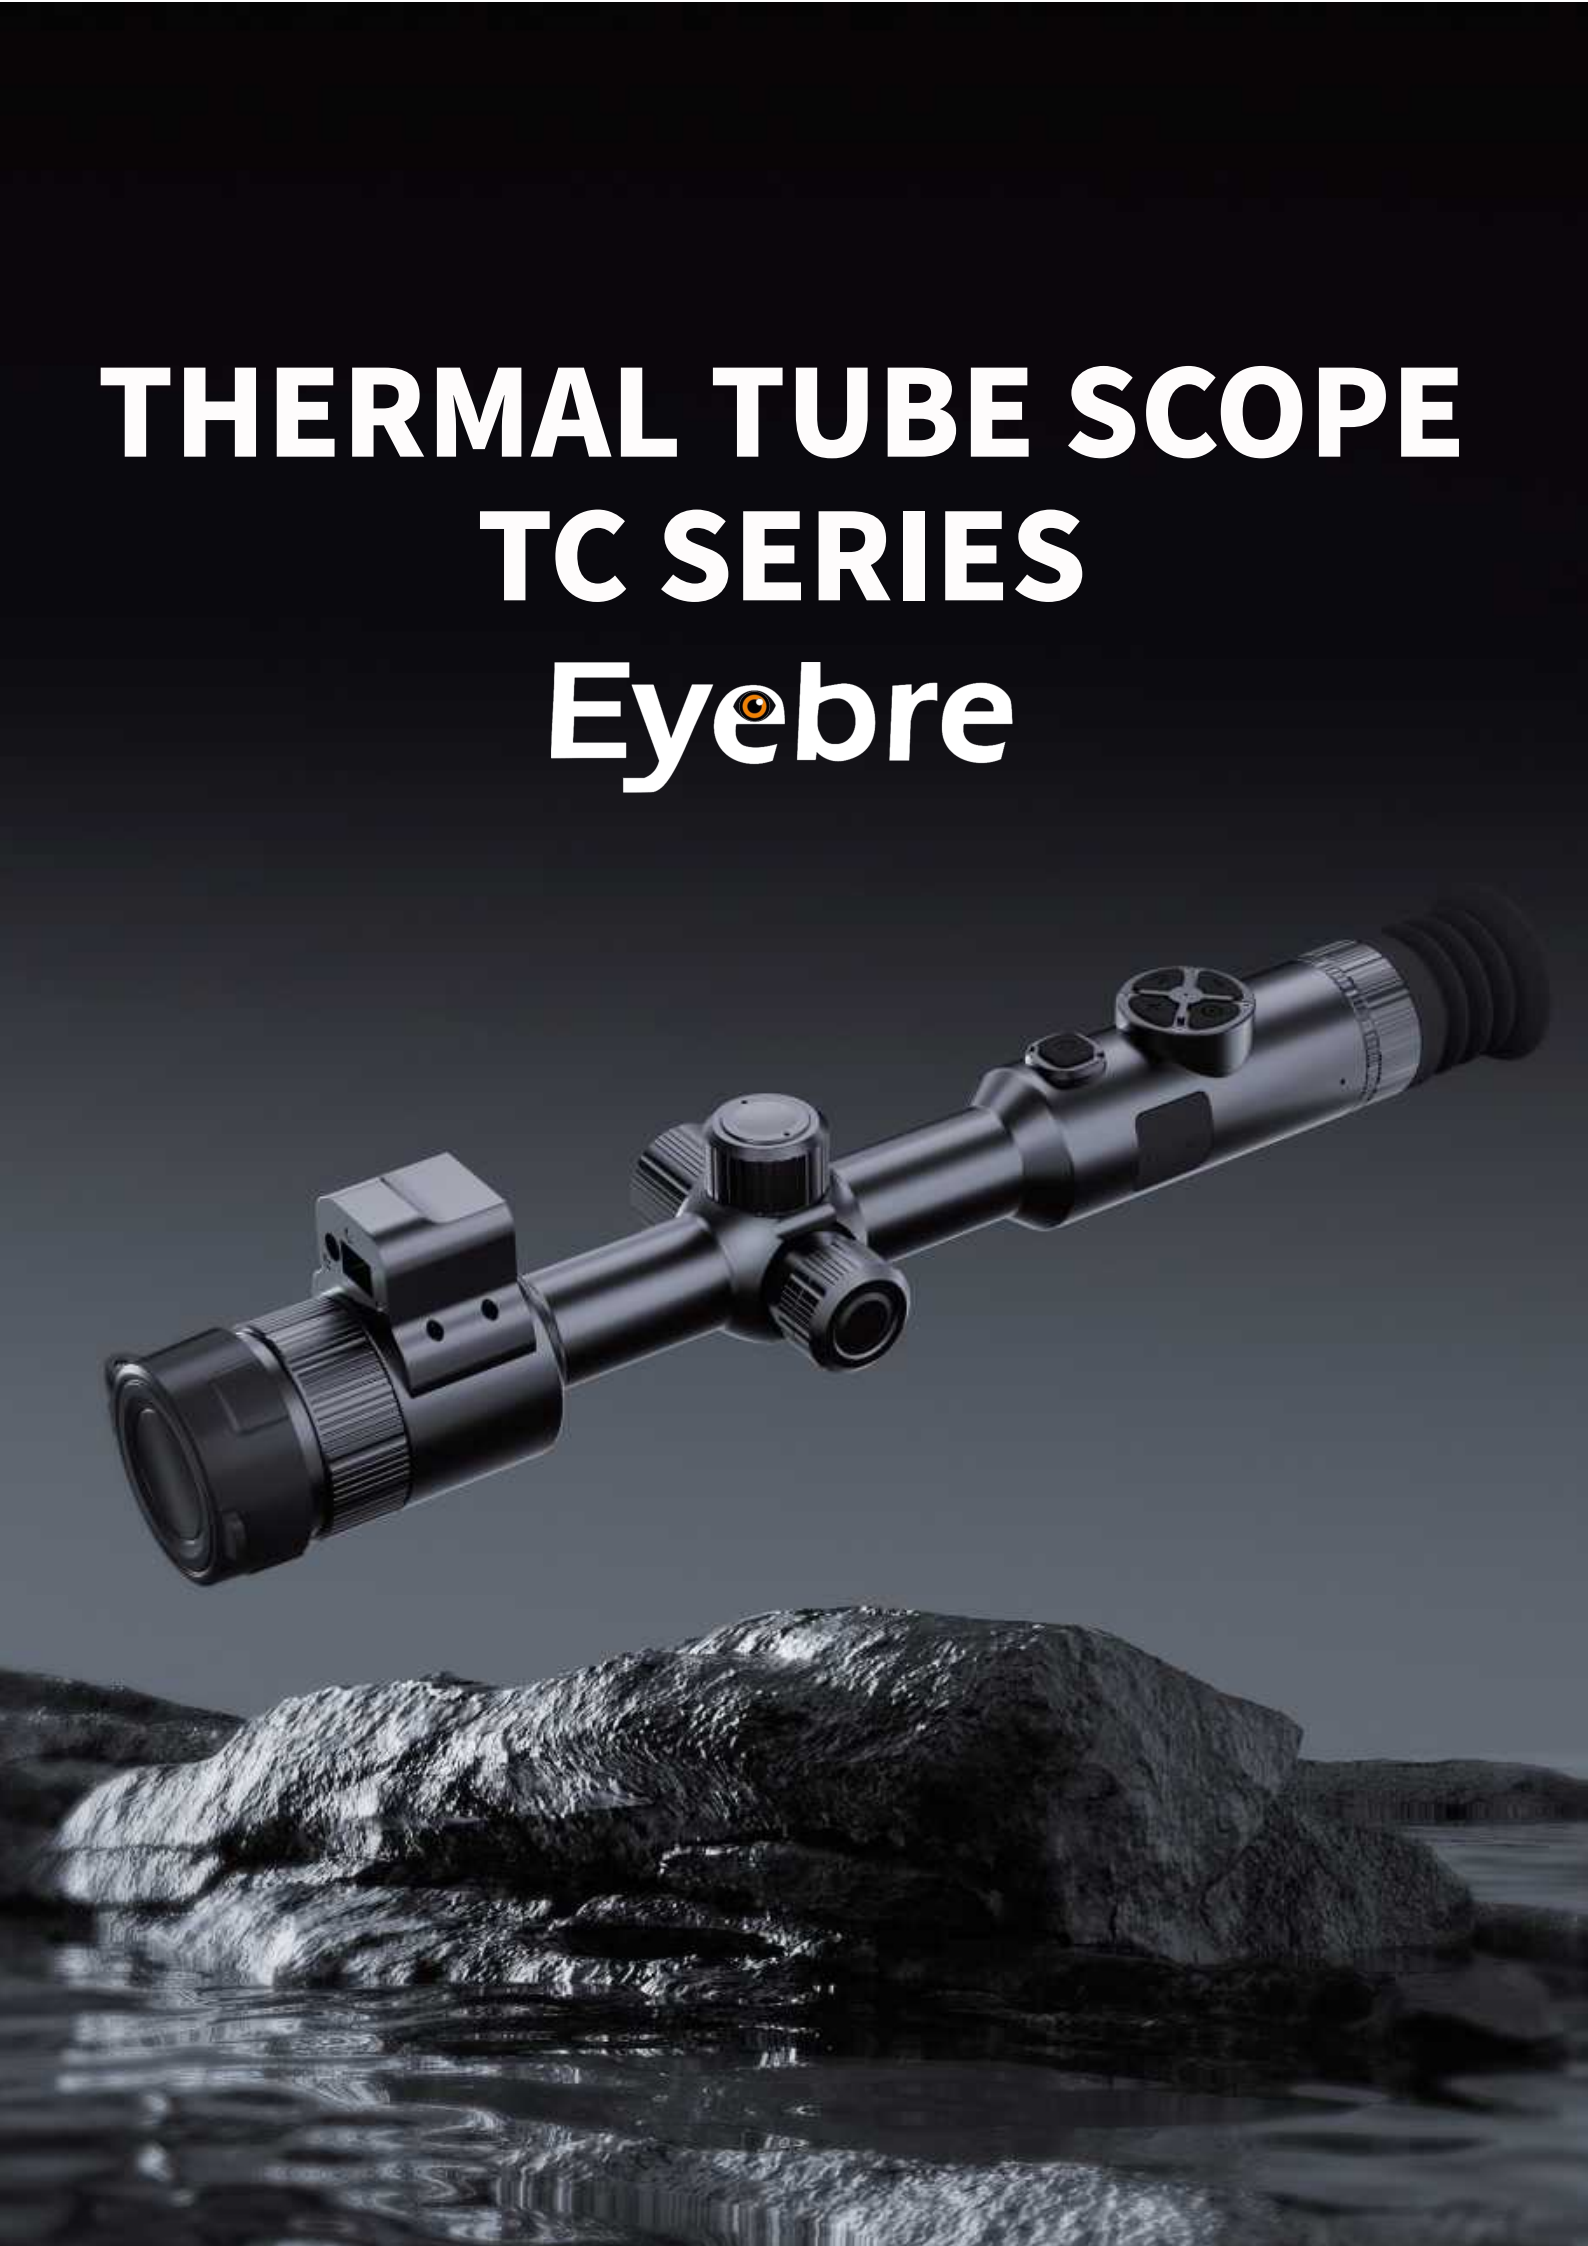

TC23

The TC23 features an ergonomic design that emulates the style of a traditional classic day scope. This design of this scope accommodates long term operating habits of hunters. Perfectly integrated with the latest high-quality thermal imaging technology, ultra-clear image quality, compatible with universal standard 30MM ring.

Main Feafures:

Lens	35mm
Thermal sensor	Vox 384*288 / Vox 640*512
PIP	Yes
Hot track	Yes
Display resolution	1024*768 OLED
Digital zoom	2×,4×,8×
Frame rate	50 Hz
Laser ranging	optional
Weight	690g / 741g(LRF)

12μm 12μm LRF PIP IP67

TC23S

The TC23S features an ergonomic design that emulates the style of a traditional classic day scope. This design of this scope accommodates long term operating habits of hunters. Perfectly integrated with the latest high-quality thermal imaging technology, ultra-clear image quality, compatible with universal standard 30mm ring. support photo taking, video recording, WIFI app connection with phone for transmission.

Main Feafures:

Lens	35mm / 45mm
Thermal sensor	Vox 384*288 / Vox 640*512
PIP	Yes
Diopter (Range)	±5D
3D Gyroscope	Yes
Eye Relief	48mm
Video recorder	Yes
Laser ranging	optional
Weight	759g(LRF) / 856g(LRF)

12μm 12μm

Photo

WIFI

Video

THERMAL SCOPE
TR SERIES

Eyebre

TR22

TR22 is an excellent infrared thermal imaging device. It is compact,light weight and easy to carry, it was created by the design team that won the highest global design award“the Red Dot Award”based on a conception of sturdy,strength and technology. Using the most advanced infrared thermal imaging night vision system, the image quality is excellent with high shock resistance. A variety of reticles are optional.Super long working time,It can meet various applications in law enforcement, outdoor hunting and other occasions.

12μm 12μm

LRF

PIP

IP67

Main Feafures:

Lens	25mm / 35mm / 45mm
Thermal sensor	Vox 384*288 / Vox 640*512
PIP	Yes
Diopter (Range)	±5D
3D Gyroscope	Yes
Eye Relief	48mm
Digital zoom	2×,4×,8×
Laser ranging	Yes
Weight	504g / 524g / 549g

TR22S

TR22S is a good quality infrared thermal imager. It is compact, light weight and easy to carry, it was created by the design team that won the highest global design award“the Red Dot Award”based on a conception of sturdy, strength and technology. Using the most advanced infrared thermal imaging night vision system, the image quality is excellent with high shock resistance. A variety of reticles are optional. It can capture snapshot, video recording, WIFI app connection with phone for transmission. It can meet various applications in law enforcement, outdoor hunting and other occasions.

Main Feafures:

Lens	25mm / 35mm / 45mm
Thermal sensor	Vox 384*288 / Vox 640*512
PIP	Yes
Diopter (Range)	±5D
3D Gyroscope	Yes
Capture snapshot	Yes
Video recorder	Yes
Laser ranging	Yes
Weight	500g / 520g / 545g

12μm 12μm

Photo

WIFI

Video

THERMAL MONOCULAR
RD SERIES

Eyebre

RD23S

RD23S thermal imaging monocular is light,easy to carry and comfortable to operate with one hand.It is widely used for hunting ,searching and positioning under various outdoor conditions.No matter it is day or night and no matter how bad weather conditions are.It can observe the targets hidden behind obstacles.

12μm 12μm

Photo

WIFI

Video

Main Feafures:

Lens	19mm / 25mm / 35mm
Thermal sensor	Vox 384*288 / Vox 640*512
PIP	Yes
Diopter (Range)	±5D
3D Gyroscope	Yes
Capture snapshot	Yes
Video recorder	Yes
Laser ranging	optional
Weight	312g / 322g / 342g

DIGITAL NIGHT VISION
DC SERIES

Eyebre

DC23

DC23 is an excellent digital night vision. It has lighter weight and smaller size, and fits well into traditional30mm mounting rings. The night vision system uses the most advanced ultra-low illumination image sensor, and the image colors are clear and true. It meets the requirements of high shock resitance and can adapt to various harsh environments. A variety of aiming cursors are available, with functions such as photography, video recording, and WIFI transmission, meeting various applications in outdoor hunting occasions.

Main Feafures:

Lens	50mm
sensor	CMOS 1928*1088
PIP	Yes
Diopter (Range)	±5D
3D Gyroscope	Yes
Capture snapshot	Yes
Video recorder	Yes
Laser ranging	distance 850m, ranging accuracy ± 1m
Weight	730g / 780g(LRF)

PIP Photo WIFI Video

THERMAL BOW SIGHT
BA SERIES

Eyebre

BA19

BA is an excellent infrared thermal imaging product. Compact design, small size, light weight, easy to carry. Using advanced infrared thermal imaging night vision system, the image quality is excellent. The product is designed for the needs of archery enthusiasts, while taking into account a variety of application scenarios, with photographing, video and other functions, suitable for law enforcement patrols, outdoor sports and other occasions of various applications

Main Features

Lens	19mm
Thermal sensor	Vox 256*192
PIP	Yes
WIFI	Yes
3D Gyroscope	Yes
Capture snapshot	Yes
Video recorder	Yes
Laser ranging	Yes
Weight	249g

12μm 12μm

Photo

WIFI

Video

Eyebre

Shenzhen NNPO Technology Co., LTD

Http：www.nnpotech.com
E-mail：sales@nnpotech.com

TEL：+86 0755-2790-1239
ADD：Building 4,DH Flying Technology Industry Park,No.16, Dahua Road,Baoan District,Shenzhen,Guangdong,China 518105

Mickey-IR

IR Series Handheld Thermal Imaging Monocular

Eyebre

The Mickey series is a high-performance infrared thermal imaging device that allows you to visualize thermal distribution of objects or scenes at a distance under any lighting conditions.

MK-H

Main Features

- Ultraclear Night Vision
- Suff icient Battery Life
- Infrared Thermal Tracking
- Portable Design
- Crosshair Settings
- No Shutter
- Quick Response
- Waterproof / Dustproof
- Multiple Pseudo-Colors
- Picture-in-Picture
- Photos and Videos
- WiFi Connection

Power Safety | Autonomous Driving | Environmental Protection | Intelligent Industry | Medical Detection | Forest Fire Prevention | Outdoor Night Vision | Military Security

Mickey-IR Series Handheld Thermal Imaging Monocular

Specifications

Model	MKH - 384 MKS - 384	MKH - 640 MKS - 640
Detector	Uncooled VOx 12 μm	
Resolutio, pixels	384×288	640×512
Objective Lens	19mm 25mm 35mm	25mm 35mm
Spectral Band	8-14 μm	
Display Resolution, pixels	1024×768	
Eyepiece Diopter	-5 ~ +5	
Eye Relief	20mm	
NETD	⩽50mk	
Frame Rate, Hz	50 Hz	
Waterproof	IP 67	
Detection Range (Human)	19m/800m 25m/1040m 35m/1460m	
Detection Range (Animal)	19m/1580m 25m/2080m 35m/2900m	
Power Source	3400mAh Lithium-ion Battery	
Battery Life	⩾5h	
Digital Zoom	1X、2X、4X	
Optical Magnification	12 X	
Interface	TYPE C	
Weight	⩽560g	
Dimensions	202mm X 70mm X 58mm	
Operating Temperature	-20°~ +50°	

Image Mode

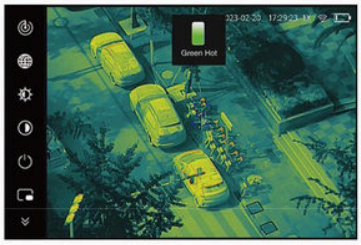

Effective Range

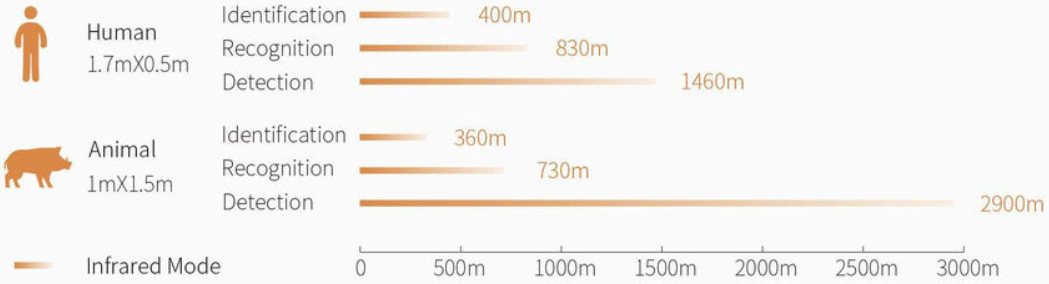

Eyebre

DC23 Series

Digital night vision device

- Excellent imaging performance, @1024*768 OLED crisper images.
- 50Hz high frame rate, ensuring capture smooth and vivid image during fast motion of observer or obiect of observation.
- 1024*768 resolution AMOLED eyepieces,colorfuland detailed images
- can reach 10 hours of stand by time You don't worry about changing the battery frequently
- IP67 degree ofprotection, water proof and dust proof high shock resistance, no fears of harsh weather

Components ofnight vision

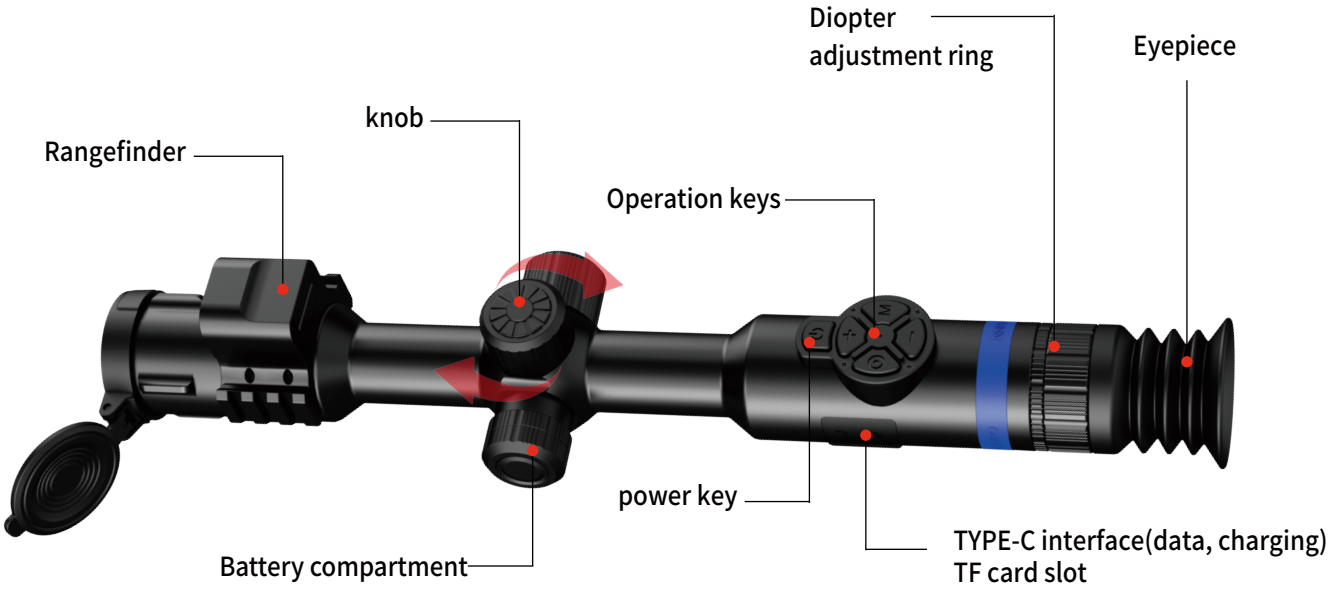

Product parameters

Model	DC23
Lens	50mm
Ranging range	3-1000m
Size	240*95*50
Weight	710g
IR Illuminator	850nm/940nm
Photo	JPG
Video format	MP4
Battery working time	＞10hrs
Voltage	DC 5V Type-C
Focus range	3m - ∞
Transfer method	WIFI
Video recording resolution	QVGA/VGA/1400P/1080P
Magnification	5-40x
IR irradiation range	350m
Frame rate	30fps
Battery type	Lithium Ion Battery
Laser ranging	Optional

Eyebre

UR23 Series

Thermal Imaging Scope

The UR23 is an excellent infrared thermography. It adopts the most advanced infrared thermal imaging night vision system with excellent image quality. Meet the requirements of high-intensity shock vibration and can adapt to various harsh environments. A variety of aiming cursors are optional, and the long working time meets various applications in law enforcement patrols, outdoor hunting and other occasions.

Product parameters

UR23	UR23-325	UR23-335	UR23-345	UR23-625	UR23-635	UR23-645
Lens	25mm	35mm	45mm	25mm	35mm	45mm
Detector	Uncooled vanadium oxide 384*288			Uncooled vanadium oxide 640*512		
Overall magnification	2.39~19.11×	3.34～26.75×	4.3～34.4×	1.43～11.47×	2.01～16.05×	2.58～20.64×
NETD	⩽25mk					
Cell size	12μm					
Frame rate	50 Hz					
Display Resolution	1024*768 OLED					
Digital zoom	2×,4×,8×					
Field of View (HxV)	10.5°×7.9°	7.5°×5.7°	5.9°×4.4°	17.5°×14°	12.5°×10°	9.8°×7.8°
Eyerelief	48mm					
Dioptre adjustment, dpt	±5					
Compensation method	Shutter Calibration, scene Calibration, automatic Calibration					
Reticle	8 styles, 5 colors					
Pallet	White hot, Black hot, Red hot, Green hot, Iron red, Fusion					
Battery Type	Li-ion 18650 Rechargeable Battery Replaceable					
PIP	Yes					
Hot spot tracking	Yes					
Video output	Composite video output					
Battery Life (Operating)	>8 hours					
External power supply	TYPE-C interface					
Housing Materials	Aluminum Alloy					
Size (L × W × H) mm / inch	194mm*77.6mm *58mm	199.6mm*77.6mm *58mm	209.6mm*77.6mm *49mm	194mm*77.6mm *58mm	199.6mm*77.6mm *58mm	209.6mm*77.6mm *49mm
Weight (Without battery) Kg/ oz	515g	520g	545g	515g	520g	545g
Protection rate	IP67					
Operating Temperature	-20℃...+60 ℃					

Eyebre

Shark Series

Day and Night Digital Scope

The Shark is a high-performance digital night vision rifle scope . The Shark is the perfect digital night vision optic for the discerning hunter with excellent low-light sensor sensitivity. Featuring a 12+ hour run time and an IP67 rating, It can last all night in any hunting conditions.

CE RoHS FC

Product Parameters

Model	Shark
Lens	75mm
Ranging range	5-1000m
Size	240*95*50
Weight	710g
IR Illuminator	850nm/940nm optional
Video format	MP4
Storage type	support 4-128G（FAT32）
Battery working time	Up to 12hrs
Voltage	5V Type-C
Focus range	3m - ∞
Transfer method	WIFI
Video recording resolution	1080P
Magnification	5-40x

Eyebre®

Infrared thermal imaging

FOCUSED ON INFRARED THERMAL IMAGING

NIGHT-VISION SYSTEM TECHNOLOGY

Shenzhen NNPO is an innovative company ,which is specialized in optics , thermal image night visions and related outdoor products with development ,production ,sales & service all in one .Our company' s headquarter is in Beijing, but our production factory is located in manufacturing frontier zone in Songgang of Shenzhen ,We have our own strong R&D engineering team ,we also have several doctors who are rich experience in optics and thermal image fields more than 20 years.

We have our own hardware designing, machining, software developing abilities are our key competiveness, we are pay attention to every details of products for reviewing ,checking & testing to get a perfect product to our customer .As we are the original manufactory in China ,so we can provide better clients' buying experience, the good quality product & best after sold service.

We are looking forward to establish long term relationship with you to achieve win-win.

Eyebre®

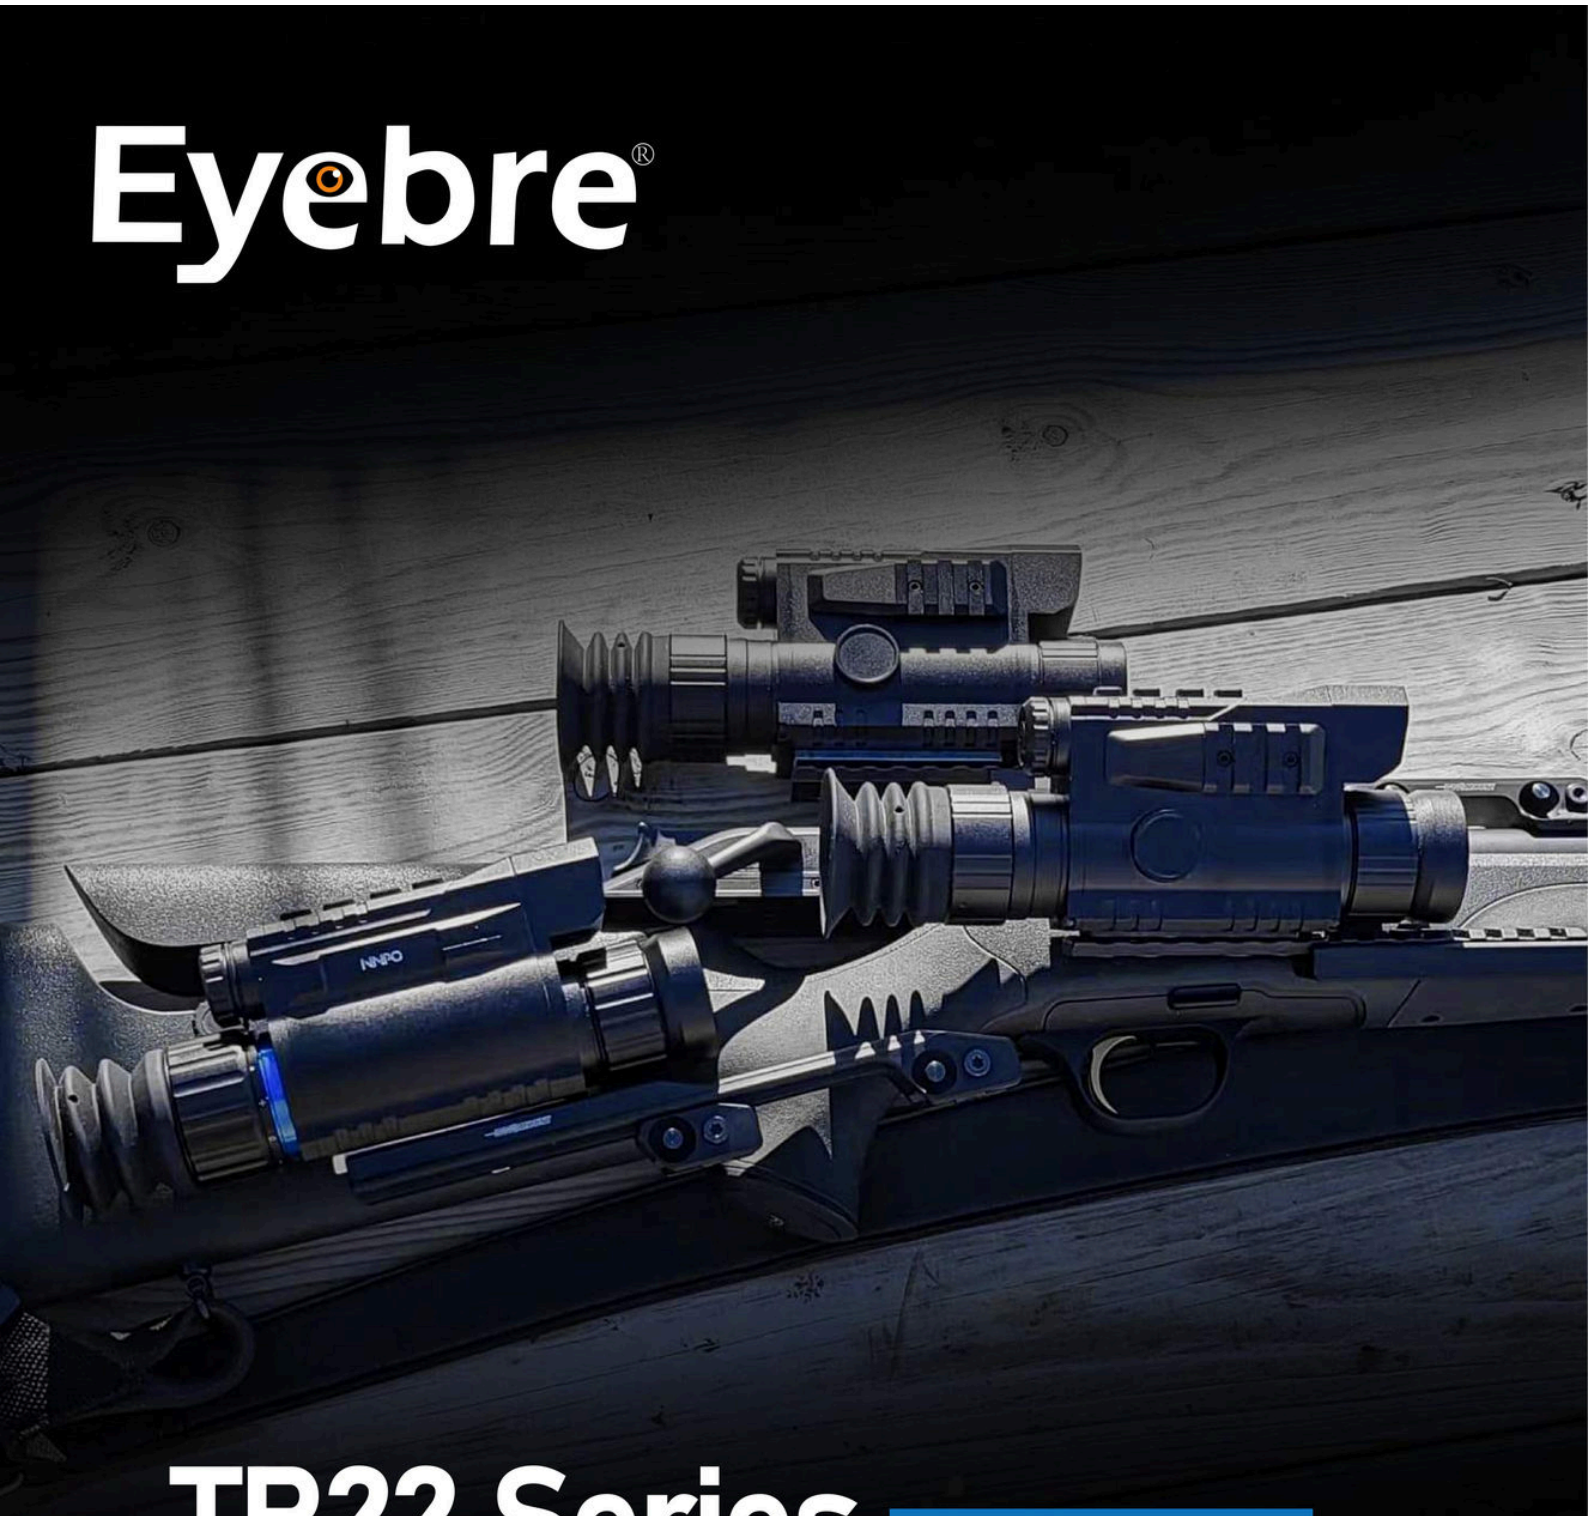

TR22 Series

Thermal Imaging Scope

TR22 series thermal imaging scope is portable and easy for operation. It is excellent image quality make it as a great companion for night observation,even in hard condition of rainy or foggy,it still works with outstanding performance.

RESOLUTION

384 x 288 / 640 x 512 FOR OPTIONAL

High Imaging Quality

The advanced image processing of thermal sensor,which has high performance electronics and optimized infrared optics create excellent image clarity and provide better detection and classification,in day and night.

HD

HD Micro Display

1024 x 768 high resolution internal display offers sharp image and vivid colors.

12μm

Thermal Imaging Sensor

High performance 12um pixel Pitch detectors are embedded in the compact body.

Product Parameters

Model	TR22-325LRF	TR22-335LRF	TR22-350LRF	TR22-625LRF	TR22-635LRF	TR22-650LRF
Lens	25mm	35mm	50mm	25mm	35mm	50mm
Thermal sensor	Uncooled Vox					
Resolution	384x288	384x288	384x288	640x512	640x512	640x512
Pixel size	12μm					
NETD,mk	≤35					
Optical magnification	2.39	3.34	4.78	1.4	1.96	2.8
Display Resolution	1024*768 OLED					
Digital zoom	2×, 4×, 8×					
Field of View (HxV)	10.5°×7.9°	7.5°×5.7°	5.3°×4°	17.5°×14°	12.5°×10°	8.8°×7°
Eyerelief	48mm					
Dioptre adjustment, dpt	±5					
Battery Type	Li-ion 18650 Rechargeable Battery Replaceable					
Battery Life (Operating)	>8hours					
Housing Materials	Aluminum Alloy					
Size (L × W × H),mm	194x77.6x58	199.6x77.6x58	209.6x77.6x49	194x77.6x58	199.6x77.6x58	209.6x77.6x49
Weight (Without battery), g	515	520	545	515	520	545

Detection Rang e(m)

	TR22-325LRF/TR22-625LRF	TR22-335LRF/TR22-635LRF	TR22-350LRF/TR22-650LRF
Rabbit(0.2x0.3m)	450m	700m	850m
Human(1.8x0.5m)	1000m	1500m	1800m
Dear(1.5x0.9m)	1300m	2000m	2500m
Car(1.5x0.9m)	2500m	3000m	4000m

Eyebre®

Tube TC23 Series

Thermal Imaging Scope

NNPO TC23 has been developed a ergonomic design to put all of the major controls within easy reach. It combines the traditional style and feel of a day scope and the advanced technology of thermal .uses a conventional 30mm tube Rifle Scope classis allowing you to attach it to your Rifle using standard scope rings. This makes it easy to mount and achie-vethe perfect eye relief while also maintaining the traditional appearance of your Rifle. offers solid performance and extensive features.

The design of this scope accommdoates long-term operating habits of hunters.and its 10 sets of zero calibration configuration make it convenient to switch between diferent instruments

Product Parameters

Model	TC23-335	TC23-335-LRF	TC23-345	TC-345-LRF	TC23-635	TC23-635-LRF	TC23-645	TC23-645-LRF
Lens	35mm	35mm	45mm	45mm	35mm	35mm	45mm	45mm
Resolution	384x288	384x288	384X288	384x288	640X512	640X512	640X512	640X512
Pixel	12μm							
NETD,mk	⩾35							
Optical magnification	3.34		4.3		1.96		2.52	
Display Resolution	1024*768 OLED							
Digital zoom	2×,4×, 8×							
Field of View (HxV)	7.5°×5.7°	7.5°×5.7°	5.9°×4.4°	5.9°×4.4°	12.5°×10°	12.5°×10°	9.8°×7.8°	9.8°×7.8°
Eyerelief	48mm							
Dioptre adjustment, dpt	±5							
Calibration	Shutter Calibration, scene Calibration, automatic Calibration							
Reticle Type	8-Pattern optional, or "NO reticle"							
Reticle Color	5 colors: White, Black, Red , yellow,green							
Image Palettes	White Hot / Black Hot/ Red hot /Iron red/Fusion							
PIP	Yes							
Battery Type	Li-ion 18650 Rechargeable Battery Replaceable							
Battery Life (Operating)	>8hours							
External power supply	TYPE-C interface							
Housing Materials	Aluminum Alloy							
Detection distance rabbit(0.2×0.3)m	700	700	800	800	700	700	800	800
Detection distance Human(1.8×0.5)m	1500	1500	1700	1700	1500	1500	1700	1700
Detection distance deer(1.5×0.9)m	2000	2000	2300	2300	2000	2000	2300	2300
Detection distance Vehicle(2.3×2.3)m	3000	3000	3700	3700	3000	3000	3700	3700
Recognition distance rabbit(0.2×0.3)m	180	180	200	200	180	180	200	200
Recognition distance Human(1.8×0.5)m	750	750	850	850	750	750	850	850
Recognition distance deer(1.5×0.9)m	1000	1000	1100	1100	1000	1000	1100	1100
Recognition distance Vehicle(2.3×2.3)m	1500	1500	1700	1700	1500	1500	1700	1700
Size (L × W × H),mm	396.4x813x70	396.4x813x70	402x813x70	402x813x70	396.4x813x70	396.4x813x70	402x813x70	402x813x70
Weight (Without battery),g	685	730	695	740	685	730	695	740
Protection rate	IP67							
Operating Temperature	-30℃ ~ +60 ℃							

Eyebre®

UR23 Series

Thermal Imaging Scope

UR23 series thermal imaging scope is portable and easy for operation. It is excellent imagequality make it as a great companion for night observation,even in hard condition of rainyor foggy,it still works with outstanding performance.

CE RoHS FC

High Imaging Quality

Unique image enhancement technology, under the bad environment, such as fog, rain andsnow,Image detail is richer, the contrast ratio is higher, easier to identify the target

12μm The Most Advanced

Crisper images and longer detection rangeUse the most advanced infrared thermal imaging night vision system withexcellent image quality

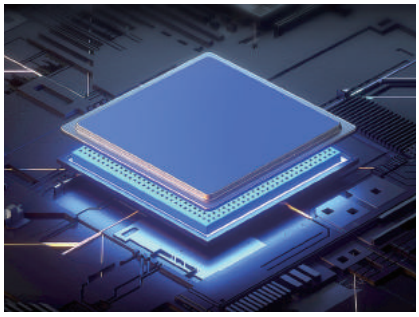

IP67 Waterproof

High Shock Resitance

Product Parameters

Model	Lens	lens	lens	lens	lens	lens
UR23	UR23-325	UR23-335	UR23-350	UR23-625	UR23-635	UR23-650
Lens	25mm	35mm	50mm	25mm	35mm	50mm
Resolution,Pixel	384x288	384x288	384X288	640X512	640X512	640X512
Magnification	2.39 —19.11X	3.34 —26.75X	4.78 —38.22X	1.4 —11.19X	1.96 —15.67X	2.8 —22.38X
NETD	⩽35mk					
Resolution,Pixel	12μm					
Frame rate	50 Hz					
Display Resolution	1024*768 OLED					
Digital zoom	2×,4×,8×					
Field of View (HxV)	10.5°×7.9°	7.5°×5.7°	5.3°×4°	17.5°×14°	12.5°×10°	8.8°×7°
Eyerelief	48mm					
Dioptre adjustment, dpt	±5					
Calibration	Shutter Calibration, scene Calibration, automatic Calibration					
Reticle Type	8-Pattern optional, or "NO reticle"					
Reticle Color	5 colors: White, Black, Red, Green, Yellow					
Image Palettes	White Hot / Black Hot/ Red hot /Iron red/Fusion					
PIP	Yes					
Battery Type	Li-ion 18650 Rechargeable Battery Replaceable					
Battery Life (Operating)	>10hours					
External power supply	TYPE-C interface					
Housing Materials	Aluminum Alloy					
Size (L × W × H)mm	210*65*85	215*65*85	220*65*85	210*65*85	215*65*85	220*65*85
Weight (Without battery)g	525g	530g	540g	525g	530g	540g
Protection rate	IP67					
Operating Temperature	-30℃ ... +60 ℃					

Eyebre®

RD23 Series

Thermal imaging monocular

RD23 series Thermal Monocular is embedded with an infrared detector, being cost-effective while providing high performance. It has a 12μm thermal sensor , which is able to discover small targets. Meanwhile, it also has a high contrast HD OLED display to provide ultra-clear thermal images. it brings you great superiority in both technology and experience of thermal imaging. Better sensor, clearer monocular!

FC RoHS CE

Image Enhancement Technology

Unique image enhancement technology, under the bad environment, such as fog, rain and snow,Image detail is richer, the contrast ratio is higher, easier to identify the target

12μm The Most Advanced

Crisper images and longer detection range.
Use the most advanced infrared thermal imaging night vision system with excellent image quality.

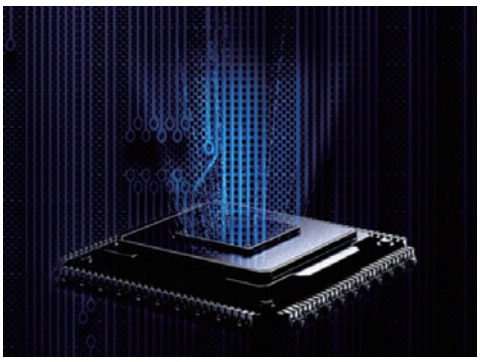

Calibration Mode

Auto Calibration | Shutter Calibration | Scene Calibration

Product Parameters

Model	RD23-319	RD23-325	RD23-335	RD23-619	RD23-625	RD23-635
Model (LRF)	RD23-319LRF	RD23 -325LRF	RD23-335LRF	RD23-619LRF	RD23-625LRF	RD23-635LRF
Lens	19mm	25mm	35mm	19mm	25mm	35mm
Thermal sensor	Uncooled Vox					
Resolution	384x288			640x512		
Pixel size	12μm					
NETD,mk	⩽35					
Display Resolution	1024*768 OLED					
Digital zoom	2×, 4×, 8×					
Field of View (HxV)	10.5°×7.9°		7.5°×5.7°		17.5°×14°	12.5°×10°
Battery Type	Li-ion 18650 Rechargeable Battery Replaceable					
Battery Life (Operating)	>8hours					
Housing Materials	plastic					

Size (L × W × H),mm	134x69x52	134x69x52	134x69x52	134x69x52	134x69x52	134x69x52	134x69x52	134x69x52
Weight (Without battery), g	325	370	340	380	325	370	340	380

Eyebre®

Shark Series

Day and Night Digital Scope

The Shark is a high-performance digital night vision rifle scope . The Shark is the perfect digital night vision optic for the discerning hunter with excellent low-light sensor sensitivity. Featuring a 12+ hour run time and an IP67 rating, It can last all night in any hunting conditions.

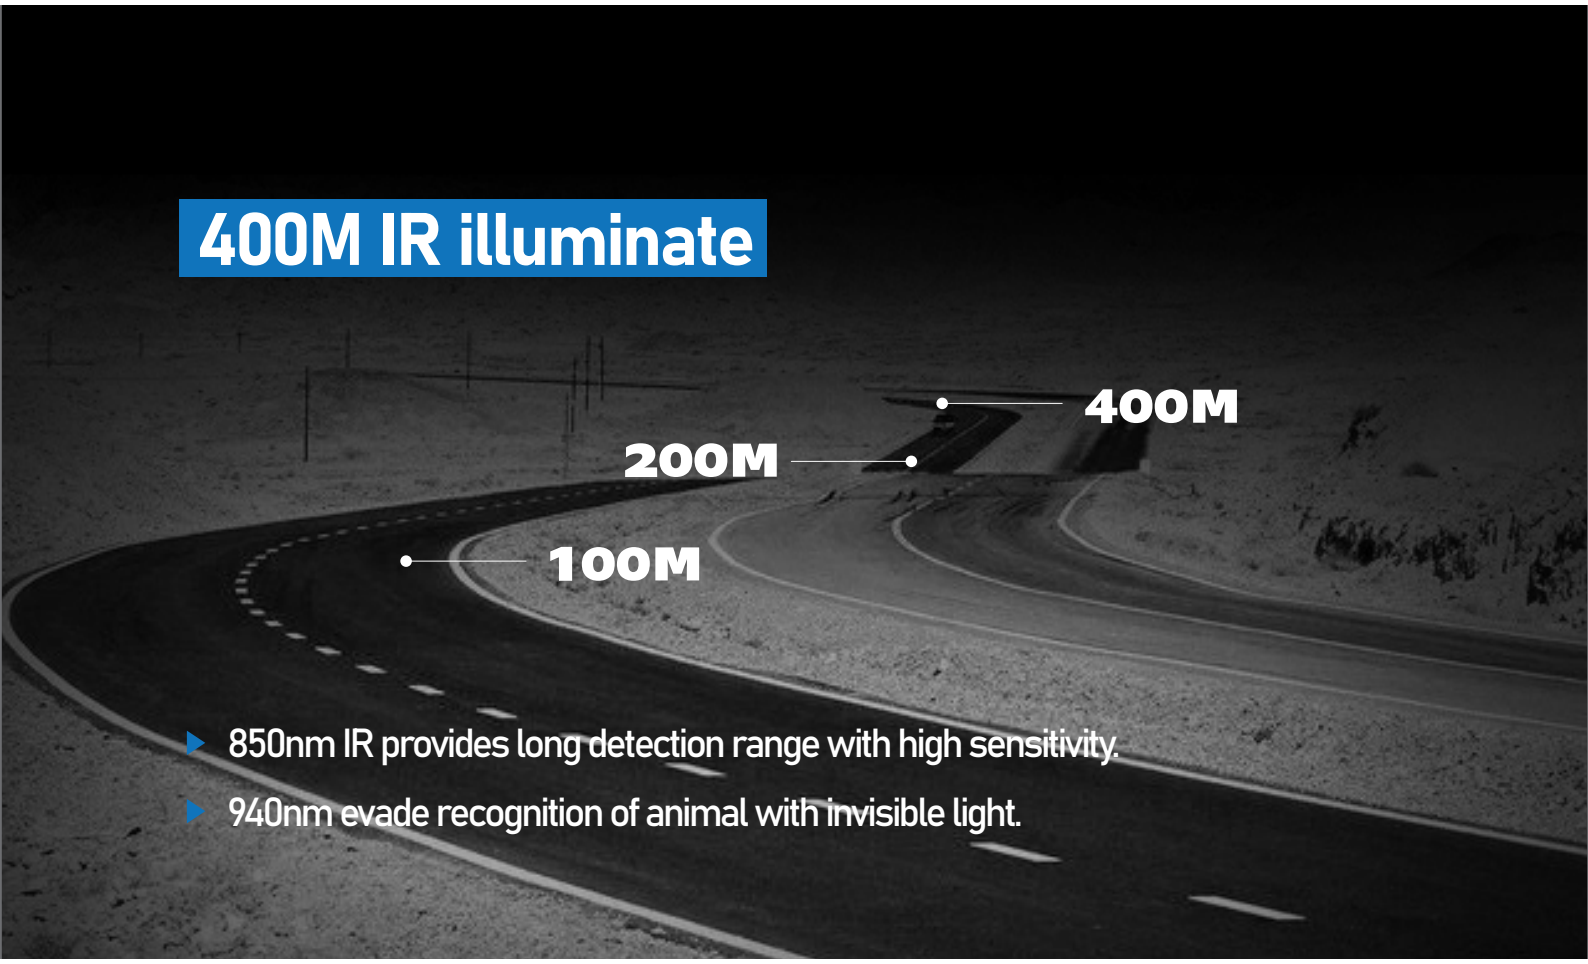

40x

5x

5-40x

Magnifying power

Magnification 5-40x
search and observe quickly switch

Video Resolution
1920 x 1080

Multi exposure
DOL wide dynamic function

Product Parameters

Model	Shark
Lens	75mm
Ranging range	5-1000m
Size	240*95*50
Weight	710g
IR Illuminator	850nm/940nm optional
Video format	MP4
Storage type	support 4-128G（FAT32）
Battery working time	Up to 12hrs
Voltage	5V Type-C
Focus range	3m - ∞
Transfer method	WIFI
Video recording resolution	1080P
Magnification	5-40x