

热成像短瞄

SPEAR

轻如影，锐如钢

短瞄

为什么选择我们

- OEM。快速打开市场，拥有自己的全品类平台。
- ODM。匹配您的创意，拓展您的产品线。
- 从品牌到功能的深度定制，满足您所有的需求。

特征

NETD≤20mK


新型温度传感芯片，温度感应更快、更灵敏

6 个调色板

白热，黑热，红热，绿热，铁红，融合，
随环境改变颜色，轻松观察。

8倍变焦

8X 电子变焦，放大和缩小，不失焦距。

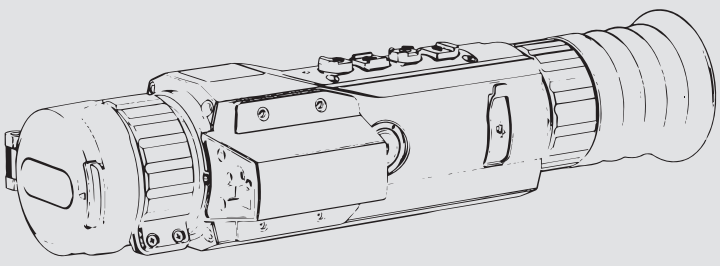

型号	SP-219 SP-225 SP-219L SP-225L	SP-325 SP-335 SP-345 SP-325L SP-335L SP-345L	SP-625 SP-635 SP-645 SP-625L SP-635L SP-645L
探测器			
材质	非制冷氧化钒		
分辨率	256×192	384×288	640×512
像元尺寸	12μm		
NETD	≤20mK		
帧频	50Hz		
镜头参数			
焦距	19mm/25mm	25mm/35mm/45mm	25mm/35mm/45mm
视场角	19mm@9.2°×6.9° 25mm@7°×5.3°	25mm@10.5°×7.9° 35mm@7.5°×5.7° 45mm@5.9°×4.4°	25mm@17.6°×14.1° 35mm@12.6°×10.1° 45mm@9.8°×7.8°
整机倍率	19mm 2.72 ~ 21.78× 25mm 3.58 ~ 28.66×	25mm 2.39 ~ 19.11× 35mm 3.34 ~ 26.75× 45mm 4.3 ~ 34.4×	25mm 1.43 ~ 11.47× 35mm 2.01 ~ 16.05× 45mm 2.58 ~ 20.64×
放大倍率	1x, 2×, 4×,8×		
显示			
屈光度调校	±6D		
画中画	支持		
出瞳距离	50mm		
亮度	1~10		
对比度	1~10		
目镜显示	0.39 英寸 1024*768（OLED）		
光标	5种样式，5种颜色		
补偿方式	快门补偿、场景补偿、自动补偿		
场景模式	丛林模式、识别模式		
伪彩	白热、黑热、红热、绿热、融合、铁红		
系统			
拍照	支持		
录像	支持		
热点追踪	支持		
录音	支持		
后坐力录像	支持		
校零	支持		
固件升级	OTA升级		
视频输出	复合视频输出（TYPE-C接口）		
本地存储	64G		
超分	支持		
激光测距	可选		
弹道计算	支持		
硬件			
WIFI	支持		
加速度计	支持		
激光测距仪	可选		
接口	USB Type-C 接口		
环境			
防护等级	-20℃ ~ 50℃		
工作温度			
电源			
外部供电	TYPE-C 接口		
电池	单节18650		
续航时间	单节电池> 4 小时		
物理特性			
尺寸(mm)		215×45×50	
重量g)	19MM 580/660 LRF	25MM 600/680 LRF	35MM 610/690 LRF 45MM 630/710 LRF
材质	航空硬质铝合金		



热成像短瞄

TRS

观察热源，同步拍摄

短瞄

为什么选择我们

- OEM。快速打开市场，拥有自己的全品类平台。
- ODM。匹配您的创意，拓展您的产品线。
- 从品牌到功能的深度定制，满足您所有的需求。

特征

NETD≤20mK


新型温度传感芯片，温度感应更快更灵敏

6 个调色板

白炽热、黑炽热、红炽热、绿炽热，铁红、融合，
颜色可随环境变化，让您轻松观察。

4倍变焦

4X 电子变焦，放大和缩小，不失焦。

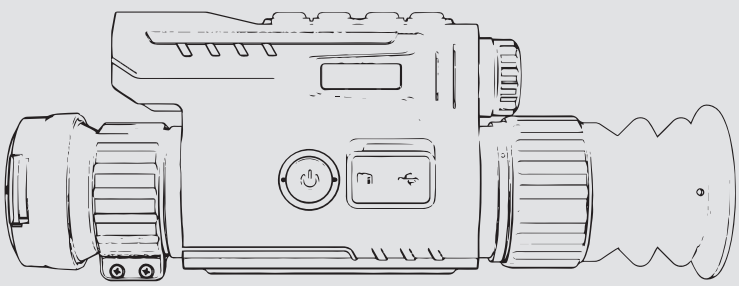

型号	TRS-325L	TRS-335L	TRS-345L	TRS625L	TRS635L	TRS645L
探测器						
材质	非制冷氧化钒					
分辨率	Vox 384×288			Vox 640×512		
NETD	12μm					
像元尺寸	≤20mK					
帧频	50Hz					
镜头参数						
焦距	25mm	35mm	45mm	25mm	35mm	45mm
整机倍率	10.5°×7.9°	7.5°×5.7°	5.9°×4.4°	17.5°×14°	12.5°×10°	9.8°×7.8°
视场角	2.39~19.11×	3.34 ~ 26.75×	4.3 ~ 34.4×	1.43 ~ 11.47×	2.01 ~ 16.05×	2.58 ~ 20.64×
屈光度调校	±5D					
放大倍率	1×,2×,4×					
显示						
画中画	支持					
出瞳距离	48mm					
目镜显示	1024*768（OLED）					
场景模式	丛林模式，识别模式					
光标	8种样式（1-5号分划线具有ffp功能），5种颜色					
伪彩	白热、黑热、红热、绿热、融合、铁红					
补偿方式	快门补偿、场景补偿、自动补偿					
系统						
录像	支持					
拍照	支持					
WIFI	支持					
热点追踪	支持					
弹道计算	支持					
固件升级	支持					
视频输出	复合视频输出（TYPE-C接口）					
硬件						
电子罗盘	支持					
加速度计	支持					
激光测距	支持					
接口	USB Type-C 接口					
环境						
工作温度	IP67					
防护等级	-20℃ ~ 60℃					
电源						
电池	单节18650					
外部供电	TYPE-C 接口					
续航时间	单节电池> 4 小时					
物理特性						
尺寸(mm)	189×58×75	196×58×75	205×58×75	189×58×75	196×58×75	205×58×75
重量(g)	570	570	585	570	570	585
材质	航空硬质铝合金					



热成像长管


TCS

锁定隐形，掌控夜晚

长管

为什么选择我们

- OEM。快速打开市场，拥有自己的全品类平台。
- ODM。匹配您的创意，拥有您的产品线。
- 从品牌到功能的深度定制，满足您所有的需求。

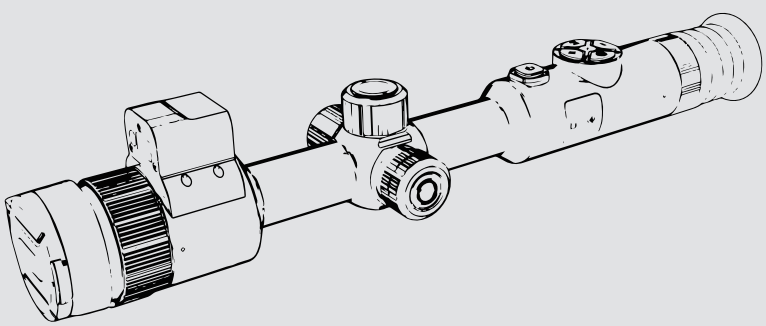

特征

NETD≤20mK

新型温度传感芯片，温度感应更快更灵敏

6 个调色板

白炽热、黑炽热、红炽热、绿炽热，铁红、融合，
颜色可随环境变化，让您轻松观察。

4倍变焦

4X 电子变焦，放大和缩小，不失焦。

型号	TCS-335L	TCS-345L	TCS-635L	TCS-645L
探测器				
材质	Uncooled Vanadium Oxide			
分辨率	VOX 384×288		VOX 640×512	
NETD	≤20mK			
像元尺寸	12μm			
帧频	50Hz			
镜头参数				
焦距	35mm	45mm	35mm	45mm
整机倍率	7.5°×5.7°	5.3°×4.4°	12.5°×10°	9.8°×7.8°
视场角	3.34 ~ 26.75×	4.3 ~ 34.4×	2.01 ~ 16.05×	2.58 ~ 20.64×
放大倍率	1×,2×,4×			
屈光度调校	±5D			
显示				
画中画	支持			
出瞳距离	48mm			
目镜显示	1024×768（OLED）			
场景模式	丛林模式、识别模式			
光标	8种样式（分划线1-5带有ffp功能）， 5种颜色			
伪彩	白热、黑热、红热、绿热、融合、铁红			
补偿方式	快门补偿、场景补偿、自动补偿			
系统				
录像	支持			
拍照	支持			
WIFI	支持			
热点追踪	支持			
弹道计算	支持			
固件升级	支持			
视频输出	复合视频输出（TYPE-C接口）			
硬件				
电子罗盘	支持			
加速度计	支持			
激光测距	支持			
接口	USB Type-C 接口			
环境				
防护等级	IP67			
工作温度	-20℃ ~ 60℃			
电源				
外部供电	TYPE-C 接口			
电池	单节21700或18650			
续航时间	单节电池> 5 小时			
物理特性				
尺寸(mm)	400×86×81	410×86×81	400×86×81	410×86×81
重量(g)	759	856	759	856
材质	航空硬质铝合金			



热成像短瞄


THRONE RS

Light as Shadow, Sharp as Steel

热成像

为什么选择我们

- OEM。快速打开市场，拥有自己的全品类平台。
- ODM。匹配您的创意，拓展您的产品线。
- 从品牌到功能的深度定制，满足您所有的需求。

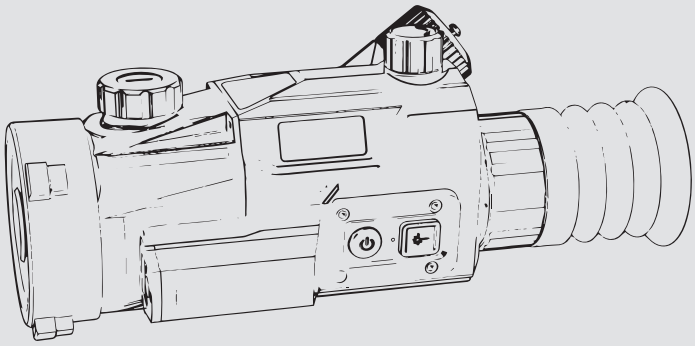

特征

NETD≤15mK

新型温度传感芯片，温度感应更快、更灵敏

5 个调色板

白热、黑热、红热、绿热、棕褐色，根据环境变化颜色，轻松观察。

8倍变焦

8X 电子变焦，放大和缩小，不失焦距。

探测器		
材质	非制冷钒氧化物	
分辨率	640×512	
像元尺寸	12μm	
NETD	≤15mK	
帧频	60Hz	
镜头		
焦距	35mm	50mm
视场角	12.6°×10.1°	8.8°×7°
变焦	1×/2×/4×/8×	
整机倍率	1.89×～15.12×	2.60×～20.80×
显示		
目镜显示	0.49 英寸 1920×1080（OLED）	
出瞳距	48mm	
场景模式	丛林模式、识别模式	
亮度	1–10	
对比度	1–10	
锐化	1–10	
伪彩模式	白热、黑热、红热、绿热、融合、铁红	
校准模式	快门校准、场景校准、自动校准	
分划板	7 种类型（分划板 1–4 支持FFP功能），含 5 种颜色	
画中画（PIP）	支持	
系统功能		
拍照	支持	
视频录制	支持	
指南针	支持	
热点追踪	支持	
录音	支持	
SAR	支持	
激光测距仪	可选配	
校零	支持	
弹道计算	支持	
CVBS 输出	复合视频输出（Type-C 接口）	
本地存储	64G	
固件升级	OTA 升级	
语言	支持 13 种语言	
屏幕亮度	支持	
自动关机	支持	
时间设置	支持	
恢复出厂设置	支持	
格式化	支持	
硬件		
激光测距仪	可选配	
WIFI	支持	
接口	USB Type-C 接口	
环境适应性		
工作温度	-20℃～60℃	
冲击	1000G/0.4ms	
防护等级	IP67	
电源		
电池类型	单节 18650 可更换电池	
工作时间	单电池＞6 小时	
外接电源	Type-C 接口	
物理特性		
尺寸（mm）	201×87×78	
重量（g）	627	
外壳	镁合金	



热成像套式


HOGHUNTER

轻如影，锐如钢

套式

为什么选择我们

- OEM。快速打开市场，拥有自己的全品类平台。
- ODM。匹配您的创意，拓展您的产品线。
- 从品牌到功能的深度定制，满足您所有的需求。

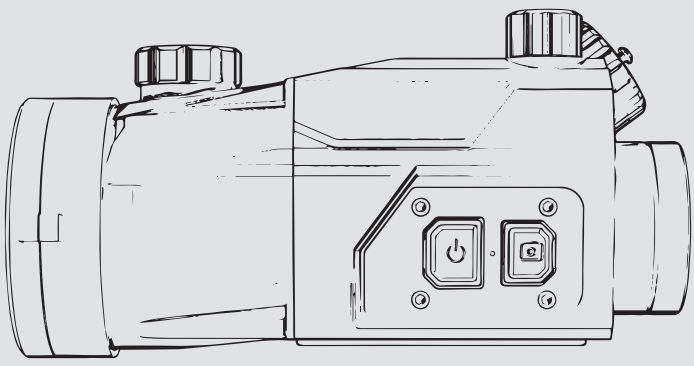

特征

NETD≤15mK

新型温度传感芯片，温度感应更快、更灵敏

5 个调色板

白热、黑热、红热、绿热、棕褐色，根据环境变化颜色，轻松观察。

5 个配置

5 种显示位置补偿方式

	HO-635	HO-635L	HO-650	HO-650L
探测器				
材质	非制冷氧化钒			
分辨率	Vox 640×512			
像元尺寸	12μm			
响应波段	8~14μm			
NETD	≤15mK			
帧频	60Hz			
镜头				
焦距	35mm		50mm	
视场角	12.5 °×10°		8.8°×7°	
显示				
出瞳距离	20mm			
亮度	1~10			
对比度	1~10			
锐度	1~10			
光标	1 种样式			
画中画	有			
场景模式	丛林模式、识别模式			
显示器类型	0.49英寸1920*1080（OLED）			
伪彩	白热、黑热、红热、绿热、沙漠黄			
系统功能				
拍照/录像	有			
热点追踪	有			
录音	有			
本地存储	64G			
激光测距	可选			
固件升级	OTA升级			
送显位置补偿	5种用户配置			
视频输出	复合视频输出（TYPE-C接口）			
硬件				
激光测距仪	可选			
WIFI	有			
接口	USB Type-C接口			
环境				
工作温度	-20℃ ~ 60℃			
防护等级	IP67			
电源				
电池类型	18650电池			
工作时长	单节电池>4小时			
外部供电	Type-C 接口			
物理特性				
尺寸	154×75×70mm	154×95×70mm	154×75×70mm	154×95×70mm
重量	450g	450g	492g	528g
外壳材质	镁合金			

Eyebre



Shark Series

Day and Night Digital Scope

The Shark is a high-performance digital night vision rifle scope . The Shark is the perfect digital night vision optic for the discerning hunter with excellent low-light sensor sensitivity. Featuring a 12+ hour run time and an IP67 rating, It can last all night in any hunting conditions.

CE RoHS FC



Product Parameters

Model	Shark
Lens	75mm
Ranging range	5-1000m
Size	240*95*50
Weight	710g
IR Illuminator	850nm/940nm optional
Video format	MP4
Storage type	support 4-128G（FAT32）
Battery working time	Up to 12hrs
Voltage	5V Type-C
Focus range	3m - ∞
Transfer method	WIFI
Video recording resolution	1080P
Magnification	5-40x

成为光电科技领域全球引领者

Eyebre

Mickey-IR 系列手持单目热像仪

Mickey系列手持红外望远镜是一款高性能红外热像设备，让您在任何光线条件下实现远距离观测物体或场景中的热能分布。



MK-H





主要功能

- 高清夜视
- 快速响应
- 分划设置
- 超长续航
- 防水防尘
- 照片视频
- 红外热跟踪
- 多种伪彩
- 无快门
- 便携机身
- 画中画
- WIFI连接




电力安全 | 自动驾驶 | 环境保护 | 智慧工业 | 医疗检测 | 森林防火 | 户外夜视 | 军事安全

Mickey-IR 系列手持单目热像仪

产品参数

型号	MKH - 384 MKS - 384	MKH - 640 MKS - 640
探测器	非制冷氧化钒 12 μm	
分辨率	384×288	640×512
镜头焦距	19mm 25mm 35mm	25mm 35mm
工作波段	8-14 μm	
显示	1024×768	
目镜视度	-5 ~ +5	
出瞳距离	20mm	
NETD	≤50mk	
帧频	50 Hz	
防水防尘	IP 67	
探测距离 (人)	1460 m	
探测距离 (动物)	2900 m	
电源	3400mAh锂离子电池	
续航时间	≥5h	
数字变倍	1X、2X、4X	
光学放大率	12 X	
接口	TYPE C 充电、数据、视频	
重量	≤560g	
尺寸	202m X 70mm X 58	
工作温度	-20°~ +50°	

作用距离

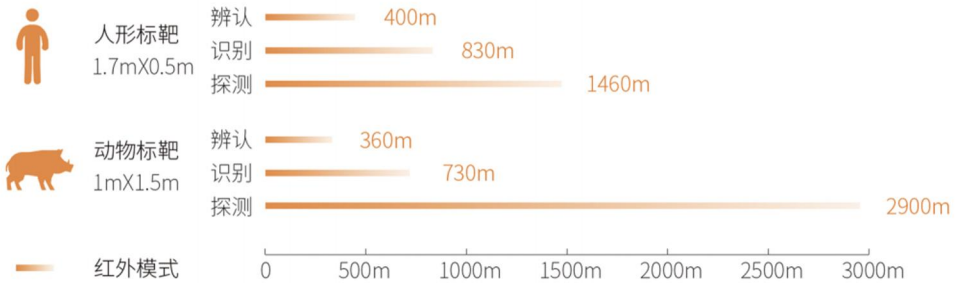

图像模式



快速目标捕获模式画中画模式



增强夜视模式



画中画模式



Eyebre

INFRARED

红外热像仪

Eyebre

INFRARED
Thermal Imager



PRODUCT SAFETY CERTIFICATION

Eyebre

Product Introduction


产品介绍

艾博睿热成像是一款优秀的热成像仪器。设计紧凑，体积小、重量轻，携带方便，由获得全球设计最高奖红点奖的设计团队，依照硬朗、强悍、肌肉、霸气、科技的设计理念倾力打造，2022年获得设计最高奖IF设计大奖。采用最先进的红外热成像夜视系统，图像质量优秀。满足高强度冲击振动的要求，可适应各种恶劣的环境。便捷设定多种瞄准光标，满足执法巡察、户外狩猎等场合的各类应用。

TR22 series is an excellent infrared thermal imager. Which is small size,compact, light weight and portable and it conforms to the ergonomic design .

- 轻、小、简洁
- 10小时超长待机
- 12μm像元，图像更清晰，观测更远
- 用户友好界面
- 画中画。

赠送

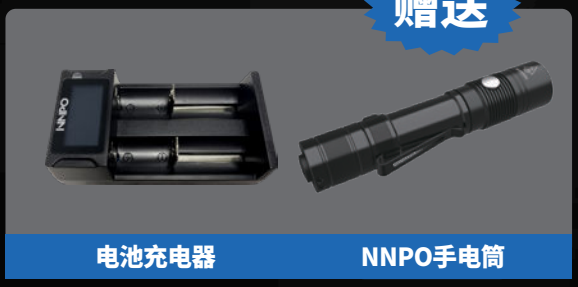

电池充电器　　NNPO手电筒



Eyebre

Technical Parameters

产品参数

TR22系列	TR22-325	TR22-335	TR22-350	TR22-625	TR22-635	TR22-650
探测器	非制冷氧化钒384*288			非制冷氧化钒640*512		
像元尺寸	12μm					
帧频	50Hz;					
目镜显示	1024*768 OLED					
放大模式	2×,4×,8×					
焦距	25mm	35mm	50mm	25mm	35mm	50mm
视场角	10.5°×7.9°	7.5°×5.7°	5.3°×4°	17.5°×14°	12.5°×10°	8.8°×7°
出瞳距离	48mm					
屈光度调校	±5					
补偿方式	快门补偿、场景补偿、自动补偿					
分划线	8种样式,5种颜色;					
极性	白热、黑热、红热、融合、铁红					
画中画	有					
视频输出	复合视频输出(TYPE-C接口)					
电池	单节18650					
工作时长	单节电池>8小时					
外部供电	TYPE-C接口					
外壳材质	航空硬质铝合金					
尺寸(mm)	194mm*77.6mm *58mm	199.6mm*77.6mm *58mm	209.6mm*77.6mm *49mm	194mm*77.6mm *58mm	199.6mm*77.6mm *58mm	209.6mm*77.6mm *49mm
重量(g)	515g	520g	545g	515g	520g	545g
防护等级	IP67					
工作温度	-30°C~60°C					

TR20 series is an excellent infrared thermal imager


Eyebre

Product Features 产品特点



可选十字瞄准线类型

- 优秀的成像性能,以12μm红外探测器可以探测更远距离、图像更清晰。
- 50赫兹高帧率,确保观察者在使用过程中捕捉物体的画面流畅,生动形象!。
- 1024 * 768分辨率AMOLED显示屏。

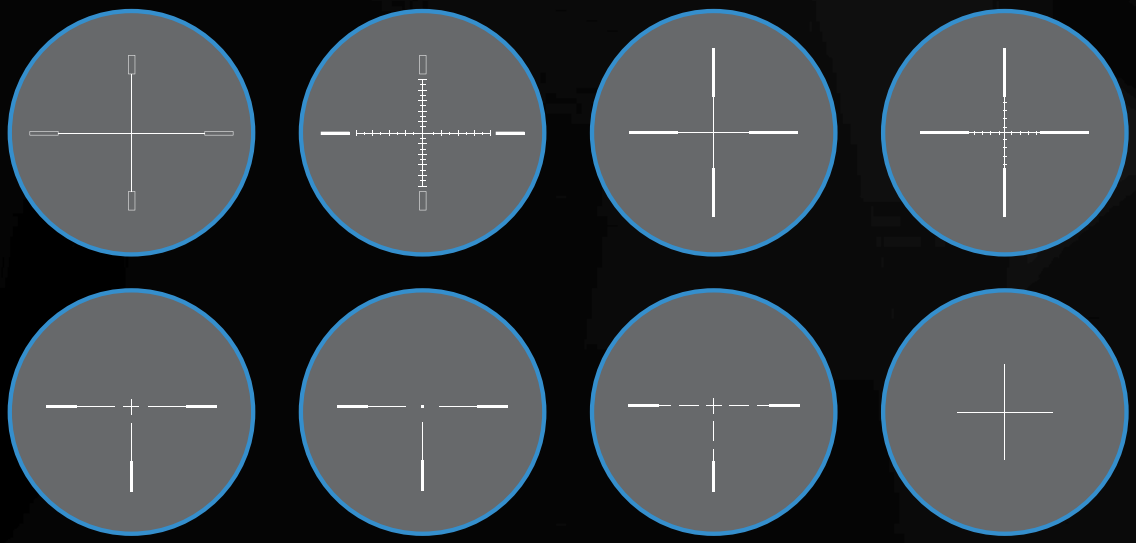

十字瞄准线颜色模式

黑色(Black) 白色(White) 红色(Red) 黄色(Yellow) 绿色(Green)

Eyebre

两种场景模式

- 两个场景之间的快速切换选择模式:丛林,识别
  将根据选中的场景模式调整图像,适应你在不同温度的环境。

The scope features a quick switch function for choosing between two scene modes: Jungles and recognition. The image will be adjusted according to the selected scene mode, allowing you toadapt to different environments.

校准模式

快门校准 **Shutter Calibration**

自动校准 **Automatic Calibration**

现场校准 **Scene Calibration**

超长待机

- 一节18650锂电池可以达到10小时的待机时间
  不用担心没电而频繁更换电池,产生焦虑



内置测距仪

- 可以检测到800米的目标

高质量的图像


- 高度敏感的热图像传感器
  ①12μm,≤35MK灵敏度热传感器,可以感知物体表面0.03度温差,即使温差对比不是特别大的情况下也能提供很好的热源突出对比。
  ②50 Hz的帧速率传感器确保动态捕捉能力强,无图传延迟,确保图像清晰且生动!

- 1024 * 768分辨率AMOLED显示屏,提供清晰和非常细节的图像。


探测范围(米)

- 使用最先进的红外热成像夜视系统的图像质量。


  Using the most advanced infrared thermal imaging night vision system with excellent image quality.

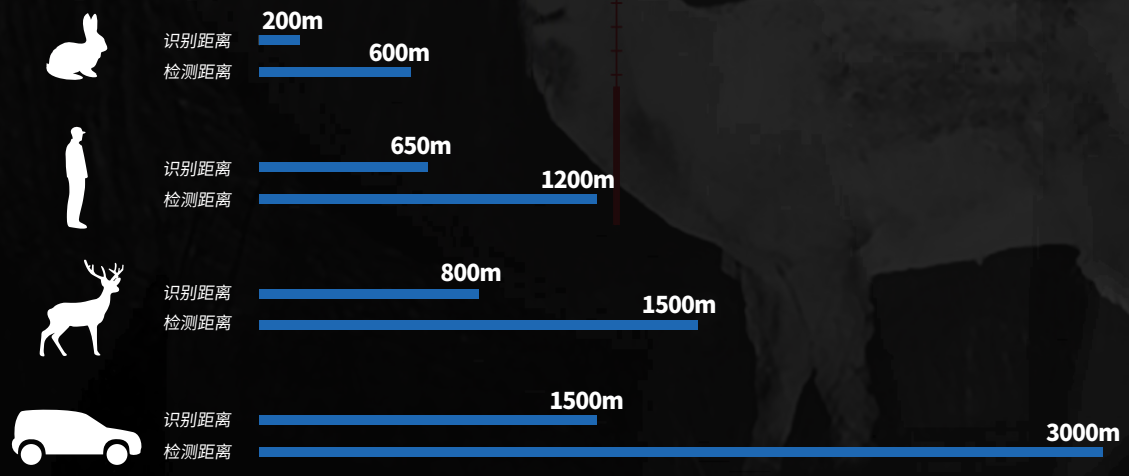

友好用户界面

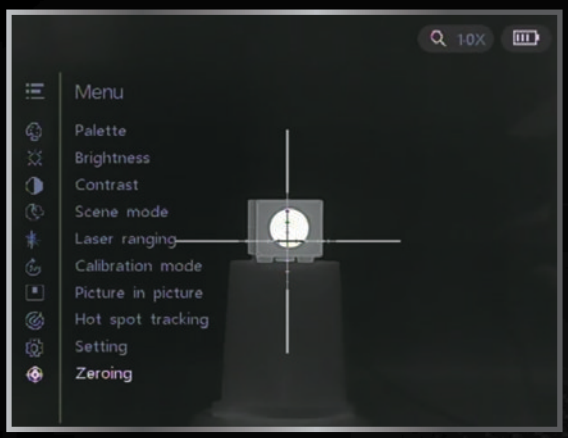

画中画

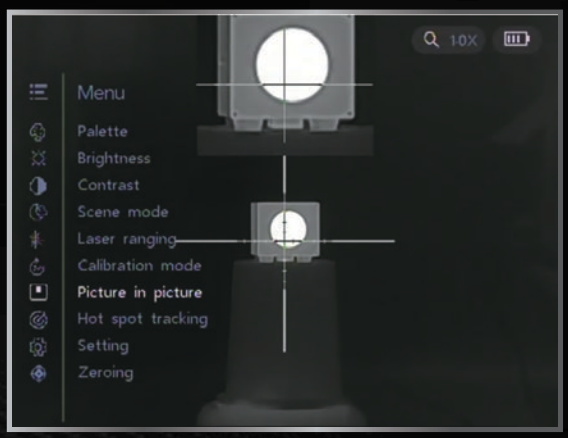

Eyebre





坚固耐用

- IP67防水防尘和高强度冲击
  不用担心恶劣的天气



应用领域



01 Search Rescue
搜索救援



02 Law Enforment
夜间巡逻




03 Hunting Observation
户外运动



04 Personal Security
个人安保

Eyebre

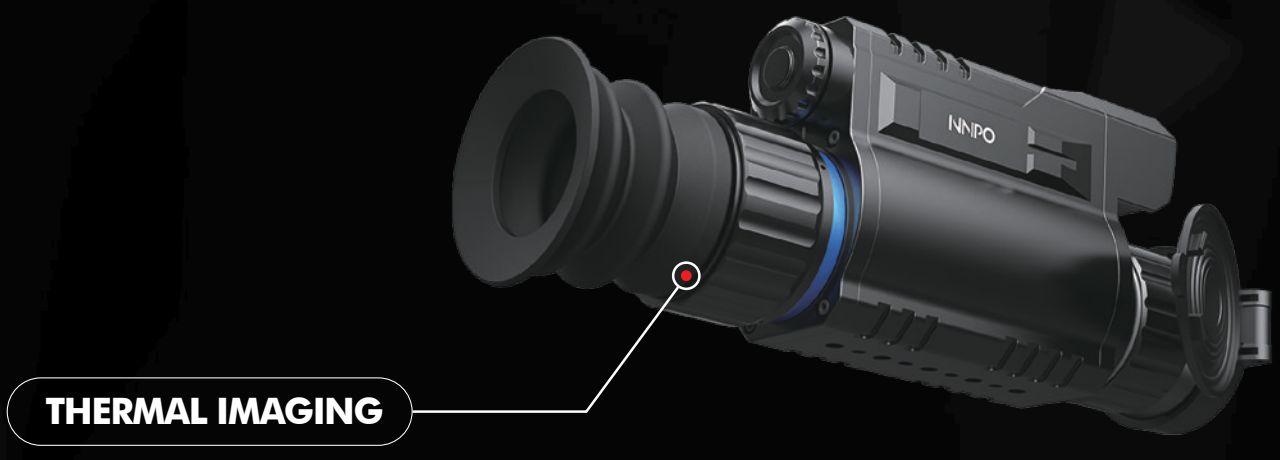

义乌英锐光学仪器有限公司

Yiwu Inre Optical Instrument Co., Ltd.

Eyebre®

Infrared thermal imaging

FOCUSED ON INFRARED THERMAL IMAGING

NIGHT-VISION SYSTEM TECHNOLOGY





Shenzhen NNPO is an innovative company ,which is specialized in optics , thermal image night visions and related outdoor products with development ,production ,sales & service all in one .Our company' s headquarter is in Beijing, but our production factory is located in manufacturing frontier zone in Songgang of Shenzhen ,We have our own strong R&D engineering team ,we also have several doctors who are rich experience in optics and thermal image fields more than 20 years.

We have our own hardware designing, machining, software developing abilities are our key competiveness, we are pay attention to every details of products for reviewing ,checking & testing to get a perfect product to our customer .As we are the original manufactory in China ,so we can provide better clients' buying experience, the good quality product & best after sold service.

We are looking forward to establish long term relationship with you to achieve win-win.

Eyebre®



TR22 Series

Thermal Imaging Scope

TR22 series thermal imaging scope is portable and easy for operation. It is excellent image quality make it as a great companion for night observation,even in hard condition of rainy or foggy,it still works with outstanding performance.

RESOLUTION

384 x 288 / 640 x 512 FOR OPTIONAL



High Imaging Quality

The advanced image processing of thermal sensor,which has high performance electronics and optimized infrared optics create excellent image clarity and provide better detection and classification,in day and night.

HD

HD Micro Display

1024 x 768 high resolution internal display offers sharp image and vivid colors.

12μm

Thermal Imaging Sensor



High performance 12um pixel Pitch detectors are embedded in the compact body.



Product Parameters



Model	TR22-325LRF	TR22-335LRF	TR22-350LRF	TR22-625LRF	TR22-635LRF	TR22-650LRF
Lens	25mm	35mm	50mm	25mm	35mm	50mm
Thermal sensor	Uncooled Vox					
Resolution	384x288	384x288	384x288	640x512	640x512	640x512
Pixel size	12μm					
NETD,mk	≤35					
Optical magnification	2.39	3.34	4.78	1.4	1.96	2.8
Display Resolution	1024*768 OLED					
Digital zoom	2×, 4×, 8×					
Field of View (HxV)	10.5°×7.9°	7.5°×5.7°	5.3°×4°	17.5°×14°	12.5°×10°	8.8°×7°
Eyerelief	48mm					
Dioptre adjustment, dpt	±5					
Battery Type	Li-ion 18650 Rechargeable Battery Replaceable					
Battery Life (Operating)	>8hours					
Housing Materials	Aluminum Alloy					
Size (L × W × H),mm	194x77.6x58	199.6x77.6x58	209.6x77.6x49	194x77.6x58	199.6x77.6x58	209.6x77.6x49
Weight (Without battery), g	515	520	545	515	520	545

Detection Rang e(m)

	TR22-325LRF/TR22-625LRF	TR22-335LRF/TR22-635LRF	TR22-350LRF/TR22-650LRF
Rabbit(0.2x0.3m)	450m	700m	850m
Human(1.8x0.5m)	1000m	1500m	1800m
Dear(1.5x0.9m)	1300m	2000m	2500m
Car(1.5x0.9m)	2500m	3000m	4000m

Eyebre®



Tube TC23 Series

Thermal Imaging Scope

NNPO TC23 has been developed a ergonomic design to put all of the major controls within easy reach. It combines the traditional style and feel of a day scope and the advanced technology of thermal .uses a conventional 30mm tube Rifle Scope classis allowing you to attach it to your Rifle using standard scope rings. This makes it easy to mount and achie-vethe perfect eye relief while also maintaining the traditional appearance of your Rifle. offers solid performance and extensive features.

The design of this scope accommdoates long-term operating habits of hunters.and its 10 sets of zero calibration configuration make it convenient to switch between diferent instruments



Product Parameters

Model	TC23-335	TC23-335-LRF	TC23-345	TC-345-LRF	TC23-635	TC23-635-LRF	TC23-645	TC23-645-LRF
Lens	35mm	35mm	45mm	45mm	35mm	35mm	45mm	45mm
Resolution	384x288	384x288	384X288	384x288	640X512	640X512	640X512	640X512
Pixel	12μm							
NETD,mk	⩾35							
Optical magnification	3.34		4.3		1.96		2.52	
Display Resolution	1024*768 OLED							
Digital zoom	2×,4×, 8×							
Field of View (HxV)	7.5°×5.7°	7.5°×5.7°	5.9°×4.4°	5.9°×4.4°	12.5°×10°	12.5°×10°	9.8°×7.8°	9.8°×7.8°
Eyerelief	48mm							
Dioptre adjustment, dpt	±5							
Calibration	Shutter Calibration, scene Calibration, automatic Calibration							
Reticle Type	8-Pattern optional, or "NO reticle"							
Reticle Color	5 colors: White, Black, Red , yellow,green							
Image Palettes	White Hot / Black Hot/ Red hot /Iron red/Fusion							
PIP	Yes							
Battery Type	Li-ion 18650 Rechargeable Battery Replaceable							
Battery Life (Operating)	>8hours							
External power supply	TYPE-C interface							
Housing Materials	Aluminum Alloy							
Detection distance rabbit(0.2×0.3)m	700	700	800	800	700	700	800	800
Detection distance Human(1.8×0.5)m	1500	1500	1700	1700	1500	1500	1700	1700
Detection distance deer(1.5×0.9)m	2000	2000	2300	2300	2000	2000	2300	2300
Detection distance Vehicle(2.3×2.3)m	3000	3000	3700	3700	3000	3000	3700	3700
Recognition distance rabbit(0.2×0.3)m	180	180	200	200	180	180	200	200
Recognition distance Human(1.8×0.5)m	750	750	850	850	750	750	850	850
Recognition distance deer(1.5×0.9)m	1000	1000	1100	1100	1000	1000	1100	1100
Recognition distance Vehicle(2.3×2.3)m	1500	1500	1700	1700	1500	1500	1700	1700
Size (L × W × H),mm	396.4x813x70	396.4x813x70	402x813x70	402x813x70	396.4x813x70	396.4x813x70	402x813x70	402x813x70
Weight (Without battery),g	685	730	695	740	685	730	695	740
Protection rate	IP67							
Operating Temperature	-30℃ ~ +60 ℃							

Eyebre®



UR23 Series

Thermal Imaging Scope

UR23 series thermal imaging scope is portable and easy for operation. It is excellent imagequality make it as a great companion for night observation,even in hard condition of rainyor foggy,it still works with outstanding performance.

CE RoHS FC




High Imaging Quality

Unique image enhancement technology, under the bad environment, such as fog, rain andsnow,Image detail is richer, the contrast ratio is higher, easier to identify the target



12μm The Most Advanced

Crisper images and longer detection rangeUse the most advanced infrared thermal imaging night vision system withexcellent image quality

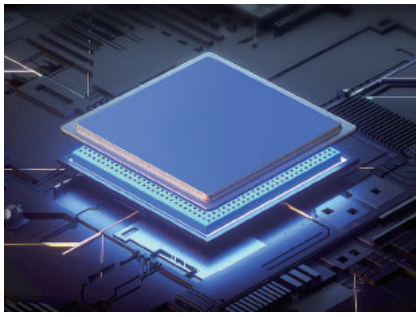

IP67 Waterproof



High Shock Resitance



Product Parameters



Model	Lens	lens	lens	lens	lens	lens
UR23	UR23-325	UR23-335	UR23-350	UR23-625	UR23-635	UR23-650
Lens	25mm	35mm	50mm	25mm	35mm	50mm
Resolution,Pixel	384x288	384x288	384X288	640X512	640X512	640X512
Magnification	2.39 —19.11X	3.34 —26.75X	4.78 —38.22X	1.4 —11.19X	1.96 —15.67X	2.8 —22.38X
NETD	⩽35mk					
Resolution,Pixel	12μm					
Frame rate	50 Hz					
Display Resolution	1024*768 OLED					
Digital zoom	2×,4×,8×					
Field of View (HxV)	10.5°×7.9°	7.5°×5.7°	5.3°×4°	17.5°×14°	12.5°×10°	8.8°×7°
Eyerelief	48mm					
Dioptre adjustment, dpt	±5					
Calibration	Shutter Calibration, scene Calibration, automatic Calibration					
Reticle Type	8-Pattern optional, or "NO reticle"					
Reticle Color	5 colors: White, Black, Red, Green, Yellow					
Image Palettes	White Hot / Black Hot/ Red hot /Iron red/Fusion					
PIP	Yes					
Battery Type	Li-ion 18650 Rechargeable Battery Replaceable					
Battery Life (Operating)	>10hours					
External power supply	TYPE-C interface					
Housing Materials	Aluminum Alloy					
Size (L × W × H)mm	210*65*85	215*65*85	220*65*85	210*65*85	215*65*85	220*65*85
Weight (Without battery)g	525g	530g	540g	525g	530g	540g
Protection rate	IP67					
Operating Temperature	-30℃ ... +60 ℃					

Eyebre®

RD23 Series

Thermal imaging monocular

RD23 series Thermal Monocular is embedded with an infrared detector, being cost-effective while providing high performance. It has a 12μm thermal sensor , which is able to discover small targets. Meanwhile, it also has a high contrast HD OLED display to provide ultra-clear thermal images. it brings you great superiority in both technology and experience of thermal imaging. Better sensor, clearer monocular!



FC RoHS CE




Image Enhancement Technology

Unique image enhancement technology, under the bad environment, such as fog, rain and snow,Image detail is richer, the contrast ratio is higher, easier to identify the target



12μm The Most Advanced

Crisper images and longer detection range.
Use the most advanced infrared thermal imaging night vision system with excellent image quality.

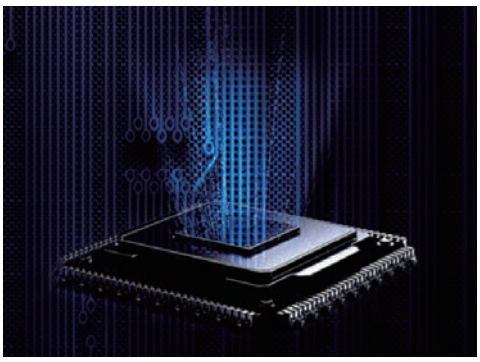

Calibration Mode

Auto Calibration | Shutter Calibration | Scene Calibration



Product Parameters

Model	RD23-319	RD23-325	RD23-335	RD23-619	RD23-625	RD23-635
Model(LRF)	RD23-319LRF	RD23 -325LRF	RD23-335LRF	RD23-619LRF	RD23-625LRF	RD23-635LRF
Lens	19mm	25mm	35mm	19mm	25mm	35mm
Thermal sensor	Uncooled Vox					
Resolution	384x288			640x512		
Pixel size	12μm					
NETD,mk	⩽35					
Display Resolution	1024*768 OLED					
Digital zoom	2×, 4×, 8×					
Field of View (HxV)	10.5°×7.9°		7.5°×5.7°		17.5°×14°	12.5°×10°
Battery Type	Li-ion 18650 Rechargeable Battery Replaceable					
Battery Life (Operating)	>8hours					
Housing Materials	plastic					
Size (L × W × H),mm	134x69x52	134x69x52	134x69x52	134x69x52	134x69x52	134x69x52	134x69x52	134x69x52
Weight (Without battery), g	325	370	340	380	325	370	340	380

Eyebre®




Shark Series

Day and Night Digital Scope

The Shark is a high-performance digital night vision rifle scope . The Shark is the perfect digital night vision optic for the discerning hunter with excellent low-light sensor sensitivity. Featuring a 12+ hour run time and an IP67 rating, It can last all night in any hunting conditions.

CE RoHS FC

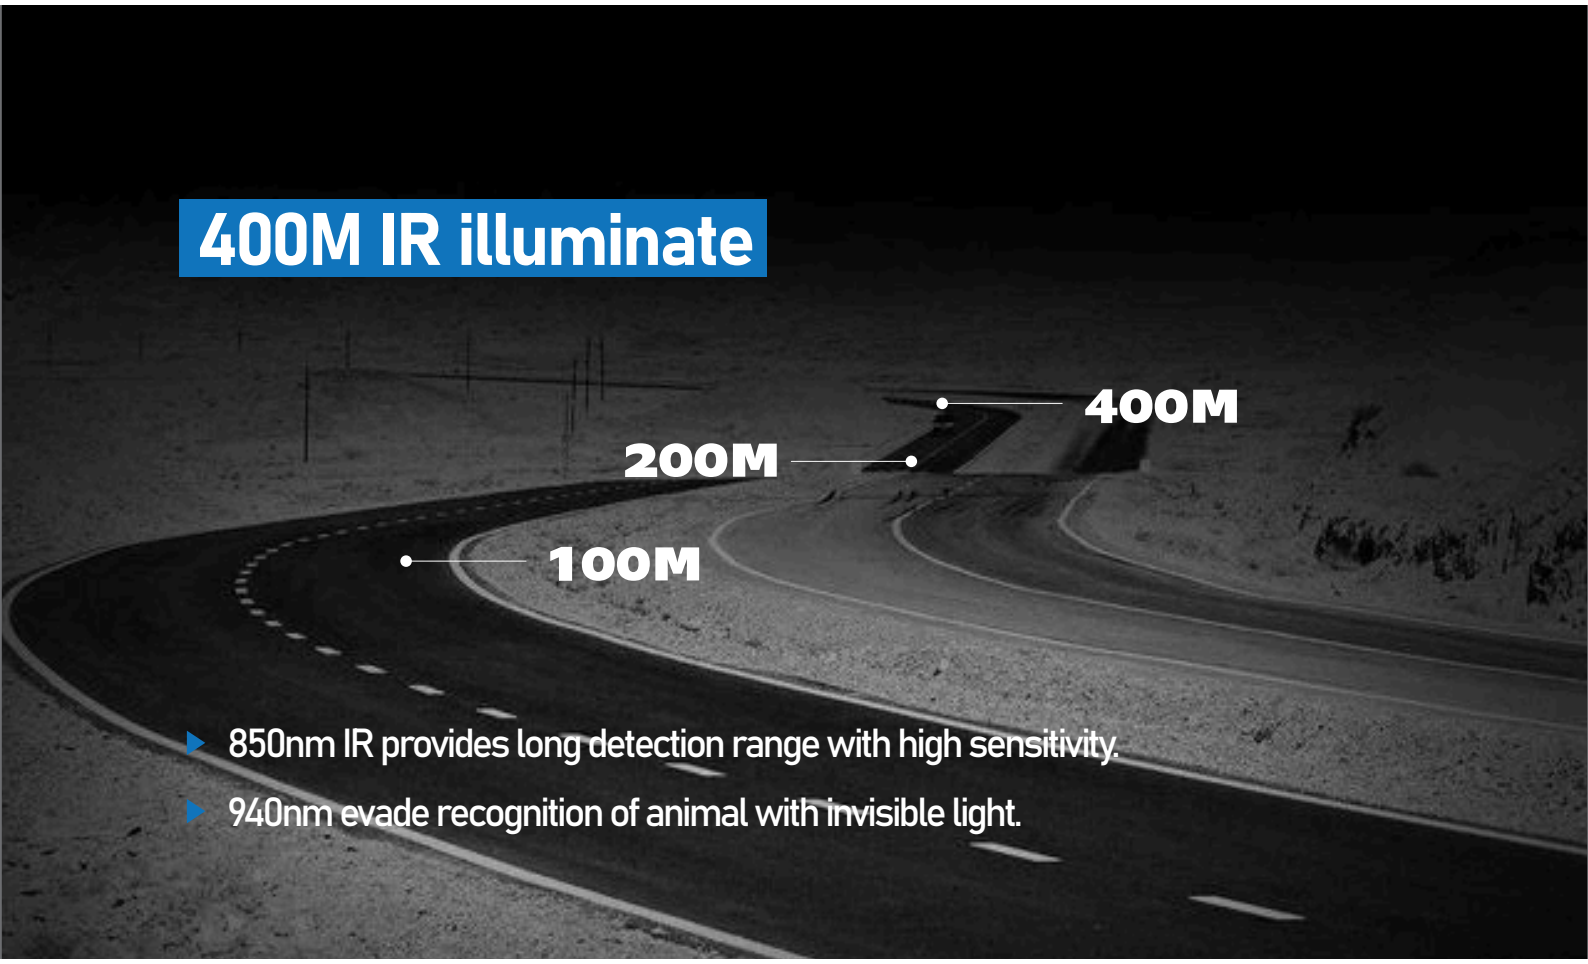

40x

5x

5-40x

Magnifying power

Magnification 5-40x
search and observe quickly switch

Video Resolution
1920 x 1080

Multi exposure
DOL wide dynamic function







Product Parameters

Model	Shark
Lens	75mm
Ranging range	5-1000m
Size	240*95*50
Weight	710g
IR Illuminator	850nm/940nm optional
Video format	MP4
Storage type	support 4-128G（FAT32）
Battery working time	Up to 12hrs
Voltage	5V Type-C
Focus range	3m - ∞
Transfer method	WIFI
Video recording resolution	1080P
Magnification	5-40x