



德國 **fischer** 扭矩控制型抗震拉脹錨栓 #570453-FAZ II 10/10 K R (M10x75mm)

- 地震載重規範符合：美國混凝土協會ACI 355.2、歐洲技術評估組織ETA EN1998-1地震帶抗震荷載C1(0.5mm)/C2(0.8mm)及開裂混凝土使用限制
- 符合行政院及雙北新建建築物外牆飾材管理規定



316系不鏽鋼 R (A4)

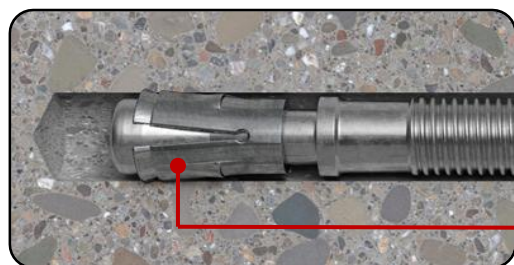

歐盟技術認證
ETA-23/0162



抗震荷載認證
C1 (0.5 mm)



抗震荷載認證
C2 (0.8 mm)








120分鐘防火時效



耐腐蝕不鏽鋼
1.4401




消防灑水認證



強度表【平均極限強度】

FAZ II R (316系不鏽鋼)			M10
有效埋深	h_{ef}	(mm)	40
非開裂混凝土 C30/37 (約4300 psi)			
拉力	$N_{Ru,m}$	Kgf (kN)	2120 (20.8)
剪力	$V_{Ru,m}$	kgf (kN)	1957 (19.2)
開裂混凝土 C30/37 (約4300 psi)			
拉力	$N_{Ru,m}$	kgf (kN)	1498 (14.7)
剪力	$V_{Ru,m}$	kgf (kN)	1957 (19.2)

• 鋼材失效 = 藍色斜體數字

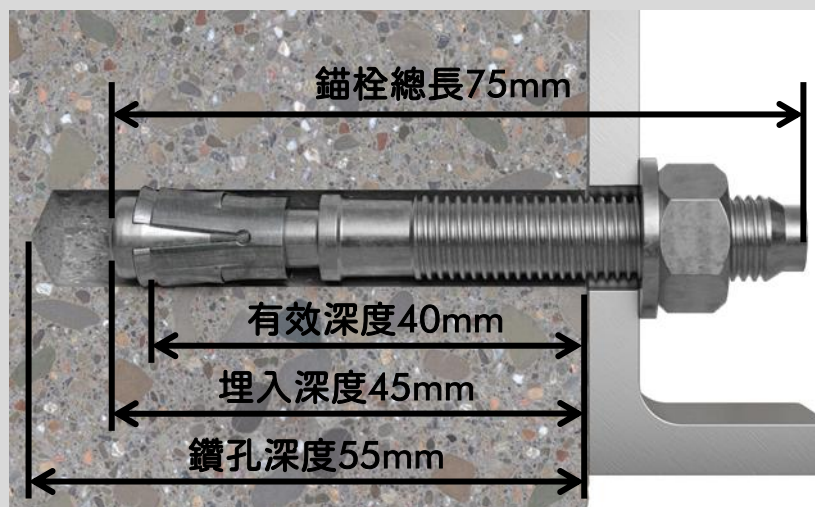

富華成股份有限公司
台北市大安路一段84巷7號一樓
P: (02)2773-5110 F: (02)2773-5339
E: swapnal@ms61.hinet.net
W: www.fischer.de/de-de