

MOBILITY COMMONS / 147228


REVIEW / v2.5

Jing-Zhang Mobility Commons

Enterprise-resident mobility | provisional spatial relationship

THREE INTERFACES, ONE ORDINARY TRIP

Review relationship only - not a surveyed route or approved alignment

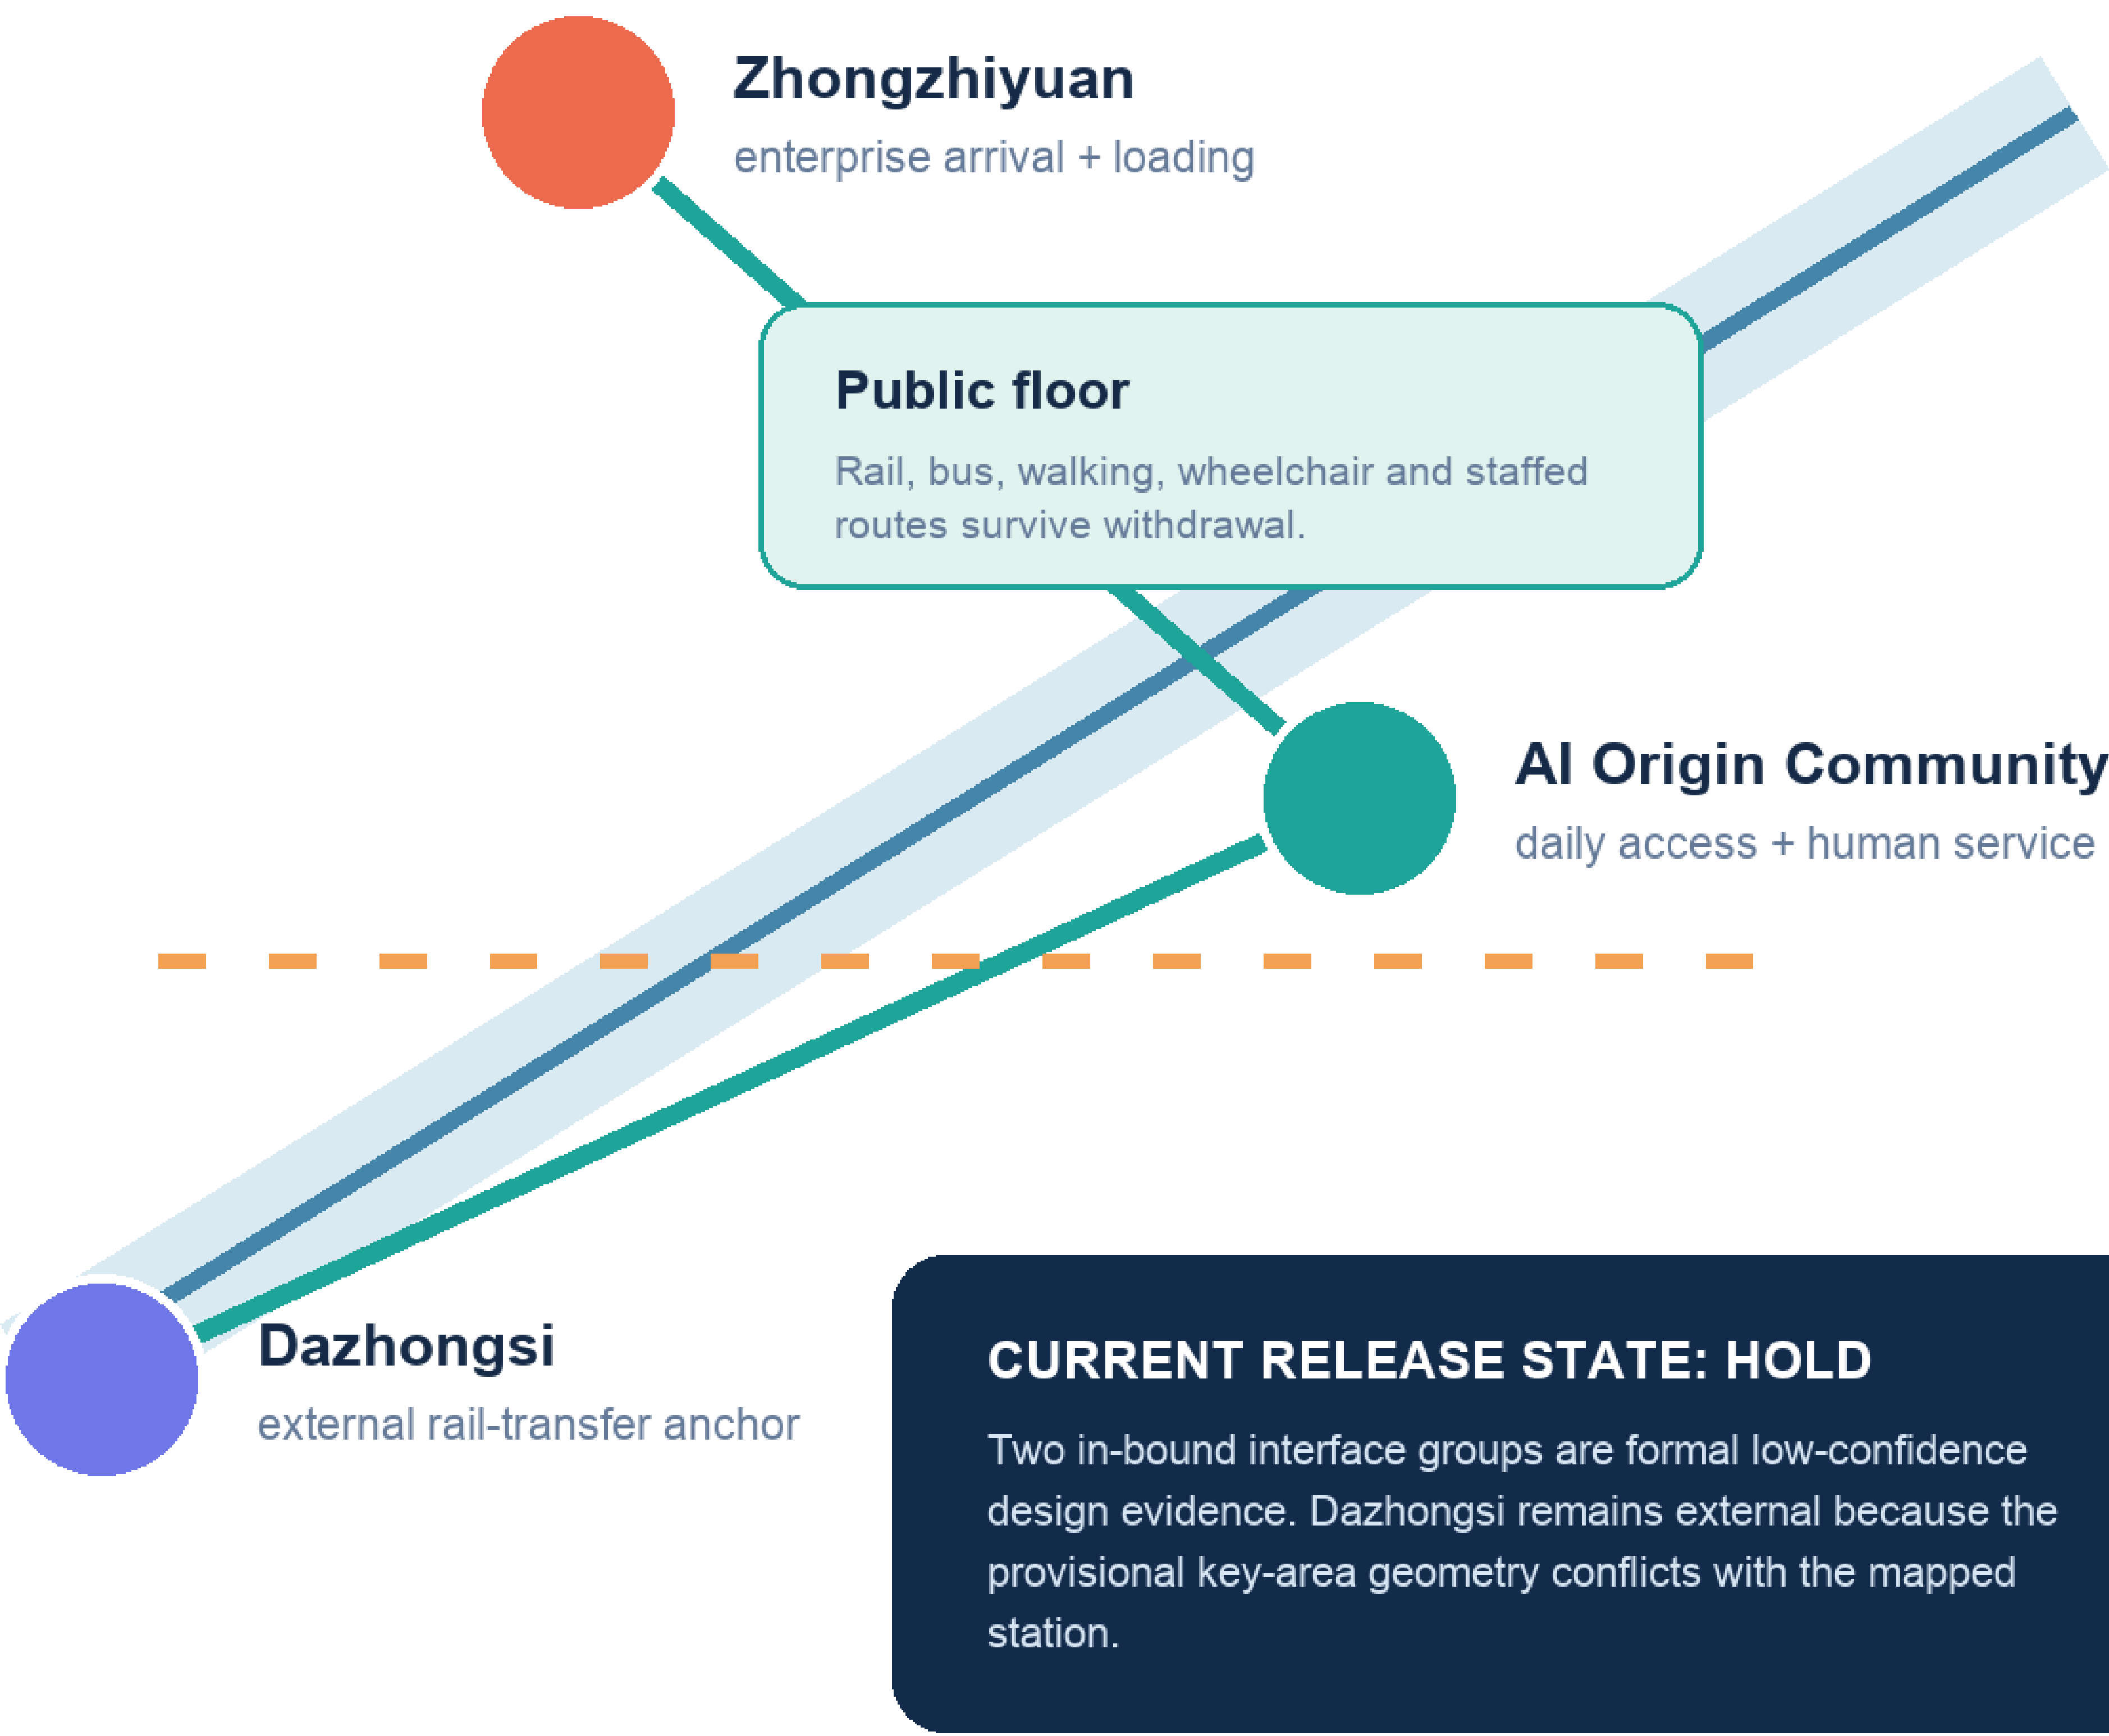

FIVE RELEASE GATES

- 01 **GEOMETRY**
official boundary + right-of-way
- 02 **DEMAND**
dated grouped counts + consent
- 03 **SAFETY**
access + fire continuity
- 04 **RESPONSIBILITY**
receiver + SLA + maintenance
- 05 **EQUITY**
human parity + rollback

AUTHORIZATION 0 | FIELD RECORDS 0

Three key areas and stop conditions

Three key areas / Three operating roles

REVIEW / v2.5

Each area has a minimum pilot, accountable owner and stop condition

01

Zhongzhiyuan

enterprise arrival

shuttle merge / loading

pilot / reversible

STOP

No permanent community ban

02

AI Origin

resident daily

human parity / accessible

pilot / reversible

STOP

No home trajectory

03

Dazhongsi | external anchor

geometry conflict / HOLD

Confirm key-area-to-station relation first

STOP

No fire/access blockage

服务水平 / SERVICE LEVELS

到达连续 route continuity

换乘可靠 transfer reliability

路缘有序 curb order

申诉闭环 complaint closure


LAND USE / GEOJSON READBACK

DESIGN PROPOSAL · NOT STATUTORY

Land-use structure | GeoJSON computation

One denominator, four design polygons, reproducible. Not statutory planning control.

Denominator: provisional working area 11,412,825.386 m²

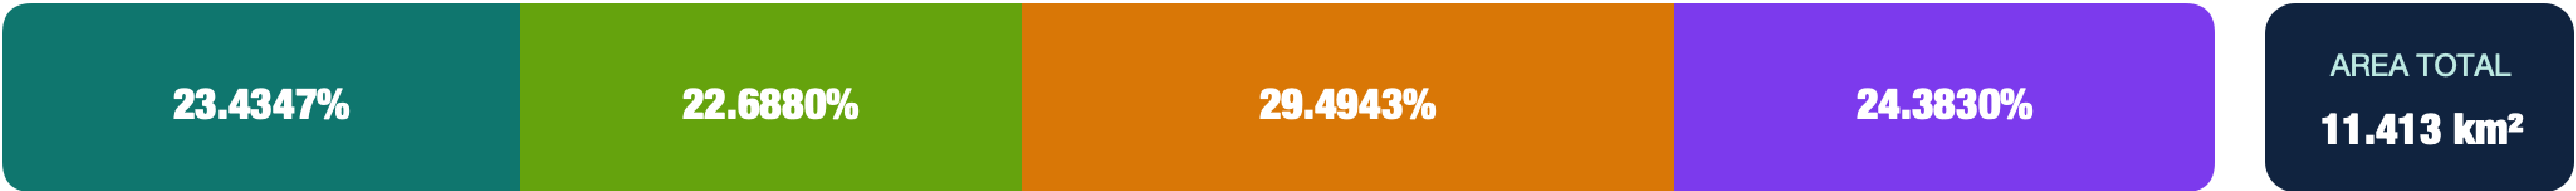

● LU-001 · AI R&D and innovation

23.4347%

2,674,562.492 m²

agent_generated_design · medium confidence

● LU-002 · Parks and open space

22.6880%

2,589,339.239 m²

agent_generated_design · medium confidence

● LU-003 · Industry, service and commerce

29.4943%

3,366,138.181 m²

agent_generated_design · medium confidence

● LU-004 · Community services

24.3830%

2,782,792.823 m²

agent_generated_design · medium confidence

Evidence chain geometry/land_use.geojson → geometry/site_boundary.geojson → metrics.json

Shares = declared polygon area / provisional area, displayed to 4 decimals. Recalculate the whole package after a boundary or layer revision.

MOBILITY COMMONS / 147228


REVIEW / v2.5

MULTIMODAL MOBILITY LOOP

Five ground modes + one conditional air experiment / people flow stays visible

01 MODE STACK / 方式叠层

Backbone → transfer → curb → people flow

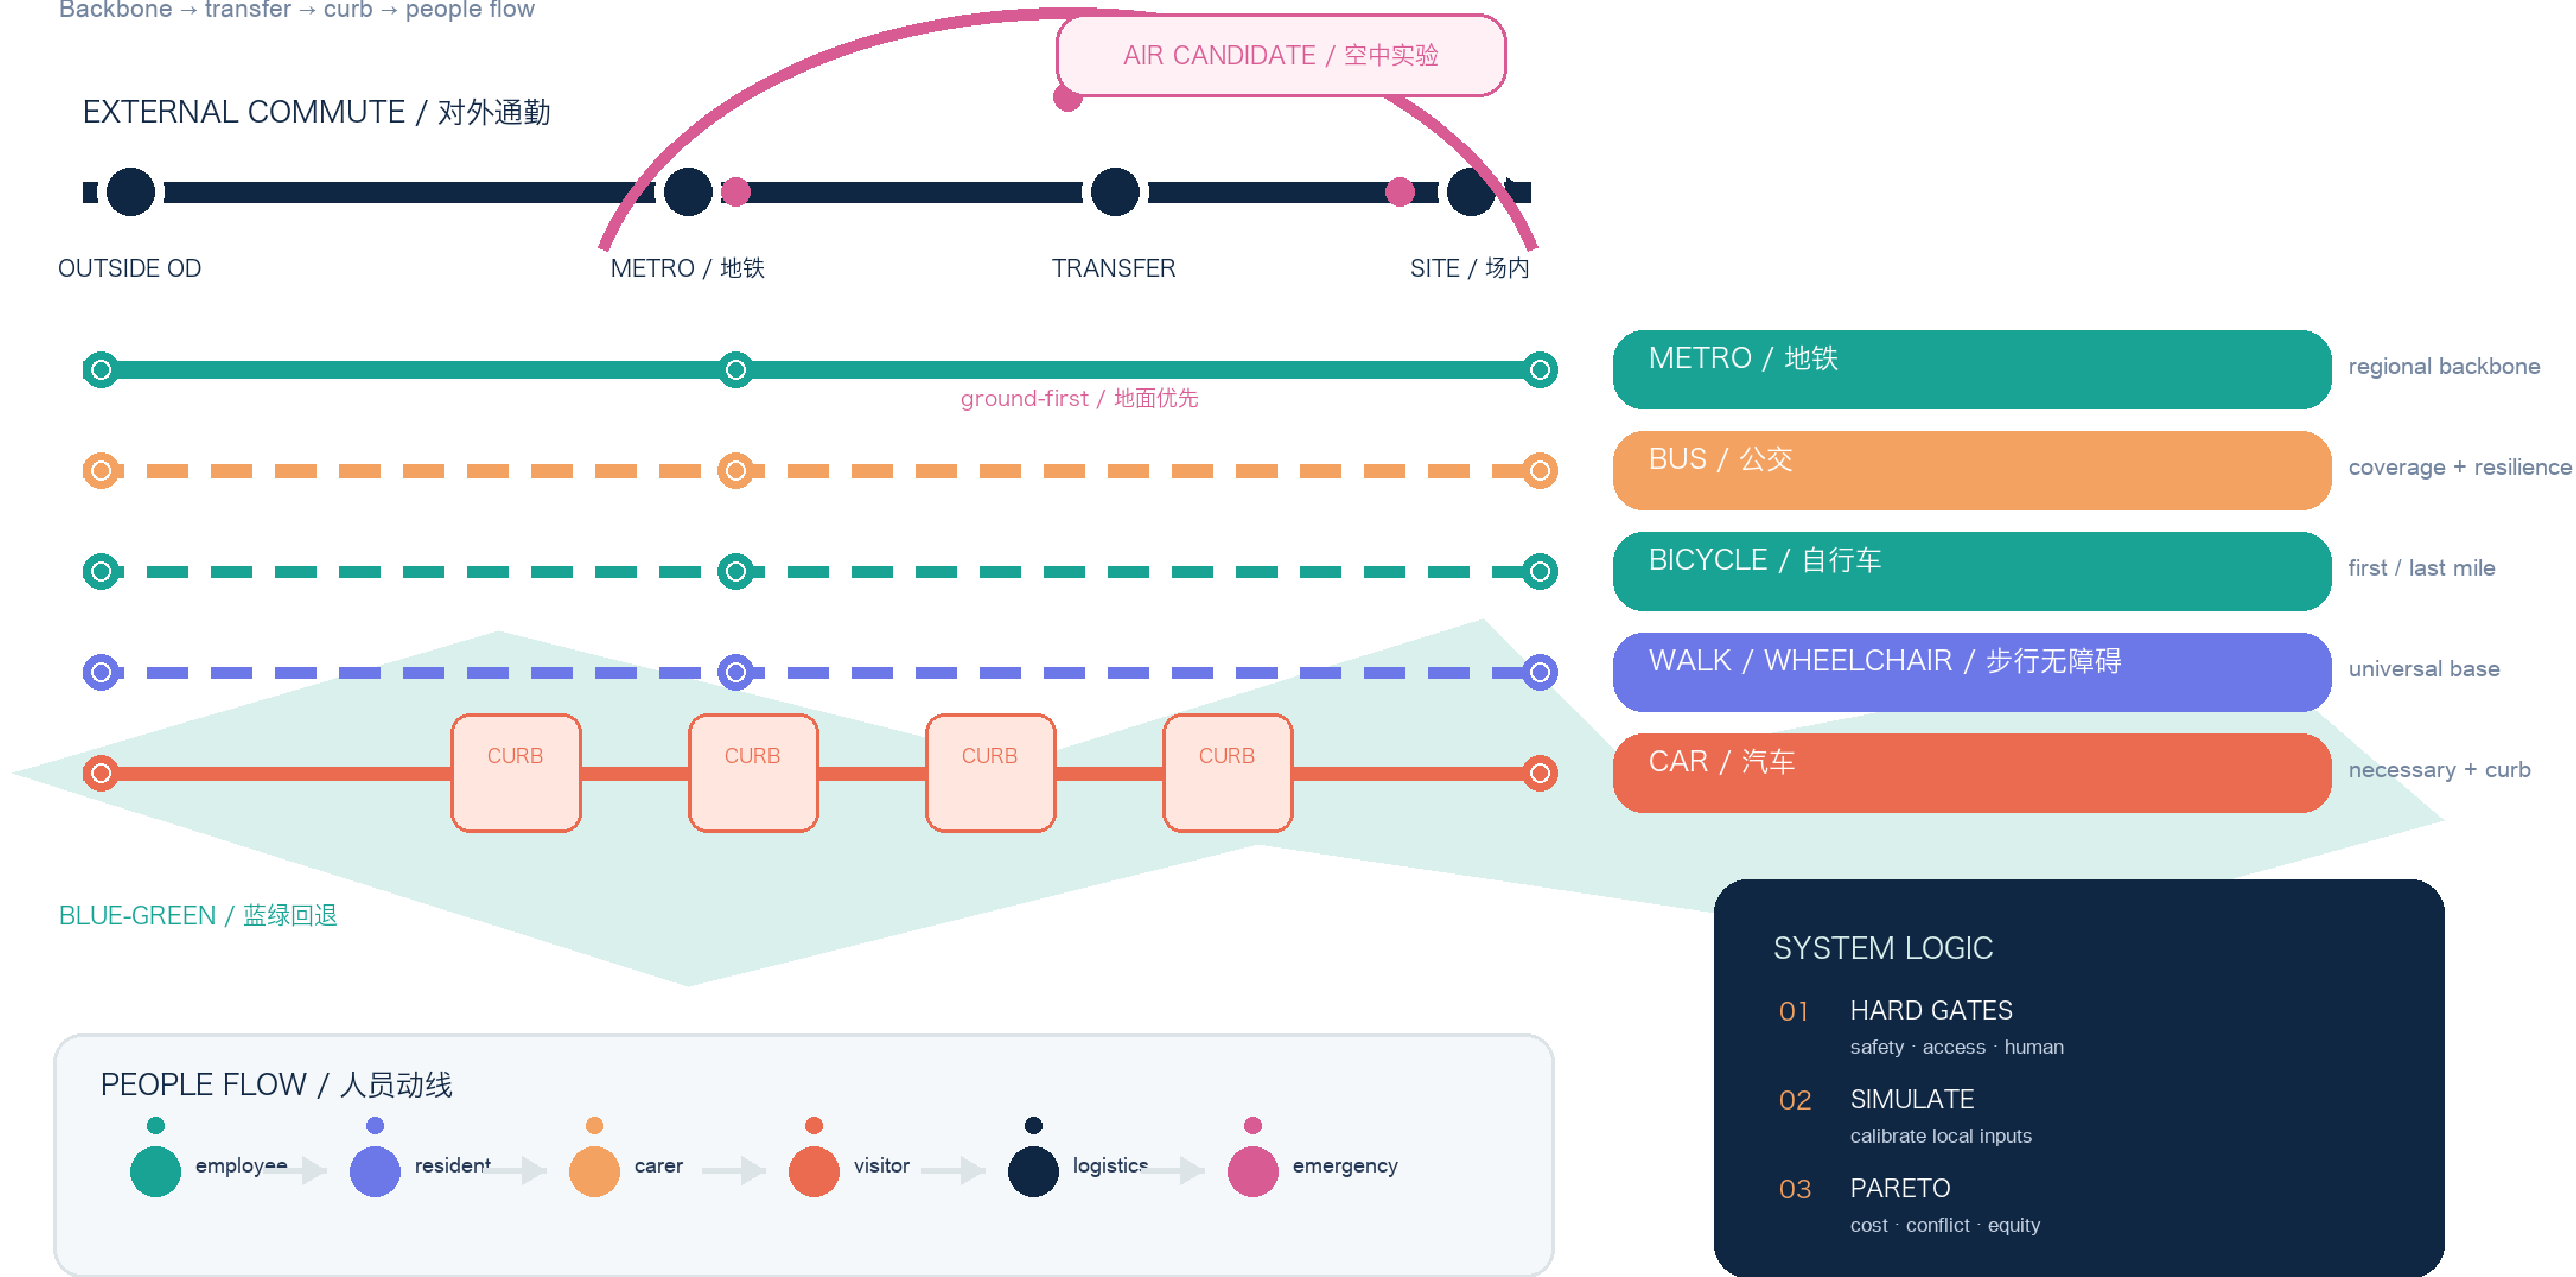

MOBILITY COMMONS / 147228

JING-ZHANG / v1.2

MULTIMODAL MODEL OBJECTS

Residents · vehicles · metro · curb · accessible flow · gated air candidate

JING-ZHANG / MODEL

01 MODEL OBJECTS

Agent-based demand meets capacity, queues and hard gates.

A DEMAND AGENTS

1,000-person normalized unit

	RESIDENT 380 design units	380
	EMPLOYEE 450 design units	450
	CARER / CHILD 60 design units	60
	VISITOR 50 design units	50
	LOGISTICS 40 design units	40
	NIGHT SHIFT 20 design units	20

OD + time

B NETWORK + FLEET

60-second steps · 120-minute horizon

METRO	180 / 10 min service object
BUS	60 / 12 min service object
BIKE	160 spaces service object
CAR + CURB	20 / 15 min service object
WALK + ACCESS	6 / min service object
AIR CANDIDATE	BLOCKED service object

metrics

C ANALYSIS OUTPUTS

screen first · compare second

	QUEUE car curb 86 / 0 / 47
	LOAD metro gate 1.05 / .88 / .96
	WAIT transfer 14.2 / 7.4 / 10.6 min
	TRANSFER reliability 72 / 88 / 84%
	CONFLICT people 12.4 / 5.8 / 6.8
	EQUITY worst gap 22 / 9 / 12 pt

grouped OD only

no personal trace

seed 147228

synthetic sandbox

S0 / S1 / S3 values are design sensitivities; replace with dated local calibration before any performance claim.

Source: visual/assets/movement-simulation.json

PROVISIONAL · MODEL SPEC · NOT A BASELINE

DESIGN-SCENARIO SIMULATION

Transparent sandbox · not a current baseline · gates before scores

P0 ▢ P1 / DESIGN BOARD


01 CANDIDATE EFFICIENCY

0–100 illustrative index · dashed line = 75 suggested threshold

1,000-person design unit

SCORE / DESIGN INDEX

0100

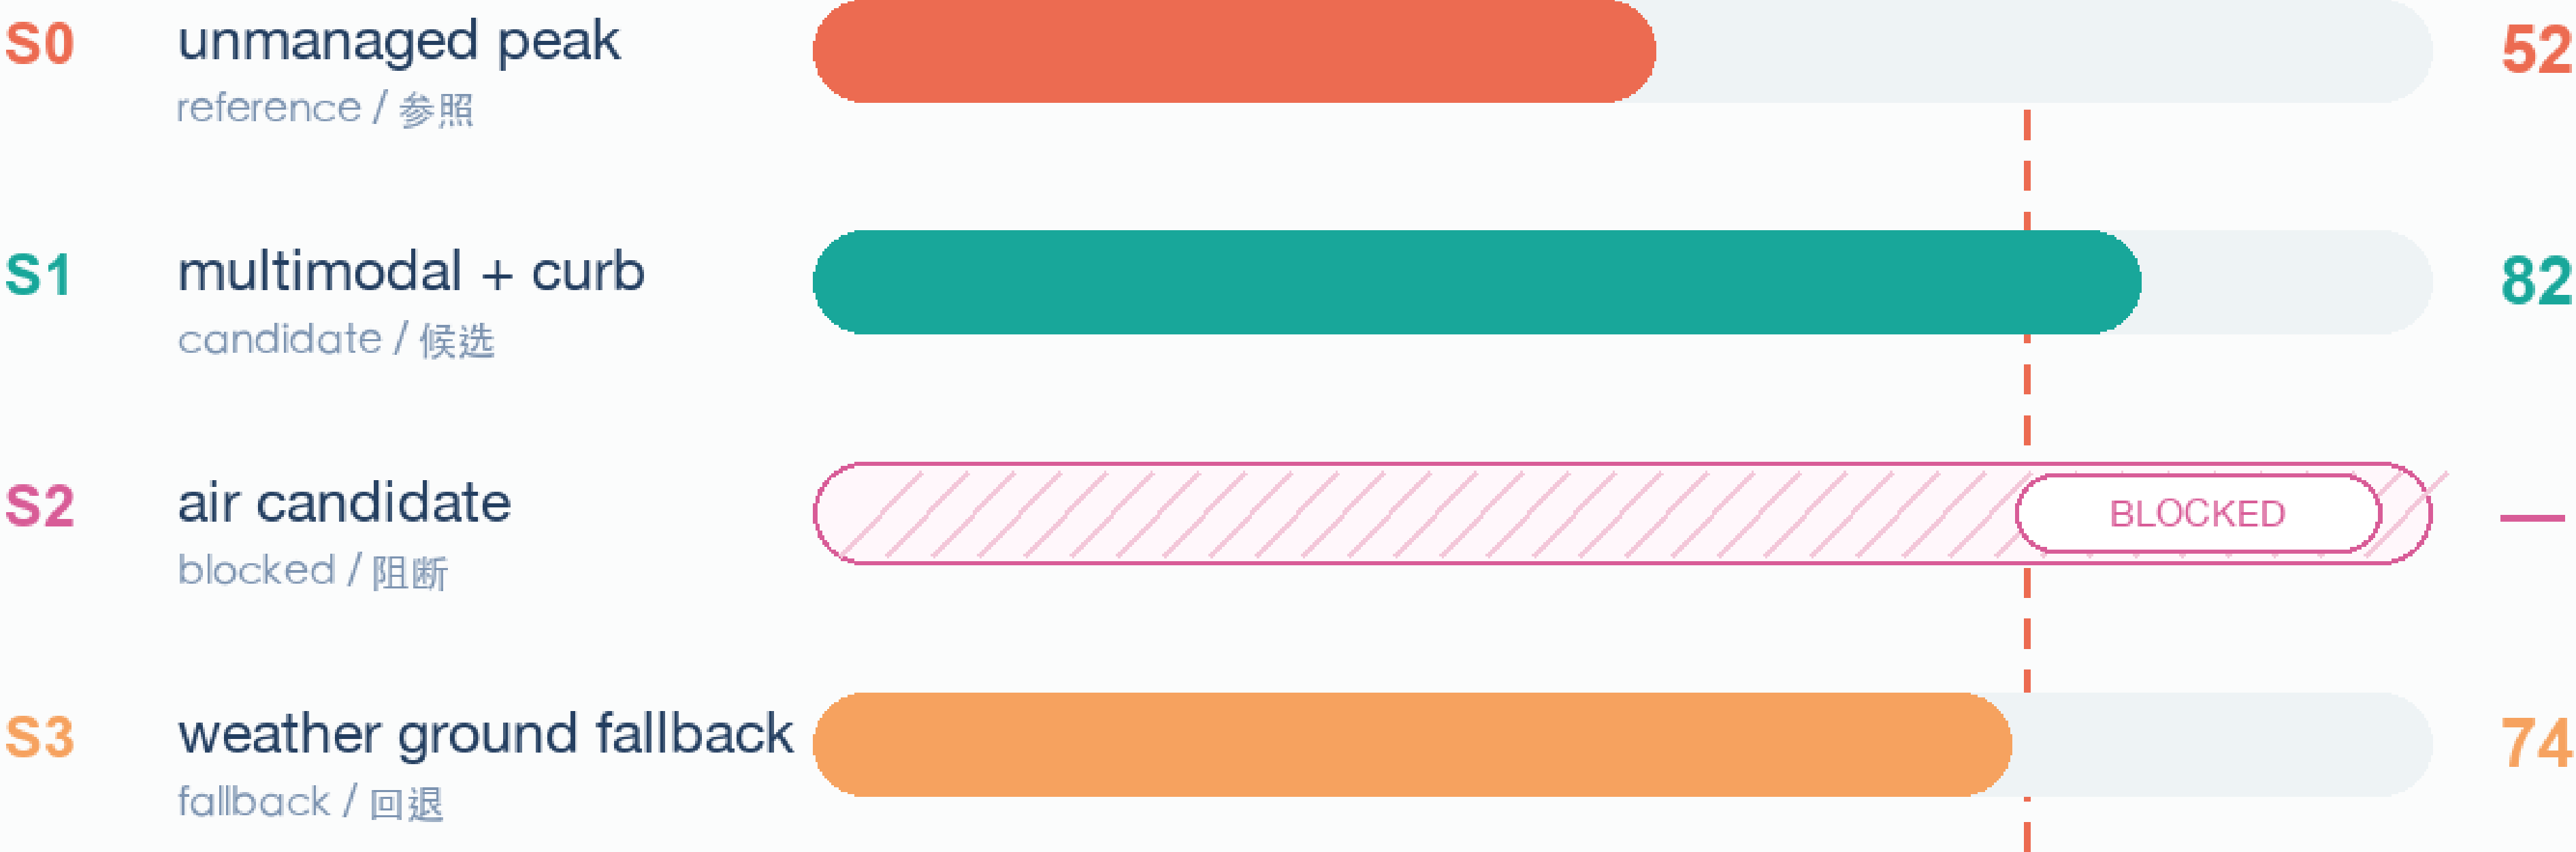

S1 +30 vs S0

candidate only after proposed hard-gate screen

TRADE-OFF READOUT

illustrative values / design inputs

	S0	S1	S2	S3
Generalized cost (lower) index	100	78	—	85
Transfer reliability (higher) %	72%	88%	—	84%
People conflicts (lower) /1000	12.4	5.8	—	6.8
External car inflow (lower) %	42%	25%	—	28%
Worst-group gap (lower) pt	22	9	—	12
Energy index (lower) index	100	77	—	84

02 DECISION & CALIBRATION

S1 · DESIGN CANDIDATE

S2 · BLOCKED UNTIL APPROVAL



Design values only. Replace each row with dated, grouped and locally calibrated evidence before claiming performance.

Source: visual/assets/movement-simulation.json

PROVISIONAL · NOT A BASELINE

Metrics, evidence states and planned coverage

MOBILITY COMMONS / 147228

EVIDENCE / v2.5


Mobility Evidence Board

Declared geometry | unknown local baseline | planned coverage | gated release



01 / EVIDENCE STATES

A readable state must precede every comparison or release decision.

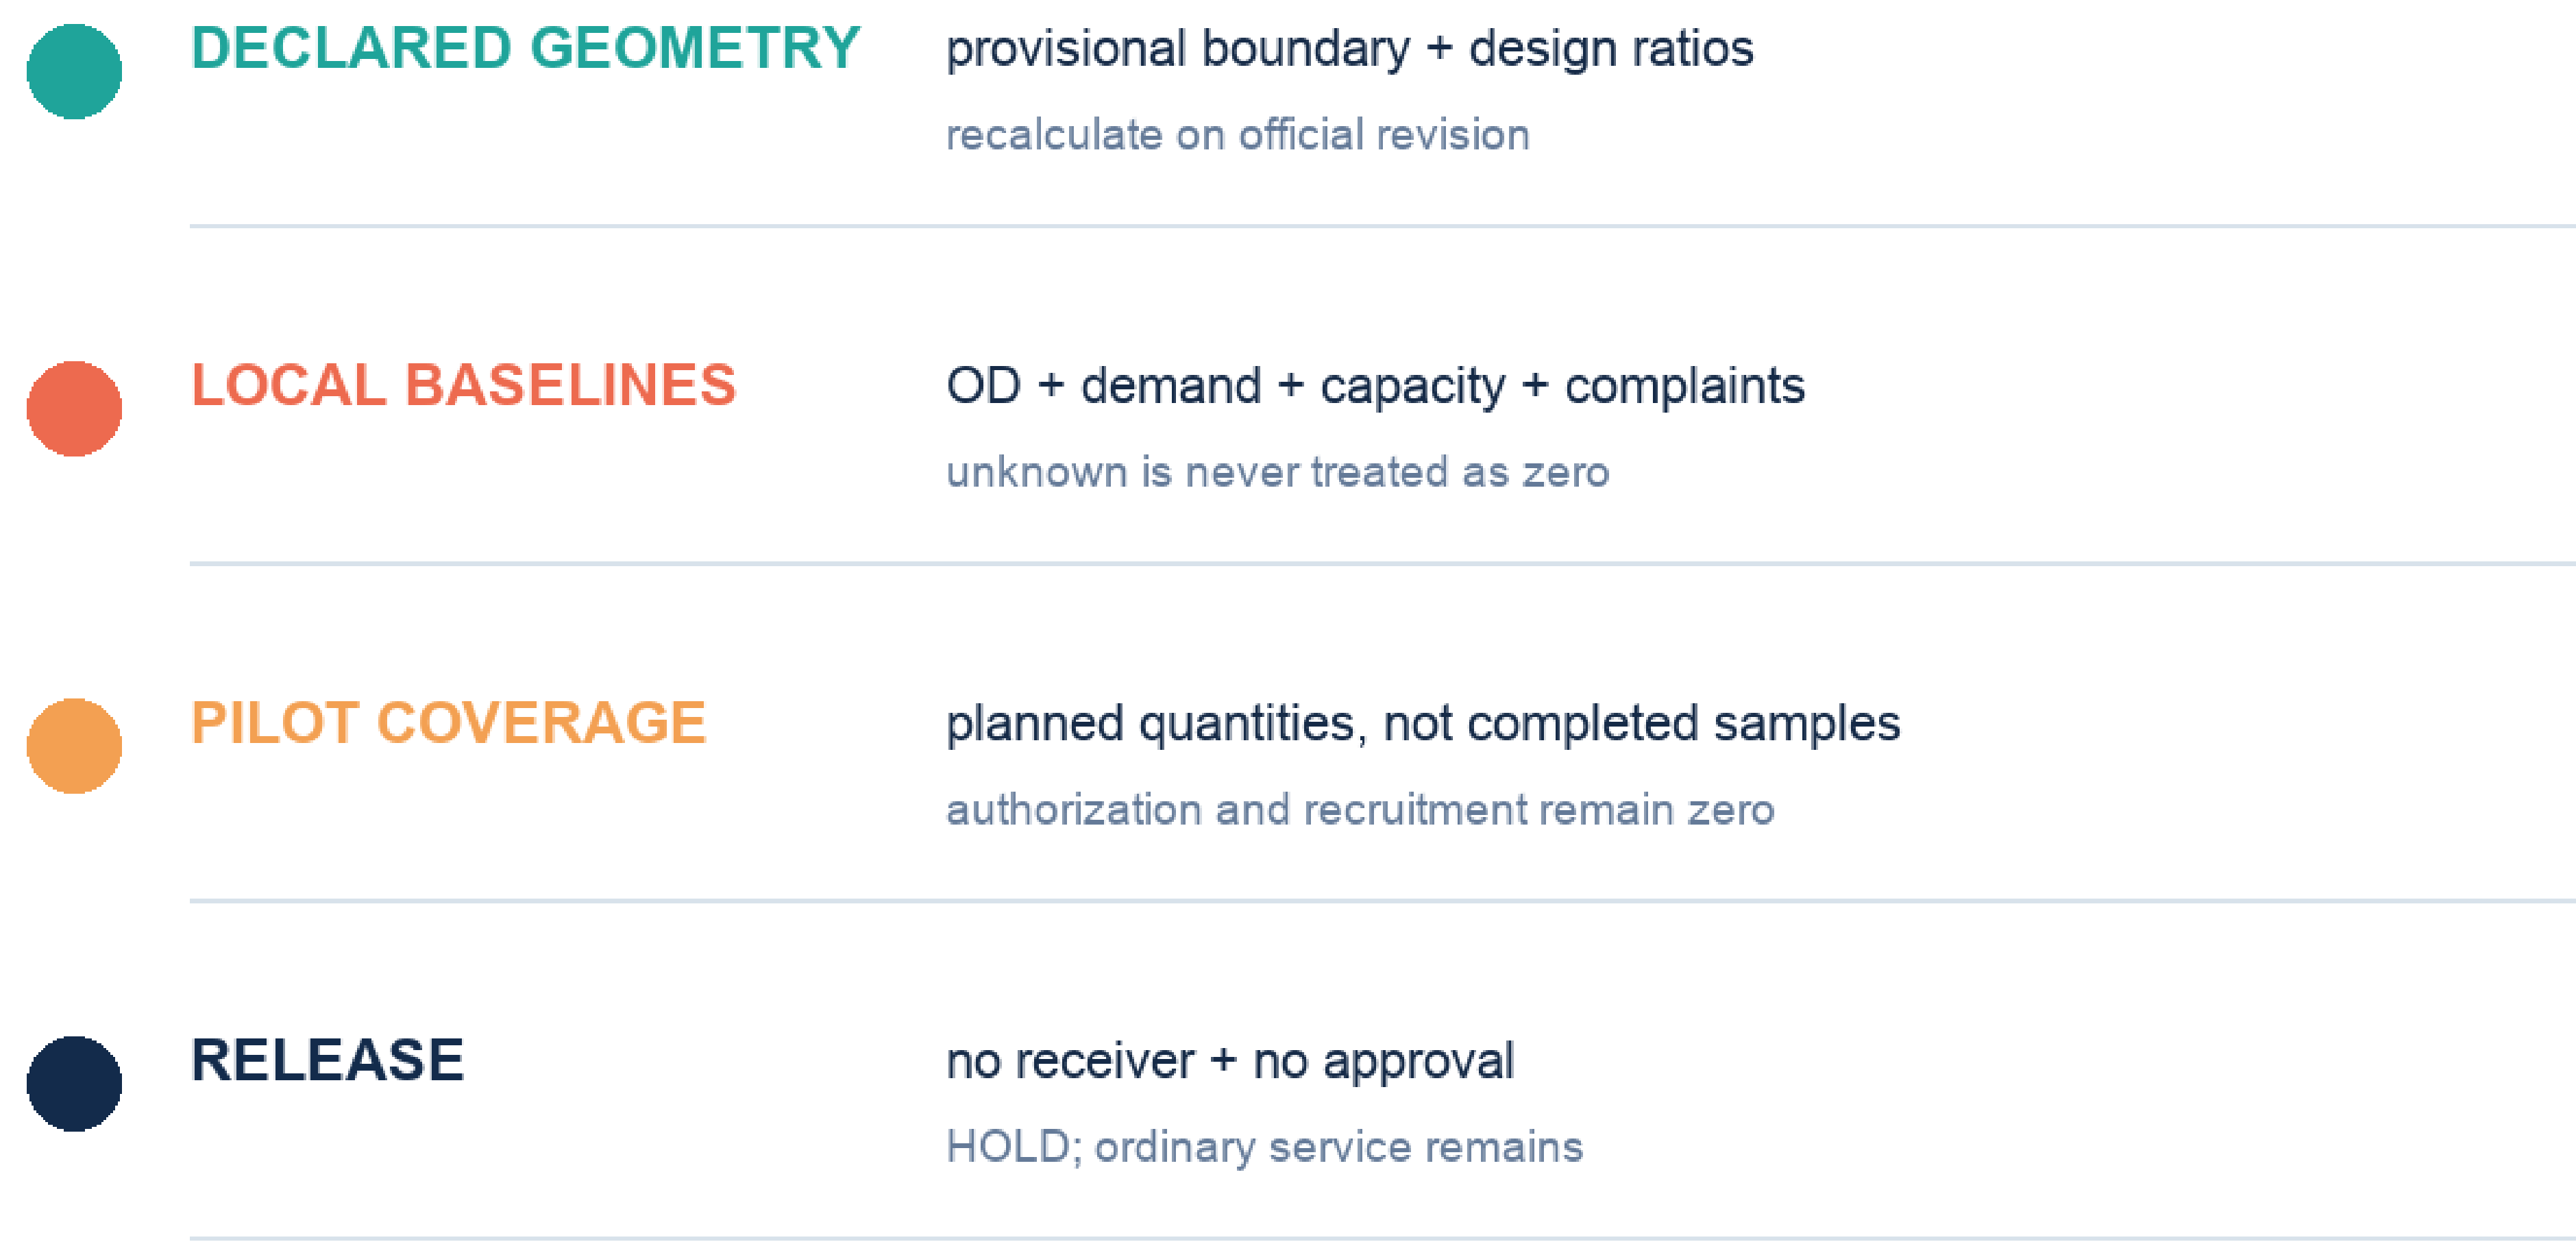

PLANNED TWELVE-WEEK COVERAGE



02 / REVIEW CHAIN

Hard gates first; comparison second; local calibration last.

