

Three key areas / Three operating roles

MULTIMODAL / v1.1

MOBILITY COMMONS / v1.0

Each area has a minimum pilot, accountable owner and stop condition

01

Zhongzhiyuan

enterprise arrival

shuttle merge / loading

pilot / reversible

STOP

No permanent community ban

02

AI Origin

resident daily

human parity / accessible

pilot / reversible

STOP

No home trajectory

03

Dazhongsi

rail + curb

station / cycle / event

pilot / reversible

STOP

No fire/access blockage

服务水平 / SERVICE LEVELS

到达连续 route continuity

换乘可靠 transfer reliability

路缘有序 curb order

申诉闭环 complaint closure


Two-sided demand ledger / Time-windowed land-use

MULTIMODAL / v1.1

MOBILITY COMMONS / v1.0

Enterprise arrival, resident daily access and public curb share one time axis

Time windows are pilot defaults, not a local forecast

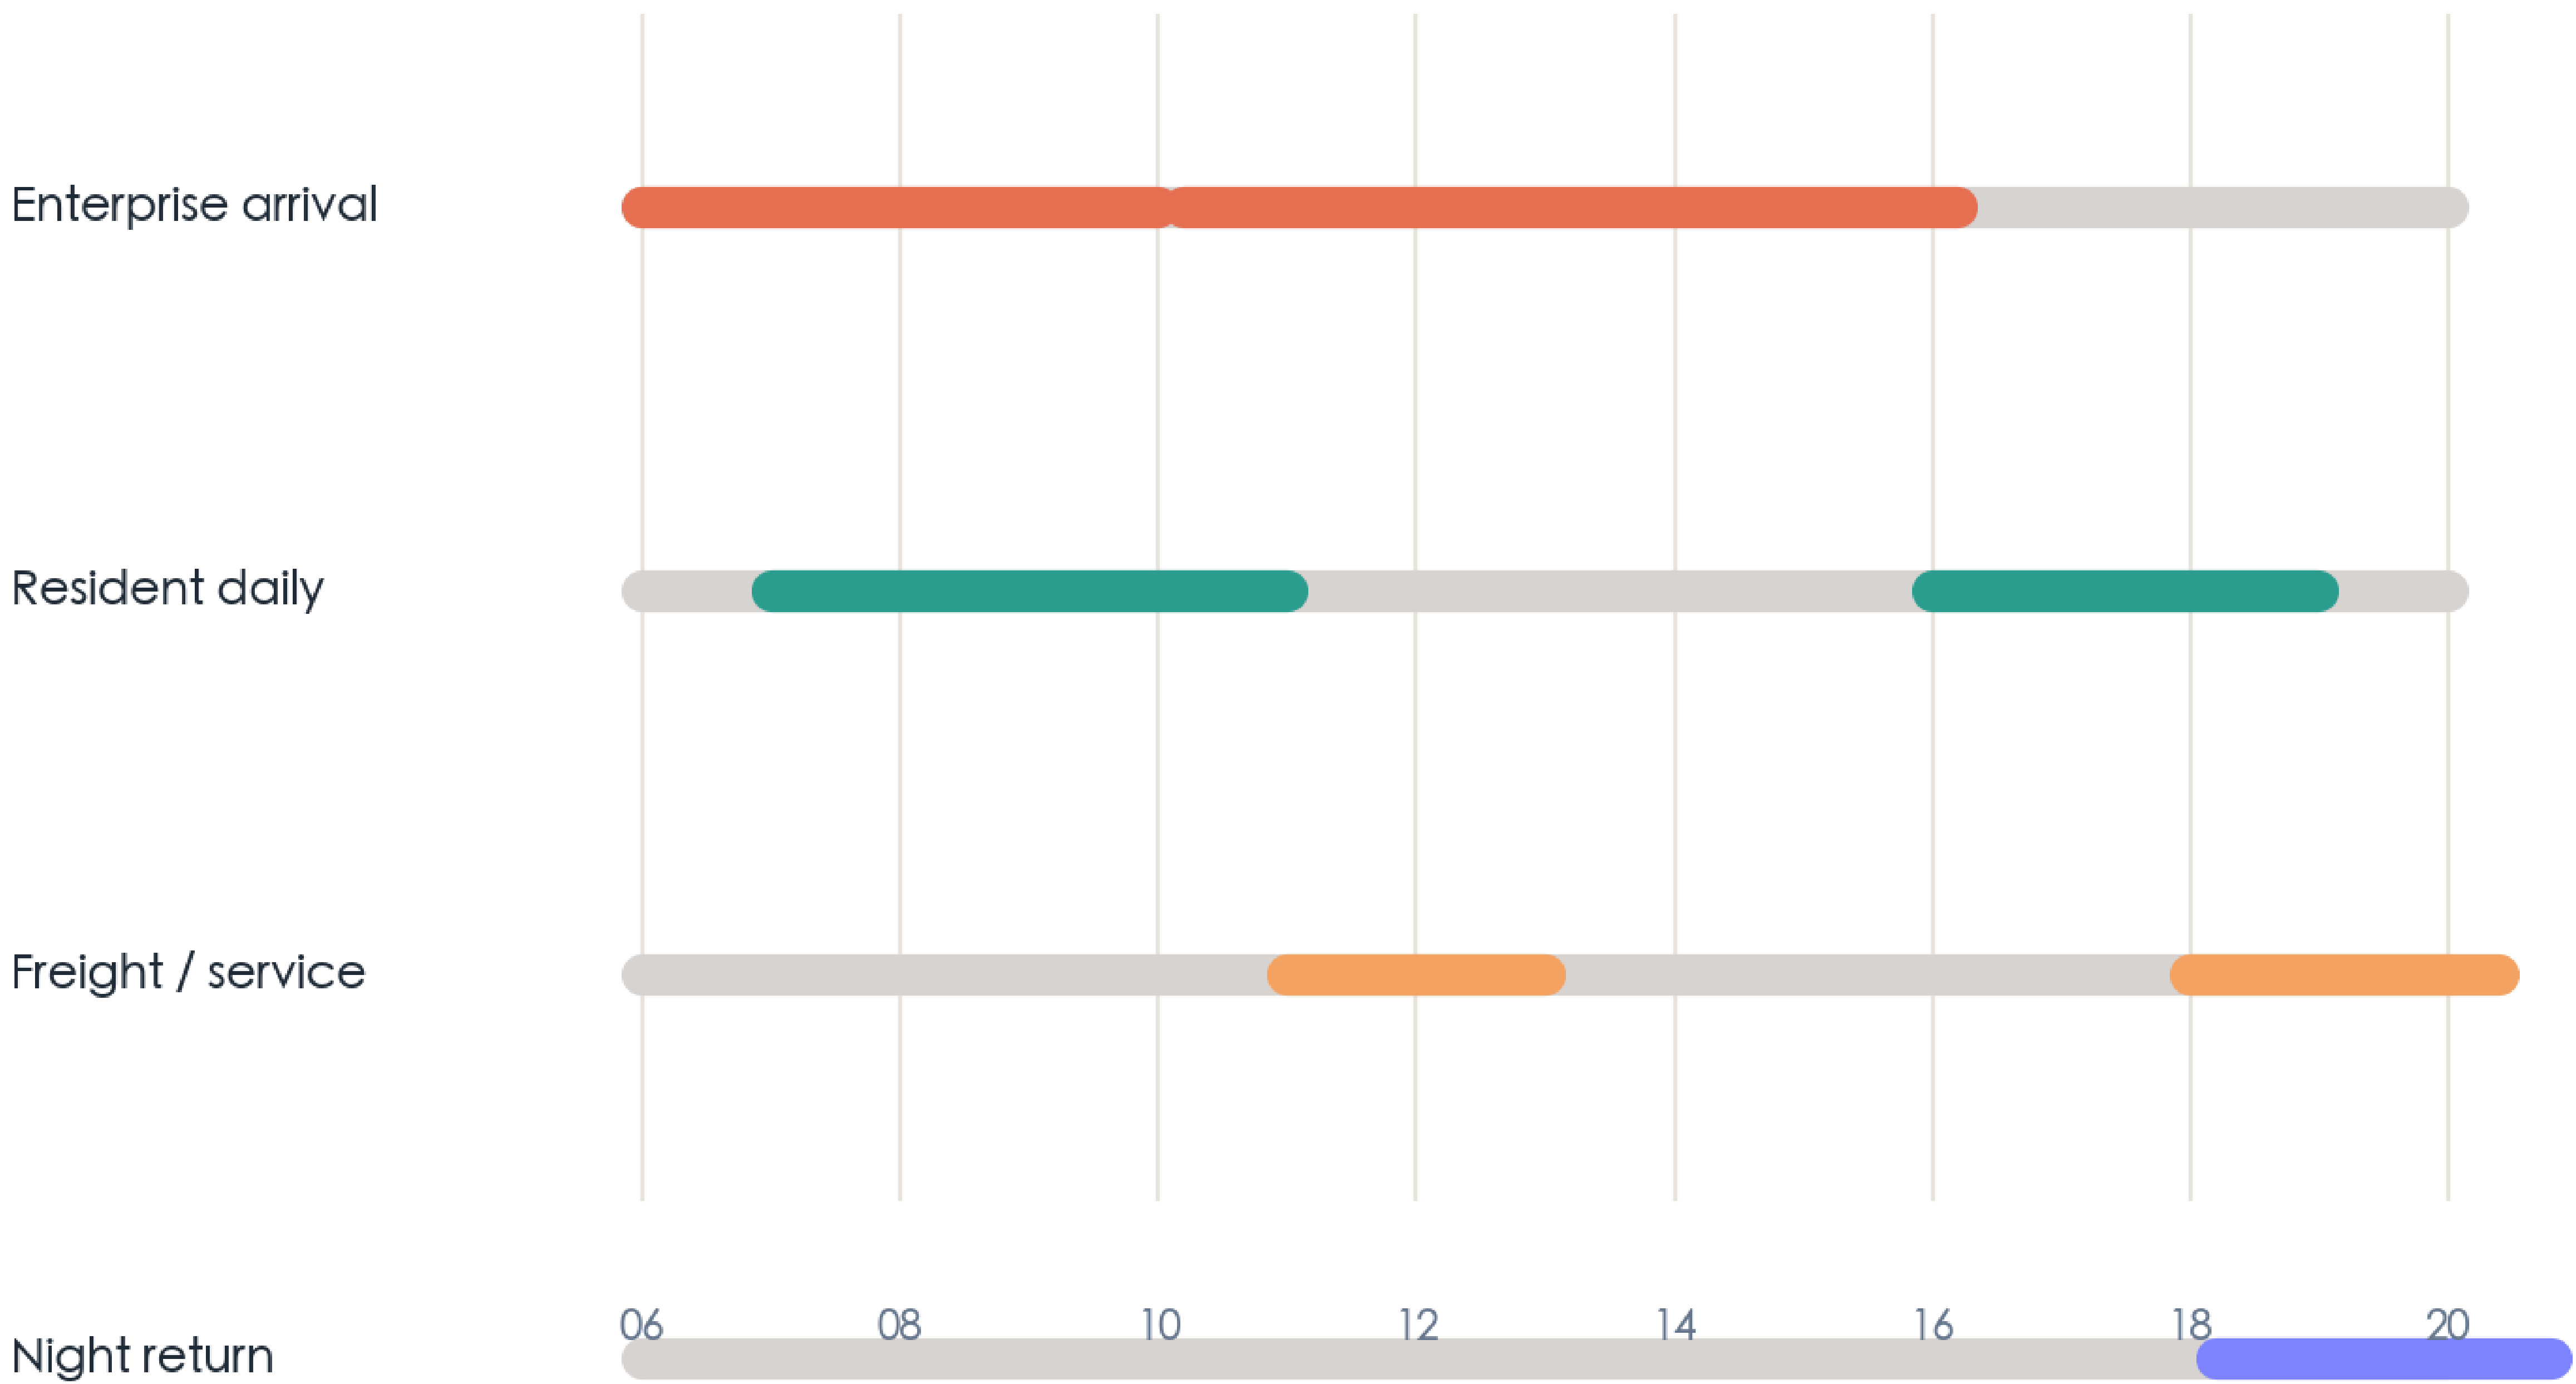

数据规则 / data rule

聚合到班次、服务类型和时间窗；不保存个人连续轨迹

Concept land-use base

Enterprise




Green



Service



Resident

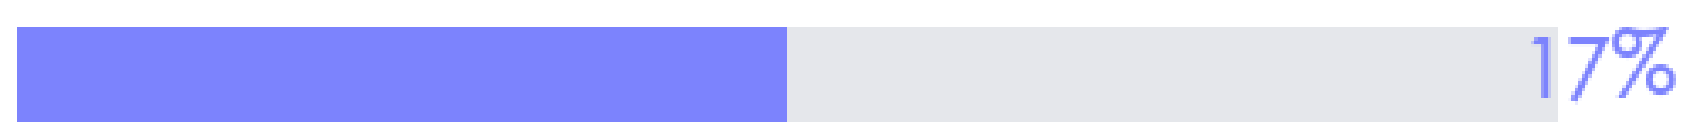

Key: demand is measured in P0

MOBILITY EVIDENCE BOARD

Known geometry · unknown baseline · pilot gates · traceable outputs

JING-ZHANG / EVIDENCE

11.41

km² / provisional working area

KNOWN

12.34%

green ratio / concept footprint

KNOWN

7.33%

public space / concept footprint

KNOWN

5

GROUND MODES

+ 1 conditional air gate

GATED

01 EVIDENCE INVENTORY

44 traceable items · state decides whether a value enters comparison



UNKNOWN ≠ ZERO

add field evidence before updating the sandbox

02 EVIDENCE CHAIN

P0 □ P1 □ P2 · hard gates stay visible



No current performance claim · no air route claim

The board separates known files, unknown local baseline, pilot targets and blocked permissions.

Source: metrics.json + visual/assets/evidence-ledger.json


PROVISIONAL · UNKNOWN BASELINE · GATED PILOT

MULTIMODAL MOBILITY LOOP

Five ground modes + one conditional air experiment / people flow stays visible

01 MODE STACK / 方式叠层

Backbone → transfer → curb → people flow

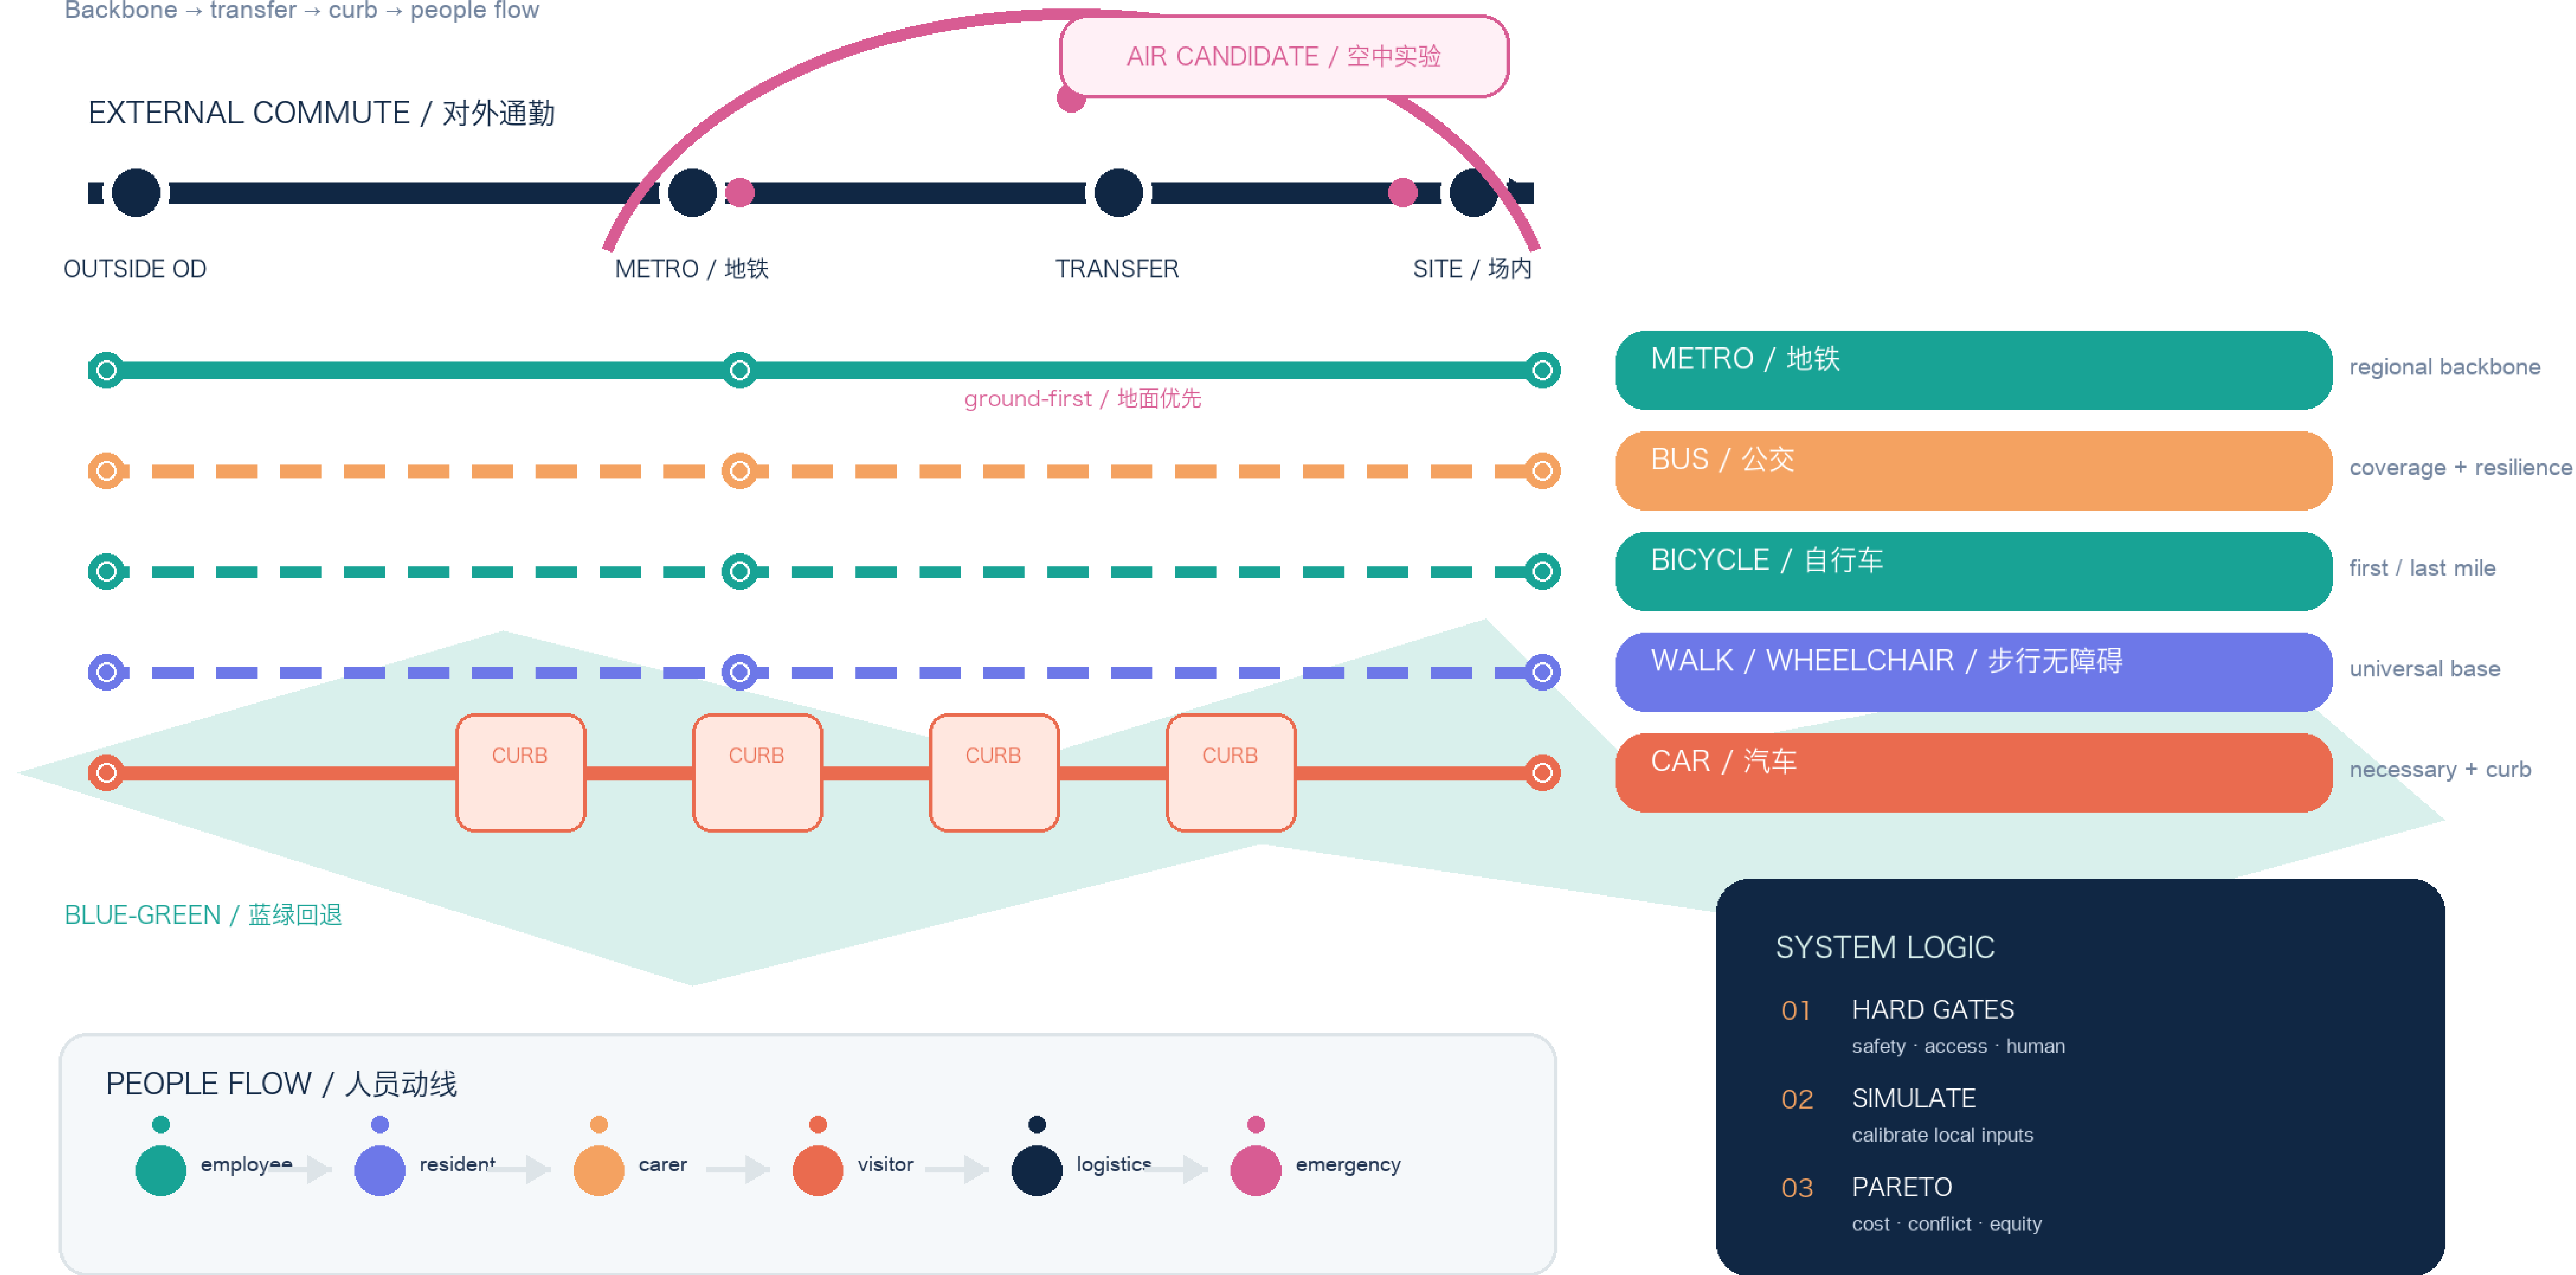


MULTIMODAL MODEL OBJECTS

Residents · vehicles · metro · curb · accessible flow · gated air candidate

JING-ZHANG / MODEL

01 MODEL OBJECTS

Agent-based demand meets capacity, queues and hard gates.

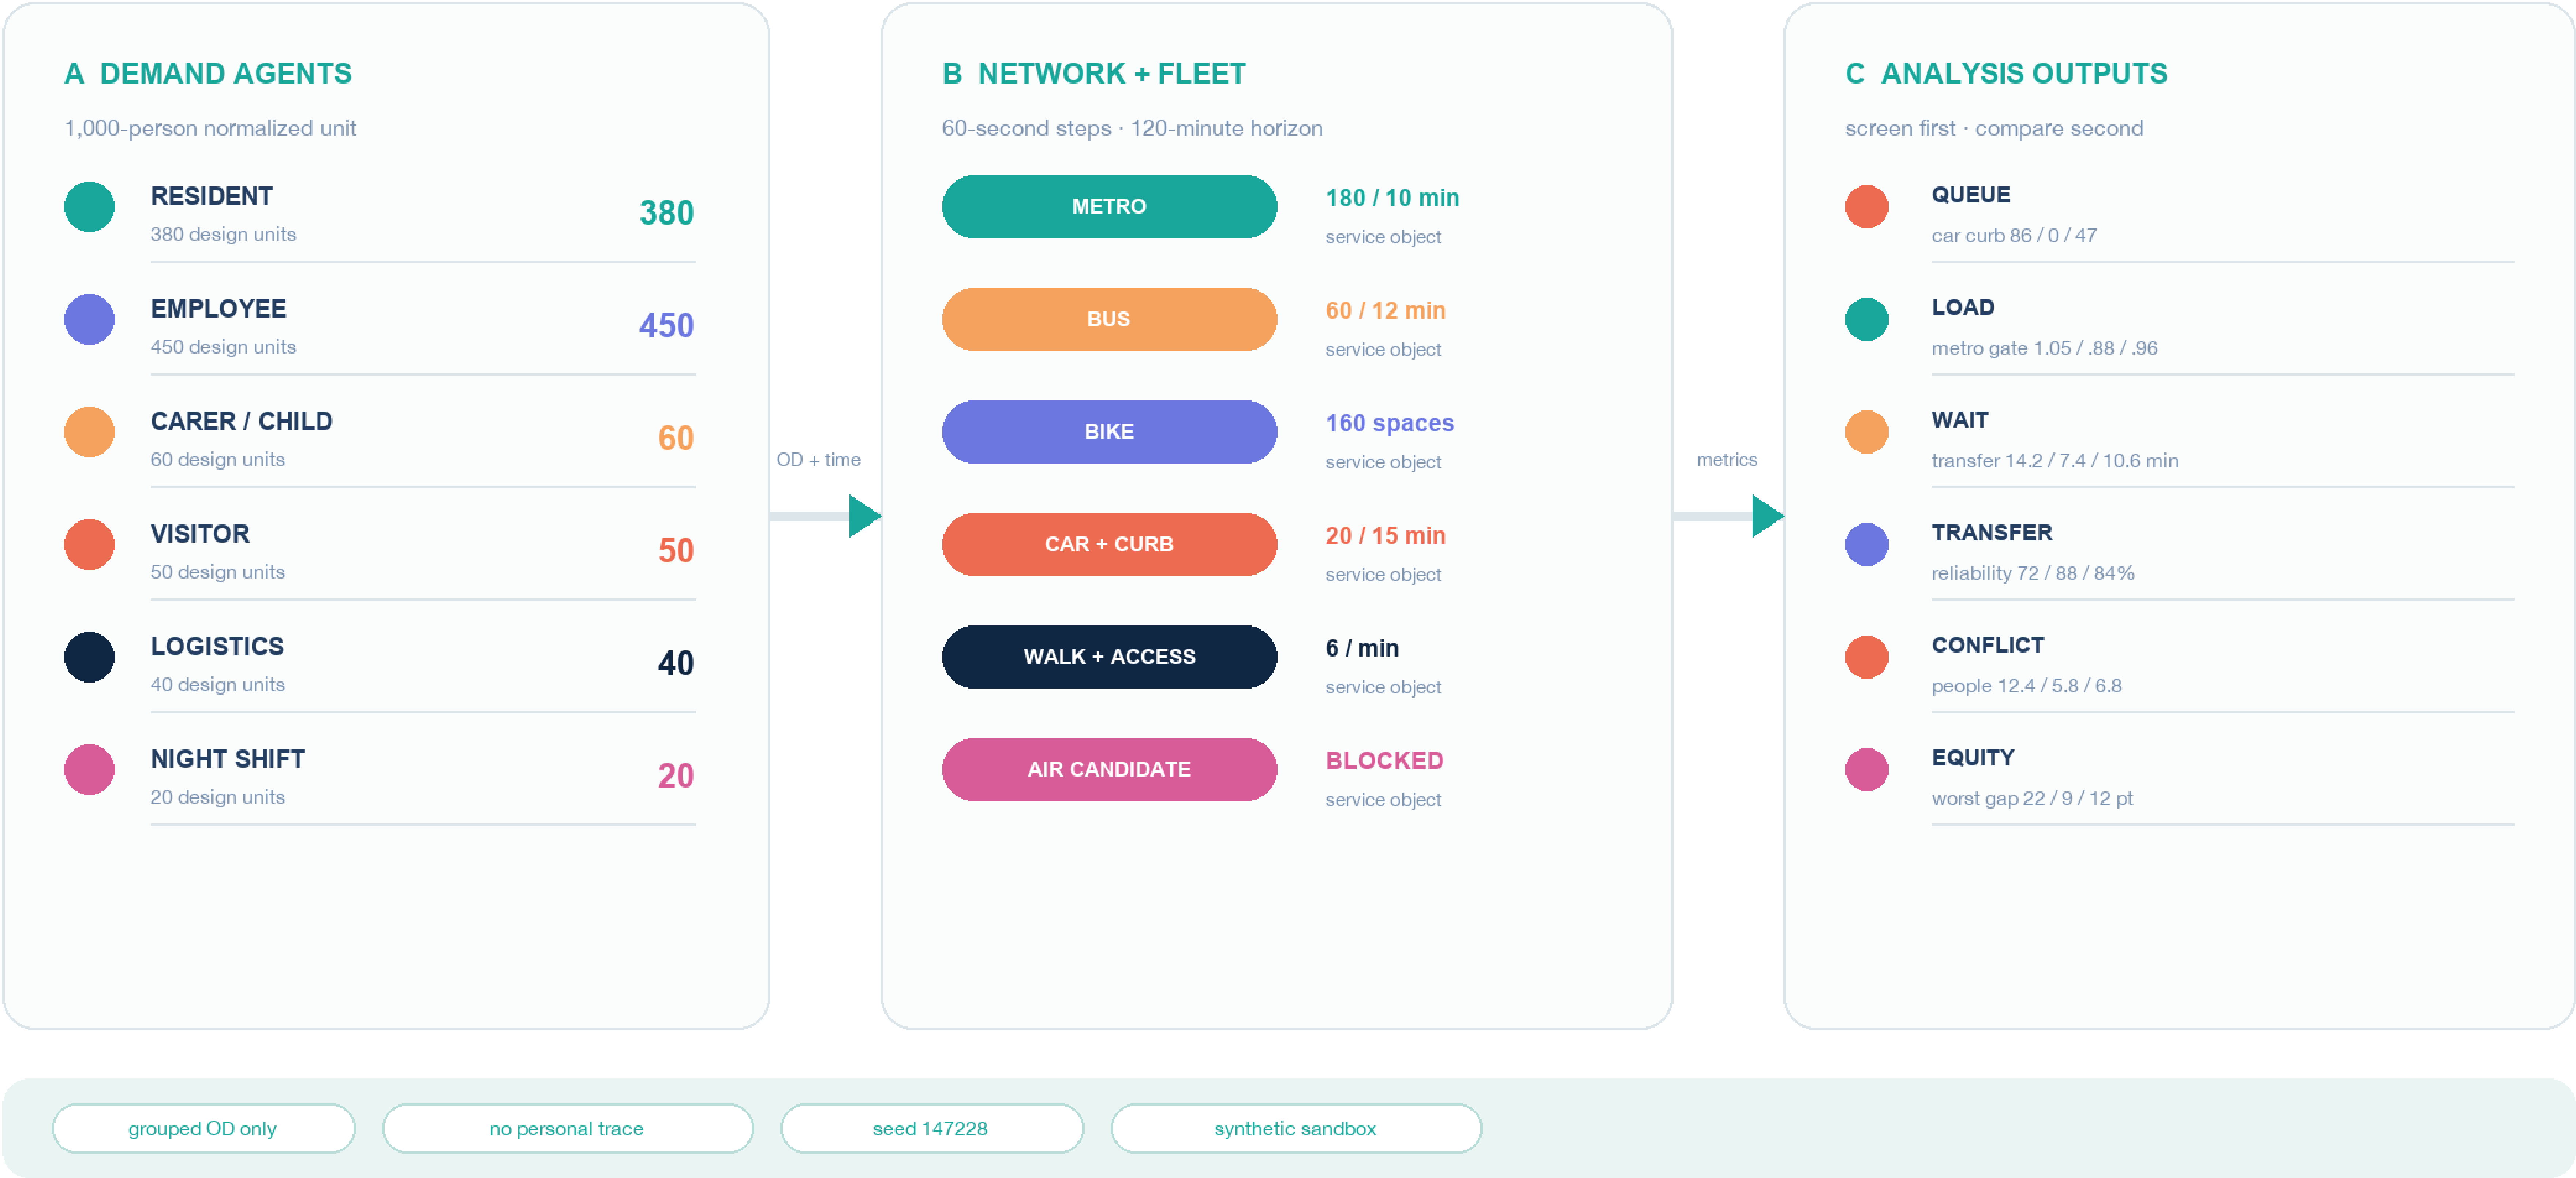

S0 / S1 / S3 values are design sensitivities; replace with dated local calibration before any performance claim.


DESIGN-SCENARIO SIMULATION

Transparent sandbox · not a current baseline · gates before scores

P0 ▢ P1 / DESIGN BOARD

01 CANDIDATE EFFICIENCY

0–100 illustrative index · dashed line = 75 suggested threshold

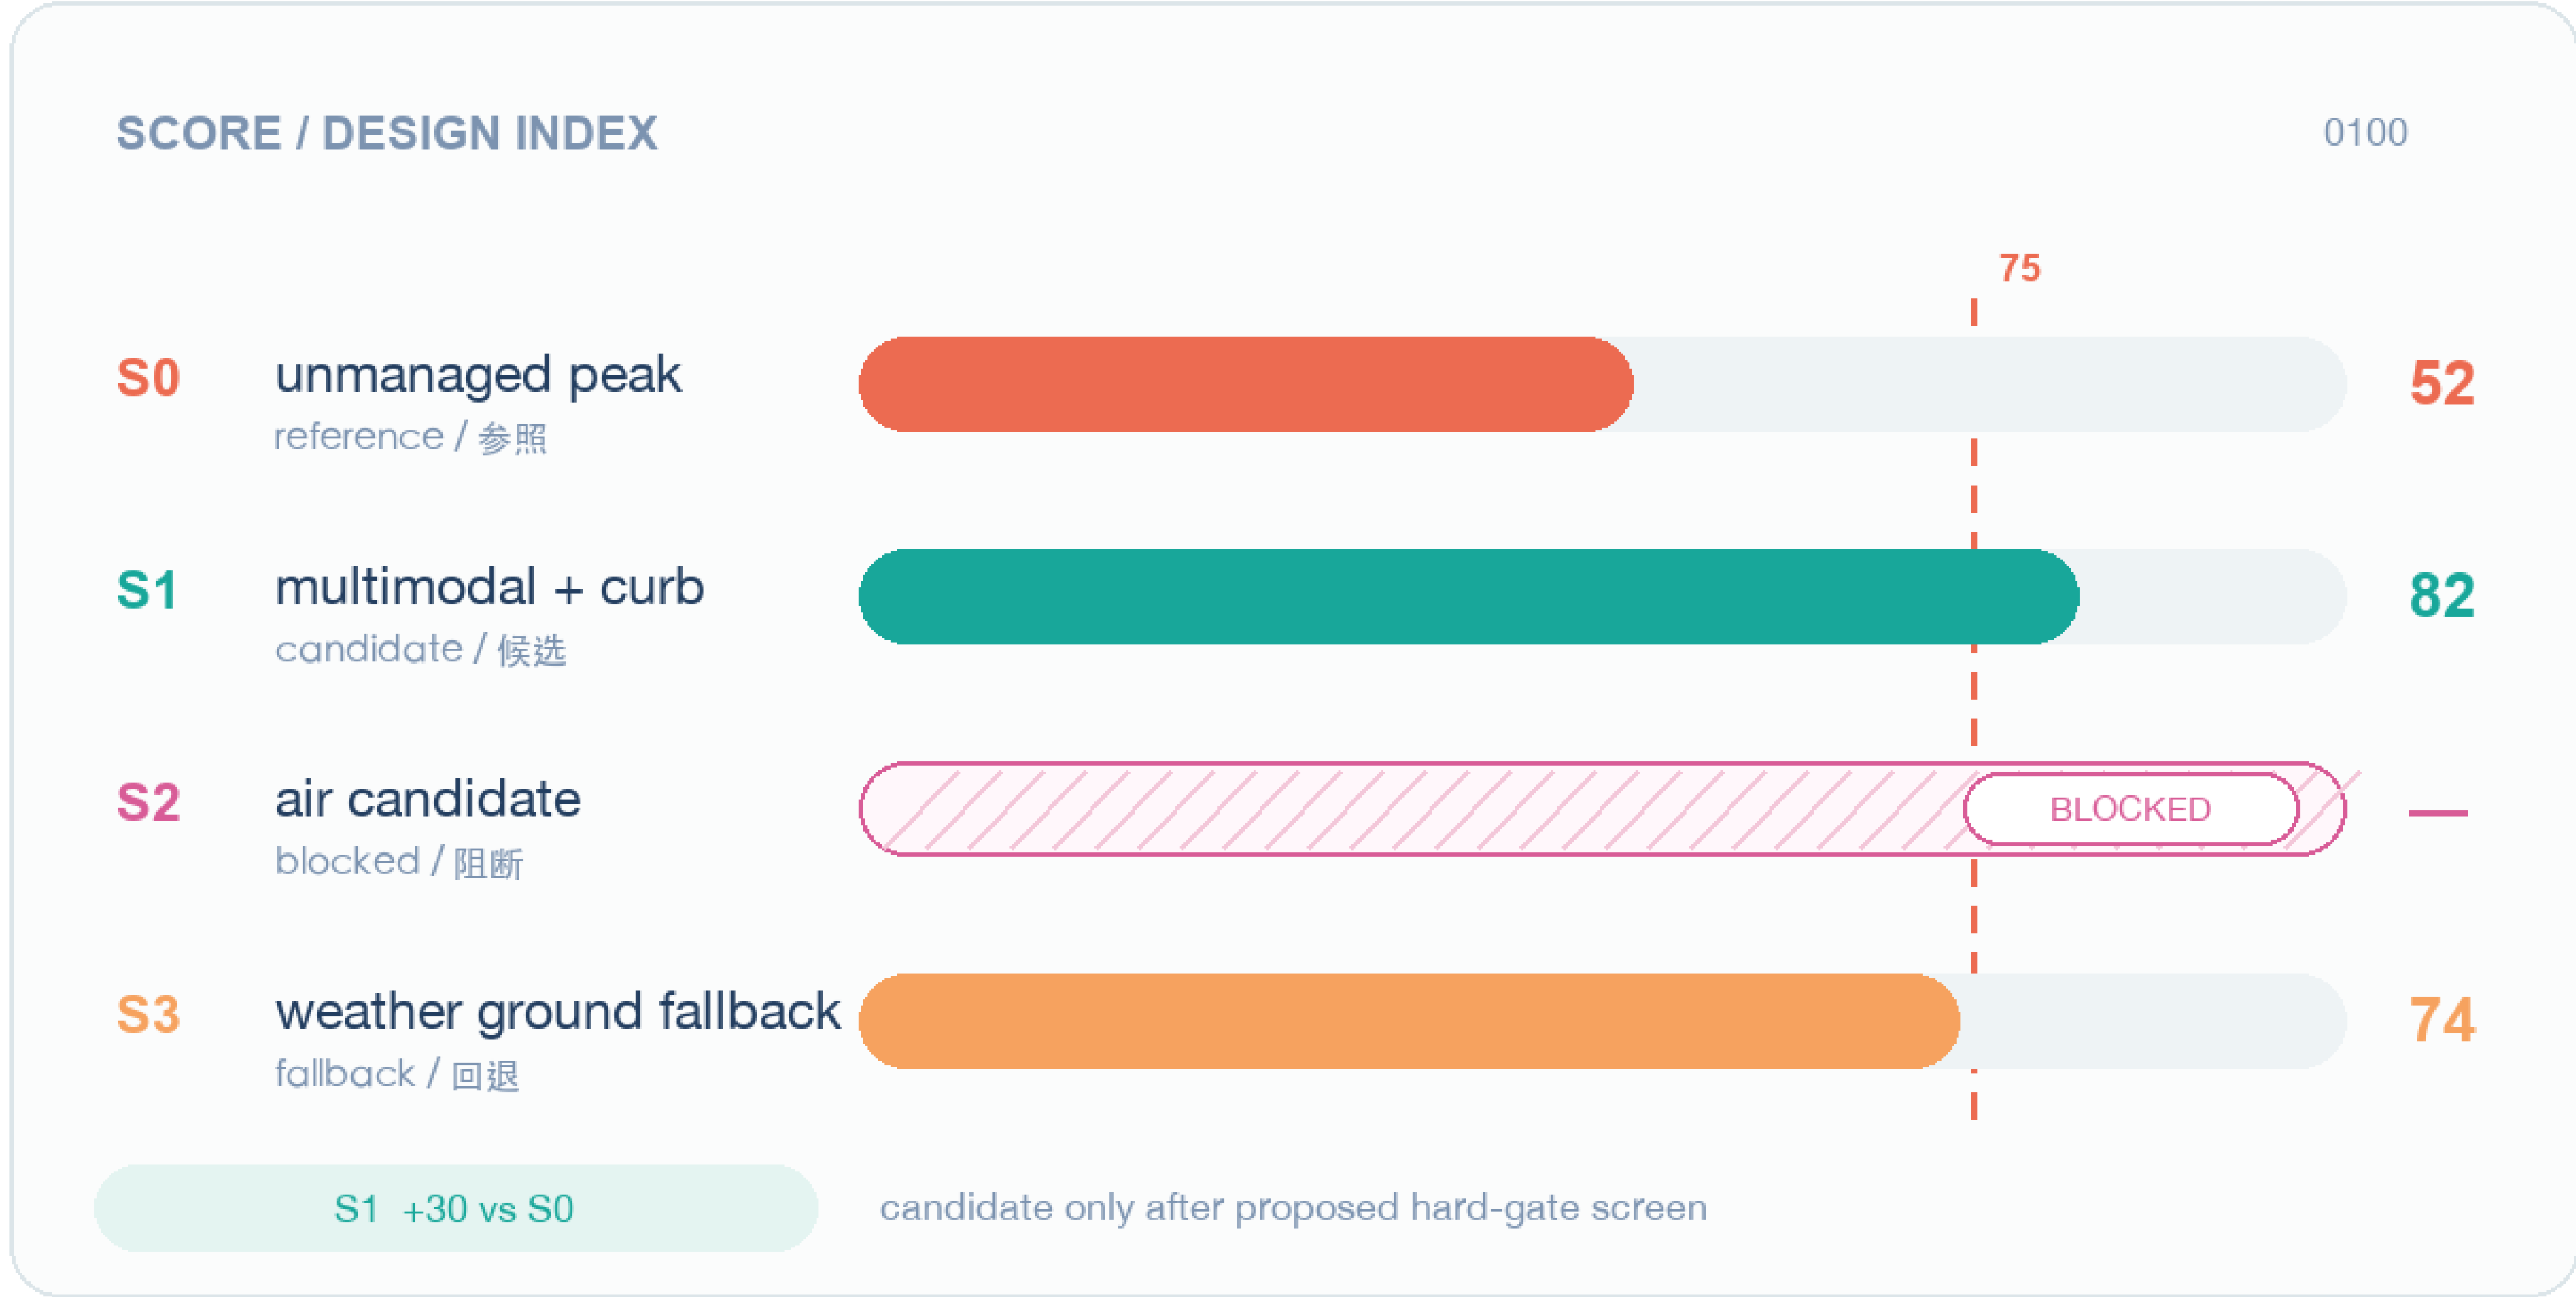


1,000-person design unit

TRADE-OFF READOUT

illustrative values / design inputs

	S0	S1	S2	S3
Generalized cost (lower) index	100	78	—	85
Transfer reliability (higher) %	72%	88%	—	84%
People conflicts (lower) /1000	12.4	5.8	—	6.8
External car inflow (lower) %	42%	25%	—	28%
Worst-group gap (lower) pt	22	9	—	12
Energy index (lower) index	100	77	—	84

02 DECISION & CALIBRATION

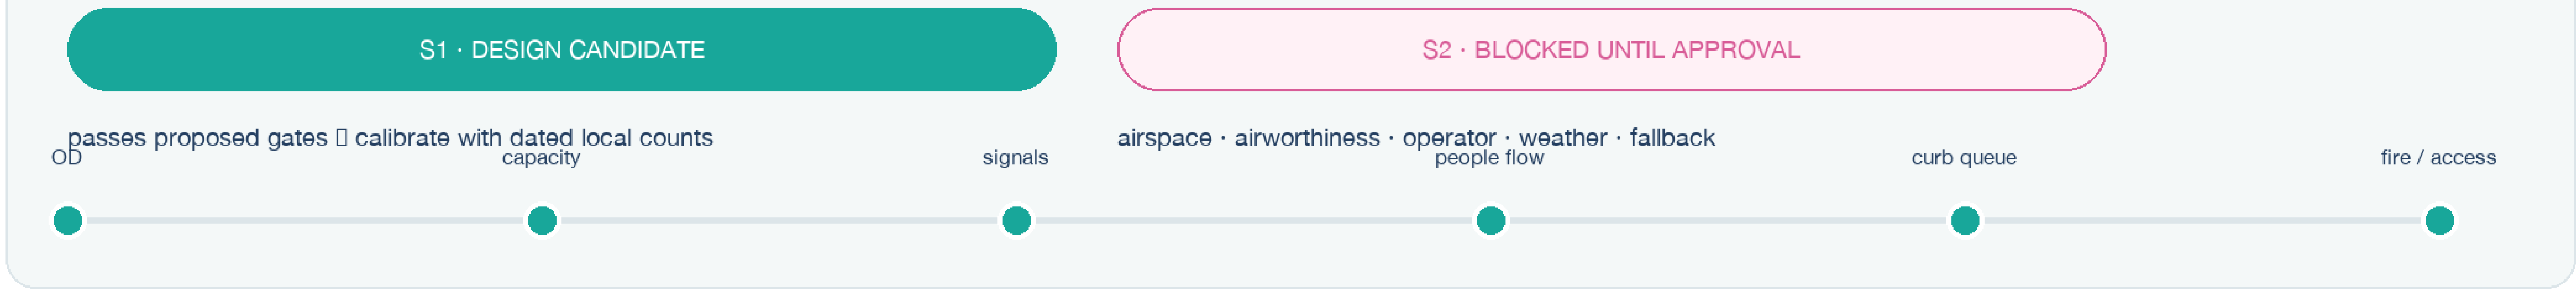

Design values only. Replace each row with dated, grouped and locally calibrated evidence before claiming performance.

Source: visual/assets/movement-simulation.json

PROVISIONAL · NOT A BASELINE


Jing-Zhang Mobility Commons / Enterprise-Resident Mobility

MULTIMODAL / v1.1

MOBILITY COMMONS / v1.0

Three key areas × three connection types × five verification gates

SPATIAL BASE / PROVISIONAL DESIGN AREA

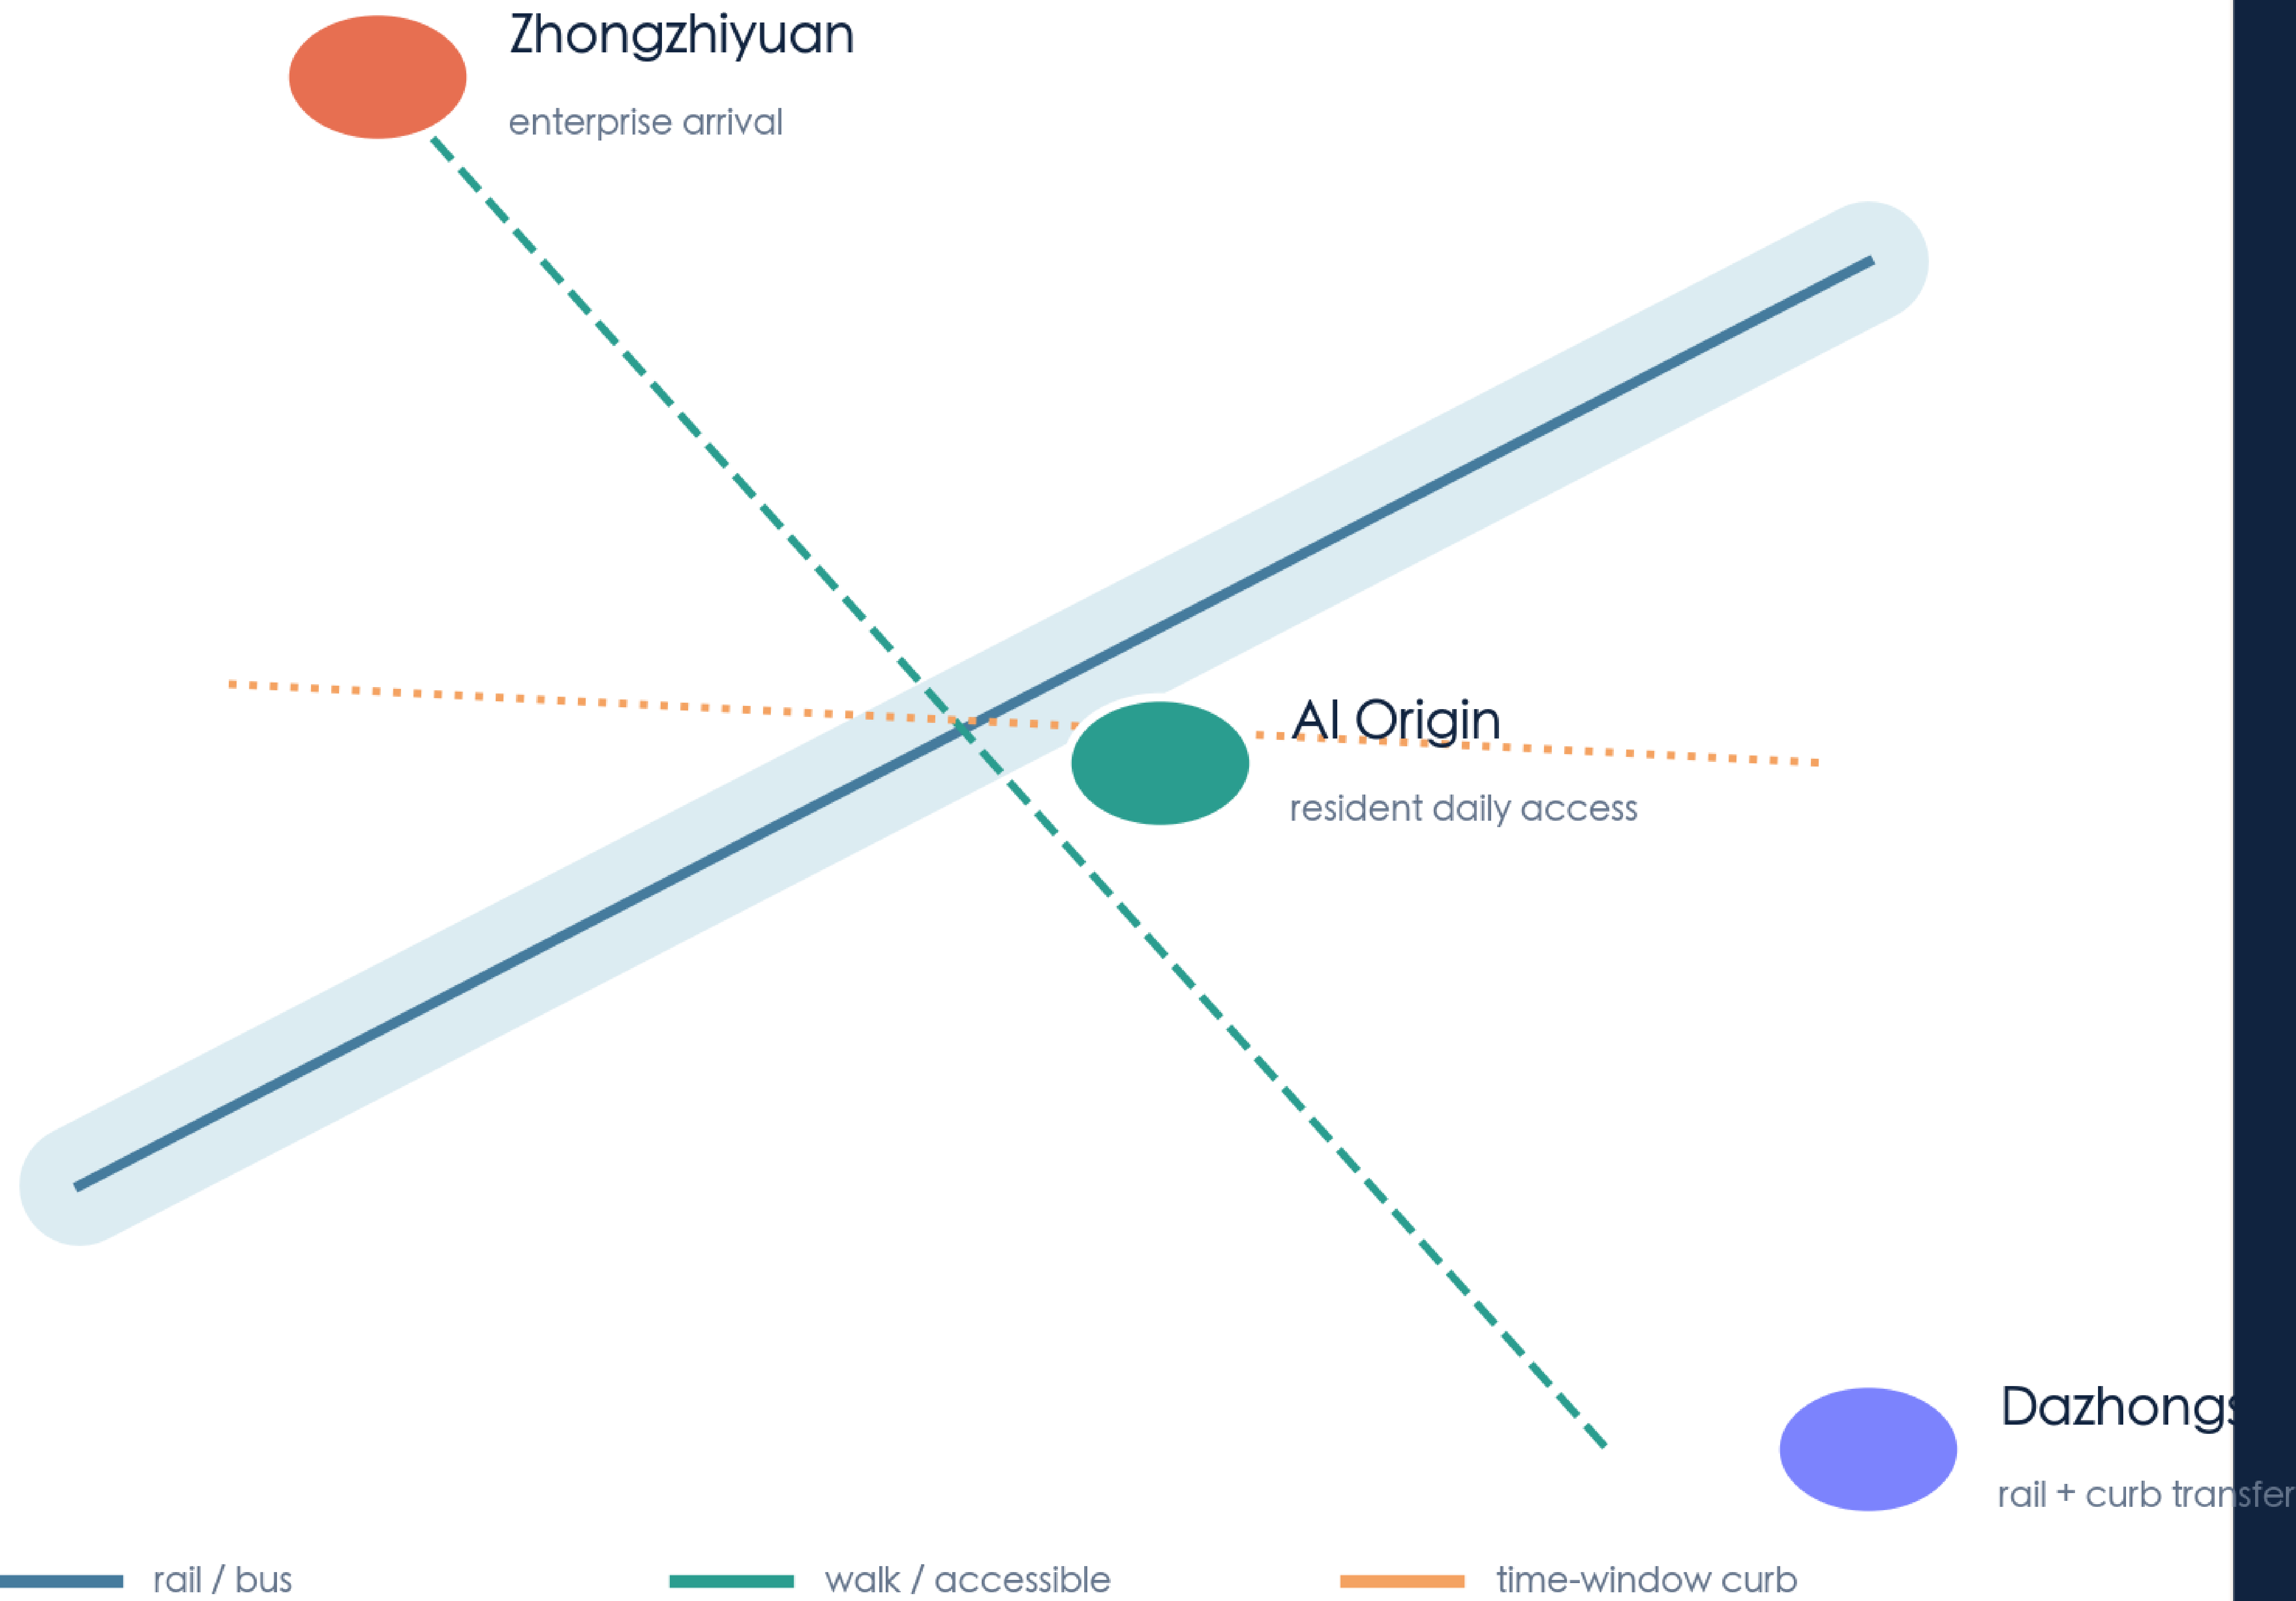

FIVE GATES

- 01 几何 / geometry
official polygon + right-of-way
- 02 需求 / demand
grouped consent + time window
- 03 安全 / safety
accessible + fire continuity
- 04 责任 / operator
SLA + maintenance + complaint
- 05 公平 / equity
human parity + rollback