

Jacuzzi
Hot Tubs
2006 Dimension And Specification Handbook

Important Safety Instructions - All Models



© 2006 Jacuzzi Hot Tubs. Jacuzzi may make product modifications and enhancements. Therefore, specifications may change without notice. Dimensions are approximate and for reference only.

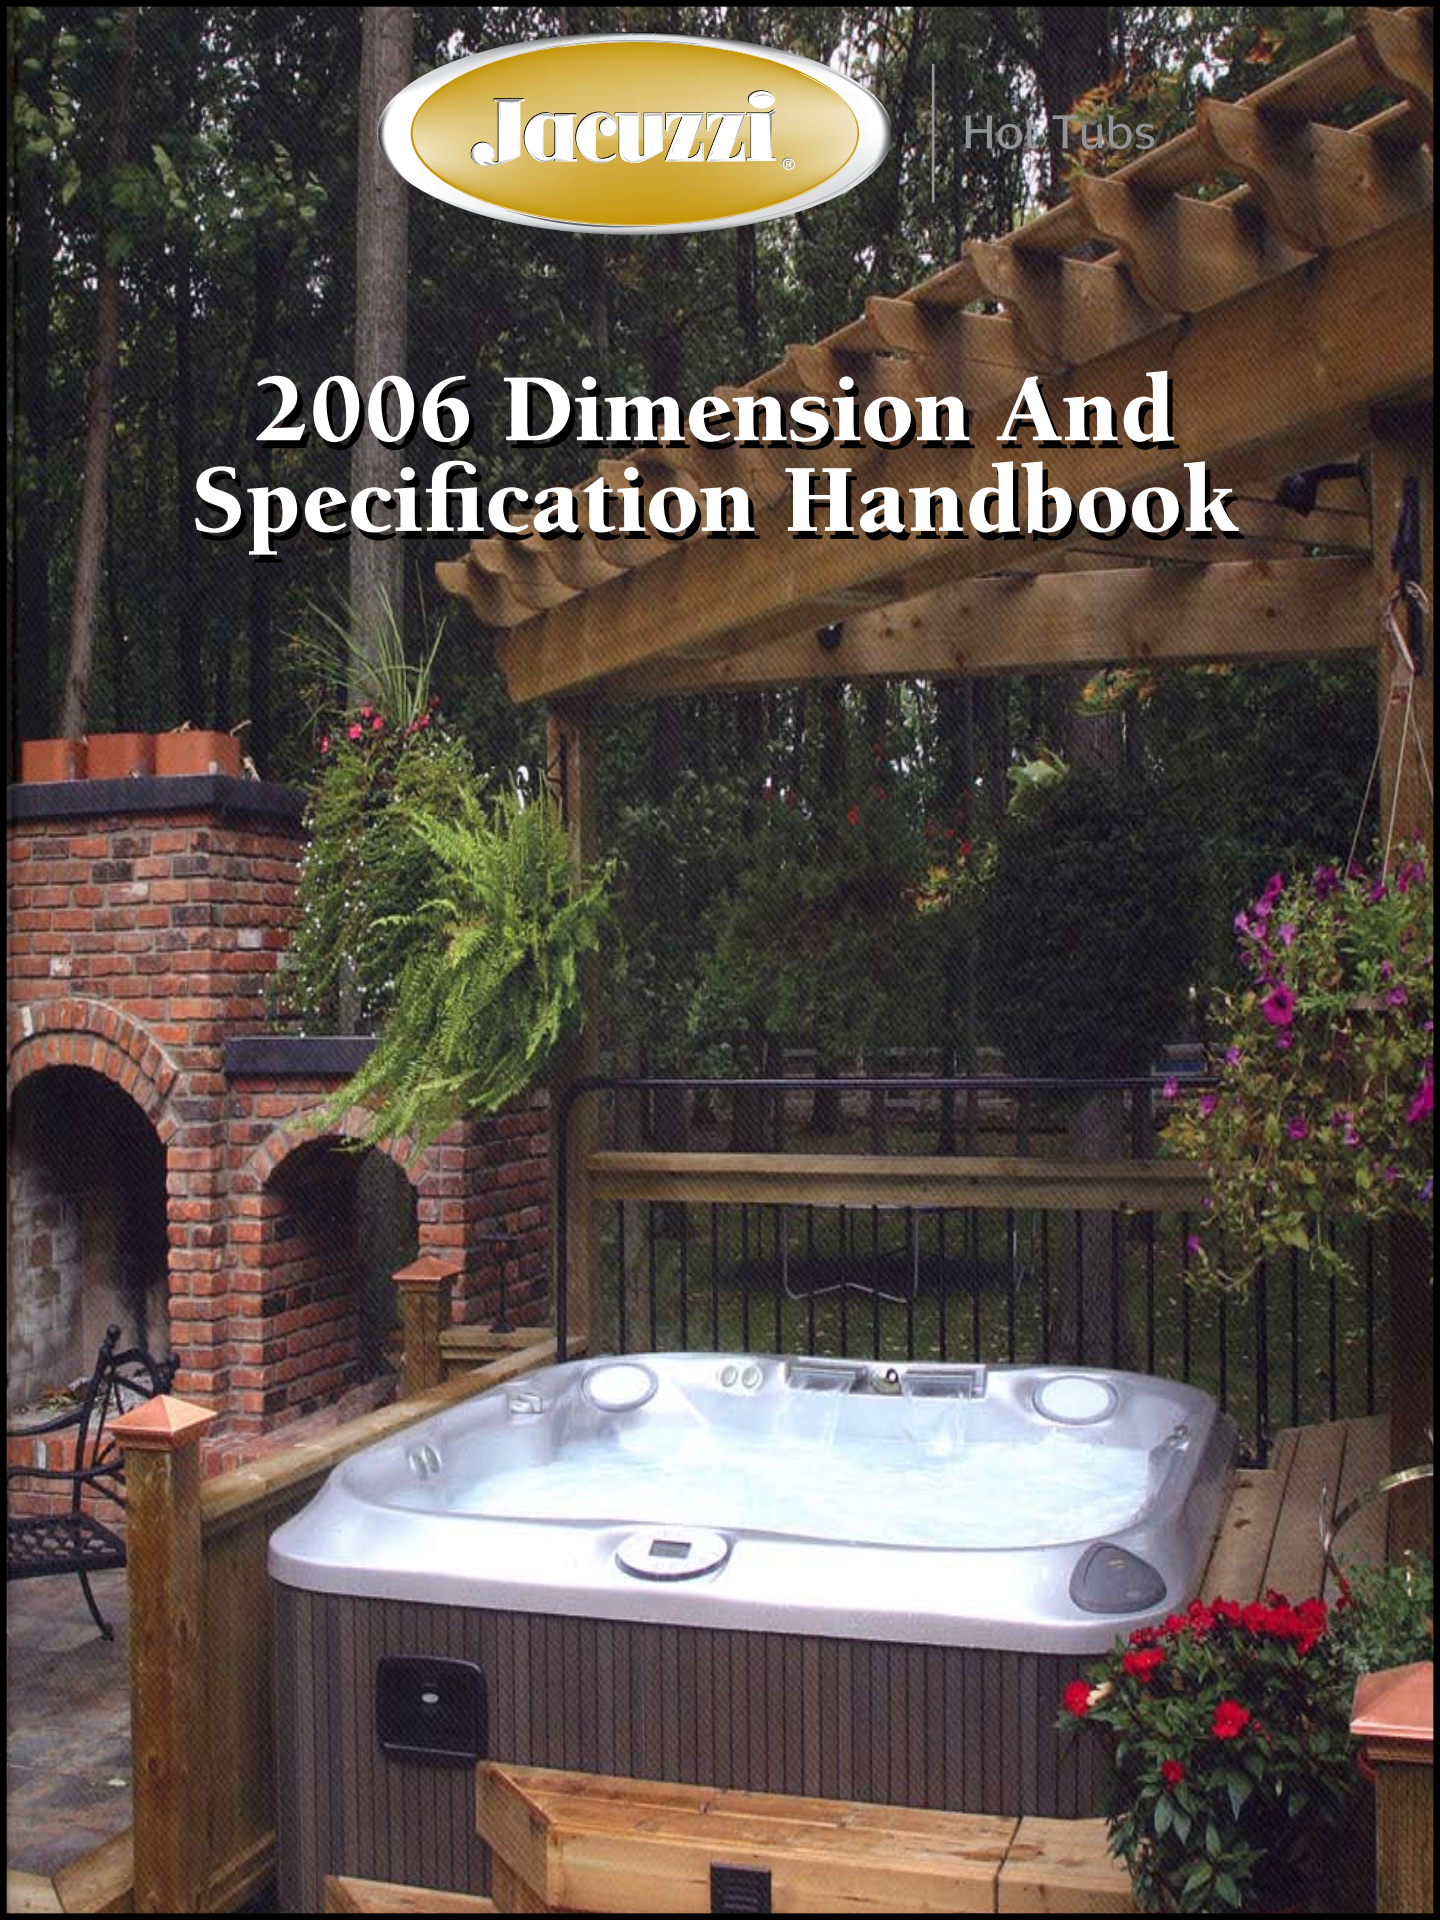

***CAUTION:** Always measure each spa for exact dimensions before designing its foundational support and/or decking.*



When designing a foundational support, always account for the following load factors:

1. *Filled spa weight, plus (+)*
2. *Combined occupant weight at the maximum seating capacity, plus (+)*
3. *Weight of the support decking, when applicable.*



The technical data given in this publication is for reference only. It implies no warranty of kind.

Table of Contents

Jacuzzi J-400 Series Hot Tubs

J-480 Specifications 5
J-480 Operation 6

J-470 Specifications 7
J-470 Operation 8

J-460 Specifications 9
J-460 Operation 10

Jacuzzi J-300 Series Hot Tubs

J-385 Specifications 11
J-385 Operation 12

J-375 Specifications 13
J-375 Operation 14

J-365 Specifications 15
J-365 Operation 16

J-355 Specifications 17
J-355 Operation 18

J-345 Specifications 19
J-355 Operation 20

J-335 Specifications 21
J-335 Operation 22

J-325 Specifications 23
J-325 Operation 24

J-315 Specifications 25
J-315 Operation 26

Table of Contents

Jacuzzi J-200 Series Hot Tubs

J-230 Specifications 27
J-230 Operation 28

J-220 Specifications 29
J-220 Operation 30

J-210 Specifications 31
J-210 Operation 32

Complete Dimensions - All 400 Series Hot Tubs 33
Complete Dimensions - All 300 Series Hot Tubs 34
Complete Dimensions - All 200 Series Hot Tubs 35

Jacuzzi J-480



Dimensions ..... *94" x 94" x 39" Front/44" Back, (239cm x 239cm x 99cm Front/112cm Back);* ***For Complete Dimensions, See Page 33***

Dry Weight ..... *950 lbs (431 kg)*

Filled Weight ..... *4,703 lbs (2,133 kg)*

Water Capacity (Avg. Fill) ..... *450 US gallons (1,703 Liters)*

Electronic Controls ..... *Solid State, LCD User Interface Displays Temperature, Time, Cycles and Fingertip Jet Control. Offers Customizing of Preprogrammed Filtration Cycles and Water Temperature Setting.*

Pump 1 (North America) ..... *1-Speed, 4.2 hp break, 2.5 hp continuous*

(Export) ..... ***1-Speed, 2.0 hp continuous***

Pump 2 (North America) ..... *1-Speed, 4.2 hp break, 2.5 hp continuous*

(Export) ..... ***1-Speed, 2.0 hp continuous***

Circulation Pump ..... *24-Hour, Programmable for Daily Start Time and Duration*

Total PowerPro Jets *48*

Maxx PowerPro (MX2) *3*

PowerPro (FX2) *6*

PowerPro (IX) ..... *1, with Independent Air Control and Multi-Colored LED Light Illumination*

PowerPro (FX) *28*

PowerPro (SX) *6*

PowerPro (NX) *4*

Diverter Valves *2*

Air Controls *4*

Total Foot Jet Therapy *5*

Water Management System ..... *One 60 ft^2 Filter Cartridge on 24-Hour Circulation Pump; One ProPolish Bag on Jets Pump 1; Optional CD Ozone Generator Ready (Factory Installed Ozone Injector)*

LED Lighting ..... *One Footwell Jet, One "Jacuzzi" Seat Logo, One ProLite with 7 Color Modes, Two Waterfall Lights*

Cabinet ..... *Synthetic Cabinet in Harvest Wheat, Autumn Red or Silverwood Color*

Acrylic Colors ..... *Textured Bluegrass, Marine, Onyx, Sahara, Copper Sand, or Sand; Marbled Platinum, Azure, or Champagne*

Headrests *4*

Waterfalls ..... *Two with Independent Flow Rate / On-Off Adjustment; Powered by 24 Circulation Pump*

Electrical Requirements ..... *North American 60 Hz Models: 240 VAC @ 30A, 50A, or 60A*

Export 50 Hz Models: 230-240VAC @ 20A, 30A, or 40A, or suitably rated circuit breaker to comply with local electrical codes. Certain countries may require dual power inputs; two GFCI RCD breakers are required for this configuration.

Warranty ..... *North American 60 Hz Models: 10 Years Shell, 7 Years Shell Surface, 5 Years for Plumbing Component Leaks, 5 Years Equipment & Controls;*

Export 50 Hz Models: 2 Years Plumbing Component Leaks, 2 Years Equipment & Controls

Seating Capacity *6*

Audio System (Optional) ..... *AM/FM/CD Stereo Receiver with Four Speakers And Deluxe Wireless Remote*

Dimensions/Specifications are Subject to Change Without Notice

Jacuzzi J-480

Diverter Valve / Air Control Diagram

Spa Operation Subject to Change without Notice

• Jet Groups E & F Powered at All Times when Pump 2 is Runing.

• Center Footwell IX Jet "G" Draws Air at Al Times when Jets Pump 1 is Running. This Jet has no Air Control.



Air Control 2: Opens / Closes Air Inlet to Jet Group D, E. amd F.

Air Control 3: Opens / Closes Air Inlet to Jet Group B.

Diverter Valve 1: Directs Jet Pump 2 Output Between Jet Group C or D.

Diverter Valve 2: Directs Jet Pump 1 Output Between Jet Group A or B.

Air Control 1: Opens / Closes Air Inlet to Jet Group C.

Waterfall Control: Controls 24 Circulation Pump Output to Both Waterfalls.

IX Control: Controls Pump 1 Output to IX Jet (G).


Air Control 4: Opens / Closes Air Inlet to Jet Group A.

Seat Depths

Front - Back
A = 29.50 - 31.50"
B = 26.00 - 28.00"
C = 30.00 - 32.00"
D = 28.25 - 30.25"
E = 26.33 - 28.33"

Front - Back
F = 17.75 - 19.75"
G = 26.25 - 28.25"
H = 32.50 - 34.50"

Listed Dimensions Represent Distance from Top of Acrylic to Lowest Point in Seat.





Dimensions/Specifications are Subject to Change Without Notice

Jacuzzi J-470



Dimensions ..... *91" x 91" x 39" Front/44" Back, (239cm x 239cm x 99cm Front/112cm Back);* ***For Complete Dimensions, See Page 33***

Dry Weight ..... *865 lbs (393 kg)*

Filled Weight ..... *4,284 lbs (1,943 kg)*

Water Capacity (Avg. Fill) ..... *410 US gallons (1,552 Liters)*

Electronic Controls ..... *Solid State, LCD User Interface Displays Temperature, Time, Cycles and Fingertip Jet Control. Offers Customizing of Preprogrammed Filtration Cycles and Water Temperature Setting.*

Pump 1 (North America) ..... *1-Speed, 4.2 hp break, 2.5 hp continuous*
(Export) ..... ***1-Speed, 2.0 hp continuous***

Pump 2 (North America) ..... *1-Speed, 4.2 hp break, 2.5 hp continuous*
(Export) ..... ***1-Speed, 2.0 hp continuous***

Circulation Pump ..... *24-Hour, Programmable for Daily Start Time and Duration*

Total PowerPro Jets *39*

Maxx PowerPro (MX2) *3*

PowerPro (FX2) *5*

PowerPro (IX) ..... *1, with Independent Air Control and Multi-Colored LED Light Illumination*

PowerPro (FX) *26*

PowerPro (NX) *4*

Diverter Valves *2*

Air Controls *4*

Total Foot Jet Therapy *5*

Water Management System ..... *One 60 ft^2 Filter Cartridge on 24-Hour Circulation Pump; One ProPolish Bag on Jets Pump 1; Optional CD Ozone Generator Ready (Factory Installed Ozone Injector)*

LED Lighting ..... *One Footwell Jet, One "Jacuzzi" Seat Logo, One ProLite with 7 Color Modes, Two Waterfall Lights*

Cabinet ..... *Synthetic Cabinet in Harvest Wheat, Autumn Red or Silverwood Color*

Acrylic Colors ..... *Textured Bluegrass, Marine, Onyx, Sahara, Copper Sand, or Sand; Marbled Platinum, Azure, or Champagne*

Cabinet ..... *Synthetic Cabinet in Harvest Wheat, Autumn Red or Silverwood Color*

Acrylic Colors ..... *Textured Bluegrass, Marine, Onyx, Sahara, or Sand; Marbled Platinum or Azure*

Headrests *4*

Waterfalls ..... *Two with Independent Flow Rate / On-Off Adjustment; Powered by 24 Circulation Pump*

Electrical Requirements ..... *North American 60 Hz Models: 240 VAC @ 30A, 50A, or 60A*
Export 50 Hz Models: 230-240VAC @ 20A, 30A, or 40A, or suitably rated circuit breaker to comply with local electrical codes. Certain countries may require dual power inputs; two GFCI RCD breakers are required for this configuration.

Warranty ..... *North American 60 Hz Models: 10 Years Shell, 7 Years Shell Surface, 5 Years for Plumbing Component Leaks, 5 Years Equipment & Controls;*
Export 50 Hz Models: 2 Years Plumbing Component Leaks, 2 Years Equipment & Controls

Seating Capacity *6*

Audio System (Optional) ..... *AM/FM/CD Stereo Receiver with Four Speakers And Deluxe Wireless Remote*

Dimensions/Specifications are Subject to Change Without Notice

Jacuzzi J-470

Diverter Valve / Air Control Diagram

Spa Operation Subject to Change without Notice

• Jet Group E & F Powered at All Times when Pump 2 is Running.

• Center Footwell IX Jet "G" Draws Air at Al Times when Jets Pump 1 is Running. This Jet has no Air Control.



Air Control 4: Opens / Closes Air Inlet to Jet Group D.

Air Control 2: Opens / Closes Air Inlet to Jet Group B.

Diverter Valve 2: Directs Jet Pump 2 Output Between Jet Group C or D.

Diverter Valve 1: Directs Jet Pump 1 Output Between Jet Group A or B.

Air Control 3: Opens / Closes Air Inlet to Jet Group C, E & F.

Waterfall Control: Controls 24 Circulation Pump Output to Both Waterfalls.

IX Control: Controls Pump 1 Output to IX Jet (G).


Air Control 1: Opens / Closes Air Inlet to Jet Group A.


Seat Depths

Front - Back
A = 29.00 - 31.00"
B = 26.50 - 28.50"
C = 30.50 - 32.50"
D = 21.00 - 23.00"
E = 27.25 - 29.25"

Front - Back
F = 17.00 - 19.00"
G = 25.00 - 27.00"
H = 32.50 - 34.50"

Listed Dimensions Represent Distance from Top of Acrylic to Lowest Point in Seat.



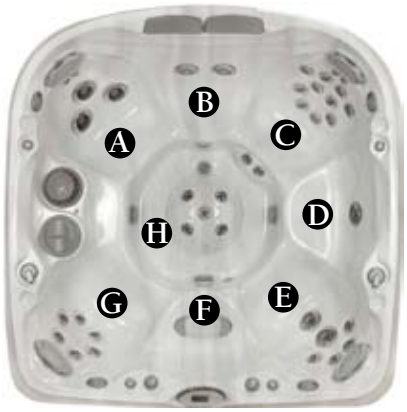

Dimensions/Specifications are Subject to Change Without Notice

Jacuzzi J-460



Dimensions.....*88" x 77" x 34" (224cm x 196cm x 87cm);* ***For Complete Dimensions, See Page 33***

Dry Weight.....*887 lbs (338 kg)*

Filled Weight.....*3,414 lbs (1,549 kg)*

Water Capacity (Avg. Fill) .....*320 US gallons (1,210 Liters)*

Electronic Controls.....*Solid State, LCD User Interface Displays Temperature, Time, Cycles and Fingertip Jet Control. Offers Customizing of Preprogrammed Filtration Cycles and Water Temperature Setting.*

Pump 1 (North America).....*1-Speed, 4.2 hp break, 2.5 hp continuous*

(Export).....***1-Speed, 2.0 hp continuous***

Pump 2 (North America).....*1-Speed, 4.2 hp break, 2.5 hp continuous*

(Export).....***1-Speed, 2.0 hp continuous***

Circulation Pump .....*24-Hour, Programmable for Daily Start Time and Duration*

Total PowerPro Jets.....*33*

Maxx PowerPro (MX2) *5*

PowerPro (FX2).....*5*

PowerPro (IX).....*1, with Independent Air Control and Multi-Colored LED Light Illumination*

PowerPro (FX).....*18*

PowerPro (SX).....*4*

Diverter Valves.....*1*

Air Controls.....*4*

Total Foot Jet Therapy *3*

Water Management System.....*One 45 ft^2 Filter Cartridge on 24-Hour Circulation Pump; One ProPolish Bag on Jets Pump 1; Optional CD Ozone Generator Ready (Factory Installed Ozone Injector)*

LED Lighting.....*One Footwell Jet, One "Jacuzzi" Seat Logo, One ProLite with 7 Color Modes, Two Waterfall Lights*

Cabinet.....*Synthetic Cabinet in Harvest Wheat, Autumn Red or Silverwood Color*

Acrylic Colors.....*Textured Bluegrass, Marine, Onyx, Sahara, Copper Sand, or Sand; Marbled Platinum, Azure, or Champagne*

Headrests.....*4*

Waterfalls.....*Two with Independent Flow Rate / On-Off Adjustment; Powered by 24 Circulation Pump*

Electrical Requirements.....*North American 60 Hz Models: 240 VAC @ 30A, 50A, or 60A*

Export 50 Hz Models: 230-240VAC @ 20A, 30A, or 40A, or suitably rated circuit breaker to comply with local electrical codes. Certain countries may require dual power inputs; two GFCI RCD breakers are required for this configuration.

Warranty.....*North American 60 Hz Models: 10 Years Shell, 7 Years Shell Surface, 5 Years for Plumbing Component Leaks, 5 Years Equipment & Controls;*

Export 50 Hz Models: 2 Years Plumbing Component Leaks, 2 Years Equipment & Controls

Seating Capacity *6*

Audio System (Optional).....*AM/FM/CD Stereo Receiver with Four Speakers And Deluxe Wireless Remote*

Dimensions/Specifications are Subject to Change Without Notice

Jacuzzi J-460

Diverter Valve / Air Control Diagram

Spa Operation Subject to Change without Notice



Air Control 4:
Opens / Closes
Air Inlet to Jet
Group D & E.

Air Control 2:
Opens / Closes
Air Inlet to Jet
Group B.

Jet Selector 1:
Directs Jet Pump 1
Output Between
Jet Group A or B.

Air Control 3:
Opens / Closes
Air Inlet to Jet
Group C & F.

Air Control 1:
Opens / Closes
Air Inlet to Jet
Group A.

• Jet Group C - F Powered at All Times when Pump 2 is Running.

Waterfall Control:
Controls Circulation Output to Both Waterfalls.


IX Control:
Controls Pump 1 Output to IX Jet (G).

• Center Footwell IX Jet "G" Draws Air at Al Times when Jets Pump 1 is Running. This Jet has no Air Control.

Seat Depths

A = 25.50" (64.7cm)
B = 24.75" (62.9cm)
C = 26.00" (66.0cm)
D = 23.12" (59.7cm)
E = 26.50" (67.3cm)
F = 18.00" (45.7cm)
G = 23.50" (59.7cm)
H = 31.25" (79.4cm)

Listed Dimensions Represent Distance from Top of Acrylic to Lowest Point in Seat.





Dimensions/Specifications Subject to Change Without Notice

Jacuzzi J-385



Dimensions ..... *94" x 94" x 38" (239cm x 239cm x 97cm);* ***For Complete Dimensions, See Page 34***

Dry Weight ..... *1,042 lbs (473 kg)*

Filled Weight ..... *5,629 lbs (2,553 kg)*

Water Capacity (Avg. Fill) ..... *550 US gallons (2,082 Liters)*

Electronic Controls ..... *Solid State, LCD User Interface Displays Temperature, Time, Cycles and Fingertip Jet Control. Offers Customizing of Preprogrammed Filtration Cycles and Water Temperature Setting. Also Includes 1 Remote Control Panel for Secondary Jet Control.*

Pump 1 (North America) ..... *2-Speed, 4.2 hp break, 2.5 hp continuous*

(Export) ..... ***2-Speed, 2.0 hp continuous***

Pump 2 (North America) ..... *1-Speed, 4.2 hp break, 2.5 hp continuous*

(Export) ..... ***1-Speed, 2.0 hp continuous***

Pump 3 (North America) ..... *1-Speed, 3.2 hp break, 2.0 hp continuous*

(Export) ..... ***1-Speed, 2.0 hp continuous***

Circulation Pump ..... ***24-Hour,*** *24-Hour, Programmable for Daily Start Time and Duration*

Total PowerPro Jets *43*

Maxx PowerPro (MX) *7*

PowerPro (FX2) *4*

PowerPro (LX) *3*

PowerPro (FX) *27*

PowerPro (SX) *2*

Diverter Valves *2*

Air Controls ..... *5, On / Off Pushbutton Type*

Total Foot Jets Therapy *3*

Water Management System ..... *Two 60 ft^2 Filter Cartridges; Filter 1 on 24-Hour Circulation Pump; Filter 2 on Jets Pump 1; Optional CD Ozone Generator Ready (Factory Installed Ozone Injector)*

LED Lighting ..... *One Underwater ProLite with 7 Color Modes, Two Colored Waterfall Lights*

Cabinet ..... *Synthetic Cabinet in Harvest Wheat, Autumn Red or Silverwood Color*

Acrylic Colors ..... *Textured Bluegrass, Marine, Onyx, Sahara, Copper Sand, or Sand; Marbled Platinum, or Azure or Champagne*

Headrests *5*

Waterfalls ..... *Two with Independent Flow Rate / On-Off Adjustment; Powered by Pump 1*

Electrical Requirements ..... *North American 60 Hz Models: 240 VAC @ 40A, 50A, or 60A*

Export 50 Hz Models: 230-240 VAC @ 35A or 40A, or suitably rated circuit breaker to comply with local electrical codes. Certain countries may require dual power inputs; two GFCI RCD Breakers are required for this configuration.

Warranty ..... *North American 60 Hz Models: 10 Years Shell, 7 Years Shell Surface, 5 Years for Plumbing Component Leaks, 5 Years Equipment & Controls;*

Export 50 Hz Models: 2 Years Plumbing Component Leaks, 2 Years Equipment & Controls

Seating Capacity ..... *6 - 7*

Audio System (Optional) ..... *AM/FM/CD Stereo Receiver with Dual Pop-Up Speakers And Standard Wireless Remote*

Dimensions/Specifications are Subject to Change Without Notice

Jacuzzi J-385

Diverter Valve / Air Control Diagram

Spa Operation Subject to Change without Notice

Air Control 1:
Opens / Closes Air Inlet to Jet Group D.

Air Control 2:
Opens / Closes Air Inlet to Jet Group B.



Diverter Valve 1:
Directs Jet Pump 1 Output Between Jet Group A or B.

Diverter Valve 2:
Directs Jet Pump 2 Output Between Jet Group C or D.

• Foot and Side Wall Jets "E" Powered by Pump 3

Air Control 5:
Opens / Closes Air Inlet to Jet Group C.

Air Control 4:
Opens / Closes Air Inlet to Jet Group E.

Air Control 3:
Opens / Closes Air Inlet to Jet Group A.

Seat Depths

A = 27.00" (68.6cm)
B = 23.00" (58.4cm)
C = 28.50" (72.4cm)
D = 22.75" (57.8cm)
E = 26.50" (67.3cm)
F = 17.50" (44.5cm)
G = 27.50" (69.9cm)
H = 27.00" (68.6cm)
I = 33.50" (85.1cm)

Listed Dimensions Represent Distance from Top of Acrylic to Lowest Point in Seat.



Dimensions/Specifications Subject to Change Without Notice

Jacuzzi J-375


Back

Front

Dimensions ..... *91" x 91" x 38" (231cm x 231cm x 97cm);* ***For Complete Dimensions, See Page 34***

Dry Weight ..... *960 lbs (436 kg)*

Filled Weight ..... *4,963 lbs (2,251 kg)*

Water Capacity (Avg. Fill) ..... *480 US gallons (1,817 Liters)*

Electronic Controls ..... *Solid State, LCD User Interface Displays Temperature, Time, Cycles and Fingertip Jet Control. Offers Customizing of Preprogrammed Filtration Cycles and Water Temperature Setting. Also Includes 1 Remote Control Panel for Secondary Jet Control.*

Pump 1 (North America) ..... *2-Speed, 4.2 hp brake, 2.5 hp continuous*

(Export) ..... ***2-Speed, 2.0 hp continuous***

Pump 2 (North America) ..... *1-Speed, 4.2 hp brake, 2.5 hp continuous*

(Export) ..... ***1-Speed, 2.0 hp continuous***

Circulation Pump ..... *24-Hour, Programmable for Daily Start Time and Duration*

Total PowerPro Jets *34*

Maxx PowerPro (MX) *4*

PowerPro (FX2) *2*

PowerPro (LX) *3*

PowerPro (FX) *23*

PowerPro (SX) *2*

Diverter Valves *2*

Air Controls ..... *5, On / Off Pushbutton Type*

Total Foot Jets Therapy *5*

Water Management System ..... *Two 60 ft^2 Filter Cartridges; Filter 1 on 24-Hour Circulation Pump; Filter 2 on Jets Pump 1; Optional CD Ozone Generator Ready (Factory Installed Ozone Injector)*

LED Lighting ..... *One Underwater ProLite with 7 Color Modes, Two Colored Waterfall Lights*

Cabinet ..... *Synthetic Cabinet in Harvest Wheat, Autumn Red or Silverwood Color*

Acrylic Colors ..... *Textured Bluegrass, Marine, Onyx, Sahara, Copper Sand, or Sand; Marbled Platinum, or Azure or Champagne*

Headrests *4*

Waterfalls ..... *Two with Independent Flow Rate / On-Off Adjustment; Powered by Pump 1*

Electrical Requirements ..... *North American 60 Hz Models: 240 VAC @ 40A, 50A, or 60A*

Export 50 Hz Models: 230-240 VAC @ 20A, 30A, or 40A, or suitably rated circuit breaker to comply with local electrical codes. Certain countries may require dual power inputs; two GFCI RCD Breakers are required for this configuration.

Warranty ..... *North American 60 Hz Models: 10 Years Shell, 7 Years Shell Surface, 5 Years for Plumbing Component Leaks, 5 Years Equipment & Controls;*

Export 50 Hz Models: 2 Years Plumbing Component Leaks, 2 Years Equipment & Controls

Seating Capacity ..... *6 - 7*

Audio System (Optional) ..... *AM/FM/CD Stereo Receiver with Dual Pop-Up Speakers And Standard Wireless Remote*

Dimensions/Specifications are Subject to Change Without Notice

Jacuzzi J-375

Diverter Valve / Air Control Diagram

Spa Operation Subject to Change without Notice

Air Control 1: Opens / Closes Air Inlet to Jet Group D.

Air Control 2: Opens / Closes Air Inlet to Jet Group C.



Air Control 3: Opens / Closes Air Inlet to Jet Group A.

Diverter Valve 2: Directs Jet Pump 2 Output Between Jet Groups D or E.

Diverter Valve 1: Directs Jet Pump 1 Output Between Jet Groups A & B or C.

Air Control 5: Opens / Closes Air Inlet to Jet Group B.

Air Control 4: Opens / Closes Air Inlet to Jet Group E.

Seat Depths

A = 28.75" (73.0cm)
B = 21.50" (54.6cm)
C = 26.75" (67.9cm)
D = 22.50" (57.2cm)
E = 26.00" (66.0cm)
F = 19.00" (48.3cm)
G = 27.00" (68.6cm)
H = 26.50" (67.3cm)
I = 34.00" (86.4cm)

Listed Dimensions Represent Distance from Top of Acrylic to Lowest Point in Seat.



Dimensions/Specifications Subject to Change Without Notice

Jacuzzi J-365



Dimensions ..... *91" x 84" x 38" (231cm x 213cm x 97cm);* ***For Complete Dimensions, See Page 34***

Dry Weight ..... *887 lbs (402 kg)*

Filled Weight ..... *4,006 lbs (1,817 kg)*

Water Capacity (Avg. Fill) ..... *374 US gallons (1,416 Liters)*

Electronic Controls ..... *Solid State, LCD User Interface Displays Temperature, Time, Cycles and Fingertip Jet Control. Offers Customizing of Preprogrammed Filtration Cycles and Water Temperature Setting.*

Pump 1 (North American) ..... *2-Speed, 4.2 hp brake, 2.5 hp continuous*

(Export) ..... ***2-Speed, 2.0 hp continuous***

Pump 2 (North American) ..... *1-Speed, 4.2 hp brake, 2.5 hp continuous*

(Export) ..... ***1-Speed, 2.0 hp continuous***

Circulation Pump ..... *24-Hour, Programmable for Daily Start Time and Duration*

Total PowerPro Jets *30*

Maxx PowerPro (MX) *3*

PowerPro (FX2) *2*

PowerPro (LX) *3*

PowerPro (FX) *22*

Diverter Valves *2*

Air Controls ..... *5, On / Off Pushbutton Type*

Total Foot Jets Therapy *4*

Water Management System ..... *Two 60 ft^2 Filter Cartridges; Filter 1 on 24-Hour Circulation Pump; Filter 2 on Jets Pump 1; Optional CD Ozone Generator Ready (Factory Installed Ozone Injector)*

LED Lighting ..... *One Underwater ProLite with 7 Color Modes, One Colored Waterfall Lights*

Cabinet ..... *Synthetic Cabinet in Harvest Wheat, Autumn Red or Silverwood Color*

Acrylic Colors ..... *Textured Bluegrass, Marine, Onyx, Sahara, Copper Sand, or Sand; Marbled Platinum, or Azure or Champagne*

Headrests *4*

Waterfalls ..... *One with Flow Rate / On-Off Adjustment; Powered by Pump 1*

Electrical Requirements ..... *North American 60 Hz Models: 240 VAC @ 40A, 50A, or 60A*

Export 50 Hz Models: 230-240 VAC @ 20A, 30A, or 40A, or suitably rated circuit breaker to comply with local electrical codes. Certain countries may require dual power inputs; two GFCI RCD Breakers are required for this configuration.

Warranty ..... *North American 60 Hz Models: 10 Years Shell, 7 Years Shell Surface, 5 Years for Plumbing Component Leaks, 5 Years Equipment & Controls;*

Export 50 Hz Models: 2 Years Plumbing Component Leaks, 2 Years Equipment & Controls

Seating Capacity ..... *6 - 7*

Audio System (Optional) ..... *AM/FM/CD Stereo Receiver with Dual Pop-Up Speakers And Standard Wireless Remote*

Dimensions/Specifications are Subject to Change Without Notice

Jacuzzi J-365

Diverter Valve / Air Control Diagram

Spa Operation Subject to Change without Notice

Air Control 1: Opens / Closes Air Inlet to Jet Group B.

Air Control 2: Opens / Closes Air Inlet to Jet Group D.

Air Control 3: Opens / Closes Air Inlet to Jet Group A.



Diverter Valve 1: Directs Jet Pump 1 Output Between Jet Group A or B.

• Footwell Jets D are always on when Pump 2 is activated

Diverter Valve 2: Directs Jet Pump 2 Output Between Jet Groups C or E.

Air Control 4: Opens / Closes Air Inlet to Jet Group C.

Air Control 5: Opens / Closes Air Inlet to Jet Group E.

Seat Depths

A = 25.00" (63.5cm)
B = 23.25" (59.1cm)
C = 28.00" (71.1cm)
D = 22.50" (57.2cm)
E = 27.00" (68.6cm)
F = 19.25" (48.9cm)
G = 26.50" (67.3cm)
H = 25.25" (64.1cm)
I = 33.50" (85.1cm)

Listed Dimensions Represent Distance from Top of Acrylic to Lowest Point in Seat.



Dimensions/Specifications Subject to Change Without Notice

Jacuzzi J-355


Back
Front

Dimensions ..... *91" x 84" x 38" (231cm x 213cm x 97cm);* ***For Complete Dimensions, See Page 34***

Dry Weight ..... *882 lbs (400 kg)*

Filled Weight ..... *3,909 lbs (1,773 kg)*

Water Capacity (Avg. Fill) ..... *363 US gallons (1,374 Liters)*

Electronic Controls ..... *Solid State, LCD User Interface Displays Temperature, Time, Cycles and Fingertip Jet Control. Offers Customizing of Preprogrammed Filtration Cycles and Water Temperature Setting.*

Pump 1 (North American) ..... *2-Speed, 4.2 hp brake, 2.5 hp continuous*

(Export) ..... ***2-Speed, 2.0 hp continuous***

Pump 2 (North American) ..... *1-Speed, 4.2 hp brake, 2.5 hp continuous*

(Export) ..... ***1-Speed, 2.0 hp continuous***

Circulation Pump ..... *24-Hour, Programmable for Daily Start Time and Duration*

Total PowerPro Jets *27*

Maxx PowerPro (MX) *5*

PowerPro (FX2) *2*

PowerPro (LX) *1*

PowerPro (FX) *19*

Diverter Valves *2*

Air Controls ..... *4, On / Off Pushbutton Type*

Total Foot Jets Therapy *2*

Water Management System ..... *Two 60 ft^2 Filter Cartridges; Filter 1 on 24-Hour Circulation Pump; Filter 2 on Jets Pump 1; Optional CD Ozone Generator Ready (Factory Installed Ozone Injector)*

LED Lighting ..... *One Underwater ProLite with 7 Color Modes, One Colored Waterfall Lights*

Cabinet ..... *Synthetic Cabinet in Harvest Wheat, Autumn Red or Silverwood Color*

Acrylic Colors ..... *Textured Bluegrass, Marine, Onyx, Sahara, Copper Sand, or Sand; Marbled Platinum, or Azure or Champagne*

Headrests *3*

Waterfalls ..... *Two with Independent Flow Rate / On-Off Adjustment; Powered by Pump 1*

Electrical Requirements ..... *North American 60 Hz Models: 240 VAC @ 40A, 50A, or 60A*

Export 50 Hz Models: 230-240 VAC @ 20A, 30A or 40A, or suitably rated circuit breaker to comply with local electrical codes. Certain countries may require dual power inputs; two GFCI RCD Breakers are required for this configuration.

Warranty ..... *North American 60 Hz Models: 10 Years Shell, 7 Years Shell Surface, 5 Years for Plumbing Component Leaks, 5 Years Equipment & Controls;*

Export 50 Hz Models: 2 Years Plumbing Component Leaks, 2 Years Equipment & Controls

Seating Capacity ..... *5 - 6*

Audio System (Optional) ..... *AM/FM/CD Stereo Receiver with Dual Pop-Up Speakers And Standard Wireless Remote*

Dimensions/Specifications are Subject to Change Without Notice

Jacuzzi J-355

Diverter Valve / Air Control Diagram

Spa Operation Subject to Change without Notice

Air Control 1: Opens / Closes Air Inlet to Jet Group D.

Air Control 2: Opens / Closes Air Inlet to Jet Group B.



Air Control 3: Opens / Closes Air Inlet to Jet Group A.

Diverter Valve 1: Directs Jet Pump 1 Output Between Jet Groups A or B.

Diverter Valve 2: Directs Jet Pump 2 Output Between Jet Groups C or D.

Air Control 4: Opens / Closes Air Inlet to Jet Group C.

Seat Depths

A = 29.00" (73.6cm)
B = 21.75" (55.2cm)
C = 27.00" (68.6cm)
D = 22.75" (57.8cm)
E = 13.75" (34.9cm)
F = 27.50" (69.9cm)
G = 26.50" (67.3cm)
H = 33.25" (84.5cm)

Listed Dimensions Represent Distance from Top of Acrylic to Lowest Point in Seat.



Dimensions/Specifications Subject to Change Without Notice

Jacuzzi J-345

Back



Front

Dimensions ..... *84" x 84" x 36" (213cm x 213cm x 91cm);* ***For Complete Dimensions, See Page 34***

Dry Weight ..... *822 lbs (373 kg)*

Filled Weight ..... *3,624 lbs (1,644 kg)*

Water Capacity (Avg. Fill) ..... *336 US gallons (1,272 Liters)*

Electronic Controls ..... *Solid State Electronic Controls with LED Readout, Programmable Temperature, Filtration, and Heat Cycles*

Pump 1 (North American) ..... *2-Speed, 4.2 hp brake, 2.5 hp continuous*

(Export) ..... ***2-Speed, 2.0 hp continuous***

Pump 2 (North American) ..... *1-Speed, 4.2 hp brake, 2.5 hp continuous*

(Export) ..... ***1-Speed, 2.0 hp continuous***

Circulation Pump ..... *Yes, 24-hours*

Total PowerPro Jets *25*

Maxx PowerPro (MX) *5*

PowerPro (FX2) *2*

PowerPro (LX) *2*

PowerPro (FX) *16*

Diverter Valves *2*

Air Controls ..... *4, On / Off Pushbutton Type*

Total Foot Jets Therapy *2*

Water Management System ..... *Two 60 ft^2 Filter Cartridges; Filter 1 on 24-Hour Circulation Pump; Filter 2 on Jets Pump 1; Optional CD Ozone Generator Ready (Factory Installed Ozone Injector)*

LED Lighting ..... *One Underwater ProLite with 7 Color Modes, One Colored Waterfall Lights*

Cabinet ..... *Synthetic Cabinet in Harvest Wheat, Autumn Red or Silverwood Color*

Acrylic Colors ..... *Textured Bluegrass, Marine, Onyx, Sahara, Copper Sand, or Sand; Marbled Platinum, or Azure or Champagne*

Headrests *4*

Waterfall ..... *One Independent Flow Rate / On-Off Adjustment; Powered by Pump 1*

Electrical Requirements ..... *North American 60 Hz Models: 240 VAC @ 40A, 50A, or 60A* ***Export 50 Hz Models: 230-240 VAC @ 20A, 30A or 40A, or suitably rated circuit breaker to comply with local electrical codes. Certain countries may require dual power inputs; two GFCI RCD Breakers are required for this configuration.***

Warranty ..... *North American 60 Hz Models: 10 Years Shell, 7 Years Shell Surface, 5 Years for Plumbing Component Leaks, 5 Years Equipment & Controls;* ***Export 50 Hz Models: 2 Years Plumbing Component Leaks, 2 Years Equipment & Controls***

Seating Capacity ..... *4 - 5*

Audio System (Optional) ..... *AM/FM/CD Stereo Receiver with Dual Pop-Up Speakers And Standard Wireless Remote*

Dimensions/Specifications are Subject to Change Without Notice

Jacuzzi J-345

Diverter Valve / Air Control Diagram

Spa Operation Subject to Change without Notice

Air Control 1: Opens / Closes Air Inlet to Jet Group A.

Air Control 2: Opens / Closes Air Inlet to Jet Group C.

Air Control 3: Opens / Closes Air Inlet to Jet Group B.



Diverter Valve 2: Directs Jet Pump 2 Output Between Jet Group C or D.

Diverter Valve 1: Directs Jet Pump 1 Output Between Jet Group A or B.

Air Control 4: Opens / Closes Air Inlet to Jet Group D.

Seat Depths

A = 25.50" (64.8cm)
B = 24.00" (60.1cm)
C = 28.50" (72.4cm)
D = 23.00" (58.4cm)
E = 27.50" (69.9cm)
F = 19.75" (50.2cm)
G = 27.00" (58.6cm)
H = 25.75" (65.4cm)
I = 34.00" (86.4cm)

Listed Dimensions Represent Distance from Top of Acrylic to Lowest Point in Seat.



Dimensions/Specifications Subject to Change Without Notice

Jacuzzi J-335

Back



Front

Dimensions ..... *84" x 84" x 36" (213cm x 213cm x 91cm);* ***For Complete Dimensions, See Page 34***

Dry Weight ..... *812 lbs (369 kg)*

Filled Weight ..... *3,798 lbs (1,723 kg)*

Water Capacity (Avg. Fill) ..... *358 US gallons (1,355 Liters)*

Electronic Controls ..... *Solid State Electronic Controls with LED Readout, Programmable Temperature, Filtration, and Heat Cycles*

Pump 1 (North American) ..... *2-Speed, 4.2 hp brake, 2.5 hp continuous*

(Export) ..... ***2-Speed, 2.0 hp continuous***

Pump 2 (North American) ..... *1-Speed, 4.2 hp brake, 2.5 hp continuous*

(Export) ..... ***1-Speed, 2.0 hp continuous***

Circulation Pump ..... *Yes, 24-hours*

Total PowerPro Jets *24*

PowerPro (FX2) *1*

PowerPro (LX) *3*

PowerPro (FX) *18*

PowerPro (SX) *2*

Diverter Valves *1*

Air Controls ..... *3, On / Off Pushbutton Type*

Water Management System ..... *Two 60 ft^2 Filter Cartridges; Filter 1 on 24-Hour Circulation Pump; Filter 2 on Jets Pump 1; Optional CD Ozone Generator Ready (Factory Installed Ozone Injector)*

LED Lighting ..... *One Underwater ProLite with 7 Color Modes, One Colored Waterfall Lights*

Cabinet ..... *Synthetic Cabinet in Harvest Wheat, Autumn Red or Silverwood Color*

Acrylic Colors ..... *Textured Bluegrass, Marine, Onyx, Sahara, Copper Sand, or Sand; Marbled Platinum, or Azure or Champagne*

Headrests *4*

Waterfall ..... *One Independent Flow Rate / On-Off Adjustment; Powered by Pump 1*

Electrical Requirements ..... *North American 60 Hz Models: 240 VAC @ 40A, 50A, or 60A* ***Export 50 Hz Models: 230-240 VAC @ 20A, 30A or 40A, or suitably rated circuit breaker to comply with local electrical codes. Certain countries may require dual power inputs; two GFCI RCD Breakers are required for this configuration.***

Warranty ..... *North American 60 Hz Models: 10 Years Shell, 7 Years Shell Surface, 5 Years for Plumbing Component Leaks, 5 Years Equipment & Controls;* ***Export 50 Hz Models: 2 Years Plumbing Component Leaks, 2 Years Equipment & Controls***

Seating Capacity *4*

Audio System (Optional) ..... *AM/FM/CD Stereo Receiver with Dual Pop-Up Speakers And Standard Wireless Remote*

Dimensions/Specifications are Subject to Change Without Notice

Jacuzzi J-335

Diverter Valve / Air Control Diagram

Spa Operation Subject to Change without Notice

Air Control 2:
Opens / Closes
Air Inlet to Jet
Group C.



Air Control 3:
Opens / Closes
Air Inlet to Jet
Group A & D.

Diverter Valve 1:
Directs Jet Pump 1
Output Between
Jet Group A or B.

Air Control 1:
Opens / Closes
Air Inlet to Jet
Group B.

Pump 1 - Powers Jet Group D at All Times, When Running.
Pump2 - Powers Jet Group C at All Times, When Running.

Seat Depths

A = 26.50" (67.3cm)
B = 24.00" (60.1cm)
C = 28.75" (73.0cm)
D = 23.00" (58.4cm)
E = 27.50" (69.9cm)
F = 19.75" (50.2cm)
G = 27.00" (68.6cm)
H = 34.00" (86.4cm)

Listed Dimensions Represent Distance from Top of Acrylic to Lowest Point in Seat.



Dimensions/Specifications Subject to Change Without Notice

Jacuzzi J-325

Back



Front

Dimensions ..... *76" x 84" x 34" (193cm x 213cm x 86cm);* ***For Complete Dimensions, See Page 34***

Dry Weight ..... *738 lbs (335 kg)*

Filled Weight ..... *3,407 lbs (1,545 kg)*

Water Capacity (Avg. Fill) ..... *320 US gallons (1,211 Liters)*

Electronic Controls ..... *Solid State Electronic Controls with LED Readout, Programmable Temperature, Filtration, and Heat Cycles*

Pump 1 (North American) ..... *2-Speed, 4.0 hp brake, 2.5 hp continuous*

(Export) ..... ***2-Speed, 2.0 hp continuous***

Circulation Pump ..... *Yes, 24-hours*

Total PowerPro Jets *15*

PowerPro (FX2) *4*

PowerPro (LX) *7*

PowerPro (FX) *4*

Diverter Valves *1*

Air Controls ..... *3, On / Off Pushbutton Type*

Total Foot Jets Therapy *2*

Water Management System ..... *Two 60 ft^2 Filter Cartridges; Filter 1 on 24-Hour Circulation Pump; Filter 2 on Jets Pump 1; Optional CD Ozone Generator Ready (Factory Installed Ozone Injector)*

LED Lighting ..... *One Underwater ProLite with 7 Color Modes, One Colored Waterfall Lights*

Cabinet ..... *Synthetic Cabinet in Harvest Wheat, Autumn Red or Silverwood Color*

Acrylic Colors ..... *Textured Bluegrass, Marine, Onyx, Sahara, Copper Sand, or Sand; Marbled Platinum, or Azure or Champagne*

Headrests *4*

Waterfall ..... *One Independent Flow Rate / On-Off Adjustment; Powered by Pump 1*

Electrical Requirements ..... *North American 60 Hz Models: 240 VAC @ 40A, or 50A,* ***Export 50 Hz Models: 230-240 VAC @ 20A, or 30A, or suitably rated circuit breaker to comply with local electrical codes. Certain countries may require dual power inputs; two GFCI RCD Breakers are required for this configuration.***

Warranty ..... *North American 60 Hz Models: 10 Years Shell, 7 Years Shell Surface, 5 Years for Plumbing Component Leaks, 5 Years Equipment & Controls;* ***Export 50 Hz Models: 2 Years Plumbing Component Leaks, 2 Years Equipment & Controls***

Seating Capacity *4*

Audio System (Optional) ..... *N/A*

Dimensions/Specifications are Subject to Change Without Notice

Jacuzzi J-325

Diverter Valve / Air Control Diagram

Spa Operation Subject to Change without Notice



Diverter Valve 1: Directs Jet Pump1 Output Between Jet Groups A or B & C.

Air Control 1: Opens / Closes Air Inlet to Jet Group A.

Air Control 2: Opens / Closes Air Inlet to Jet Group B.

Air Control 3: Opens / Closes Air Inlet to Jet Group C.

Seat Depths

A = 27.00" (68.6cm)
B = 27.25" (69.2cm)
C = 25.75" (65.4cm)
D = 21.50" (54.6cm)
E = 28.00" (71.1cm)
F = 31.25" (79.4cm)

Listed Dimensions Represent Distance from Top of Acrylic to Lowest Point in Seat.



Dimensions/Specifications Subject to Change Without Notice

Jacuzzi J-315

Back



Front

Dimensions ..... *76" x 66" x 32" (193cm x 168cm x 81cm);* ***For Complete Dimensions, See Page 34***

Dry Weight ..... *640 lbs (290 kg)*

Filled Weight ..... *2,308 lbs (1,047 kg)*

Water Capacity (Avg. Fill) ..... *200 US gallons (757 Liters)*

Electronic Controls ..... *Solid State Electronic Controls with LED Readout, Programmable Temperature, Filtration, and Heat Cycles*

Pump 1 (North American) ..... *2-Speed, 2.0 hp brake, 1.5 hp continuous*

(Export) ..... ***2-Speed, 2.0 hp continuous***

Circulation Pump ..... *Yes, 24-hours*

Total PowerPro Jets *13*

PowerPro (FX2) *3*

PowerPro (LX) *4*

PowerPro (FX) *6*

Diverter Valves *1*

Air Controls ..... *2, On / Off Pushbutton Type*

Total Foot Jets Therapy *2*

Water Management System ..... *Two 60 ft^2 Filter Cartridges; Filter 1 on 24-Hour Circulation Pump; Filter 2 on Jets Pump 1; Optional CD Ozone Generator Ready (Factory Installed Ozone Injector)*

LED Lighting ..... *One Underwater ProLite with 7 Color Modes, One Colored Waterfall Lights*

Cabinet ..... *Synthetic Cabinet in Harvest Wheat, Autumn Red or Silverwood Color*

Acrylic Colors ..... *Textured Bluegrass, Marine, Onyx, Sahara, Copper Sand, or Sand; Marbled Platinum, or Azure or Champagne*

Headrests *3*

Waterfall ..... *One Independent Flow Rate / On-Off Adjustment; Powered by Pump 1*

Electrical Requirements ..... *North American 60 Hz Models: 120 VAC @ 15A or 240 VAC @ 30A, 40A* ***Export 50 Hz Models: 230-240 VAC @ 20A, or 30A, or suitably rated circuit breaker to comply with local electrical codes. Certain countries may require dual power inputs; two GFCI RCD Breakers are required for this configuration.***

Warranty ..... *North American 60 Hz Models: 10 Years Shell, 7 Years Shell Surface, 5 Years for Plumbing Component Leaks, 5 Years Equipment & Controls;* ***Export 50 Hz Models: 2 Years Plumbing Component Leaks, 2 Years Equipment & Controls***

Seating Capacity *3*

Audio System (Optional) ..... *N/A*

Dimensions/Specifications are Subject to Change Without Notice

Jacuzzi J-315

Diverter Valve / Air Control Diagram

Spa Operation Subject to Change without Notice

Jet Selector:
Directs Jet Pump1 Output Between Jet Groups A & B.

Air Control 1:
Opens / Closes Air Inlet to Jet Group A.



Air Control 2:
Opens / Closes Air Inlet to Jet Group B.

Seat Depths

A = 26.50" (67.3cm)
B = 28.00" (71.1cm)
C = 27.00" (68.6cm)
D = 28.00" (71.1cm)
E = 27.75" (70.5cm)

Listed Dimensions Represent Distance from Top of Acrylic to Lowest Point in Seat.



Dimensions/Specifications Subject to Change Without Notice

Jacuzzi J-230

Back



Front

Dimensions ..... *84" x 84" x 36" (213cm x 213cm x 91cm);* ***For Complete Dimensions, See Page 35***

Dry Weight ..... *630 lbs (286 kg)*

Filled Weight ..... *3,799 lbs (1723 kg)*

Water Capacity (Avg. Fill) ..... *380 US gallons (1,438 Liters)*

Electronic Controls ..... *Solid State Electronic Controls with LED Readout, Programmable Temperature, Filtration, and Heat Cycles*

Pump 1 (North American) ..... *2-Speed, 4.2 hp brake, 2.5 hp continuous*

Pump 1 (Export) ..... ***2-Speed, 3.5 hp brake, 2.0 hp continuous***

Pump 2 (North American) ..... *1-Speed, 4.2 hp brake, 2.0 hp continuous*

Pump 2 (Export) ..... ***2-Speed, 3.5 hp brake, 2.0 hp continuous***

Total Jets *33*

Euro Jets *6*

Micro Jets *20*

Luxury Jets *3*

Pulsator Jets *4*

Air Controls *2*

Total Foot Jets Therapy *2*

Water Management System ..... *One 50 ft^2 Filter Cartridge; Filter 1 on Jets Pump 1, Optional CD Ozone Generator Ready (Factory Installed Ozone Injector)*

Lighting ..... *Underwater with Two Colored Lenses; Optional Underwater Plug-in Multi-Color LED Light*

Cabinet ..... *Synthetic Cabinet in Autumn Red or Silverwood Color*

Acrylic Colors ..... *Textured Marine, Sahara, or Marbled Platinum*

Headrests *3*

Electrical Requirements ..... *North American 60Hz Models: 240 VAC @ 40A, 50A or 60A* ***Export 50Hz Models: 230 VAC @ 20A, 30A, or 40A, or suitably rated circuit breaker to comply with local electrical codes. Certain countries may require dual power inputs; two GFCI RCD Breakers are required for this configuration.***

Warranty ..... *North American 60Hz Models: 5 Years Shell, 3 Years Shell Surface, 3 Years for Plumbing Component Leaks, 3 Years Equipment & Controls;* ***Export 50Hz Models: 5 Years Shell, 3 Years Shell Surface, 1 Years for Plumbing Component Leaks, 1 Year Equipment & Controls***

Seating Capacity *5*


Audio System (Optional) ..... *N/A*

Dimensions/Specifications are Subject to Change Without Notice

Jacuzzi J-230

Diverter Valve / Air Control Diagram

Spa Operation Subject to Change without Notice

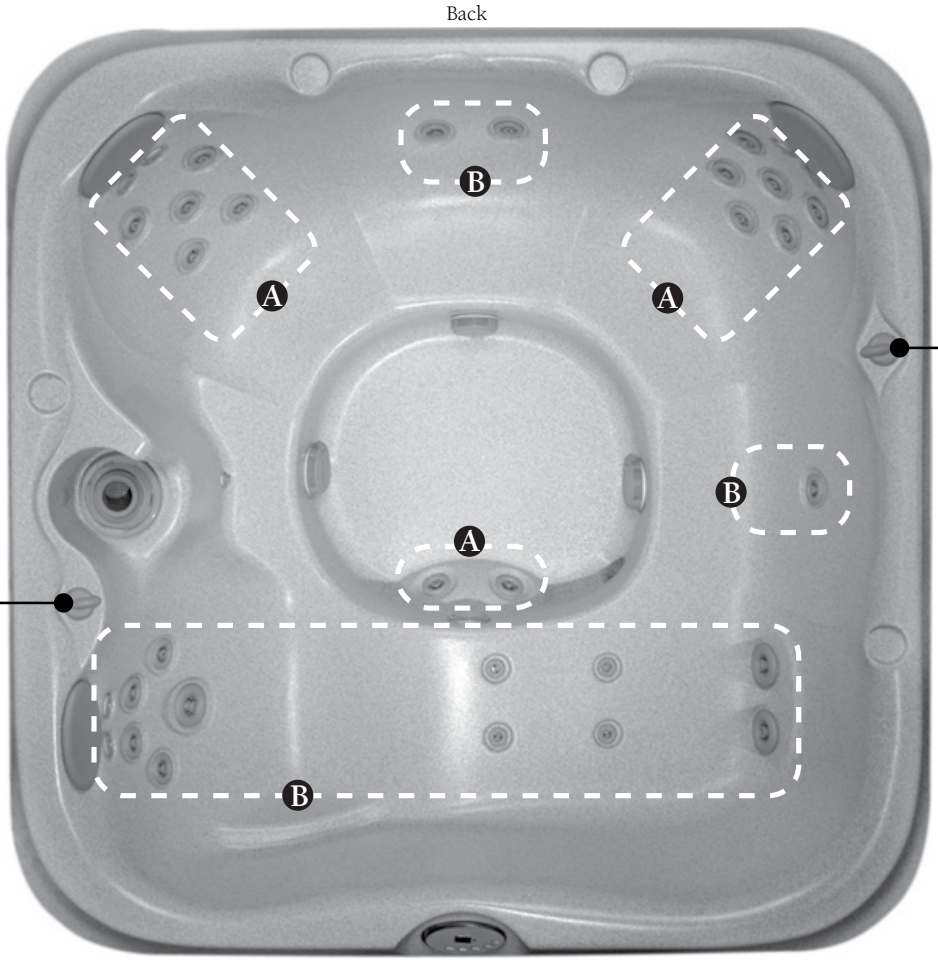

Air Control 1: Opens / Closes Air Inlet to Jet Group A.


Air Control 2: Opens / Closes Air Inlet to Jet Group B.

Jets Groups A Powered by Jet Pump 1.
Jets Groups B Powered by Jet Pump 2.

Seat Depths

A = 28.0" (71.1cm)
B = 26.5" (67.3cm)
C = 26.5" (67.3cm)
D = 26.0" (66.0cm)
E = 33.0" (83.8cm)

Listed Dimensions Represent Distance from Top of Acrylic to Lowest Point in Seat.

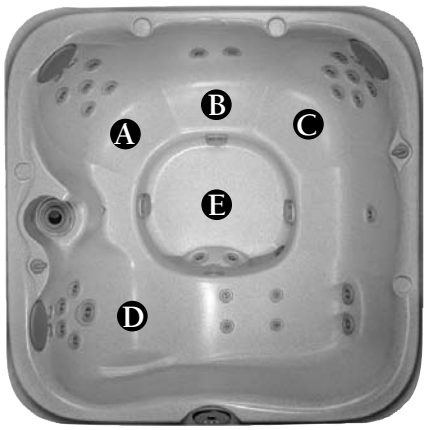

Dimensions/Specifications Subject to Change Without Notice

Jacuzzi J-220



Dimensions ..... *76" x 84" x 36" (193cm x 213cm x 91 cm);* ***For Complete Dimensions, See Page 35***

Dry Weight ..... *530 lbs (240 kg)*

Filled Weight ..... *3,324lbs (1,508 kg)*

Water Capacity (Avg. Fill) ..... *335 US gallons (1,268 Liters)*

Electronic Controls ..... *Solid State Electronic Controls with LED Readout, Programmable Temperature, Filtration, and Heat Cycles*

Pump 1 (North American) ..... *2-Speed, 2.0 hp brake, 1.5 hp continuous*

Pump 1 (Export) ..... ***2-Speed, 2.0 hp brake, 1.5 hp continuous***

Total Jets *21*

Euro Jets *4*

Micro Jets *15*

Luxury Jets *2*

Diverter Valves *1*

Air Controls *3*

Total Foot Jets Therapy *2*

Water Management System ..... *One 50 ft^2 Filter Cartridge; Filter 1 on Jets Pump 1, Optional CD Ozone Generator Ready (Factory Installed Ozone Injector)*

Lighting ..... *Underwater with Two Colored Lenses; Optional Underwater Plug-in Multi-Color LED Light*

Cabinet ..... *Synthetic Cabinet in Autumn Red or Silverwood Color*

Acrylic Colors ..... *Textured Marine, Sahara, or Marbled Platinum*

Headrests *2*

Electrical Requirements ..... *North American 60Hz Models: 120 VAC @ 15A or 240 VAC @ 30A or 40A* ***Export 50Hz Models: 230 VAC @ 20A, or 30A, or suitably rated circuit breaker to comply with local electrical codes. Certain countries may require dual power inputs; two GFCI RCD Breakers are required for this configuration.***

Warranty ..... *North American 60Hz Models: 5 Years Shell, 3 Years Shell Surface, 3 Years for Plumbing Component Leaks, 3 Years Equipment & Controls;* ***Export 50Hz Models: 5 Years Shell, 3 Years Shell Surface, 1 Years for Plumbing Component Leaks, 1 Year Equipment & Controls***

Seating Capacity *4*

Audio System (Optional) ..... *N/A*

Jacuzzi J-220

Diverter Valve / Air Control Diagram

Spa Operation Subject to Change without Notice



Diverter Valve: Directs Jet Pump1 Output Between Jet Group A & B.

Air Control 2: Opens / Closes Air Inlet to Jet Group B.

Air Control 1: Opens / Closes Air Inlet to Jet Group A.

Air Control 3: Opens / Closes Air Inlet to Jet Group C.

Jets Groups A - B Powered by Jet Pump 1.

Seat Depths

A = 27.0" (68.6cm)
B = 31.3" (79.4cm)
C = 24.5" (62.2cm)

Listed Dimensions Represent Distance from Top of Acrylic to Lowest Point in Seat.



Dimensions/Specifications Subject to Change Without Notice

Jacuzzi J-210

Back



Front

Dimensions ..... *78" Round x 36" Deep (198cm Round x 914cm Deep);* ***For Complete Dimensions, See Page 35***

Dry Weight ..... *410 lbs (186 kg)*

Filled Weight ..... *2,245 lbs (1,018 kg)*

Water Capacity (Avg. Fill) ..... *220 US gallons (833 Liters)*

Electronic Controls ..... *Solid State Electronic Controls with LED Readout, Programmable Temperature, Filtration, and Heat Cycles*

Pump 1 (North American) ..... *2-Speed, 2.0 hp brake, 1.5 hp continuous*

Pump 1 (Export) ..... ***2-Speed, 3.5 hp brake, 2.0 hp continuous***

Total Jets *19*

Euro Jets *4*

Micro Jets *10*

Luxury Jets *4*

Divert-A-Jet *1*

Air Controls *3*

Total Foot Jets Therapy *2*

Water Management System ..... *One 50 ft^2 Filter Cartridge; Optional CD Ozone Generator Ready (Factory Installed Ozone Injector)*

Lighting ..... *Underwater with Two Colored Lenses; Optional Underwater Plug-in Multi-Color LED Light*

Cabinet ..... *Synthetic Cabinet in Autumn Red or Silverwood Color*

Acrylic Colors ..... *Textured Marine, Sahara, or Marbled Platinum*

Electrical Requirements ..... *North American 60 Hz Models: 120 VAC @ 15A or 240 VAC @ 30A or 40A,* ***Export 50Hz Models: 230 VAC @ 20A or 30A, or suitably rated circuit breaker to comply with local electrical codes. Certain countries may require dual power inputs; two GFCI RCD Breakers are required for this configuration.***

Warranty ..... *North American 60Hz Models: 5 Years Shell, 3 Years Shell Surface, 3 Years for Plumbing Component Leaks, 3 Years Equipment & Controls;* ***Export 50Hz Models: 5 Years Shell, 3 Years Shell Surface, 1 Years for Plumbing Component Leaks, 1 Year Equipment & Controls***


Seating Capacity *4*

Audio System (Optional) ..... *N/A*

Jacuzzi J-210

Diverter Valve / Air Control Diagram

Spa Operation Subject to Change without Notice

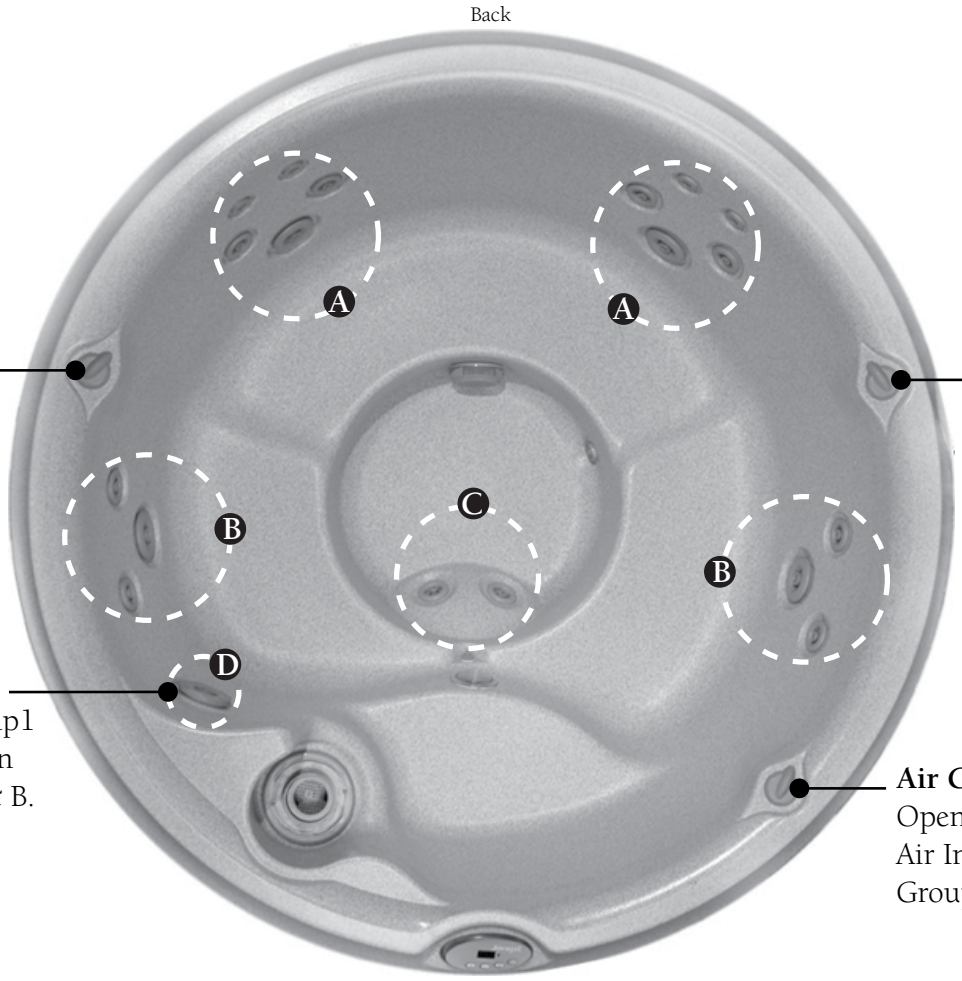

Air Control 3:
Opens / Closes
Air Inlet to Jet
Diver-A-Jet D.

Air Control 2:
Opens / Closes
Air Inlet to Jet
Group A & C.

Diver-A-Jet:
Directs Jet Pump1
Output Between
Jet Groups A & B.

Air Control 1:
Opens / Closes
Air Inlet to Jet
Group B.

Jets Groups C Powered Continuously When Jet Pump is Running.

Seat Depths

A = 27.0" (68.6cm)
B = 24.5" (62.2cm)
C = 16.5" (41.9cm)
D = 24.5" (62.2cm)
E = 34.0" (86.4cm)

Listed Dimensions Represent Distance from Top of Acrylic to Lowest Point in Seat.




Dimensions/Specifications Subject to Change Without Notice

Complete Dimensions - All 400 Series Models


Spa Models	DIMENSIONS - (A - F)					
	A	B	C	D	E	F
J-480	94" (239cm)	94" (239cm)	20.5" (52.1cm)	11" (27.9cm)	34.625" (87.9cm)	94" (239cm)
J-470	91" (231cm)	91" (231cm)	20.5" (52.1cm)	15.75" (40.0cm)	24.25" (61.6)	91" (231cm)
J-460	88" (224cm)	77" (196cm)	14.25" (36.2cm)	9.5" (24.1cm)	24.5" (62.2cm)	88" (224cm)
	DIMENSIONS - (G - L)					
	G	H	I	J	K	L
J-480	32.5" (82.6cm)	38.75" (98.4cm)	44" (112cm)	≈ 8.25" (21.0cm)	≈ 720.75" (1830.7cm)	≈ 120.25" (305.4cm)
J-470	32.5" (82.6cm)	38.75" (98.4cm)	44" (112cm)	≈ 8.50" (21.6cm)	≈ 900.50" (2287.3cm)	≈ 146.625" (372.4cm)
J-460	27.25" (69.2cm)	34" (86.4cm)	34" (86.4cm)	≈ 9" (22.9cm)	≈ 384.75" (977.3cm)	≈ 144.375" (366.7cm)
	DIMENSIONS - (M - O)					
	M	N	O			
J-480	≈ 19.875" (50.5cm)	≈ 491.25" (1247.8cm)	Front Left			
J-470	≈ 19.875" (50.5cm)	≈ 458.5" (1164.6cm)	Front Left			
J-460	≈ 16.875" (42.9cm)	≈ 441" (1120.1cm)	Front Right			

IMPORTANT! Always Measure Each Hot Tub for Exact Dimensions BEFORE Designing its Foundation Support and/or Decking.

Spa Top View (J-480 Illustrated)

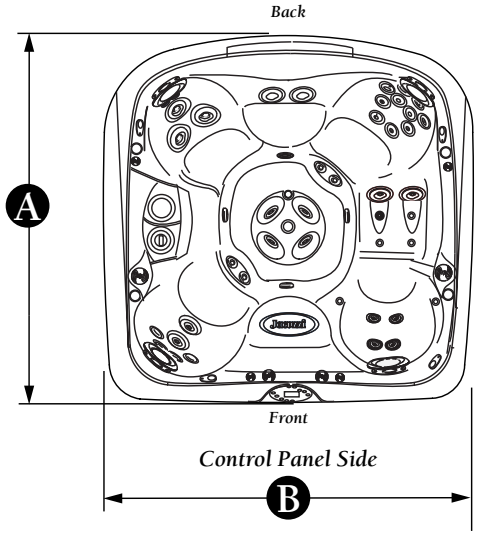


Spa Bottom View (J-480 Illustrated)

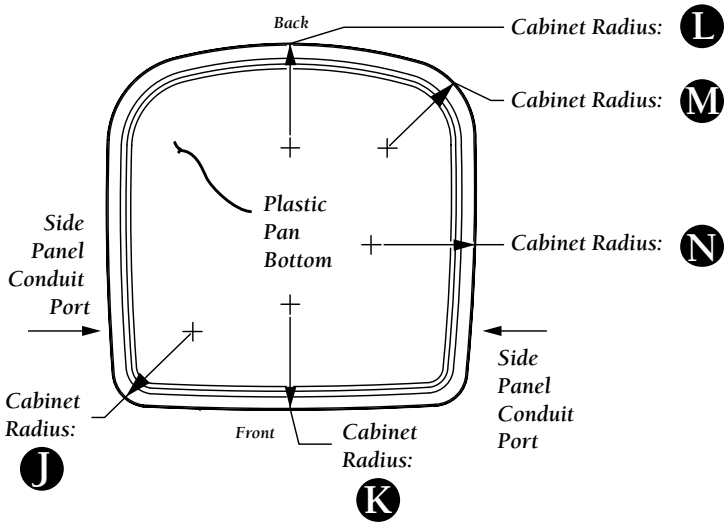


IMPORTANT! Always Measure Each Hot Tub for Exact Dimensions BEFORE Designing its Foundation Support and/or Decking.

Control Panel Side View (All Models)

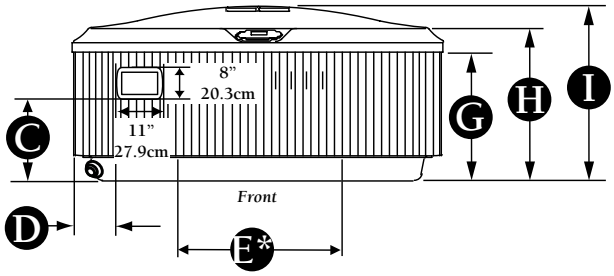


Front/Rear Panel

Side View (J-480 Illustrated)

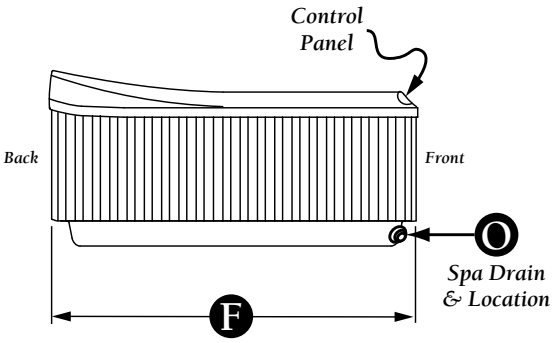

Left/Right Side Panel

Important Panel Access Details

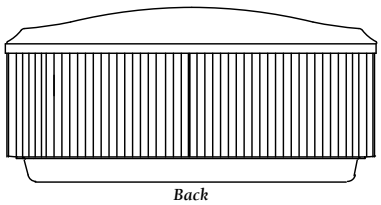

**Note: Side Panels Utilize a Wrap-Around Design which Meets at the Back of the Spa. For Serviceability, Always Allow for Full Side and Back Panel Access.*


Note: Gaps in underlying wood frame are for ventilation purposes; not for electrical hook-ups or other uses.

Complete Dimensions - All 300 Series Models

Spa Model	DIMENSIONS (A - F)					
	A	B	C	D	E	F
J-385	94" (238.8cm)	94" (238.8cm)	16.5" (41.9cm)	2.75" (7.0cm)	66.75" (169.5cm)	66.75" (169.5cm)
J-375	91" (231.1cm)	91" (231.1cm)			64.50" (163.8cm)	64.50" (163.8cm)
J-365	84" (213.4cm)					
J-355						
J-345		84" (213.4cm)			57.50" (146.1cm)	57.50" (146.1cm)
J-335						
J-325		76" (193.0cm)	N/A		50.25" (127.6cm)	50.25" (127.6cm)
J-315	66" (167.6cm)				49.63" (126.1cm)	49.63" (126.1cm)
	DIMENSIONS (G - L)					
	G	H	I	J	K	L
J-385	31.75" (80.6cm)	38" (96.5cm)	67.50" (171.5cm)	Front Left	***IMPORTANT! Always Measure Each Hot Tub for Exact Dimensions BEFORE Designing its Foundation Support and/or Decking.***	
J-375			64.50" (163.8cm)	Front Left		
J-365			57.63" (146.4cm)	Front Left		
J-355			57.50" (146.1cm)	Front Left		
J-345	30.00" (76.2cm)	36" (91.4cm)		Front Left		
J-335	29.75" (75.6cm)			Front Left		
J-325	28.00" (71.1cm)	34" (86.4cm)	57.38" (145.7cm)	Front Right		
J-315	26.00" (66.0cm)	32" (81.3cm)	39.63" (100.7cm)	Front Left		


- Dimensions Subject to Change Without Notice -

Spa Top View (J-385 Illustrated)

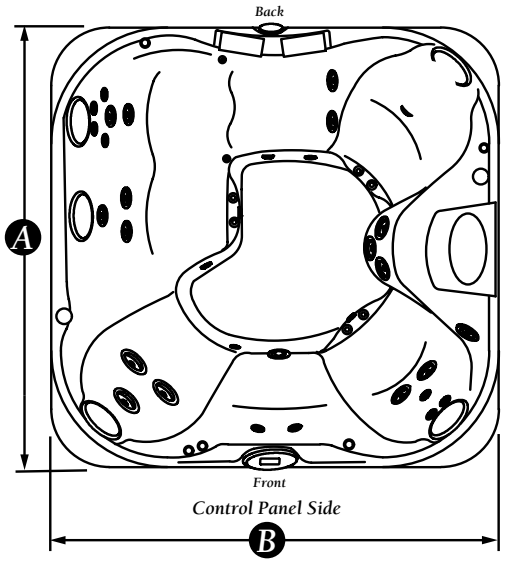


IMPORTANT! Always Measure Each Hot Tub for Exact Dimensions BEFORE Designing its Foundation Support and/or Decking.

Control Panel Side View (All Models)

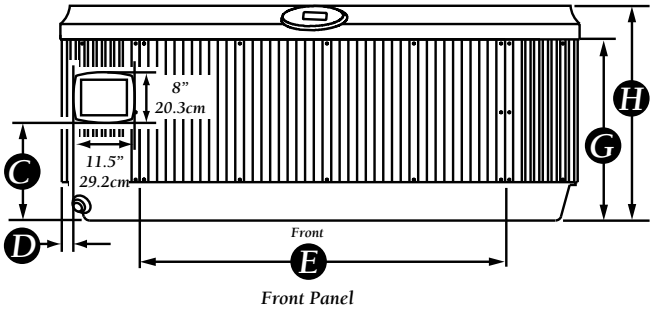


Front Panel

Rear Side View (All Models)

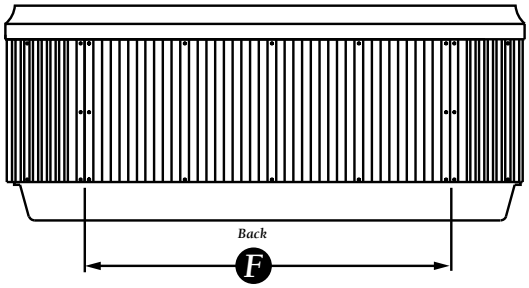


Rear Panel

Spa Bottom View

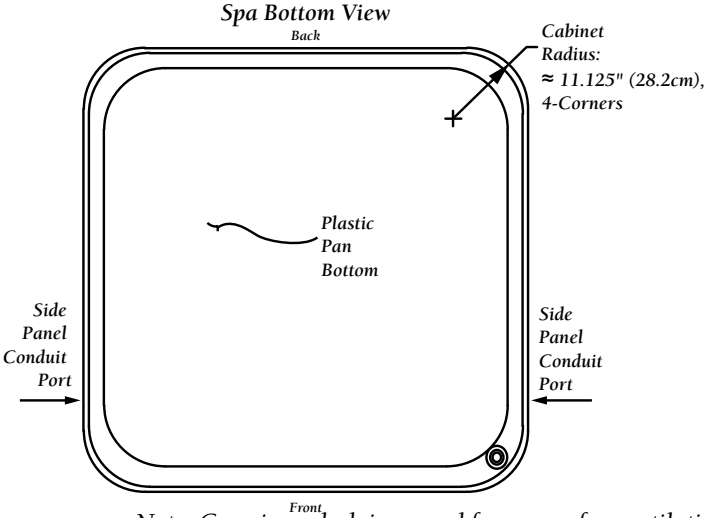

Left / Right Side View (All Models)

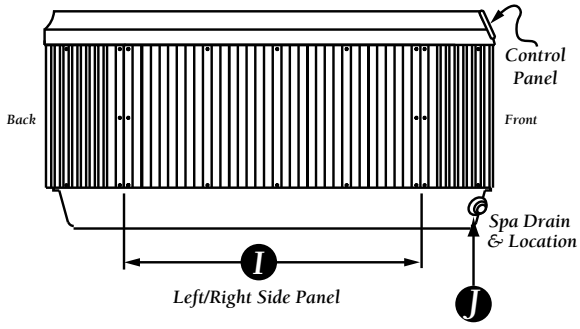

Note: Gaps in underlying wood frame are for ventilation purposes; not for electrical hook-ups or other uses.


Complete Dimensions - All 200 Series Models

Spa Model	DIMENSIONS (A - F)					
	A	B	C	D	E	F
J-210 (Round Spa)	78" (198.1cm) Round		77.25" (196.2cm) Round	30.25" (76.8cm)	36" (91.4cm)	77.25" (196.2cm) Round
J-220 (Retangular Spa)	84" (213.4cm)	76" (193.0cm)	75.25" (191.1cm)			83.25" (211.5cm)
J-230 (Square Spa)	84" (213.4cm)	84" (213.4cm)	83.25" (211.4cm)			83.25" (211.4cm)

- Dimensions Subject to Change Without Notice -


IMPORTANT! Always Measure Each Hot Tub for Exact Dimensions BEFORE Designing its Foundation Support and/or Decking.

Spa Top View (J-230 Illustrated)

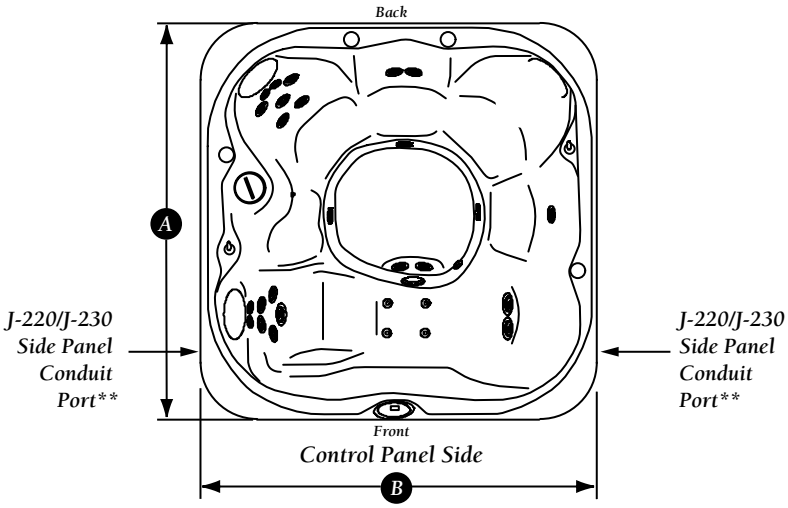

*****Single Conduit Port Available on Round J-210 Models at Front Panel Side of Spa.***

Control Panel Side View (All Models)

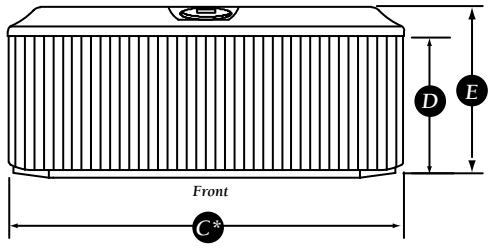


Equipment Access Panel (Spa Drain Hose Located Behind Front Panel)


****Panels C & F: Always Design Surround or Decking to Allow Removal of Entire Side Skirt on All Sides of Spa for Drain / Repair Access.***

IMPORTANT! Always Measure Each Hot Tub for Exact Dimensions BEFORE Designing its Foundation Support and/or Decking.

Spa Bottom View (J-230 Illustrated)

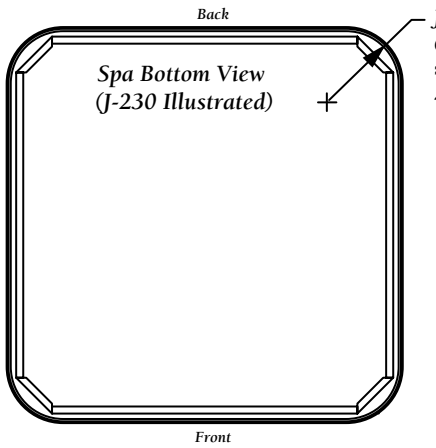

Left / Right Side View (All Models)

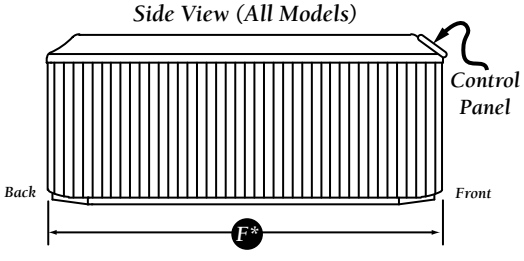


Note: Gaps in underlying wood frame are for ventilation purposes; not for electrical hook-ups or other uses.

NOTES:

NOTES:

NOTES:


Back
Forward



Hot Tubs

14525 Monte Vista Ave. • Chino, CA 91710
Website: http://www.jacuzzipremium-dealers.com

Rev-B/(D.A.M.06.20.06)
© 2006 Jacuzzi Hot Tubs
Printed in U.S.A.