

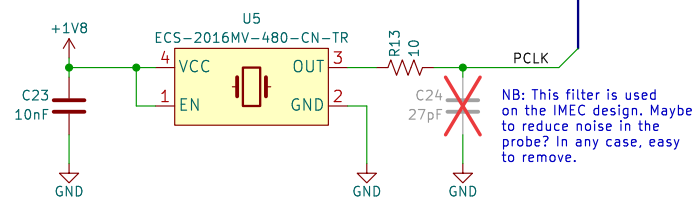
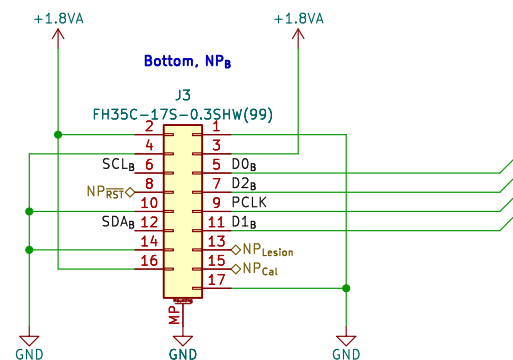
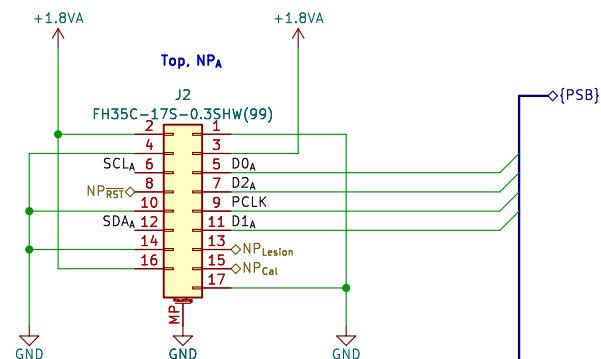


Jonathan P. Newman		
Open Ephys, Inc		
Sheet: Serializer		
File: serializer.kicad_sch		
Title: ONIX Neuropixels 2.0 Economical Headstage		
Size: A4	Date: 2021-12-16	Rev: B
KiCad E.D.A. kicad (7.0.0)		Id: 6/5

NB: This does not make sense to me but is copied from IMEC headstage since I dont know the idiosyncracies of the device, e.g. maybe i2c must be disconnected for noise reasons. Still does not explain double pullup (i.e why not put the nominal i2c bus as unused output of the switch). Maybe default access?

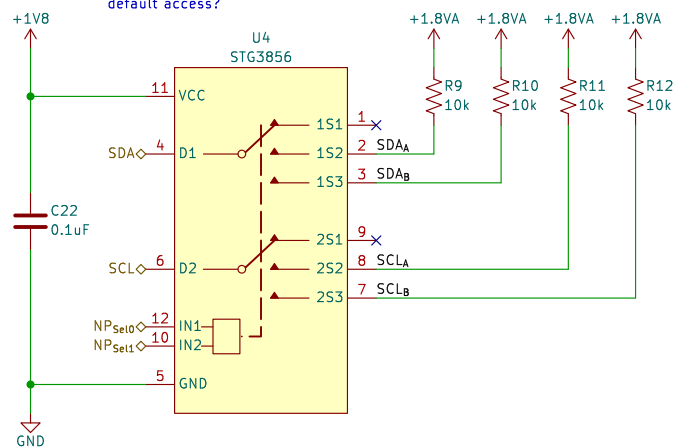

Jonathan P. Newman

Open Ephys, Inc

Sheet: Neuropixels 2.0

File: neuropixels-2.0.kicad_sch

Title: ONIX Neuropixels 2.0 Economical Headstage

Size: A4


Date:


KiCad E.D.A. kicad (7.0.0)



Rev: B

Id: 6/5

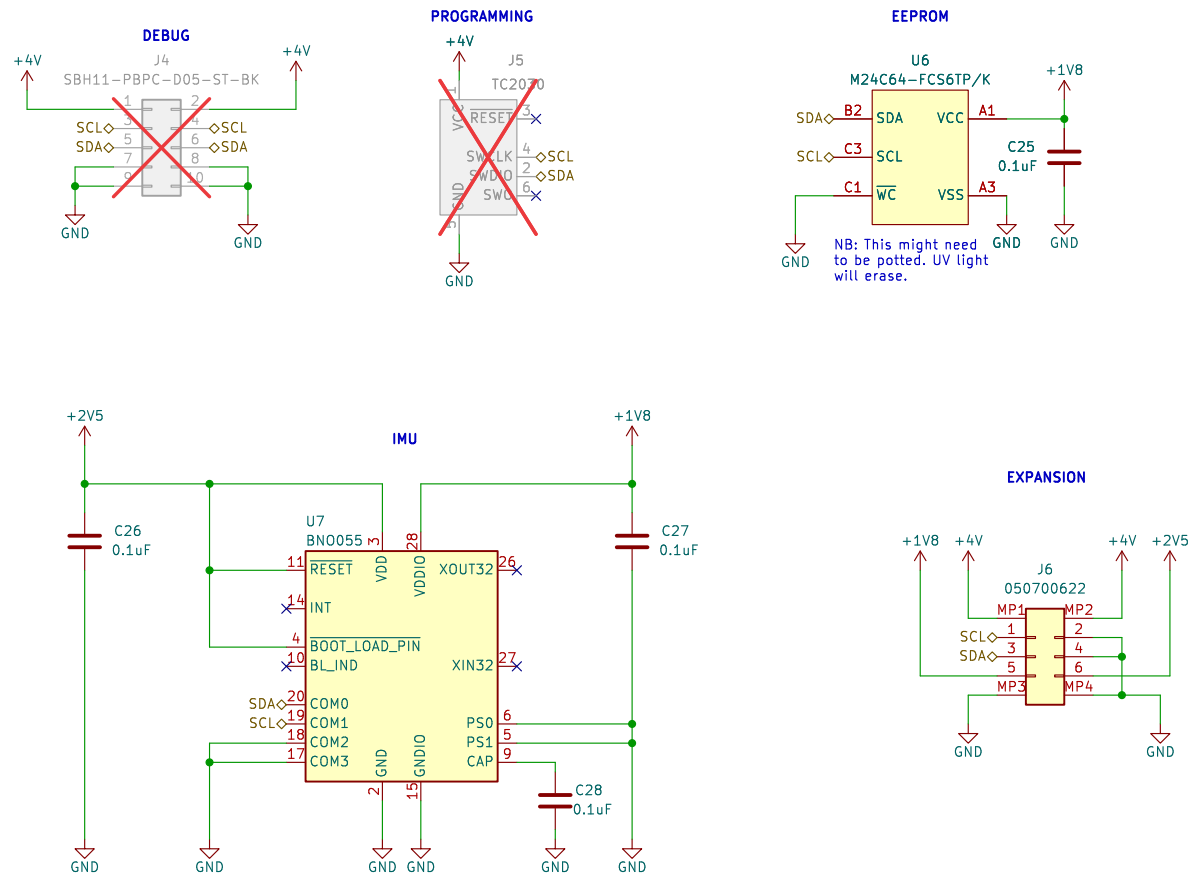

Jonathan P. Newman		
Open Ephys, Inc		
Sheet: Peripherals File: peripherals.kicad_sch		
Title: ONIX Neuropixels 2.0 Economical Headstage		
Size: A4	Date:	Rev: B
KiCad E.D.A. kicad (7.0.0)		Id: 7/5