

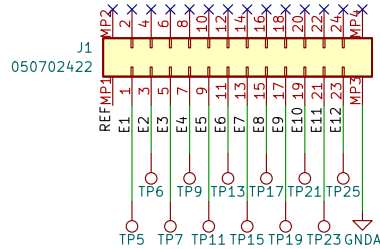


NB: The MPx connectors form  
2 side connectors called "nails"  
that are typically used for routing  
power. We use them for GND and REF.  
- MP1 and MP2 are internally connected  
- MP3 and MP4 are internally connected

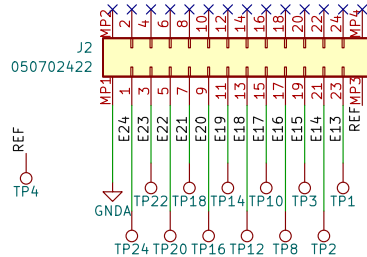

Jonathan P. Newman

**Open Ephys, Inc.**

Sheet: /

File: pupdrive-eib24.kicad\_sch

**Title: Pupdrive EIB-24**

Size: A5

Date: 2022-01-25

KiCad E.D.A. kicad (6.0.0)



**Rev: A**

Id: 1/1