
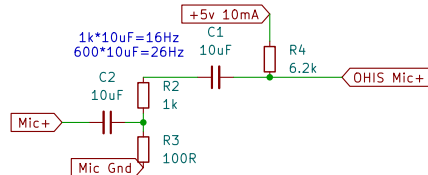


# Yaesu pinouts


J2  
Yaesu HF RJ45 Mic



Radio Side: Dynamic Mic.  
20dB pad, DC block.

OHIS Side: Electret Mic  
Bias voltage.


J1  
OHIS RJ45

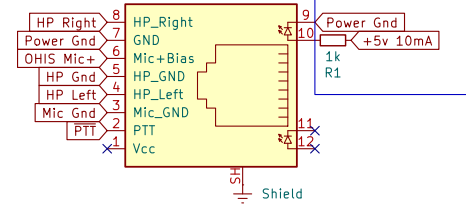


Optional. Do not connect otherwise.

Tie all "Shield"s to metallic case.  
DO NOT TIE TO GROUND!


J3 Yaesu HF GX16-8P Mic




J6  
Yaesu Mobile Mic In

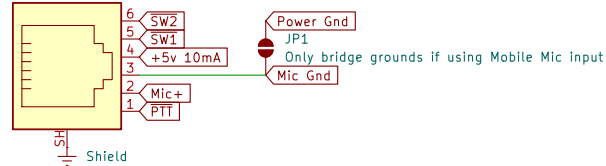


J4  
Headphone In



J5  
Speaker In



Unused by OHIS, but  
of interest to the user.



Sheet: /  
File: Yaesu.kicad\_sch

Title:

Size: A4  
KiCad E.D.A. 8.0.1

Date:

Rev:  
Id: 1/1