MOSFET – N-Channel, UltraFET Trench

250 V, 14 A, 122 mΩ

FDMS2734

V_{DS}	$R_{DS(on)}$ MAX	I_D MAX
250 V	122 mΩ @ 10 V	14 A
	130 mΩ @ 6 V	



Bottom View

WDFN8 5×6, 1.27P
(Power 56)
CASE 506DP

General Description

UltraFET devices combine characteristics that enable benchmark efficiency in power conversion applications. Optimized for $R_{DS(on)}$, low ESR, low total and Miller gate charge, these devices are ideal for high frequency DC to DC converters.

Features

- Max $R_{DS(on)}$ = 122 mΩ at V_{GS} = 10 V, I_D = 2.8 A
- Max $R_{DS(on)}$ = 130 mΩ at V_{GS} = 6 V, I_D = 1.7 A
- Low Miller Charge
- Optimized Efficiency at High Frequencies
- Pb−Free, Halide Free and RoHS Compliant

Applications

- DC – DC Conversion

ELECTRICAL CONNECTION

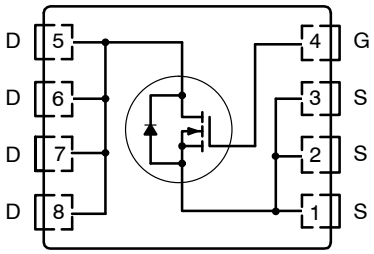

N-CHANNEL MOSFET

MAXIMUM RATINGS (T_A = 25°C unless otherwise noted)

Symbol	Parameter	Value	Unit
V_{DS}	Drain to Source Voltage	250	V
V_{GS}	Gate to Source Voltage	±20	V
I_D	Drain Current: – Continuous (Silicon limited) T_C = 25°C – Continuous T_A = 25°C (Note 1a) – Pulsed	 14 2.8 30	A
P_D	Power Dissipation: T_C = 25°C T_A = 25°C (Note 1a)	 78 2.5	W
T_J, T_{STG}	Operating and Storage Junction Temperature Range	−55 to +150	°C

Stresses exceeding those listed in the Maximum Ratings table may damage the device. If any of these limits are exceeded, device functionality should not be assumed, damage may occur and reliability may be affected.

MARKING DIAGRAM



&Z = Assembly Plant Code
&2 = 2−Digit Date Code (Year and Week)
&K = 2−Digit Lot Run Code
FDMS2734 = Specific Device Code

THERMAL CHARACTERISTICS

Symbol	Parameter	Value	Unit
$R_{\theta JC}$	Thermal Resistance, Junction to Case	1.6	°C/W
$R_{\theta JA}$	Thermal Resistance, Junction to Ambient (Note 1a)	50	

ORDERING INFORMATION

Device	Package	Shipping†
FDMS2734	WDFN8 5×6, 1.27P (Power 56) (Pb−Free, Halide Free)	3000 / Tape & Reel

†For information on tape and reel specifications, including part orientation and tape sizes, please refer to our Tape and Reel Packaging Specification Brochure, BRD8011/D.

ELECTRICAL CHARACTERISTICS (T_J = 25°C unless otherwise noted)

Symbol	Parameter	Test Condition	Min	Typ	Max	Unit
OFF CHARACTERISTICS						
BV_{DSS}	Drain to Source Breakdown Voltage	I_D = 250 μA, V_{GS} = 0 V	250	–	–	V
$\frac{\Delta BV_{DSS}}{\Delta T_J}$	Breakdown Voltage Temperature Coefficient	I_D = 250 μA, Referenced to 25°C	–	250	–	mV/°C
I_{DSS}	Zero Gate Voltage Drain Current	V_{DS} = 200 V	–	–	1	μA
I_{GSS}	Gate to Source Leakage Current	V_{GS} = ±20 V, V_{DS} = 0 V	–	–	±100	nA
ON CHARACTERISTICS (Note 2)						
$V_{GS(th)}$	Gate to Source Threshold Voltage	V_{GS} = V_{DS}, I_D = 250 μA	2	3	4	V
$\frac{\Delta V_{GS(th)}}{\Delta T_J}$	Gate to Source Threshold Voltage Temperature Coefficient	I_D = 250 μA, Referenced to 25°C	–	−11	–	mV/°C
$R_{DS(on)}$	Static Drain to Source On Resistance	V_{GS} = 10 V, I_D = 2.8 A	–	105	122	mΩ
		V_{GS} = 6 V, I_D = 1.7 A	–	110	130	
		V_{GS} = 10 V, I_D = 2.8 A, T_J = 125°C	–	217	258	
g_{FS}	Forward Transconductance	V_{DS} = 10 V, I_D = 2.8 A	–	11	–	S
DYNAMIC CHARACTERISTICS						
C_{iss}	Input Capacitance	V_{DS} = 100 V, V_{GS} = 0 V, f = 1 MHz	–	1775	2365	pF
C_{oss}	Output Capacitance		–	80	110	pF
C_{rss}	Reverse Transfer Capacitance		–	25	40	pF
R_g	Gate Resistance	f = 1 MHz	–	0.9	–	Ω
SWITCHING CHARACTERISTICS						
$t_{d(on)}$	Turn-On Delay Time	V_{DD} = 125 V, I_D = 2.8 A, V_{GS} = 10 V, R_{GEN} = 6 Ω	–	22	36	ns
t_r	Rise Time		–	10	20	ns
$t_{d(off)}$	Turn-Off Delay Time		–	36	58	ns
t_f	Fall Time		–	12	22	ns
$Q_{g(TOT)}$	Total Gate Charge at 10 V	V_{GS} = 0 V to 10 V, V_{DD} = 125 V, I_D = 2.8 A	–	30	42	nC
Q_{gs}	Gate to Source Gate Charge	V_{DD} = 125 V, I_D = 2.8 A	–	7	–	nC
Q_{gd}	Gate to Drain “Miller” Charge	V_{DD} = 125 V, I_D = 2.8 A	–	9	–	nC
DRAIN-SOURCE DIODE CHARACTERISTICS						
V_{SD}	Source to Drain Diode Forward Voltage	V_{GS} = 0 V, I_S = 2.8 A (Note 2)	–	0.75	1.20	V
t_{rr}	Reverse Recovery Time	I_F = 2.8 A, di/dt = 100 A/μs	–	79	119	ns
Q_{rr}	Reverse Recovery Charge		–	214	321	nC

Product parametric performance is indicated in the Electrical Characteristics for the listed test conditions, unless otherwise noted. Product performance may not be indicated by the Electrical Characteristics if operated under different conditions.

NOTES:

1. $R_{\theta JA}$ is determined with the device mounted on a 1 in^2 pad 2 oz copper pad on a 1.5 x 1.5 in. board of FR−4 material. $R_{\theta JC}$ is guaranteed by design while $R_{\theta CA}$ is determined by the user’s board design.



a) 50°C/W when mounted on a 1 in^2 pad of 2 oz copper.

b) 125°C/W when mounted on a minimum pad of 2 oz copper.

2. Pulse Test: Pulse Width < 300 μs, Duty cycle < 2.0%.

TYPICAL CHARACTERISTICS

(T_J = 25°C unless otherwise noted)

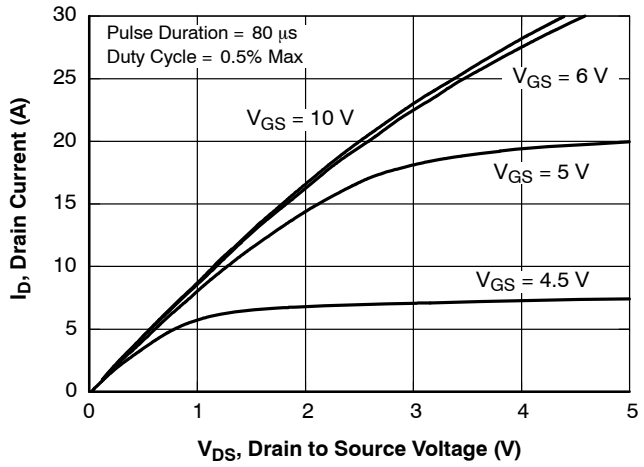

Figure 1. On Region Characteristics

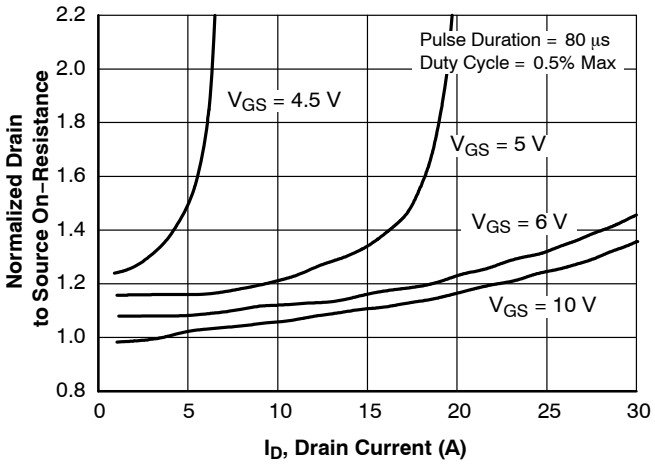

Figure 2. Normalized On−Resistance vs. Drain Current and Gate Voltage

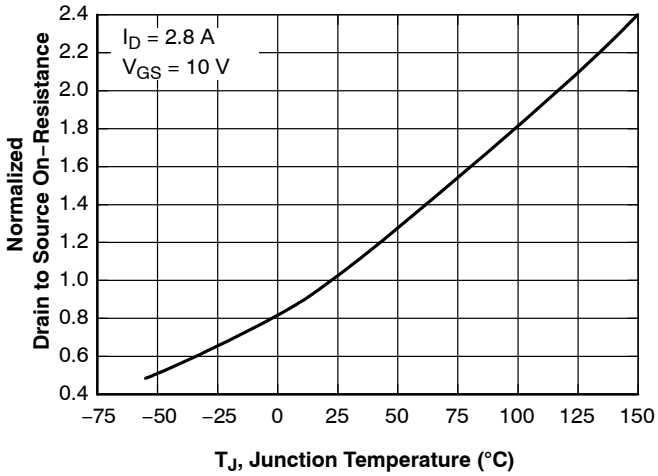

Figure 3. Normalized On Resistance vs. Junction Temperature

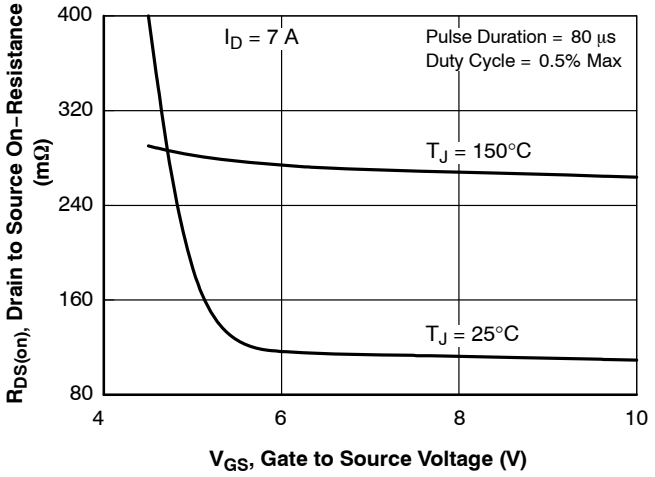

Figure 4. On−Resistance vs. Gate to Source Voltage

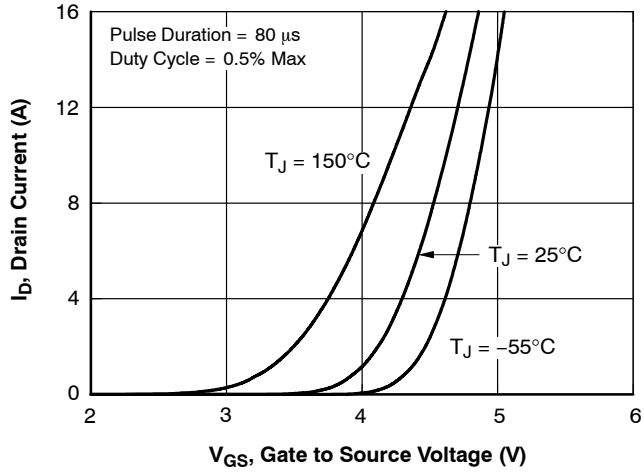

Figure 5. Transfer Characteristics

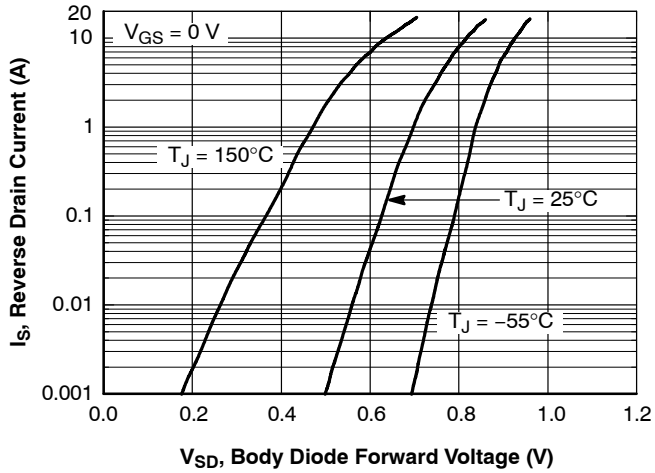

Figure 6. Source to Drain Diode Forward Voltage vs. Source Current

TYPICAL CHARACTERISTICS (continued)

(T_J = 25°C unless otherwise noted)

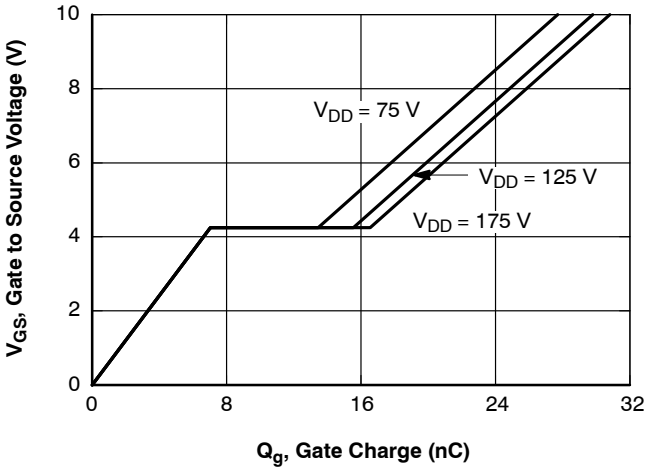

Figure 7. Gate Charge Characteristics

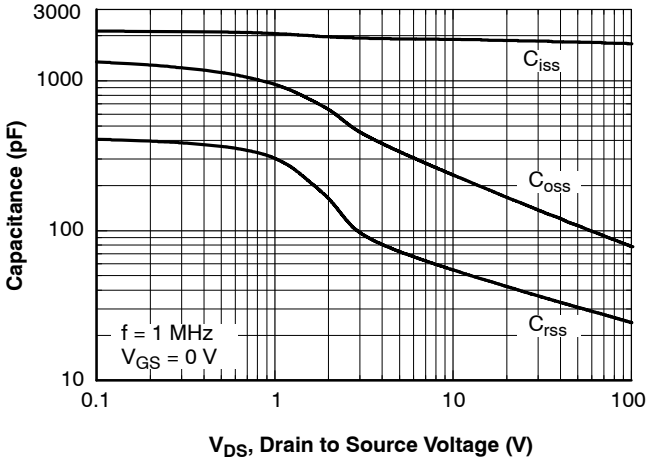

Figure 8. Capacitance vs. Drain to Source Voltage

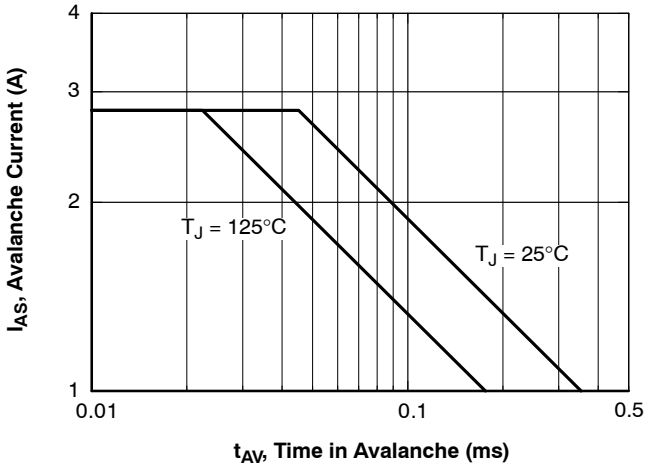

Figure 9. Unclamped Inductive Switching Capability

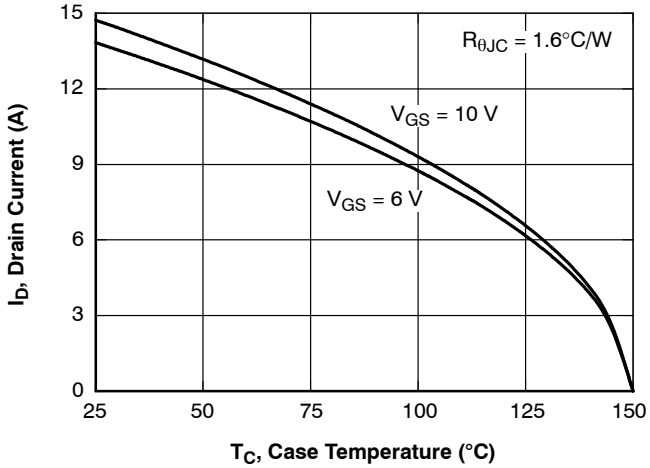

Figure 10. Maximum Continuous Drain Current vs. Case Temperature

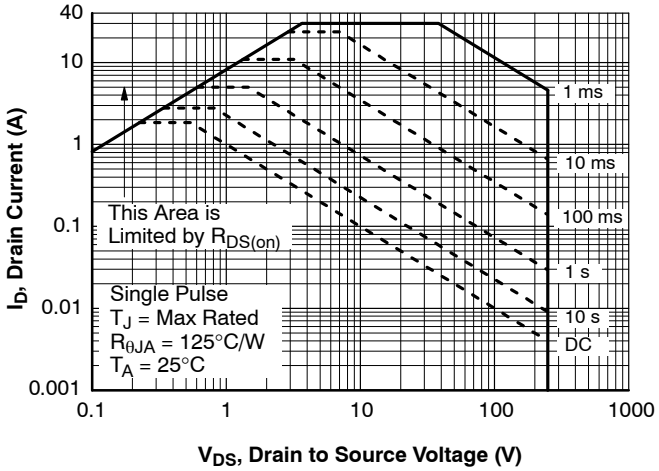

Figure 11. Forward Bias Safe Operating Area

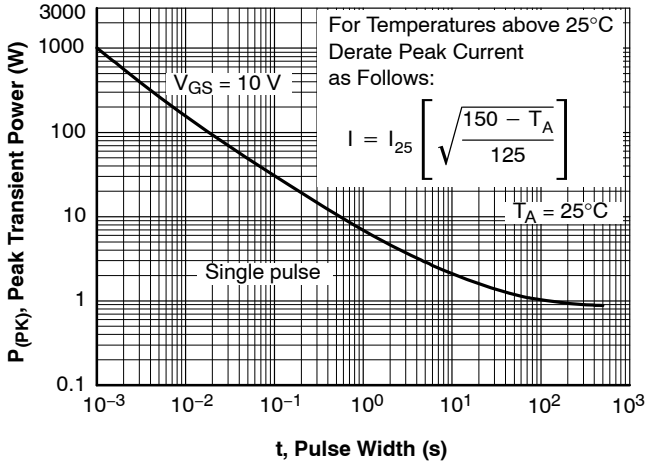

Figure 12. Single Pulse Maximum Power Dissipation

TYPICAL CHARACTERISTICS (continued)

(T_J = 25°C unless otherwise noted)

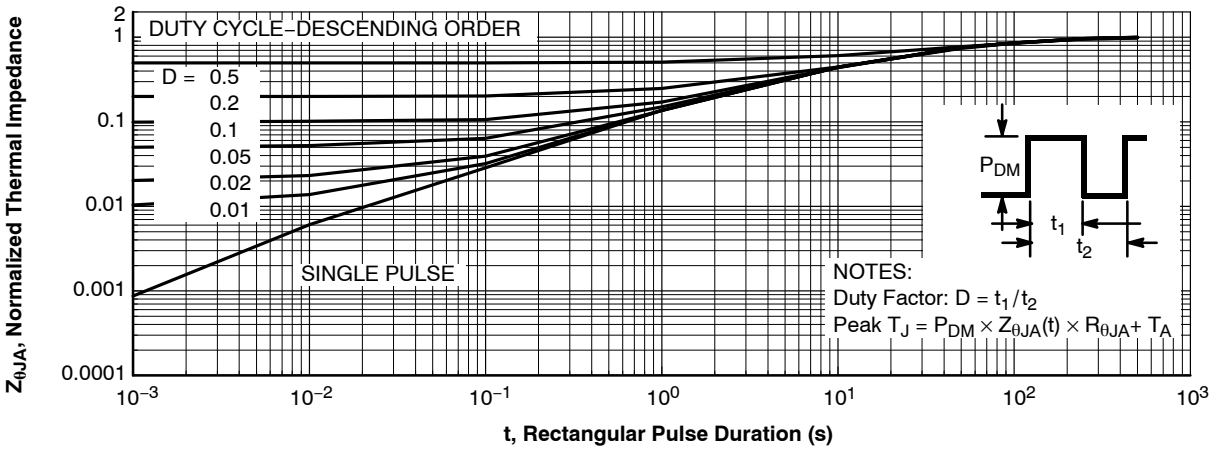

Figure 13. Transient Thermal Response Curve

WDFN8 5x6, 1.27P
CASE 506DP
ISSUE O

DATE 31 AUG 2016

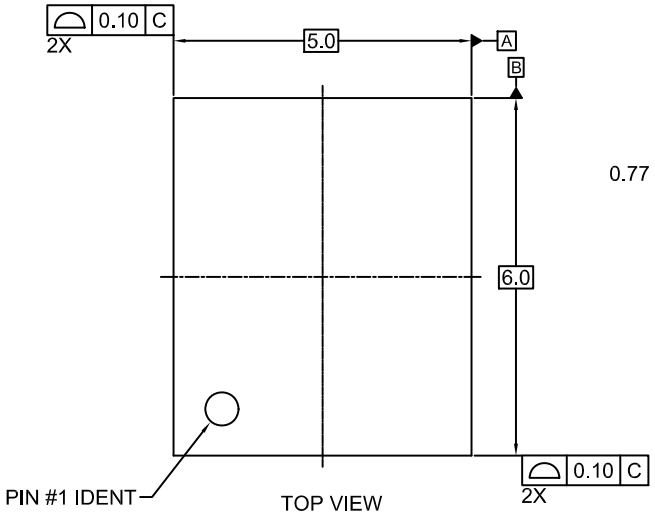

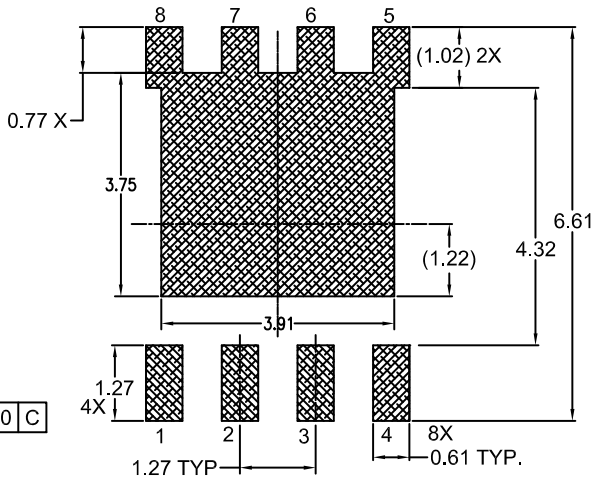

RECOMMENDED LAND PATTERN

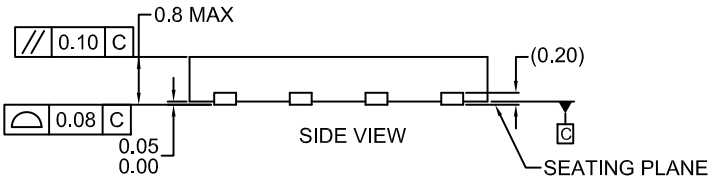

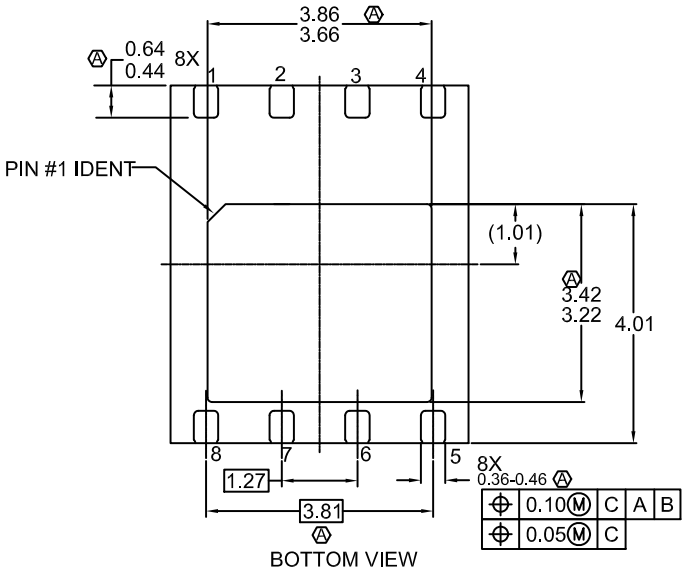

NOTES:

A. DOES NOT FULLY CONFORM TO JEDEC REGISTRATION, MO-229.
B. DIMENSIONS ARE IN MILLIMETERS.
C. DIMENSIONS AND TOLERANCES PER ASME Y14.5M, 1994
D. TERMINALS 5,6,7 AND 8 ARE TIED TO THE EXPOSED PADDLE

DOCUMENT NUMBER:	**98AON13598G**	Electronic versions are uncontrolled except when accessed directly from the Document Repository. Printed versions are uncontrolled except when stamped "CONTROLLED COPY" in red.	
DESCRIPTION:	**WDFN8 5X6, 1.27P**		**PAGE 1 OF 1**

ADDITIONAL INFORMATION

TECHNICAL PUBLICATIONS:
Technical Library: www.onsemi.com/design/resources/technical−documentation
onsemi Website: www.onsemi.com

ONLINE SUPPORT: www.onsemi.com/support
For additional information, please contact your local Sales Representative at www.onsemi.com/support/sales