MOSFET – N-Channel, POWERTRENCH®

60 V, 50 A, 13 mΩ

FDD13AN06A0

V_{DSS}	$R_{DS(on)}$ MAX	I_D MAX
60 V	13.5 mΩ @ 10 V	50 A

Features

- $R_{DS(on)}$ = 11.5 mΩ (Typ.) @ V_{GS} = 10 V, I_D = 50 A
- $Q_{G(tot)}$ = 22 nC (Typ.) @ V_{GS} = 10 V
- Low Miller Charge
- Low Q_{rr} Body Diode
- UIS Capability (Single Pulse and Repetitive Pulse)
- This Device is Pb−Free, Halide Free and is RoHS Compliant

Applications

- Consumer Appliances
- LED TV
- Synchronous Rectification
- Battery Protection Circuit
- Motor Drives and Uninterruptible Power Supplies



DPAK3 (TO−252 3 LD)
CASE 369AS

MARKING DIAGRAM

&Z	= Assembly Plant Code
&3	= 3−Digit Date Code
&K	= 2−Digits Lot Run Traceability Code
FDD13AN06A0	= Device Code



N−Channel

ORDERING INFORMATION

See detailed ordering and shipping information on page 12 of this data sheet.

MOSFET MAXIMUM RATINGS (T_C = 25°C, unless otherwise noted)

Symbol	Parameter	Ratings	Unit
V_{DSS}	Drain to Source Voltage	60	V
V_{GS}	Gate to Source Voltage	±20	V
I_D	Drain Current Continuous (T_C < 80°C, V_{GS} = 10 V) Continuous (T_A = 25°C, V_{GS} = 10 V, $R_{\theta JA}$ = 52°C/W) Pulsed	 50 9.9 Figure 4	A
E_{AS}	Single Pulse Avalanche Energy (Note 1)	56	mJ
P_D	Power Dissipation	115	W
	Derate above 25°C	0.77	W/°C
T_J, T_{STG}	Operating and Storage Temperature	−55 to 175	°C

Stresses exceeding those listed in the Maximum Ratings table may damage the device. If any of these limits are exceeded, device functionality should not be assumed, damage may occur and reliability may be affected.

THERMAL CHARACTERISTICS (T_C = 25°C, unless otherwise noted)

Symbol	Parameter	Ratings	Unit
$R_{\theta JC}$	Thermal Resistance Junction to Case, Max. D−PAK	1.3	°C/W
$R_{\theta JA}$	Thermal Resistance Junction to Ambient, Max. D−PAK	100	
$R_{\theta JA}$	Thermal Resistance Junction to Ambient, Max. D−PAK, 1 in^2 Copper Pad Area	52	°C/W

ELECTRICAL CHARACTERISTICS (T_C = 25°C unless otherwise noted)

Symbol	Parameter	Test Condition	Min	Typ	Max	Unit
OFF CHARACTERISTICS						
B_{VDSS}	Drain to Source Breakdown Voltage	I_D = 250 μA, V_{GS} = 0 V	60	–	–	V
I_{DSS}	Zero Gate Voltage Drain Current	V_{DS} = 50 V, V_{GS} = 0 V	–	–	1	μA
		V_{DS} = 50 V, V_{GS} = 0 V, T_C = 150°C	–	–	250	
I_{GSS}	Gate to Source Leakage Current	V_{GS} = ±20 V	–	–	±100	nA
ON CHARACTERISTICS						
$V_{GS(TH)}$	Gate to Source Threshold Voltage	V_{GS} = V_{DS}, I_D = 250 μA	2	–	4	V
$R_{DS(on)}$	Drain to Source On Resistance	I_D = 50 A, V_{GS} = 10 V	–	0.0115	0.0135	Ω
		I_D = 25 A, V_{GS} = 6 V	–	0.022	0.034	
		I_D = 50 A, V_{GS} = 10 V, T_J = 175°C	–	0.026	0.030	
DYNAMIC CHARACTERISTICS						
C_{ISS}	Input Capacitance	V_{DS} = 25 V, V_{GS} = 0 V, f = 1 MHz	–	1350	–	pF
C_{OSS}	Output Capacitance		–	260	–	pF
C_{RSS}	Reverse Transfer Capacitance		–	90	–	pF
$Q_{g(TOT)}$	Total Gate Charge at 10 V	V_{GS} = 0 V to 10 V, V_{DD} = 30 V, I_D = 50 A, I_g = 1.0 mA	–	22	29	nC
$Q_{g(TH)}$	Threshold Gate Charge	V_{GS} = 0 V to 2 V, V_{DD} = 30 V, I_D = 50 A, I_g = 1.0 mA	–	2.6	3.4	nC
Q_{gs}	Gate to Source Gate Charge	V_{DD} = 30 V, I_D = 50 A, I_g = 1.0 mA	–	8.2	–	nC
Q_{gs2}	Gate Charge Threshold to Plateau		–	5.6	–	nC
Q_{gd}	Gate to Drain “Miller” Charge		–	6.4	–	nC
SWITCHING CHARACTERISTICS (V_{GS} = 10 V)						
t_{ON}	Turn−On Time	V_{DD} = 30 V, I_D = 50 A V_{GS} = 10 V, R_{GS} = 12 Ω	–	–	130	ns
$t_{d(ON)}$	Turn−On Delay Time		–	9	–	ns
t_r	Rise Time		–	77	–	ns
$t_{d(OFF)}$	Turn−Off Delay Time		–	26	–	ns
t_f	Fall Time		–	25	–	ns
t_{OFF}	Turn−Off Time		–	–	77	ns
DRAIN−SOURCE DIODE CHARACTERISTICS						
V_{SD}	Source to Drain Diode Voltage	I_{SD} = 50 A	–	–	1.25	V
		I_{SD} = 25 A	–	–	1.0	V
t_{rr}	Reverse Recovery Time	I_{SD} = 50 A, dI_{SD}/dt = 100 A/μs	–	–	24	ns
Q_{RR}	Reverse Recovered Charge	I_{SD} = 50 A, dI_{SD}/dt = 100 A/μs	–	–	15	nC

Product parametric performance is indicated in the Electrical Characteristics for the listed test conditions, unless otherwise noted. Product performance may not be indicated by the Electrical Characteristics if operated under different conditions.

1. Starting T_J = 25°C, L = 45 μH, I_{AS} = 50 A.

TYPICAL CHARACTERISTICS (T_C = 25°C, unless otherwise noted)

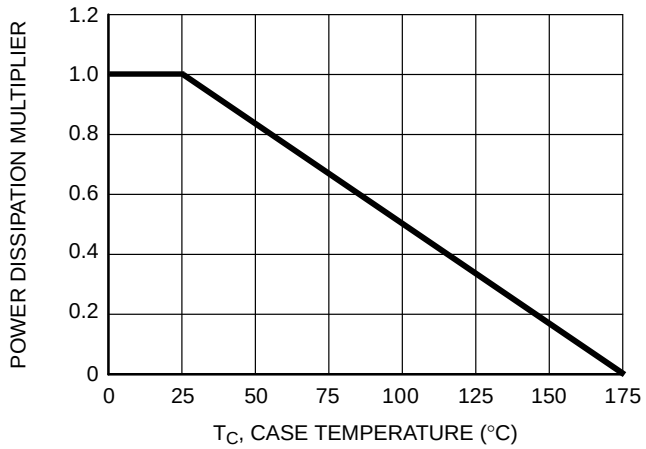

Figure 1. Normalized Power Dissipation vs. Ambient Temperature

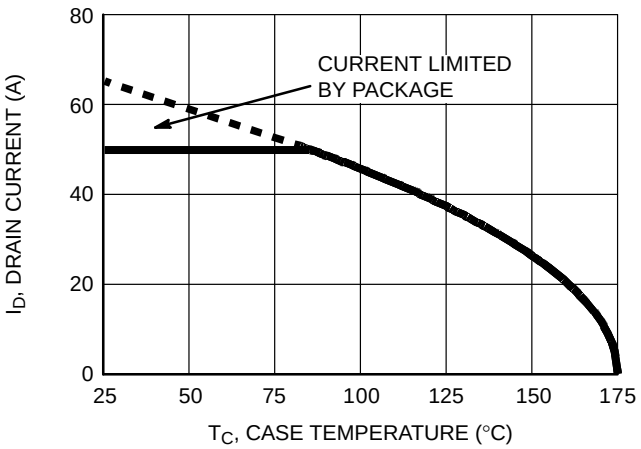

Figure 2. Maximum Continuous Drain Current vs. Case Temperature

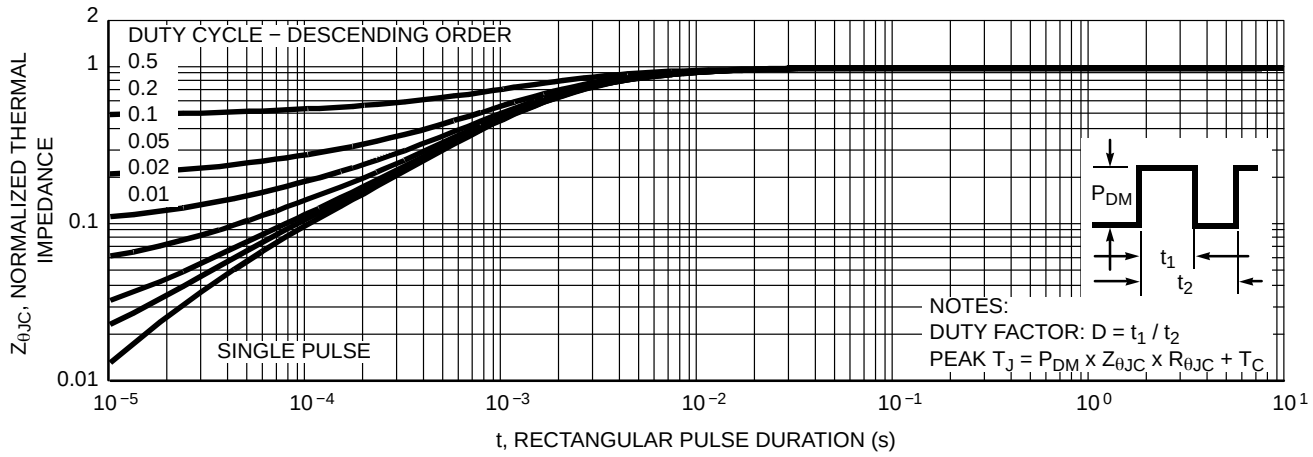

Figure 3. Normalized Maximum Transient Thermal Impedance

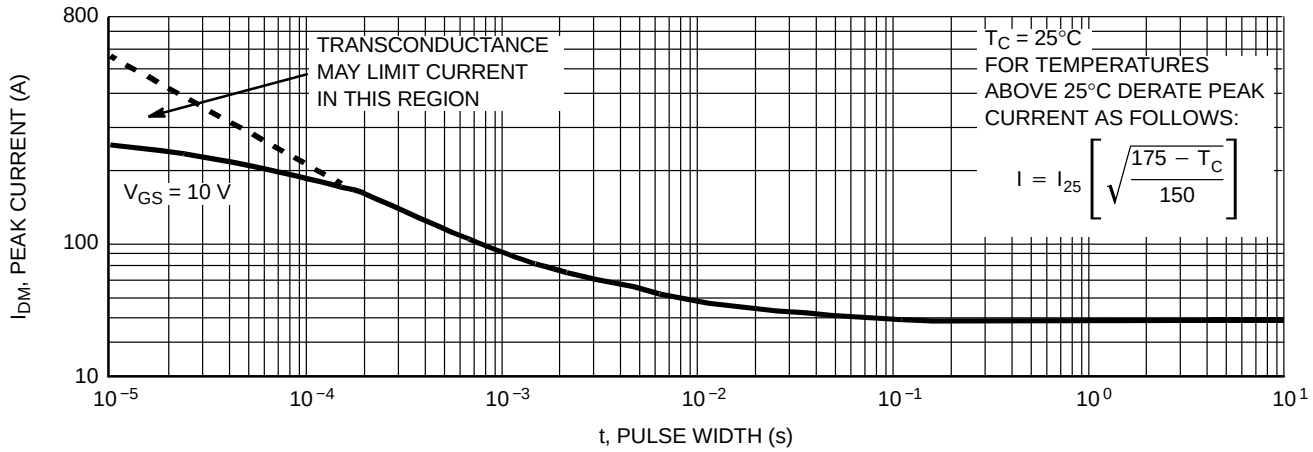

Figure 4. Peak Current Capability

TYPICAL CHARACTERISTICS (T_C = 25°C, unless otherwise noted) (continued)

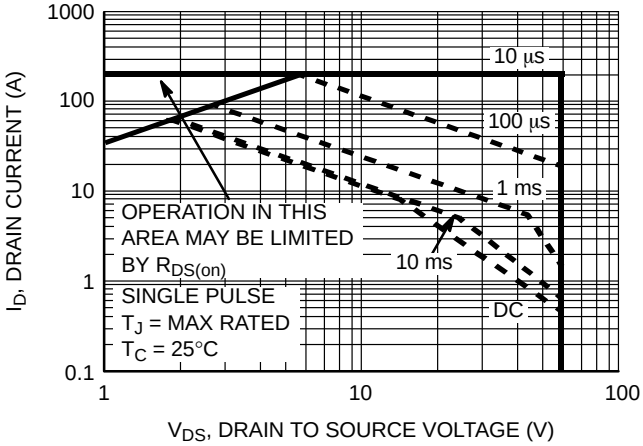

Figure 5. Forward Bias Safe Operating Area

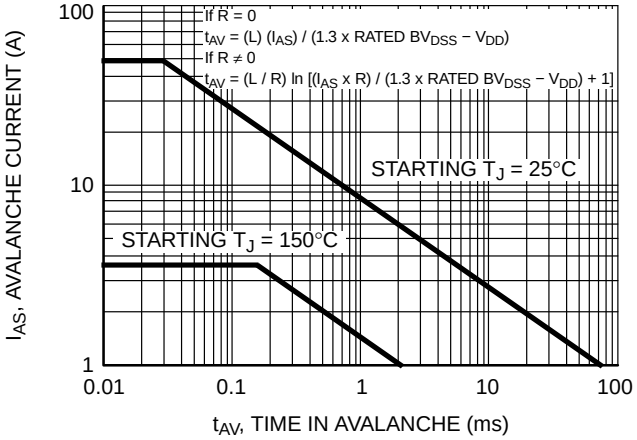

NOTE: Refer to **onsemi** Application Notes AN7514 and AN7515

Figure 6. Unclamped Inductive Switching Capability

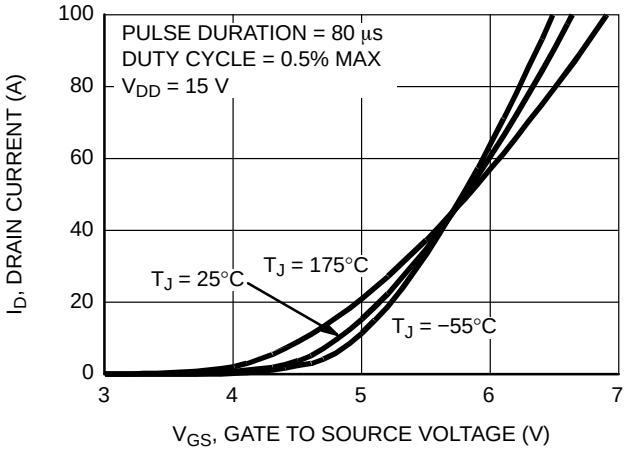

Figure 7. Transfer Characteristics

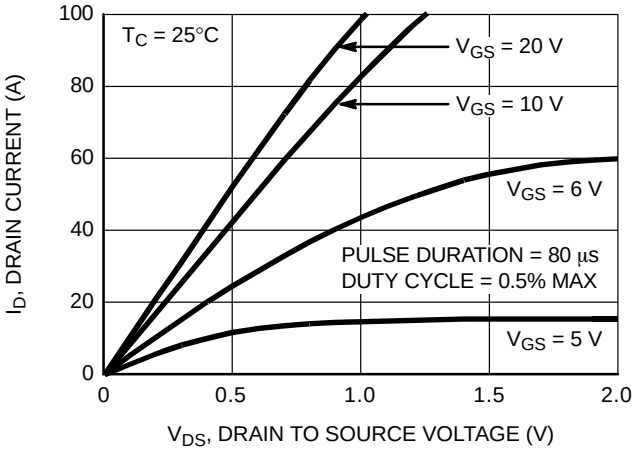

Figure 8. Saturation Characteristics

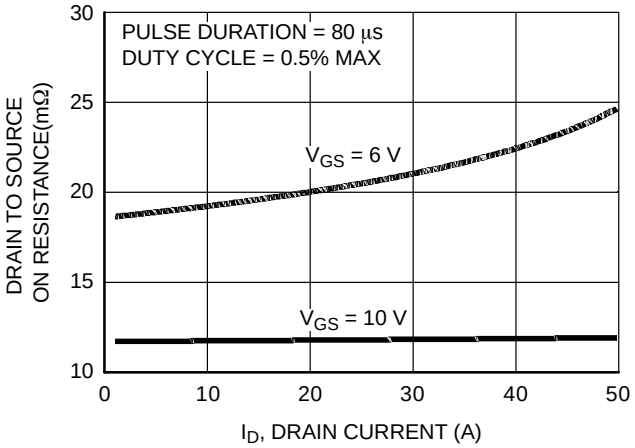

Figure 9. Drain to Source On Resistance vs. Drain Current

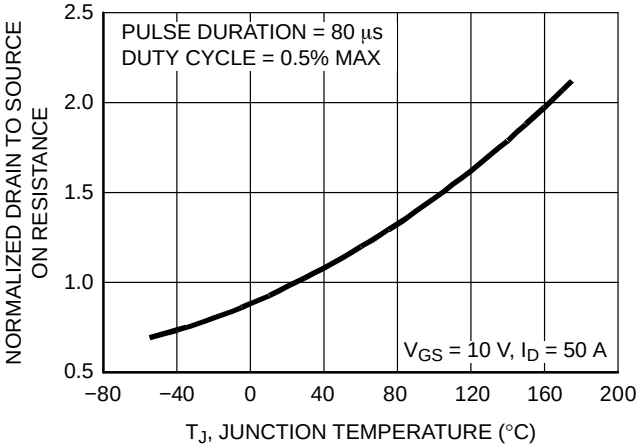

Figure 10. Normalized Drain to Source On Resistance vs. Junction Temperature

TYPICAL CHARACTERISTICS (T_C = 25°C, unless otherwise noted) (continued)

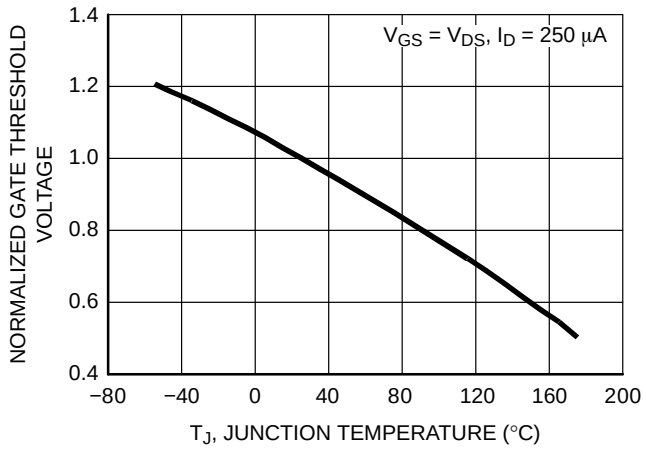

Figure 11. Normalized Gate Threshold Voltage vs. Junction Temperature

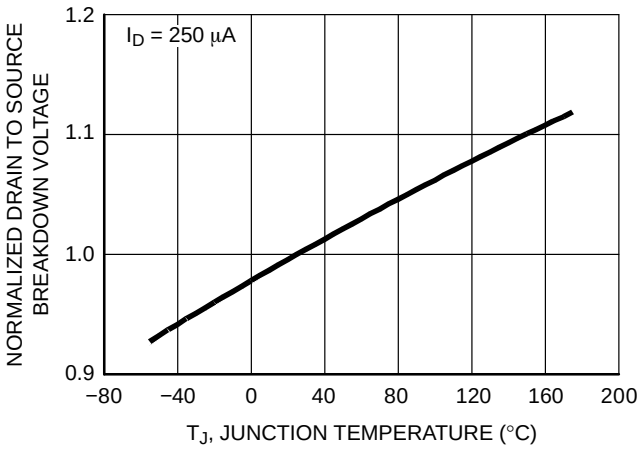

Figure 12. Normalized Drain to Source Breakdown Voltage vs. Junction Temperature

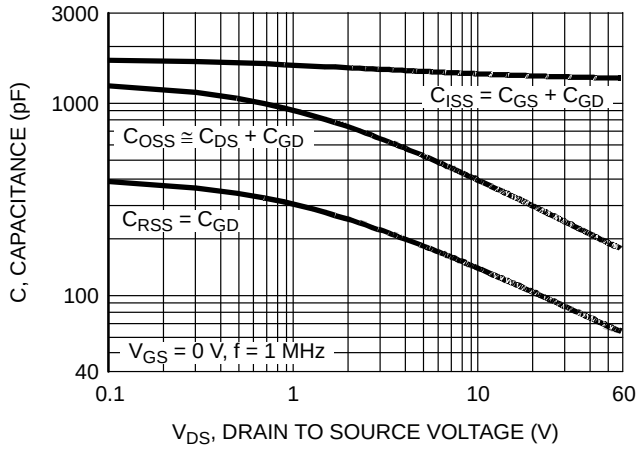

Figure 13. Capacitance vs. Drain to Source Voltage

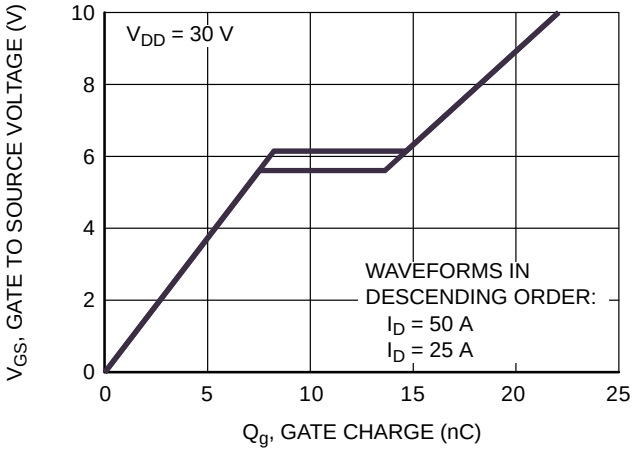

Figure 14. Gate Charge Waveforms for Constant Gate Currents

TEST CIRCUITS AND WAVEFORMS

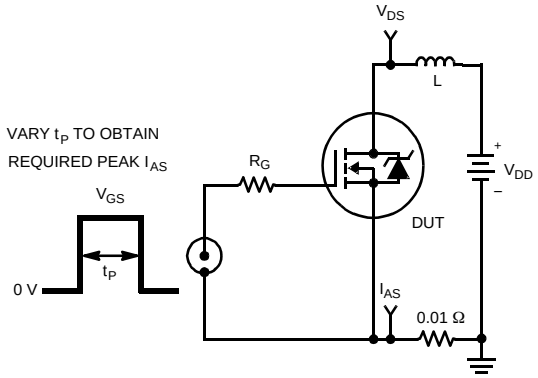

Figure 15. Unclamped Energy Test Circuit

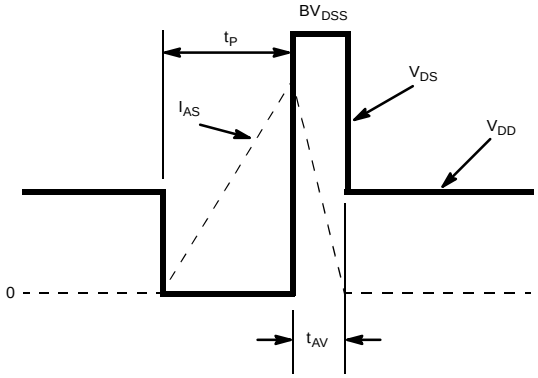

Figure 16. Unclamped Energy Waveforms

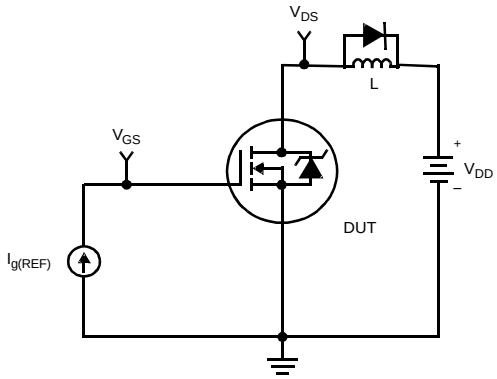

Figure 17. Gate Charge Test Circuit

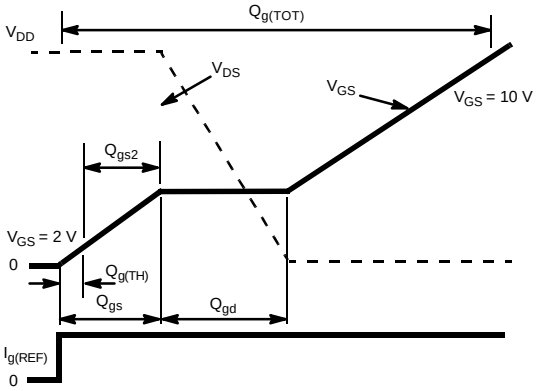

Figure 18. Gate Charge Waveforms

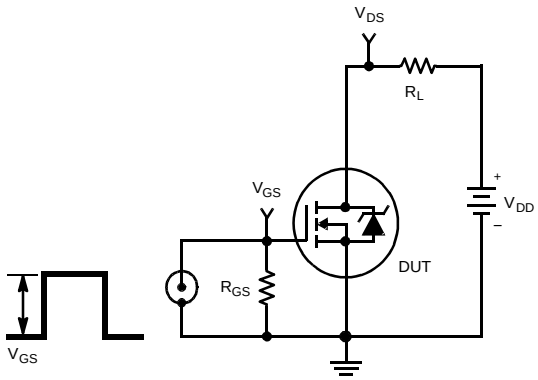

Figure 19. Switching Time Test Circuit

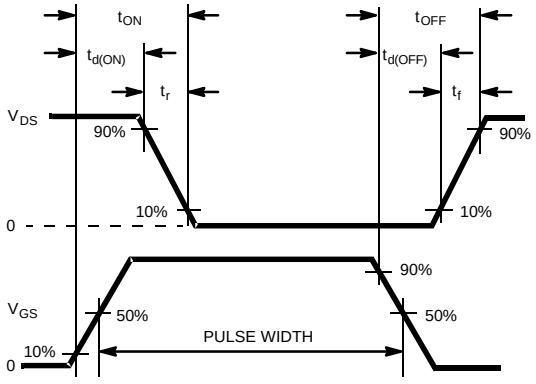

Figure 20. Switching Time Waveforms

THERMAL RESISTANCE VS. MOUNTING PAD AREA

The maximum rated junction temperature, T_{JM}, and the thermal resistance of the heat dissipating path determines the maximum allowable device power dissipation, P_{DM}, in an application. Therefore the application's ambient temperature, T_A (°C), and thermal resistance $R_{\theta JA}$ (°C/W) must be reviewed to ensure that T_{JM} is never exceeded. Equation 1 mathematically represents the relationship and serves as the basis for establishing the rating of the part.

$$P_{DM} = \frac{(T_{JM} - T_A)}{R_{\theta JA}} \quad \text{(eq. 1)}$$

In using surface mount devices such as the TO−252 package, the environment in which it is applied will have a significant influence on the part's current and maximum power dissipation ratings. Precise determination of P_{DM} is complex and influenced by many factors:

1. Mounting pad area onto which the device is attached and whether there is copper on one side or both sides of the board.
2. The number of copper layers and the thickness of the board.
3. The use of external heat sinks.
4. The use of thermal vias.
5. Air flow and board orientation.
6. For non steady state applications, the pulse width, the duty cycle and the transient thermal response of the part, the board and the environment they are in.

onsemi provides thermal information to assist the designer's preliminary application evaluation. Figure 21 defines the $R_{\theta JA}$ for the device as a function of the top copper (component side) area. This is for a horizontally positioned FR−4 board with 1 oz copper after 1000 seconds of steady state power with no air flow. This graph provides the necessary information for calculation of the steady state junction temperature or power dissipation. Pulse applications can be evaluated using the **onsemi** device Spice thermal model or manually utilizing the normalized maximum transient thermal impedance curve.

Thermal resistances corresponding to other copper areas can be obtained from Figure 21 or by calculation using Equation 2 or 3. Equation 2 is used for copper area defined in inches square and Equation 3 is for area in centimeters square. The area, in square inches or square centimeters is the top copper area including the gate and source pads.

$$R_{\theta JA} = 33.32 + \frac{23.84}{(0.268 + \text{Area})} \quad \text{(eq. 2)}$$

Area in Inches Squared

$$R_{\theta JA} = 33.32 + \frac{154}{(1.73 + \text{Area})} \quad \text{(eq. 3)}$$

Area in Centimeters Squared

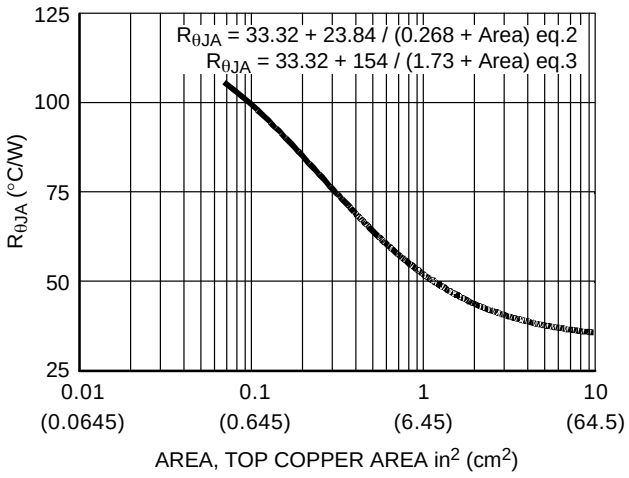

Figure 21. Thermal Resistance vs. Mounting Pad Area

PSPICE ELECTRICAL MODEL

```
.SUBCKT FDD13AN06A0 2 1 3 ; rev August 2002
Ca 12 8 5.1e−10
Cb 15 14 5.8e−10
Cin 6 8 1.3e−9

Dbody 7 5 DbodyMOD
Dbreak 5 11 DbreakMOD
Dplcap 10 5 DplcapMOD

Ebreak 11 7 17 18 65.40
Eds 14 8 5 8 1
Egs 13 8 6 8 1
Esg 6 10 6 8 1
Evthres 6 21 19 8 1
Evtemp 20 6 18 22 1

It 8 17 1

Lgate 1 9 5.2e−9
Ldrain 2 5 1.0e−9
Lsource 3 7 2.14e−9

RLgate 1 9 52
RLdrain 2 5 10
RLsource 3 7 21.4

Mmed 16 6 8 8 MmedMOD
Mstro 16 6 8 8 MstroMOD
Mweak 16 21 8 8 MweakMOD

Rbreak 17 18 RbreakMOD 1
Rdrain 50 16 RdrainMOD 3.1e−3
Rgate 9 20 3.71
RSLC1 5 51 RSLCMOD 1e−6
RSLC2 5 50 1e3
Rsource 8 7 RsourceMOD 5.5e−3
Rvthres 22 8 RvthresMOD 1
Rvtemp 18 19 RvtempMOD 1
S1a 6 12 13 8 S1AMOD
S1b 13 12 13 8 S1BMOD
S2a 6 15 14 13 S2AMOD
S2b 13 15 14 13 S2BMOD

Vbat 22 19 DC 1

ESLC 51 50 VALUE={(V(5,51)/ABS(V(5,51)))*(PWR(V(5,51)/(1e−6*160),6))}

.MODEL DbodyMOD D (IS=1.0E−11 N=1.08 RS=3.5e−3 TRS1=2.2e−3 TRS2=2.5e−9
+ CJO=.9e−9 M=5.1e−1 TT=1e−9 XTI=3.9)
.MODEL DbreakMOD D (RS=1.5e−1 TRS1=1e−3 TRS2=−8.9e−6)
.MODEL DplcapMOD D (CJO=4.1e−10 IS=1e−30 N=10 M=0.45)

.MODEL MmedMOD NMOS (VTO=3.5 KP=6 IS=1e−30 N=10 TOX=1 L=1u W=1u RG=3.71)
.MODEL MstroMOD NMOS (VTO=4.3 KP=50 IS=1e−30 N=10 TOX=1 L=1u W=1u)
.MODEL MweakMOD NMOS (VTO=2.91 KP=0.05 IS=1e−30 N=10 TOX=1 L=1u W=1u RG=3.71e+1 RS=0.1)
```

.MODEL RbreakMOD RES (TC1=9e−4 TC2=−5e−7)
.MODEL RdrainMOD RES (TC1=1.3e−2 TC2=5.2e−5)
.MODEL RSLCMOD RES (TC1=1.8e−3 TC2=1.7e−5)
.MODEL RsourceMOD RES (TC1=1e−3 TC2=1e−6)
.MODEL RvthresMOD RES (TC1=−5.3e−3 TC2=−1.0e−5)
.MODEL RvtempMOD RES (TC1=−2.5e−3 TC2=1e−6)

.MODEL S1AMOD VSWITCH (RON=1e−5 ROFF=0.1 VON=−5 VOFF=−2)
.MODEL S1BMOD VSWITCH (RON=1e−5 ROFF=0.1 VON=−2 VOFF=−5)
.MODEL S2AMOD VSWITCH (RON=1e−5 ROFF=0.1 VON=−1.5 VOFF=.5)
.MODEL S2BMOD VSWITCH (RON=1e−5 ROFF=0.1 VON=.5 VOFF=−1.5)

.ENDS

NOTE: For further discussion of the PSPICE model, consult *A New PSPICE Sub−Circuit for the Power MOSFET Featuring Global Temperature Options;* IEEE Power Electronics Specialist Conference Records, 1991, written by William J. Hepp and C. Frank Wheatley.

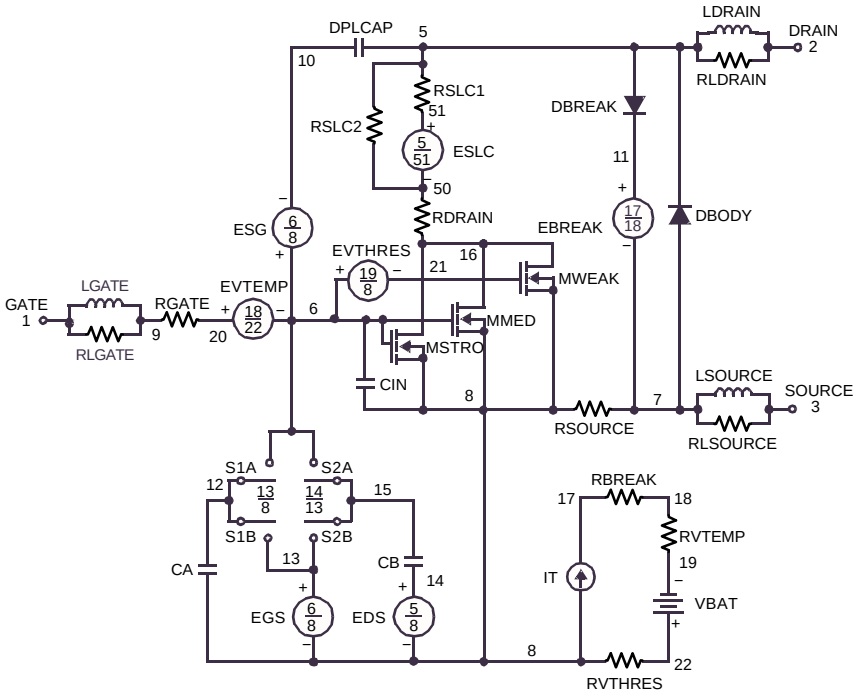

Figure 22.

SABER ELECTRICAL MODEL

```
rev August 2002
template FDD13AN06A0 n2,n1,n3
electrical n2,n1,n3
{
var i iscl
dp..model dbodymod = (isl=1.0e−11,nl=1.08,rs=3.5e−3,trs1=2.2e−3,trs2=2.5e−9,cjo=.9e−9,m=5.1e−1,tt=1e−9,xti=3.9)
dp..model dbreakmod = (rs=1.5e−1,trs1=1e−3,trs2=−8.9e−6)
dp..model dplcapmod = (cjo=4.1e−10,isl=10e−30,nl=10,m=0.45)
m..model mmedmod = (type=_n,vto=3.5,kp=6,is=1e−30, tox=1)
m..model mstrongmod = (type=_n,vto=4.3,kp=50,is=1e−30, tox=1)
m..model mweakmod = (type=_n,vto=2.91,kp=0.05,is=1e−30, tox=1,rs=0.1)
sw_vcsp..model s1amod = (ron=1e−5,roff=0.1,von=−5,voff=−2)
sw_vcsp..model s1bmod = (ron=1e−5,roff=0.1,von=−2,voff=−5)
sw_vcsp..model s2amod = (ron=1e−5,roff=0.1,von=−1.5,voff=.5)
sw_vcsp..model s2bmod = (ron=1e−5,roff=0.1,von=.5,voff=−1.5)
c.ca n12 n8 = 5.1e−10
c.cb n15 n14 = 5.8e−10
c.cin n6 n8 = 1.3e−9

dp.dbody n7 n5 = model=dbodymod
dp.dbreak n5 n11 = model=dbreakmod
dp.dplcap n10 n5 = model=dplcapmod

spe.ebreak n11 n7 n17 n18 = 65.40
spe.eds n14 n8 n5 n8 = 1
spe.egs n13 n8 n6 n8 = 1
spe.esg n6 n10 n6 n8 = 1
spe.evthres n6 n21 n19 n8 = 1
spe.evtemp n20 n6 n18 n22 = 1

i.it n8 n17 = 1

l.lgate n1 n9 = 5.2e−9
l.ldrain n2 n5 = 1.0e−9
l.lsource n3 n7 = 2.14e−9

res.rlgate n1 n9 = 52
res.rldrain n2 n5 = 10
res.rlsource n3 n7 = 21.4

m.mmed n16 n6 n8 n8 = model=mmedmod, l=1u, w=1u
m.mstrong n16 n6 n8 n8 = model=mstrongmod, l=1u, w=1u
m.mweak n16 n21 n8 n8 = model=mweakmod, l=1u, w=1u

res.rbreak n17 n18 = 1, tc1=9e−4,tc2=−5e−7
res.rdrain n50 n16 = 3.1e−3, tc1=1.3e−2,tc2=5.2e−5
res.rgate n9 n20 = 3.71
res.rslc1 n5 n51 = 1e−6, tc1=1.8e−3,tc2=1.7e−5
res.rslc2 n5 n50 = 1e3
res.rsource n8 n7 = 5.5e−3, tc1=1e−3,tc2=1e−6
res.rvthres n22 n8 = 1, tc1=−5.3e−3,tc2=−1.0e−5
res.rvtemp n18 n19 = 1, tc1=−2.5e−3,tc2=1e−6
sw_vcsp.s1a n6 n12 n13 n8 = model=s1amod
sw_vcsp.s1b n13 n12 n13 n8 = model=s1bmod
sw_vcsp.s2a n6 n15 n14 n13 = model=s2amod
```

```
sw_vcsp.s2b n13 n15 n14 n13 = model=s2bmod

v.vbat n22 n19 = dc=1
equations {
i (n51−>n50) +=iscl
iscl: v(n51,n50) = ((v(n5,n51)/(1e−9+abs(v(n5,n51))))*((abs(v(n5,n51)*1e6/160))** 6))
}}
```

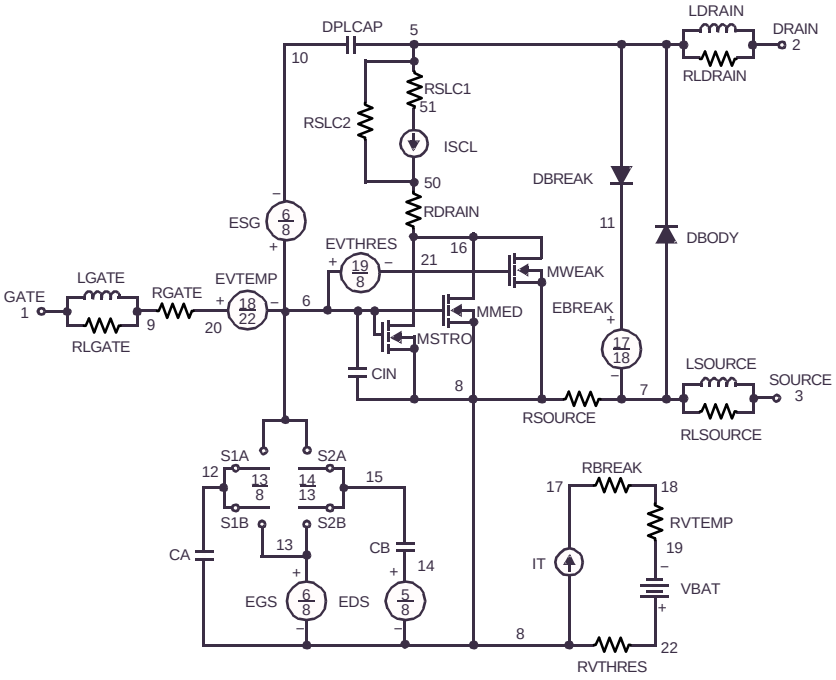

Figure 23.

PSPICE ELECTRICAL MODEL

REV 22 August 2002

FDD13AN06A0T

CTHERM1 TH 6 9.7e−4
CTHERM2 6 5 6.2e−3
CTHERM3 5 4 4.6e−3
CTHERM4 4 3 4.9e−3
CTHERM5 3 2 8e−3
CTHERM6 2 TL 4.2e−2

RTHERM1 TH 6 5.24e−2
RTHERM2 6 5 10.08e−2
RTHERM3 5 4 4.28e−1
RTHERM4 4 3 1.8e−1
RTHERM5 3 2 1.9e−1
RTHERM6 2 TL 2.1e−1

SABER ELECTRICAL MODEL

SABER thermal model FDD13AN06A0T
template thermal_model th tl
thermal_c th, tl
{
ctherm.ctherm1 th 6 =9.7e−4
ctherm.ctherm2 6 5 =6.2e−3
ctherm.ctherm3 5 4 =4.6e−3
ctherm.ctherm4 4 3 =4.9e−3
ctherm.ctherm5 3 2 =8e−3
ctherm.ctherm6 2 tl =4.2e−2

rtherm.rtherm1 th 6 =5.24e−2
rtherm.rtherm2 6 5 =10.08e−2
rtherm.rtherm3 5 4 =4.28e−1
rtherm.rtherm4 4 3 =1.8e−1
rtherm.rtherm5 3 2 =1.9e−1
rtherm.rtherm6 2 tl =2.1e−1
}

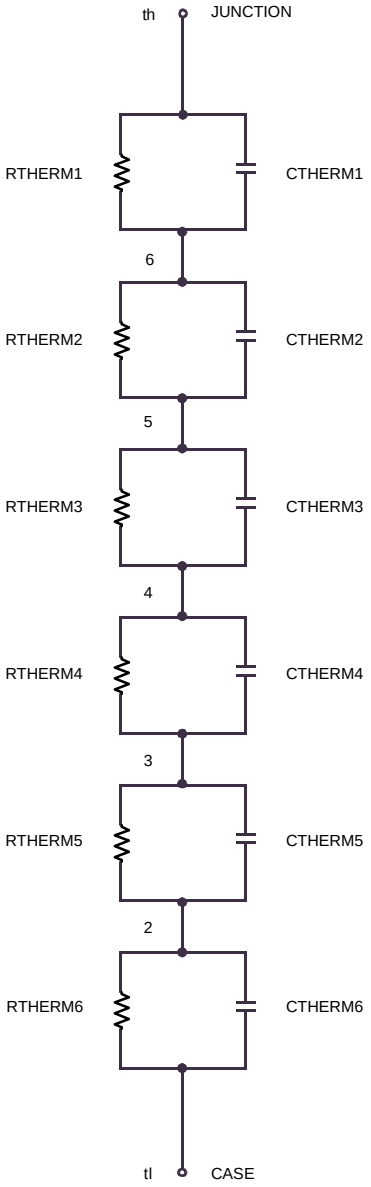

Figure 24.

PACKAGE MARKING AND ORDERING INFORMATION

Device	Device Marking	Package	Reel Size	Tape Width	Shipping†
FDD13AN06A0	FDD13AN06A0	DPAK3 (TO−252 3 LD) (Pb−Free, Halide Free)	330 mm	16 mm	2500 / Tape & Reel

†For information on tape and reel specifications, including part orientation and tape sizes, please refer to our Tape and Reel Packaging Specifications Brochure, BRD8011/D.



DPAK3 6.10x6.54x2.29, 4.57P
CASE 369AS
ISSUE B

DATE 20 DEC 2023

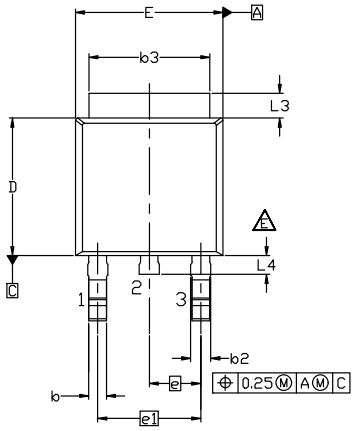

NON-DIODE PRODUCTS VERSION



NON-DIODE PRODUCTS VERSION

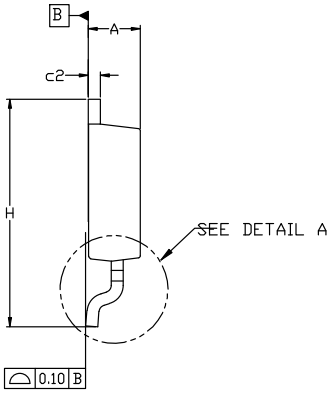

NOTES: UNLESS OTHERWISE SPECIFIED
A) THIS PACKAGE CONFORMS TO JEDEC, TO-252, ISSUE F, VARIATION AA.
B) ALL DIMENSIONS ARE IN MILLIMETERS.
C) DIMENSIONING AND TOLERANCING PER ASME Y14.5M-2018.
D) SUPPLIER DEPENDENT MOLD LOCKING HOLES OR CHAMFERED CORNERS OR EDGE PROTRUSION.
E) FOR DIODE PRODUCTS, L4 IS 0.25 MM MAX PLASTIC BODY STUB WITHOUT CENTER LEAD.
F) DIMENSIONS ARE EXCLUSIVE OF BURRS, MOLD FLASH AND TIE BAR EXTRUSIONS.
G) LAND PATTERN RECOMMENDATION IS BASED ON IPC7351A STD TO228P991X239-3N.

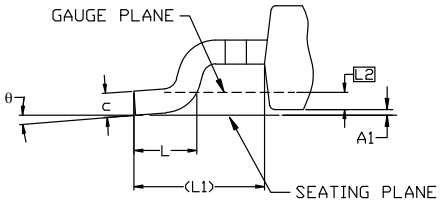

DETAIL A
(ROTATED -90°)
SCALE: 12X

DIM	MILLIMETERS		
	MIN.	NOM.	MAX.
A	2.18	2.29	2.39
A1	0.00	–	0.127
b	0.64	0.77	0.89
b2	0.76	0.95	1.14
b3	5.21	5.34	5.46
c	0.45	0.53	0.61
c2	0.45	0.52	0.58
D	5.97	6.10	6.22
D1	5.21	---	---
E	6.35	6.54	6.73
E1	4.32	---	---
e	2.286 BSC		
e1	4.572 BSC		
H	9.40	9.91	10.41
L	1.40	1.59	1.78
L1	2.90 REF		
L2	0.51 BSC		
L3	0.89	1.08	1.27
L4	---	---	1.02
θ	0°	---	10°

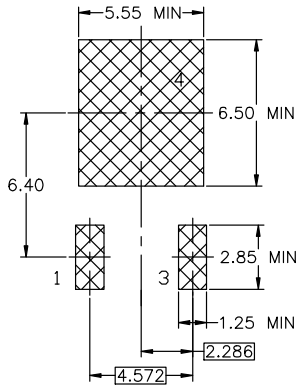

LAND PATTERN RECOMMENDATION

*FOR ADDITIONAL INFORMATION ON OUR PB-FREE STRATEGY AND SOLDERING DETAILS, PLEASE DOWNLOAD THE ON SEMICONDUCTOR SOLDERING AND MOUNTING TECHNIQUES REFERENCE MANUAL, SOLDERRM/D.

GENERIC MARKING DIAGRAM*

*This information is generic. Please refer to device data sheet for actual part marking. Pb−Free indicator, “G” or microdot “▪”, may or may not be present. Some products may not follow the Generic Marking.

XXXX = Specific Device Code
A = Assembly Location
Y = Year
WW = Work Week
ZZ = Assembly Lot Code

DOCUMENT NUMBER:	**98AON13810G**	Electronic versions are uncontrolled except when accessed directly from the Document Repository. Printed versions are uncontrolled except when stamped “CONTROLLED COPY” in red.
DESCRIPTION:	**DPAK3 6.10x6.54x2.29, 4.57P**	**PAGE 1 OF 1**

ADDITIONAL INFORMATION

TECHNICAL PUBLICATIONS:
Technical Library: www.onsemi.com/design/resources/technical−documentation
onsemi Website: www.onsemi.com

ONLINE SUPPORT: www.onsemi.com/support
For additional information, please contact your local Sales Representative at www.onsemi.com/support/sales