MOSFET – Single, N-Channel, POWERTRENCH®, 2.5 V Specified

30 V, 5.0 A, 40 mΩ

FDMA430NZ

V_{DS}	$R_{DS(on)}$ MAX	I_D MAX
30 V	40 mΩ @ 4.5 V	5.0 A
	50 mΩ @ 2.5 V	

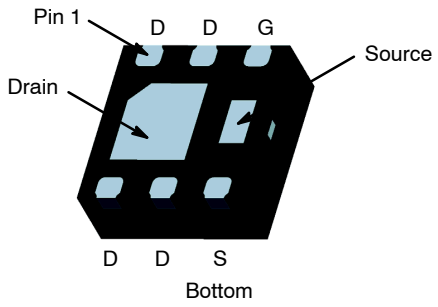

WDFN6 2x2, 0.65P
(MicroFET 2x2)
CASE 511CZ

General Description

This Single N−Channel MOSFET has been designed using **onsemi**'s advanced POWERTRENCH process to optimize the $R_{DS(on)}$ @ V_{GS} = 2.5 V on special MicroFET™ leadframe.

Features

- $R_{DS(on)}$ = 40 mΩ at V_{GS} = 4.5 V, I_D = 5.0 A
- $R_{DS(on)}$ = 50 mΩ at V_{GS} = 2.5 V, I_D = 4.5 A
- Low Profile − 0.8 mm Maximum in the New Package MicroFET 2x2 mm
- HBM ESD Protection Level > 2.5 kV Typical (Note 3)
- Free from Halogenated Compounds and Antimony Oxides
- This Device is Pb−Free, Halide Free and is RoHS Compliant

Applications

- Li−Ion Battery Pack

MARKING DIAGRAM



&Z = Assembly Plant Code
&2 = 2−Digit Date Code
&K = 2−Digits Lot Run Traceability Code
430 = Specific Device Code

PIN ASSIGNMENT

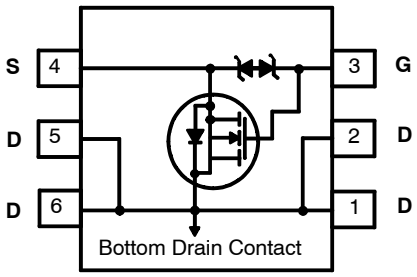

ABSOLUTE MAXIMUM RATINGS (T_A = 25°C, unless otherwise noted)

Symbol	Parameter	Ratings	Unit
V_{DSS}	Drain−Source Voltage	30	V
V_{GSS}	Gate−Source Voltage	±12	V
I_D	Drain Current − Continuous (Note 1a) − Pulsed	 5.0 20	A
P_D	Power Dissipation (Steady State) − (Note 1a) − (Note 1b)	 2.4 0.9	W
T_J, T_{STG}	Operating and Storage Junction Temperature Range	−55 to +150	°C

Stresses exceeding those listed in the Maximum Ratings table may damage the device. If any of these limits are exceeded, device functionality should not be assumed, damage may occur and reliability may be affected.

THERMAL CHARACTERISTICS (T_A = 25°C, unless otherwise noted)

Symbol	Parameter	Ratings	Unit
$R_{\theta JA}$	Thermal Resistance, Junction to Ambient (Note 1a)	52	°C/W
$R_{\theta JA}$	Thermal Resistance, Junction to Ambient (Note 1b)	145	

ORDERING INFORMATION

Device	Package	Shipping†
FDMA430NZ	WDFN6 (Pb−Free, Halide Free)	3000 / Tape & Reel

†For information on tape and reel specifications, including part orientation and tape sizes, please refer to our Tape and Reel Packaging Specification Brochure, BRD8011/D.

ELECTRICAL CHARACTERISTICS (T_J = 25°C unless otherwise noted)

Symbol	Parameter	Test Condition	Min	Typ	Max	Unit
OFF CHARACTERISTICS						
BV_{DSS}	Drain–Source Breakdown Voltage	I_D = 250 μA, V_{GS} = 0 V	30	–	–	V
$\frac{\Delta BV_{DSS}}{\Delta T_J}$	Breakdown Voltage Temperature Coefficient	I_D = 250 μA, referenced to 25°C	–	25.2	–	mV/°C
I_{DSS}	Zero Gate Voltage Drain Current	V_{DS} = 24 V, V_{GS} = 0 V	–	–	1	μA
I_{GSS}	Gate–Body Leakage	V_{GS} = ±12 V, V_{DS} = 0 V	–	–	±10	μA
ON CHARACTERISTICS (Note 2)						
$V_{GS(th)}$	Gate Threshold Voltage	V_{GS} = V_{DS}, I_D = 250 μA	0.6	0.81	1.5	V
$\frac{\Delta V_{GS(th)}}{\Delta T_J}$	Gate Threshold Voltage Temperature Coefficient	I_D = 250 μA, referenced to 25°C	–	–3.2	–	mV/°C
$R_{DS(on)}$	Static Drain–Source On Resistance	V_{GS} = 4.5 V, I_D = 5.0 A	–	23.6	40	mΩ
		V_{GS} = 4.0 V, I_D = 5.0 A	–	23.9	41	
		V_{GS} = 3.1 V, I_D = 4.5 A	–	25.4	43	
		V_{GS} = 2.5 V, I_D = 4.5 A	–	27.6	50	
		V_{GS} = 4.5 V, I_D = 5.0 A, T_J = 150°C	–	37.0	61	
g_{FS}	Forward Transconductance	V_{DS} = 5 V, I_D = 5.0 A	–	25.6	–	S
DYNAMIC CHARACTERISTICS						
C_{iss}	Input Capacitance	V_{DS} = 10 V, V_{GS} = 0 V, f = 1.0 MHz	–	600	800	pF
C_{oss}	Output Capacitance		–	110	150	pF
C_{rss}	Reverse Transfer Capacitance		–	75	115	pF
R_G	Gate Resistance	f = 1.0 MHz	–	3.5	–	Ω
SWITCHING CHARACTERISTICS (Note 2)						
$t_{d(on)}$	Turn–On Delay Time	V_{DD} = 10 V, I_D = 1 A, V_{GS} = 4.5 V, R_{GEN} = 6 Ω	–	8.3	17	ns
t_r	Turn–On Rise Time		–	7.1	15	ns
$t_{d(off)}$	Turn–Off Delay Time		–	18.1	37	ns
t_f	Turn–Off Fall Time		–	6.0	12	ns
Q_g	Total Gate Charge	V_{DS} = 10 V, I_D = 5.0 A, V_{GS} = 4.5 V	–	7.3	11	nC
Q_{gs}	Gate–Source Charge		–	0.8	2	nC
Q_{gd}	Gate–Drain Charge		–	1.9	3	nC
DRAIN–SOURCE DIODE CHARACTERISTICS AND MAXIMUM RATINGS						
I_S	Maximum Continuous Drain–Source Diode Forward Current		–	–	2.0	A
V_{SD}	Drain–Source Diode Forward Voltage	V_{GS} = 0 V, I_S = 2.0 A	–	0.69	1.2	V
t_{rr}	Diode Reverse Recovery Time	I_F = 5.0 A, di/dt = 100 A/μs	–	–	17	ns
Q_{rr}	Diode Reverse Recovery Charge		–	–	5	nC

Product parametric performance is indicated in the Electrical Characteristics for the listed test conditions, unless otherwise noted. Product performance may not be indicated by the Electrical Characteristics if operated under different conditions.

1. $R_{\theta JA}$ is the sum of the junction–to–case and case–to–ambient thermal resistance where the case thermal reference is defined as the solder mounting surface of the drain pins.



a. 52°C/W when mounted on a 1 in^2 pad of 2 oz copper



b. 145°C/W when mounted on a minimum pad of 2 oz copper

2. Pulse Test: Pulse Width < 300 μs, Duty cycle < 2.0%.
3. The diode connected between the gate and source serves only as protection against ESD. No gate overvoltage rating is implied.

TYPICAL CHARACTERISTICS

(T_J = 25°C unless otherwise noted)

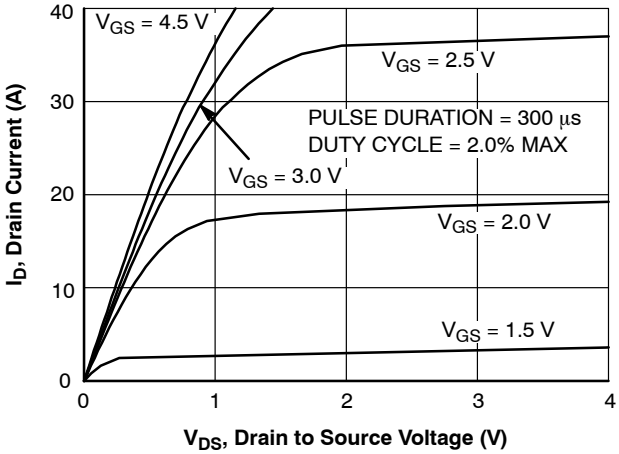

Figure 1. On−Region Characteristics

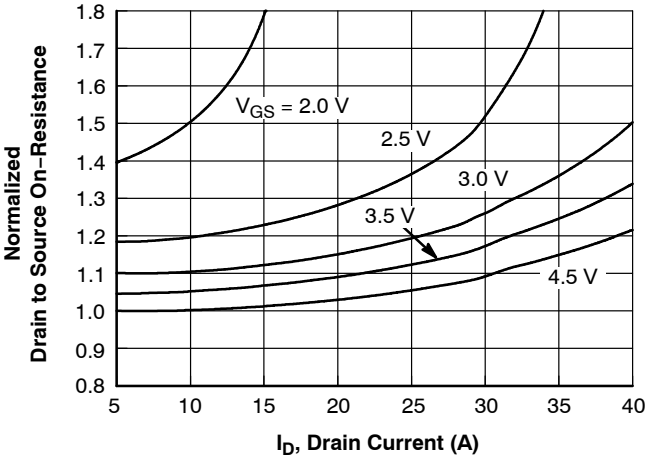

Figure 2. On−Resistance vs. Drain Current and Gate Voltage

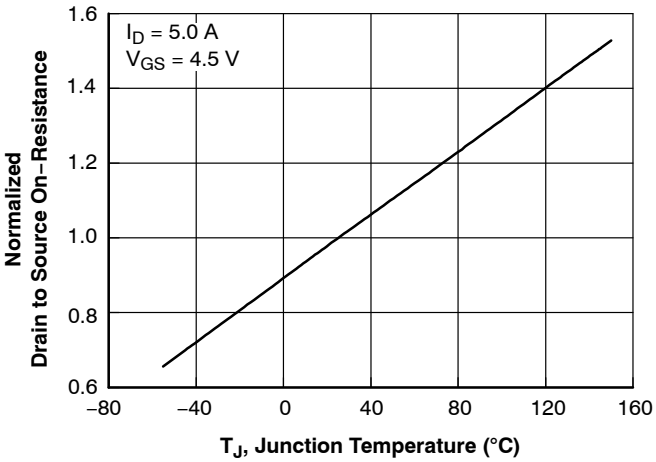

Figure 3. Normalized On−Resistance vs. Junction Temperature

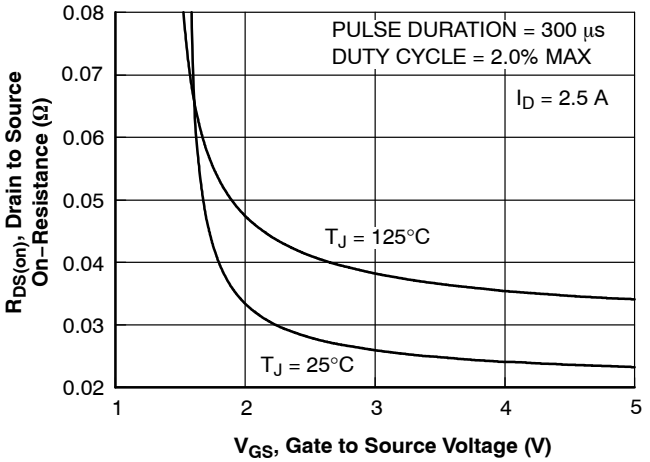

Figure 4. On−Resistance vs. Gate to Source Voltage

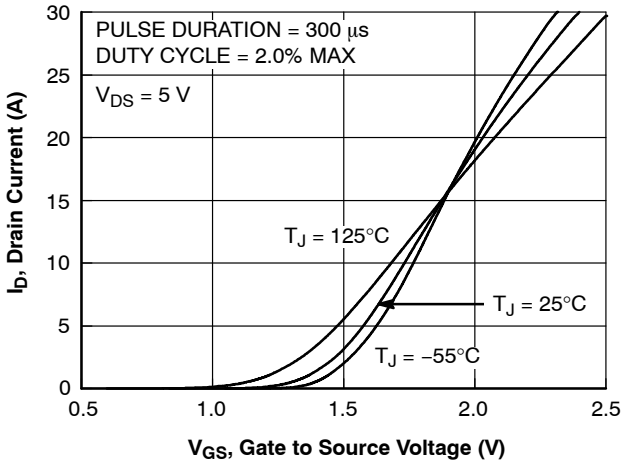

Figure 5. Transfer Characteristics

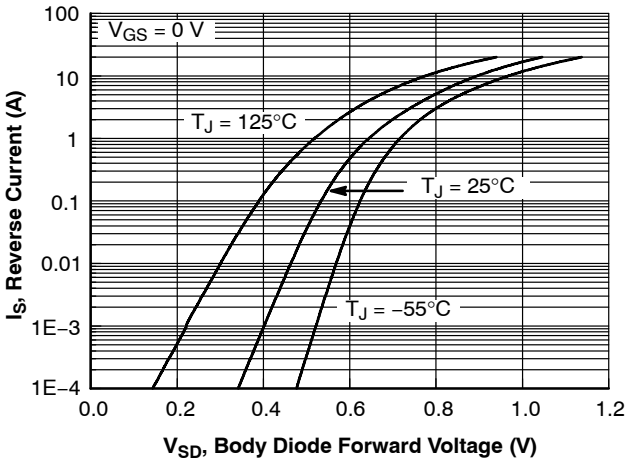

Figure 6. Source to Drain Diode Forward Voltage vs. Source Current

TYPICAL CHARACTERISTICS (continued)

(T_J = 25°C unless otherwise noted)

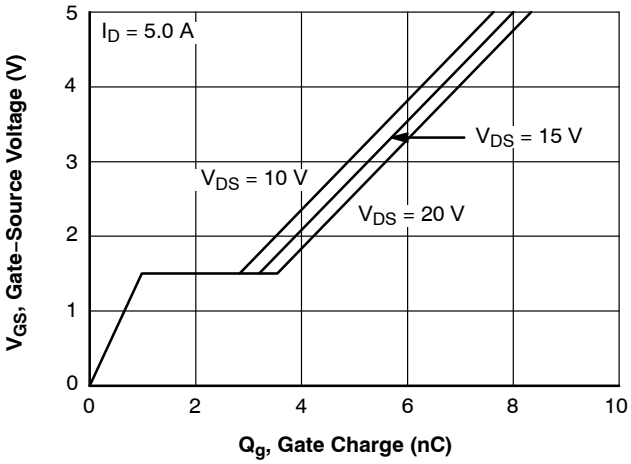

Figure 7. Gate Charge Characteristics

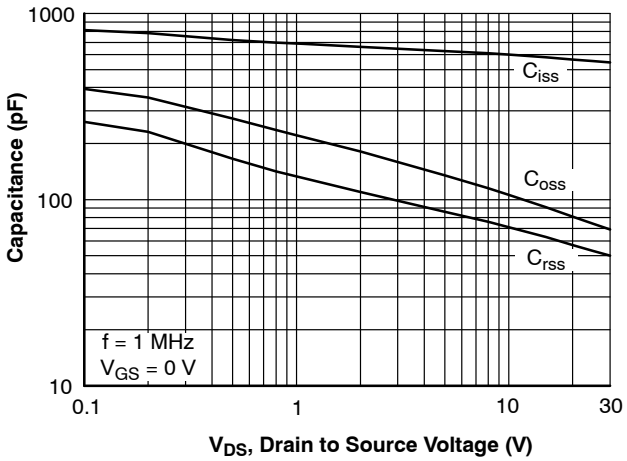

Figure 8. Capacitance vs. Drain to Source Voltage

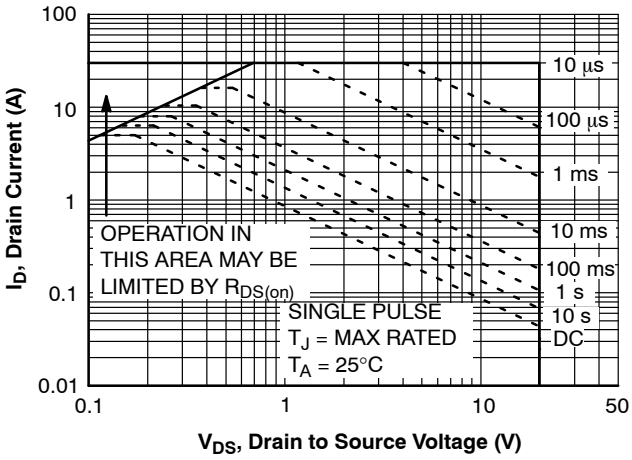

Figure 9. Safe Operating Area

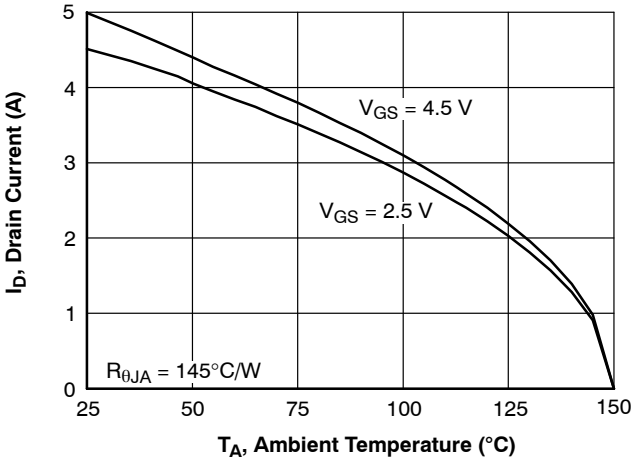

Figure 10. Maximum Continuous Drain Current vs. Ambient Temperature

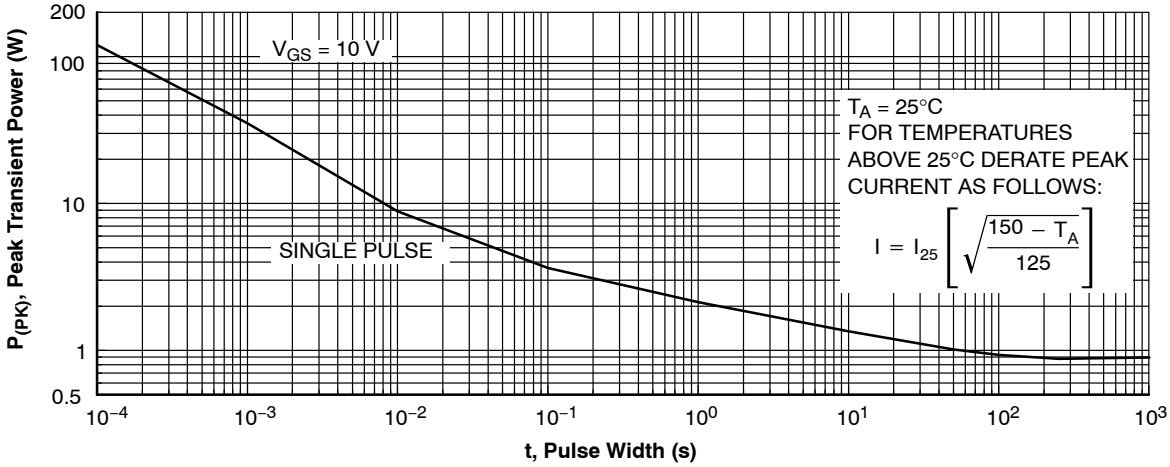

Figure 11. Single Pulse Maximum Power Dissipation

TYPICAL CHARACTERISTICS (continued)

(T_J = 25°C unless otherwise noted)

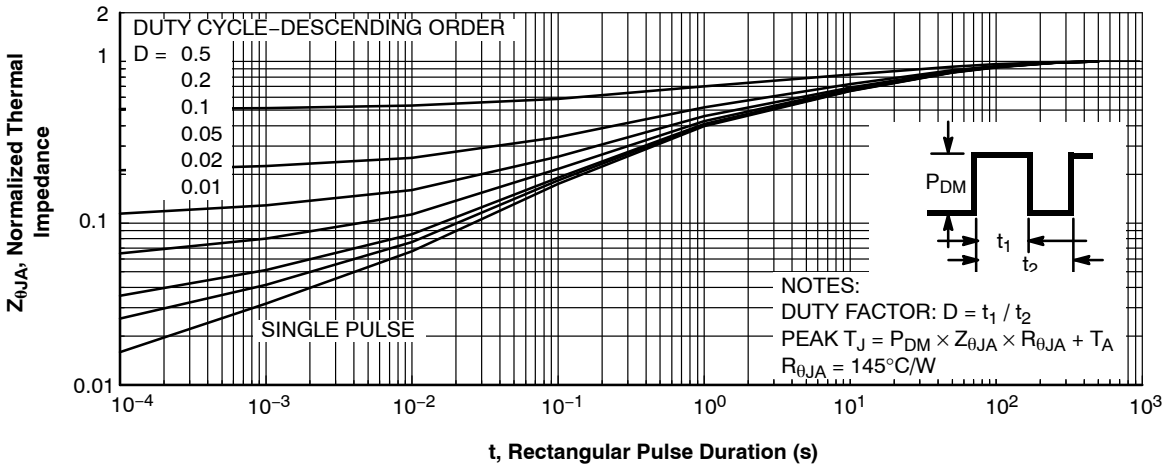

Figure 12. Transient Thermal Response Curve

WDFN6 2x2, 0.65P
CASE 511CZ
ISSUE O

DATE 31 JUL 2016

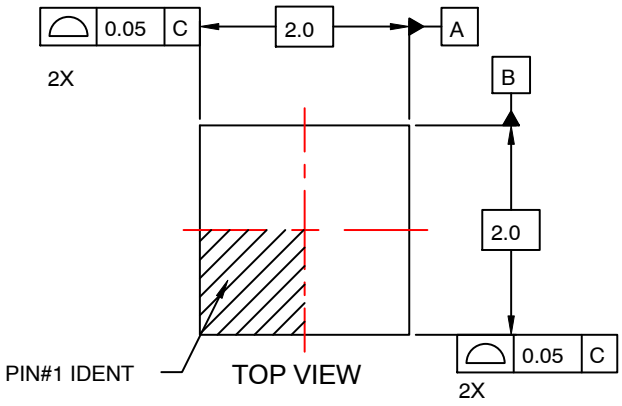

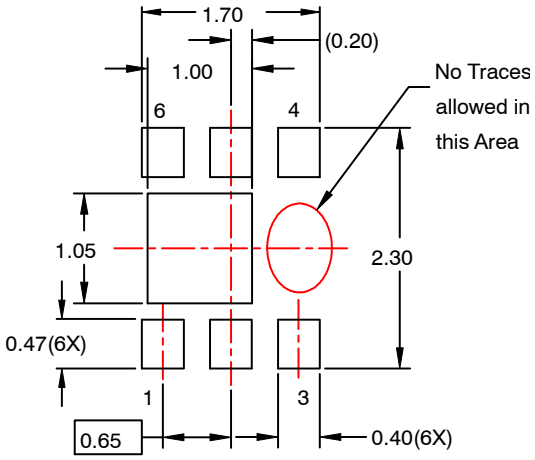

RECOMMENDED
LAND PATTERN OPT 1

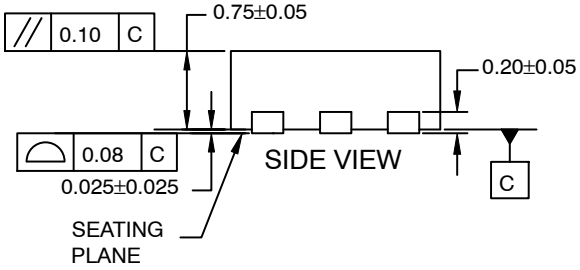

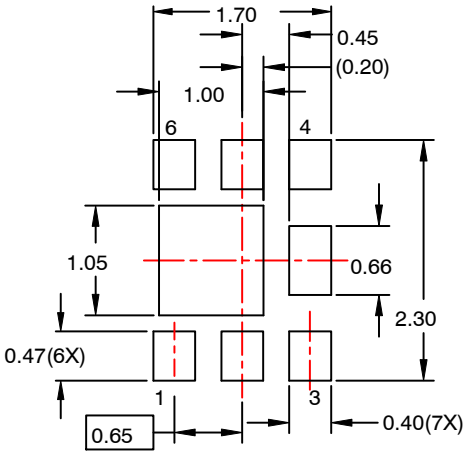

RECOMMENDED
LAND PATTERN OPT 2

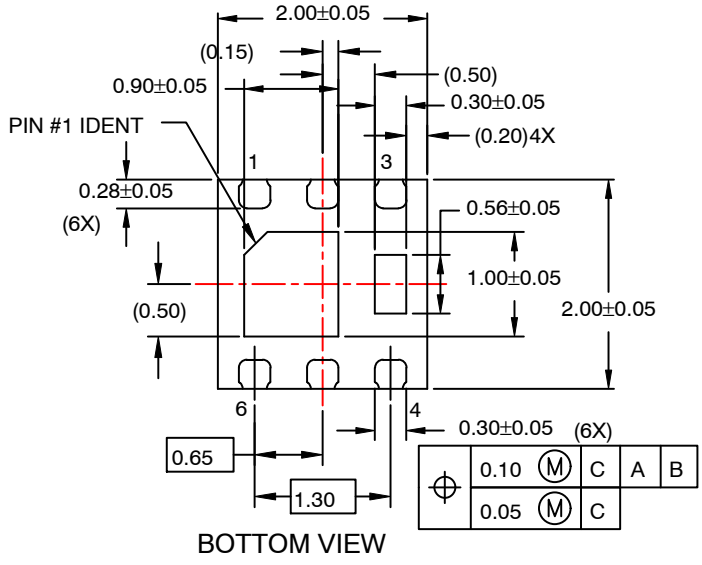

NOTES:

A. PACKAGE DOES NOT FULLY CONFORM TO JEDEC MO−229 REGISTRATION

B. DIMENSIONS ARE IN MILLIMETERS.

C. DIMENSIONS AND TOLERANCES PER ASME Y14.5M, 2009.

D. LAND PATTERN RECOMMENDATION IS EXISTING INDUSTRY LAND PATTERN.

DOCUMENT NUMBER:	**98AON13614G**	Electronic versions are uncontrolled except when accessed directly from the Document Repository. Printed versions are uncontrolled except when stamped "CONTROLLED COPY" in red.	
DESCRIPTION:	**WDFN6 2X2, 0.65P**		**PAGE 1 OF 1**

ADDITIONAL INFORMATION

TECHNICAL PUBLICATIONS:
Technical Library: www.onsemi.com/design/resources/technical−documentation
onsemi Website: www.onsemi.com

ONLINE SUPPORT: www.onsemi.com/support
For additional information, please contact your local Sales Representative at www.onsemi.com/support/sales