MOSFET – N-Channel, POWERTRENCH®

60 V, 300 A, 1.1 mΩ

FDBL86561-F085



N−Channel



H−PSOF8L 11.68 × 9.80
CASE 100CU

Features

- Typical $R_{DS(on)}$ = 0.85 mΩ at V_{GS} = 10 V, I_D = 80 A
- Typical $Q_{g(tot)}$ = 170 nC at V_{GS} = 10 V, I_D = 80 A
- UIS Capability
- AEC−Q101 Qualified and PPAP Capable
- These Devices are Pb−Free and are RoHS Compliant

Applications

- Automotive Engine Control
- PowerTrain Management
- Solenoid and Motor Drivers
- Integrated Starter/Alternator
- Primary Switch for 12 V Systems

MOSFET MAXIMUM RATINGS (T_J = 25°C unless otherwise noted)

Symbol	Parameter	Ratings	Unit
V_{DSS}	Drain−to−Source Voltage	60	V
V_{GS}	Gate−to−Source Voltage	±20	V
I_D	Drain Current − Continuous (V_{GS} = 10), T_C = 25°C (Note 1)	300	A
	Pulsed Drain Current, T_C = 25°C	See Figure 4	
E_{AS}	Single Pulse Avalanche Energy (Note 2)	1167	mJ
P_D	Power Dissipation	429	W
	Derate Above 25°C	2.86	W/°C
T_J, T_{STG}	Operating and Storage Temperature	−55 to +175	°C
$R_{\theta JC}$	Thermal Resistance, Junction to Case	0.35	°C/W
$R_{\theta JA}$	Maximum Thermal Resistance, Junction to Ambient (Note 3)	43	°C/W

Stresses exceeding those listed in the Maximum Ratings table may damage the device. If any of these limits are exceeded, device functionality should not be assumed, damage may occur and reliability may be affected.

1. Current is limited by bondwire configuration.
2. Starting T_J = 25°C, L = 0.57 mH, I_{AS} = 64 A, V_{DD} = 40 V during inductor charging and V_{DD} = 0 V during time in avalanche.
3. $R_{\theta JA}$ is the sum of the junction−to−case and case−to−ambient thermal resistance, where the case thermal reference is defined as the solder mounting surface of the drain pins. $R_{\theta JC}$ is guaranteed by design, while $R_{\theta JA}$ is determined by the board design. The maximum rating presented here is based on mounting on a 1 in^2 pad of 2oz copper.

MARKING DIAGRAM



&Z	= Assembly Plant Code
&3	= Numeric Date Code
&K	= Lot Code
FDBL86561	= Specific Device Code

ORDERING INFORMATION

Device	Package	Shipping†
FDBL86561−F085	H−PSOF8L	2000 / Tape & Reel

†For information on tape and reel specifications, including part orientation and tape sizes, please refer to our Tape and Reel Packaging Specification Brochure, BRD8011/D.

*For additional information on our Pb−Free strategy and soldering details, please download the **onsemi** Soldering and Mounting Techniques Reference Manual, SOLDERRM/D.

ELECTRICAL CHARACTERISTICS (T_J = 25°C unless otherwise noted)

Symbol	Parameter	Test Conditions		Min.	Typ.	Max.	Unit
OFF CHARACTERISTICS							
BV_{DSS}	Drain−to−Source Breakdown Voltage	I_D = 250 μA, V_{GS} = 0 V		60	–	–	V
I_{DSS}	Drain−to−Source Leakage Current	V_{DS} = 60 V, V_{GS} = 0 V	T_J = 25°C	–	–	1	μA
			T_J = 175°C (Note 4)	–	–	3	mA
I_{GSS}	Gate−to−Source Leakage Current	V_{GS} = ±20 V		–	–	±100	nA
ON CHARACTERISTICS							
$V_{GS(th)}$	Gate to Source Threshold Voltage	V_{GS} = V_{DS}, I_D = 250 μA		2.0	3.0	4.0	V
$R_{DS(on)}$	Drain to Source on Resistance	I_D = 80 A, V_{GS} = 10 V	T_J = 25°C	–	0.85	1.1	mΩ
			T_J = 175°C (Note 4)	–	1.5	2.2	mΩ
DYNAMIC CHARACTERISTICS							
C_{iss}	Input Capacitance	V_{DS} = 30 V, V_{GS} = 0 V, f = 1 MHz		–	13650	–	pF
C_{oss}	Output Capacitance			–	3375	–	pF
C_{rss}	Reverse Transfer Capacitance			–	255	–	pF
R_g	Gate Resistance	f = 1 MHz		–	2.3	–	Ω
$Q_{g(ToT)}$	Total Gate Charge at 10 V	V_{GS} = 0 to 10 V	V_{DD} = 48 V, I_D = 80 A	–	170	220	nC
$Q_{g(th)}$	Threshold Gate Charge	V_{GS} = 0 to 2 V		–	24	32	nC
Q_{gs}	Gate−to−Source Gate Charge			–	56	–	nC
Q_{gd}	Gate−to−Drain “Miller” Charge			–	24	–	nC
SWITCHING CHARACTERISTICS							
t_{on}	Turn−On Time	V_{DD} = 30 V, I_D = 80 A, V_{GS} = 10 V, R_{GEN} = 6 Ω		–	–	137	ns
$t_{d(on)}$	Turn−On Delay			–	45	–	ns
t_r	Rise Time			–	61	–	ns
$t_{d(off)}$	Turn−Off Delay			–	80	–	ns
t_f	Fall Time			–	41	–	ns
t_{off}	Turn−Off Time			–	–	156	ns
DRAIN−SOURCE DIODE CHARACTERISTIC							
V_{SD}	Source−to−Drain Diode Voltage	I_{SD} = 80 A, V_{GS} = 0 V		–	–	1.25	V
		I_{SD} = 40 A, V_{GS} = 0 V		–	–	1.2	V
t_{rr}	Reverse−Recovery Time	I_F = 80 A, dI_{SD}/dt = 100 A/μs, V_{DD} = 48 V		–	107	139	ns
Q_{rr}	Reverse−Recovery Charge			–	183	265	nC

Product parametric performance is indicated in the Electrical Characteristics for the listed test conditions, unless otherwise noted. Product performance may not be indicated by the Electrical Characteristics if operated under different conditions.

4. The maximum value is specified by design at T_J = 175°C. Product is not tested to this condition in production.

TYPICAL CHARACTERISTICS

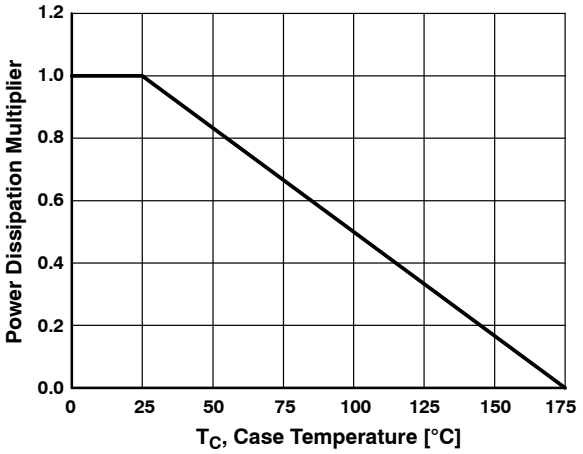

Figure 1. Normalized Power Dissipation vs. Case Temperature

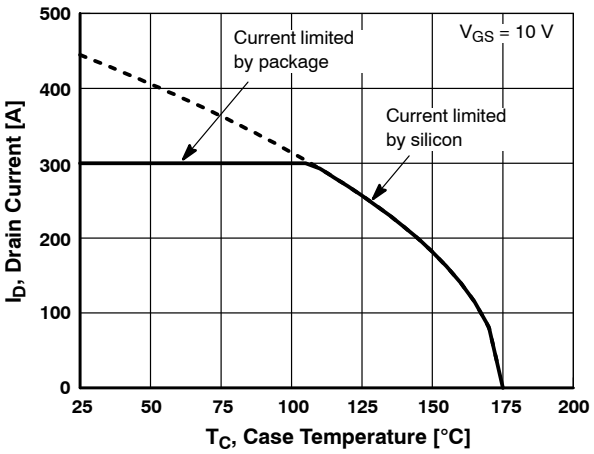

Figure 2. Maximum Continuous Drain Current vs. Case Temperature

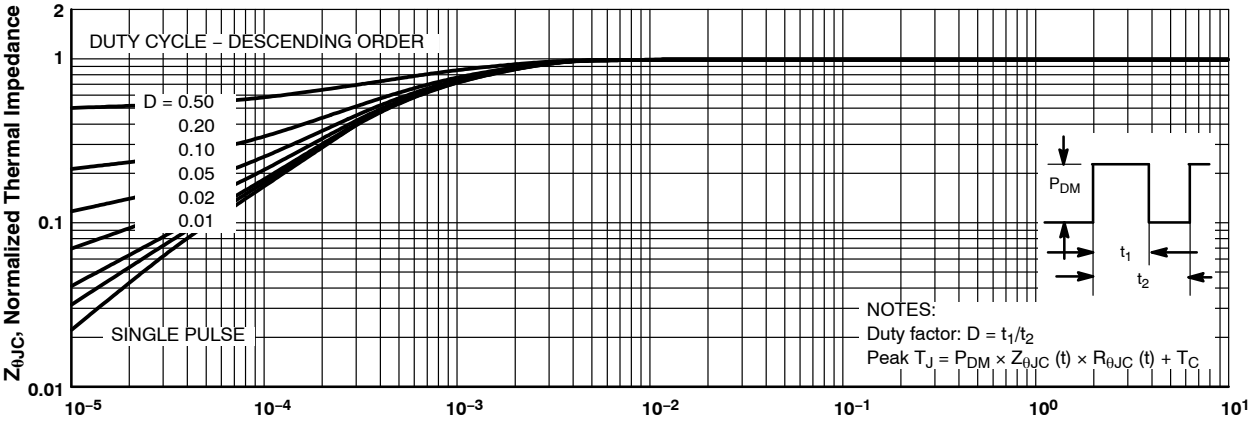

Figure 3. Normalized Maximum Transient Thermal Impedance

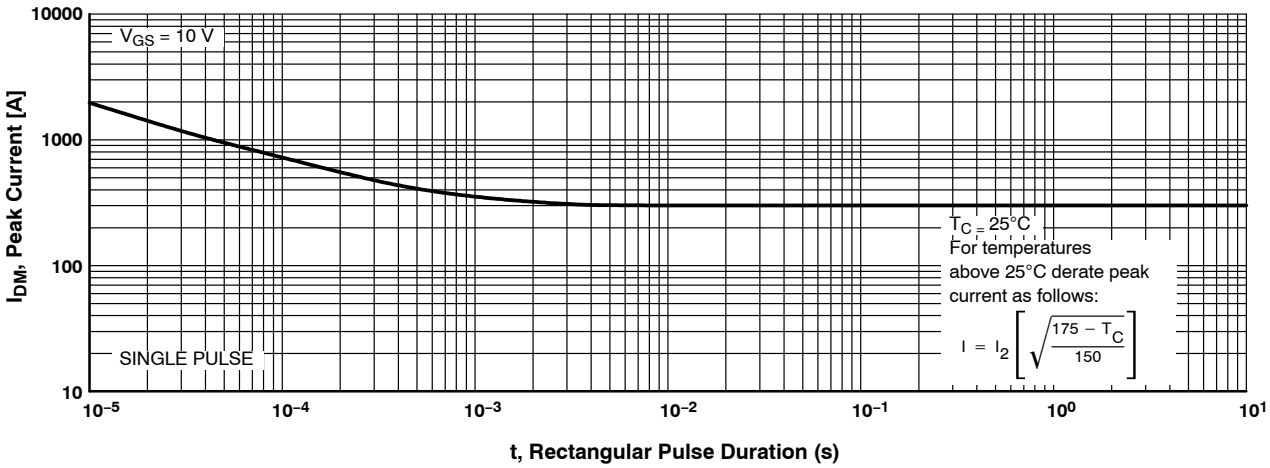

Figure 4. Peak Current Capability

TYPICAL CHARACTERISTICS (continued)

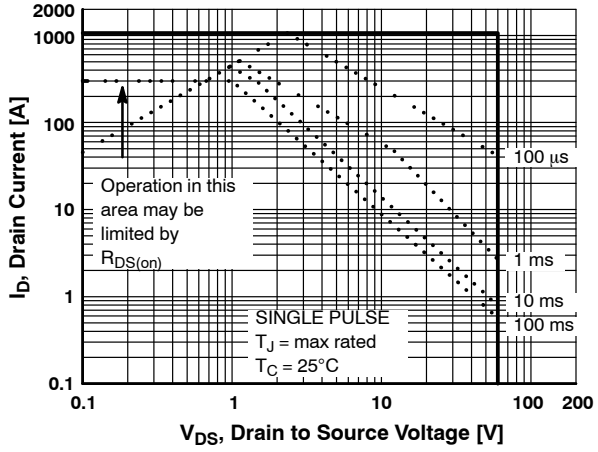

Figure 5. Forward Bias Safe Operating Area

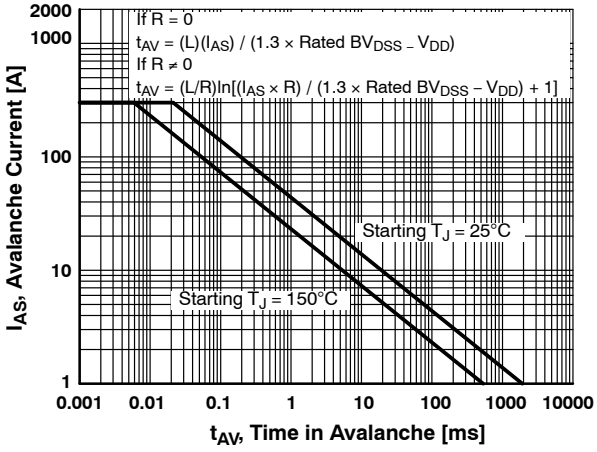

Refer to **onsemi** Application Notes AN7514 and AN7515.

Figure 6. Unclamped Inductive Switching Capability

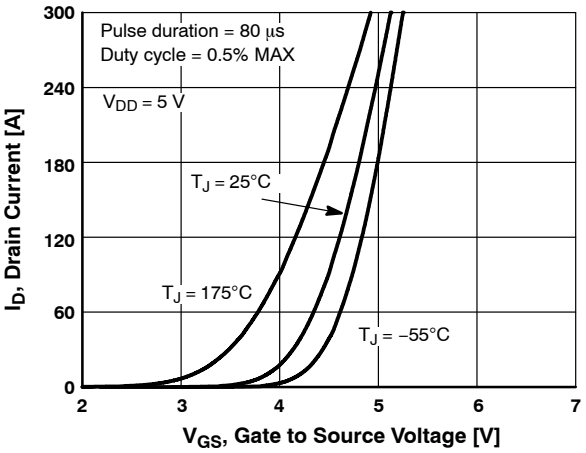

Figure 7. Transfer Characteristics

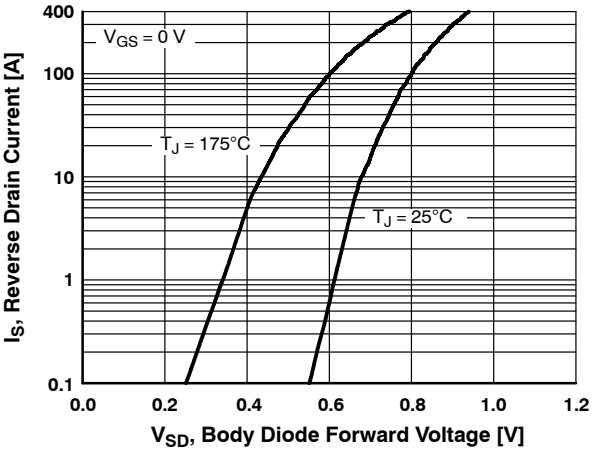

Figure 8. Forward Diode Characteristics

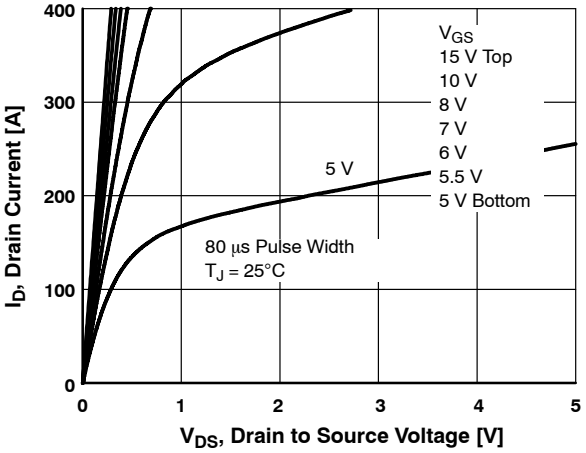

Figure 9. Saturation Characteristics

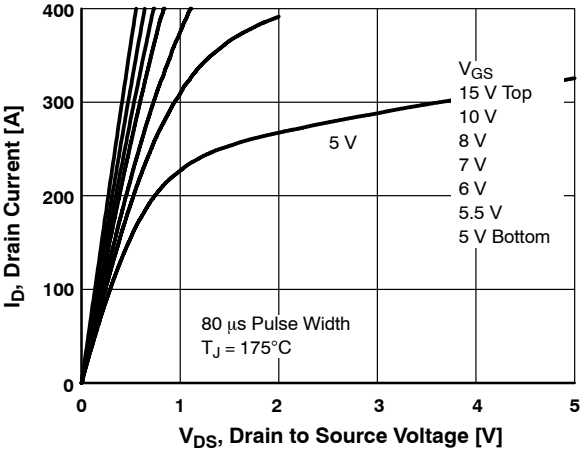

Figure 10. Saturation Characteristics

TYPICAL CHARACTERISTICS (continued)

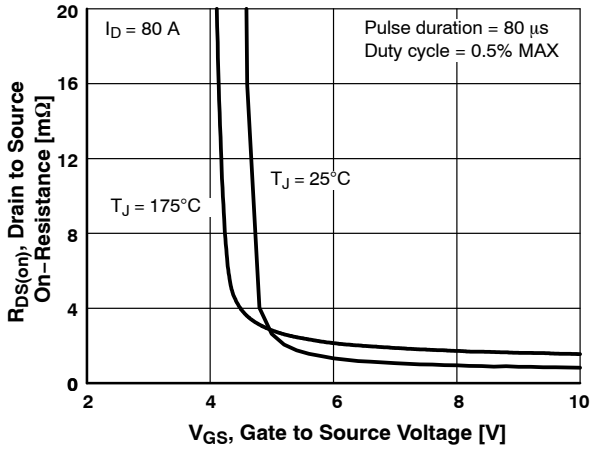

Figure 11. $R_{DS(ON)}$ vs. Gate Voltage

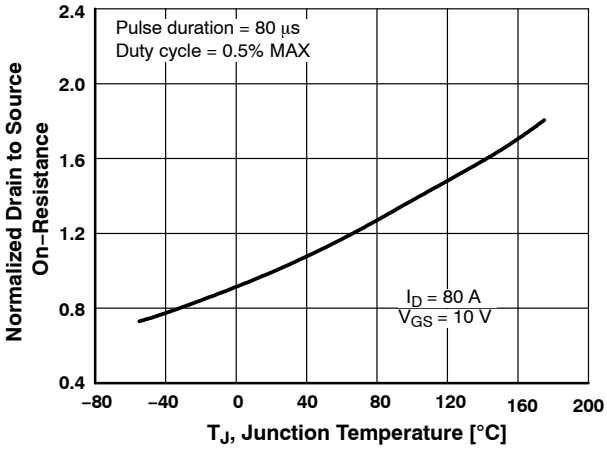

Figure 12. Normalized $R_{DS(ON)}$ vs. Junction Temperature

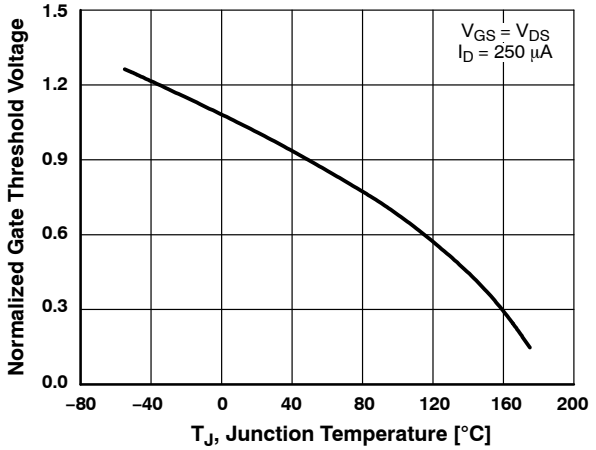

Figure 13. Normalized Gate Threshold Voltage vs. Temperature

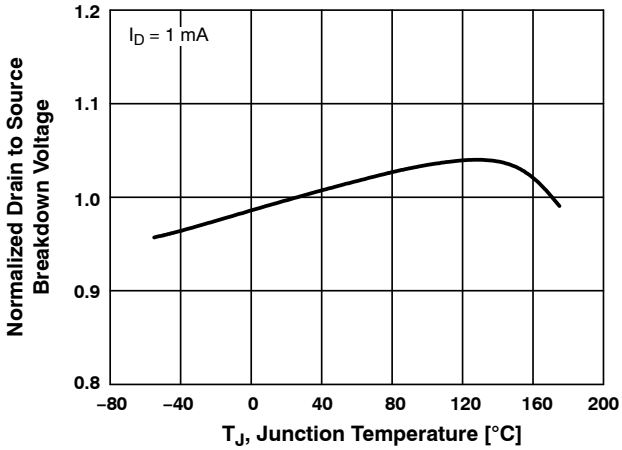

Figure 14. Normalized Drain to Source Breakdown Voltage vs. Junction Temperature

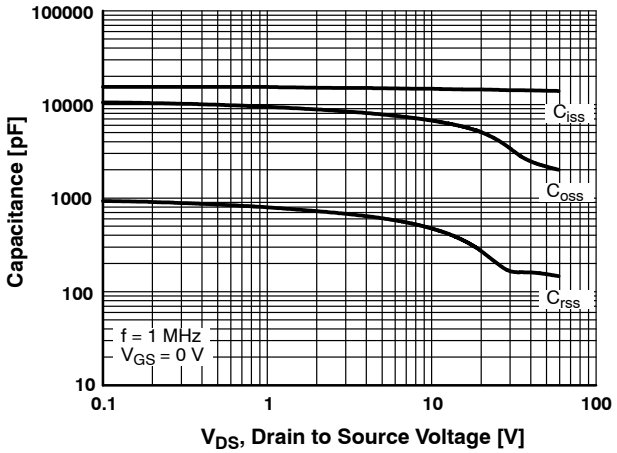

Figure 15. Capacitance vs. Drain to Source Voltage

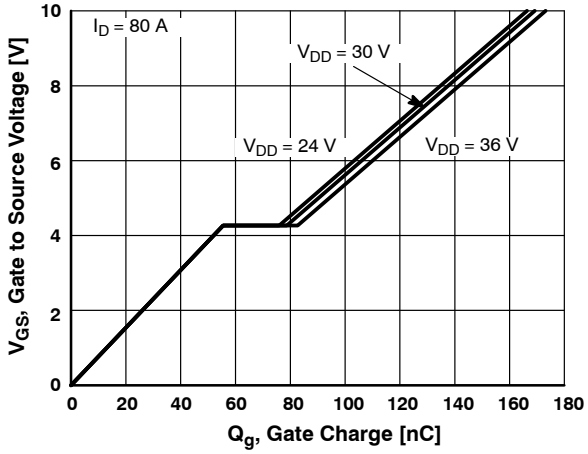

Figure 16. Gate Charge vs. Gate to Source Voltage



H−PSOF8L 11.68x9.80x2.30, 1.20P
CASE 100CU
ISSUE F

DATE 30 JUL 2024

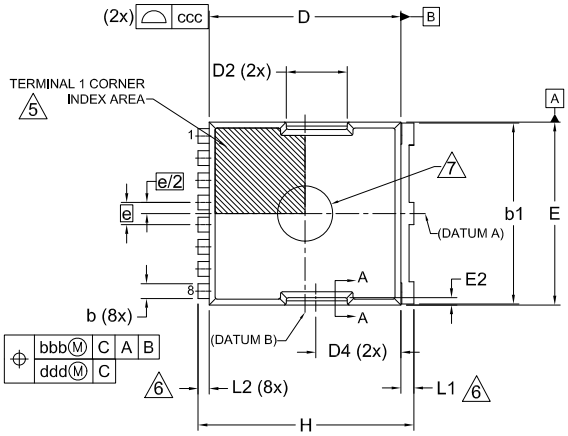

TOP VIEW



SECTION "A-A"
SCALE: 2X

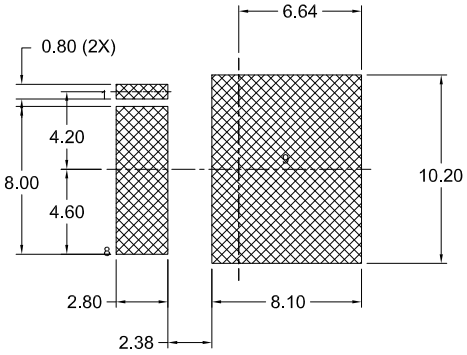

LAND PATTERN RECOMMENDATION

*FOR ADDITIONAL INFORMATION ON OUR PB-FREE STRATEGY AND SOLDERING DETAILS, PLEASE DOWNLOAD THE ONSEMI SOLDERING AND MOUNTING TECHNIQUES REFERENCE MANUAL, SOLDERRM/D.

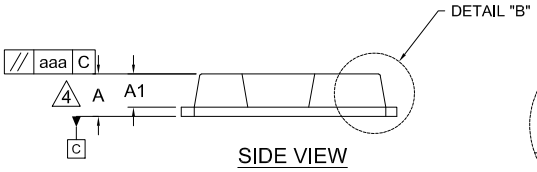

SIDE VIEW



DETAIL "B"
SCALE: 2X

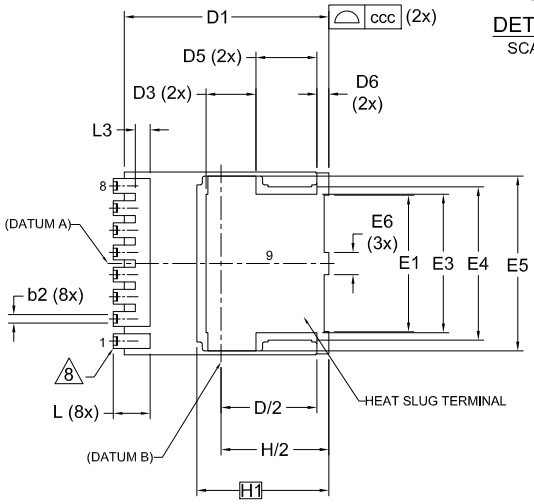

BOTTOM VIEW

NOTES:
1. PACKAGE STANDARD REFERENCE: JEDEC MO-299, ISSUE B.
2. DIMENSIONING AND TOLERANCING PER ASME Y14.5M, 2018.
3. "e" REPRESENTS THE TERMINAL PITCH.
4. THIS DIMENSION INCLUDES ENCAPSULATION THICKNESS "A1", AND PACKAGE BODY THICKNESS, BUT DOES NOT INCLUDE ATTACHED FEATURES, e.g.,EXTERNAL OR CHIP CAPACITORS. AN INTEGRAL HEATSLUG IS NOT CONSIDERED AS ATTACHED FEATURE.
5. A VISUAL INDEX FEATURE MUST BE LOCATED WITHIN THE HATCHED AREA.
6. DIMENSIONS b1,L1,L2 APPLY TO PLATED TERMINALS.
7. THE LOCATION AND SIZE OF EJECTOR MARKS ARE OPTIONAL.
8. THE LOCATION AND NUMBER OF FUSED LEADS ARE OPTIONAL.

DIM	MILLIMETERS		
	MIN.	NOM.	MAX.
A	2.20	2.30	2.40
A1	1.70	1.80	1.90
b	0.70	0.80	0.90
b1	9.70	9.80	9.90
b2	0.35	0.45	0.55
c	0.40	0.50	0.60
D	10.28	10.38	10.48
D/2	5.09	5.19	5.29
D1	10.98	11.08	11.18
D2	3.20	3.30	3.40
D3	2.60	2.70	2.80
D4	4.45	4.55	4.65
D5	3.20	3.30	3.40
D6	0.55	0.65	0.75
E	9.80	9.90	10.00
E1	7.30	7.40	7.50
E2	0.30	0.40	0.50
E3	7.40	7.50	7.60
E4	8.20	8.30	8.40

DIM	MILLIMETERS		
	MIN.	NOM.	MAX.
E5	9.36	9.46	9.56
E6	1.10	1.20	1.30
E7	0.15	0.18	0.21
e	1.20 BSC		
e/2	0.60 BSC		
H	11.58	11.68	11.78
H/2	5.74	5.84	5.94
H1	7.15 BSC		
L	1.90	2.00	2.10
L1	0.60	0.70	0.80
L2	0.50	0.60	0.70
L3	0.70	0.80	0.90
Θ	10° REF		
Θ1	10° REF		
aaa	0.20		
bbb	0.25		
ccc	0.20		
ddd	0.20		
eee	0.10		

GENERIC MARKING DIAGRAM*



A = Assembly Location
Y = Year
WW = Work Week
ZZ = Assembly Lot Code
XXXX = Specific Device Code

*This information is generic. Please refer to device data sheet for actual part marking. Pb−Free indicator, “G” or microdot “▪”, may or may not be present. Some products may not follow the Generic Marking.

DOCUMENT NUMBER:	**98AON13813G**	Electronic versions are uncontrolled except when accessed directly from the Document Repository. Printed versions are uncontrolled except when stamped “CONTROLLED COPY” in red.
DESCRIPTION:	**H−PSOF8L 11.68x9.80x2.30, 1.20P**	**PAGE 1 OF 1**

ADDITIONAL INFORMATION

TECHNICAL PUBLICATIONS:
Technical Library: www.onsemi.com/design/resources/technical−documentation
onsemi Website: www.onsemi.com

ONLINE SUPPORT: www.onsemi.com/support
For additional information, please contact your local Sales Representative at www.onsemi.com/support/sales