

SPP11N60CFD

650

0.44

11

PG-TO220

Ω

Α

 $V_{\rm DS}$ @ $T_{\rm jmax}$

R_{DS(on)}


 I_{D}

Cool MOS™ Power Transistor

Feature

- New revolutionary high voltage technology
- Ultra low gate charge
- Periodic avalanche rated
- Extreme dv/dt rated
- High peak current capability
- Intrinsic fast-recovery body diode
- Extreme low reverse recovery charge
- Pb-free lead palting; RoHS compliant, Halogen free mold compound
- Qualified for industrial grade applications according to JEDEC⁰⁾

Туре	Package	Ordering Code	Marking
SPP11N60CFD	PG-TO220	Q67040-S4618	11N60CFD



Maximum Ratings

Parameter	Symbol	Value	Unit
Continuous drain current	I _D		Α
T _C = 25 °C		11	
T _C = 100 °C		7	
Pulsed drain current, t_p limited by T_{jmax}	I _{D puls}	28	
Avalanche energy, single pulse	E _{AS}	340	mJ
$I_{\rm D} = 5.5 \text{A}, V_{\rm DD} = 50 \text{V}$			
Avalanche energy, repetitive t_{AR} limited by T_{jmax} 1)	E _{AR}	0.6	
$I_{\rm D} = 11 \text{ A}, V_{\rm DD} = 50 \text{ V}$			
Avalanche current, repetitive t_{AR} limited by T_{jmax}	I _{AR}	11	Α
Reverse diode d <i>v</i> /d <i>t</i>	d <i>v</i> /d <i>t</i>	40	V/ns
I _S =11A, V _{DS} =480V, T _j =125°C			
Gate source voltage	V_{GS}	±20	V
Gate source voltage AC (f >1Hz)	V_{GS}	±30	
Power dissipation, $T_C = 25^{\circ}C$	P _{tot}	125	W
Operating and storage temperature	T _i , T _{stg}	-55 +150	°C



Maximum Ratings

Parameter	Symbol	Value	Unit
Drain Source voltage slope	d <i>v</i> /d <i>t</i>	80	V/ns
$V_{\rm DS}$ = 480 V, $I_{\rm D}$ = 11 A, $T_{\rm j}$ = 125 °C			
Maximum diode commutation speed	d <i>i ⊭</i> dt	600	A/µs
$V_{\rm DS}$ = 480 V, $I_{\rm D}$ = 11 A, $T_{\rm j}$ = 125 °C			

Thermal Characteristics

Parameter	Symbol	Values			Unit
		min.	typ.	max.	
Thermal resistance, junction - case	R _{thJC}	-	-	1	K/W
Thermal resistance, junction - ambient, leaded	R _{thJA}	-	-	62	
Soldering temperature, wavesoldering	T_{sold}	-	_	260	°C
1.6 mm (0.063 in.) from case for 10s					

Electrical Characteristics, at Tj=25°C unless otherwise specified

Parameter	Symbol	Conditions	Values			Unit
			min.	typ.	max.]
Drain-source breakdown voltage	V _{(BR)DSS}	VGS=0V, /D=0.25mA	600	-	-	V
Drain-Source avalanche	V _{(BR)DS}	V _{GS} =0V, I _D =11A	-	700	-	
breakdown voltage						
Gate threshold voltage	V _{GS(th)}	/D=500μA, VGS=VDS	3	4	5	
Zero gate voltage drain current	I _{DSS}	V _{DS} =600V, V _{GS} =0V,				μA
		<i>T</i> _j =25°C,	-	1.1	-	
		<i>T</i> _j =150°C	-	900	-	
Gate-source leakage current	I _{GSS}	V _{GS} =20V, V _{DS} =0V	-	-	100	nA
Drain-source on-state resistance	R _{DS(on)}	VGS=10V, /D=7A,				Ω
		<i>T</i> _j =25°C	-	0.38	0.44	
		<i>T</i> _j =150°C	-	1.02	_	
Gate input resistance	R_{G}	f=1MHz, open Drain	-	0.86	-	1



SPP11N60CFD

Electrical Characteristics , at T_j = 25 °C, unless otherwise specified

Parameter	Symbol	Conditions	Values			Unit
			min.	typ.	max.	
Transconductance	g_{fs}	V _{DS} ≥2*I _D *R _{DS(on)max} ,	-	8.3	-	S
		I _D =7A				
Input capacitance	C _{iss}	V _{GS} =0V, V _{DS} =25V,	-	1200	-	pF
Output capacitance	Coss	f=1MHz	-	390	-	
Reverse transfer capacitance	C _{rss}		-	30	-	
Effective output capacitance,2)	C _{o(er)}	V _{GS} =0V,	-	45	-	pF
energy related		V _{DS} =0V to 480V				
Effective output capacitance,3)	C _{o(tr)}		-	85	-	
time related						
Turn-on delay time	t _{d(on)}	V _{DD} =380V, V _{GS} =0/10V,	-	34	-	ns
Rise time	t_{r}	$I_{\rm D}$ =11A, $R_{\rm G}$ =6.8Ω	-	18	-	
Turn-off delay time	$t_{\rm d(off)}$			43	-	
Fall time	t_{f}		-	7	-	

Gate Charge Characteristics

Gate to source charge	Q _{gs}	V _{DD} =480V, I _D =11A	-	9	-	nC
Gate to drain charge	Q_{gd}		-	23	•	
Gate charge total	Qg	V _{DD} =480V, / _D =11A,	-	48	64	
		V _{GS} =0 to 10V				
Gate plateau voltage	V _(plateau)	V _{DD} =480V, I _D =11A	-	7	1	V

⁰J-STD20 and JESD22

¹Repetitve avalanche causes additional power losses that can be calculated as $P_{AV} = E_{AR} * f$.

 $^{^2}C_{\mathrm{O(er)}}$ is a fixed capacitance that gives the same stored energy as C_{OSS} while V_{DS} is rising from 0 to 80% V_{DSS} .

 $³C_{\mathrm{O(tr)}}$ is a fixed capacitance that gives the same charging time as C_{OSS} while V_{DS} is rising from 0 to 80% V_{DSS} .




Electrical Characteristics, at T_j = 25 °C, unless otherwise specified

Parameter	Symbol	Conditions	Values			Unit
			min.	typ.	max.	
Inverse diode continuous	IS	T _C =25°C	-	-	11	Α
forward current						
Inverse diode direct current,	/ _{SM}		-	-	28	
pulsed						
Inverse diode forward voltage	V _{SD}	VGS=0V, IF=IS	-	1	1.2	V
Reverse recovery time	t _{rr}	V _R =480V, I _F =I _S ,	-	140	-	ns
Reverse recovery charge	Q _{rr}	d <i>i</i> _F /d <i>t</i> =100A/µs	-	0.7	-	μC
Peak reverse recovery current	I _{rrm}		-	11	-	Α
Peak rate of fall of reverse	di _{rr} /dt		-	1200	-	A/µs
recovery current						

Typical Transient Thermal Characteristics


Symbol	Value	Unit	Symbol	Value	Unit
	typ.			typ.	
Thermal re	esistance	•	Thermal c	apacitance	•
R _{th1}	0.015	K/W	C _{th1}	0.0001878	Ws/K
R_{th2}	0.03		C _{th2}	0.0007106	
R_{th3}	0.056		C _{th3}	0.000988	
R_{th4}	0.197		C _{th4}	0.002791	
R_{th5}	0.216		C _{th5}	0.007285	
R_{th6}	0.083		C _{th6}	0.063	

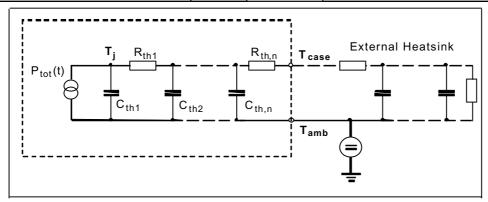



1 Power dissipation


$$P_{\text{tot}} = f(T_{\text{C}})$$

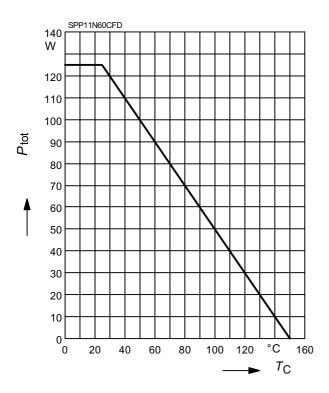

3 Transient thermal impedance

$$Z_{\text{thJC}} = f(t_{\text{p}})$$


parameter: $D = t_p/T$

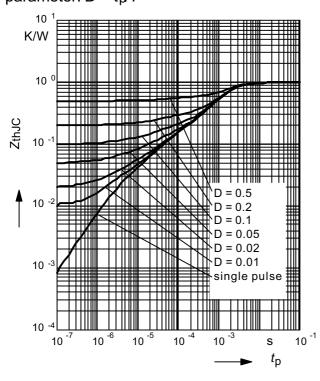

2 Safe operating area

$$I_{D} = f(V_{DS})$$


parameter : D = 0 , $T_C=25$ °C

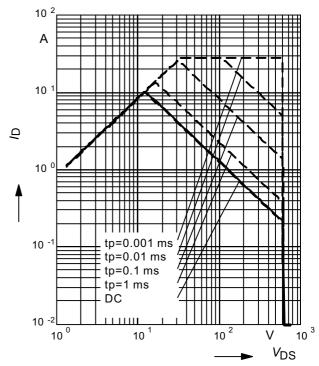

4 Typ. output characteristic

 $I_{D} = f(V_{DS}); T_{i} = 25^{\circ}C$

parameter: t_p = 10 μ s, V_{GS}

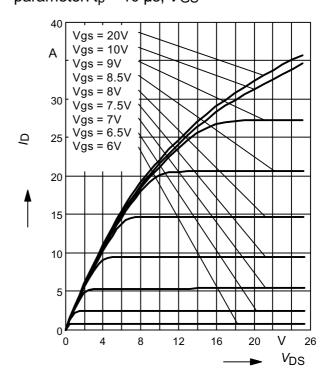




5 Typ. output characteristic

 $I_{D} = f(V_{DS}); T_{j} = 150^{\circ}C$


parameter: t_p = 10 μ s, V_{GS}

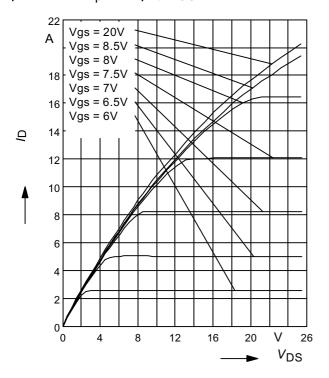

7 Drain-source on-state resistance

 $R_{DS(on)} = f(T_i)$


parameter : $I_D = 7 A$, $V_{GS} = 10 V$

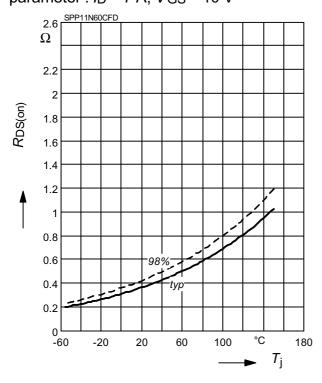

6 Typ. drain-source on resistance


 $R_{DS(on)} = f(I_D)$

parameter: T_i=150°C, V_{GS}

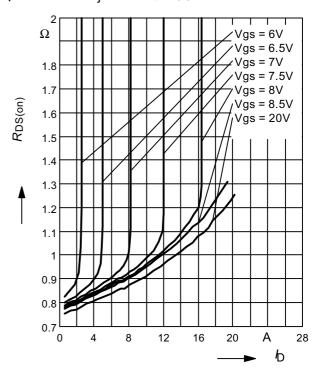

8 Typ. transfer characteristics

 $I_D = f(V_{GS}); V_{DS} \ge 2 \times I_D \times R_{DS(on)max}$ parameter: $t_p = 10 \ \mu s$

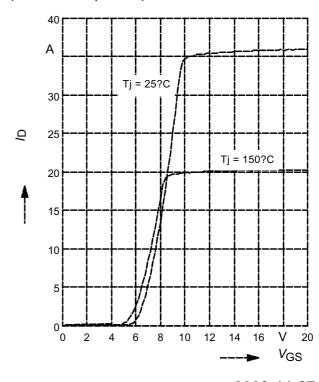




9 Typ. gate charge

 $V_{GS} = f (Q_{Gate})$


parameter: ID = 11 A pulsed

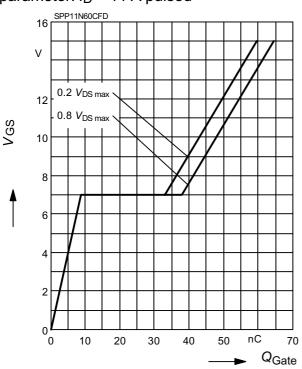

10 Forward characteristics of body diode

 $I_{\mathsf{F}} = f(\mathsf{V}_{\mathsf{SD}})$


parameter: T_i , $t_p = 10 \mu s$

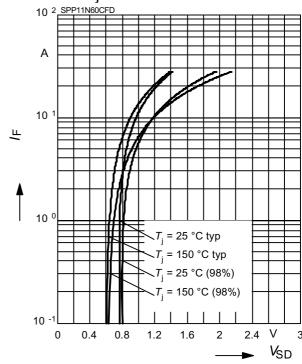

11 Avalanche SOA

 $I_{AR} = f(t_{AR})$


par.: *T*_j ≤ 150 °C

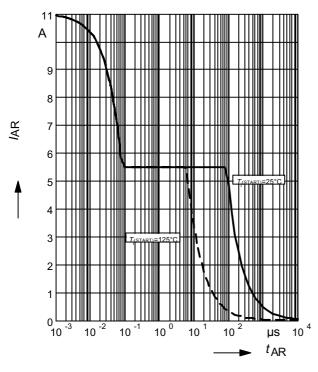

12 Avalanche energy

 $E_{AS} = f(T_i)$


par.: $I_D = 5.5 \text{ A}, V_{DD} = 50 \text{ V}$

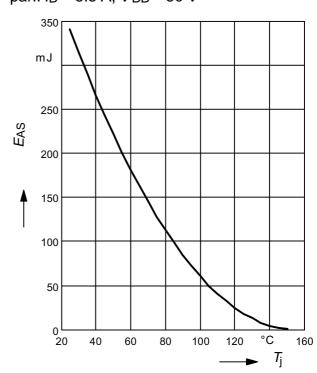



13 Drain-source breakdown voltage


 $V_{(BR)DSS} = f(T_j)$

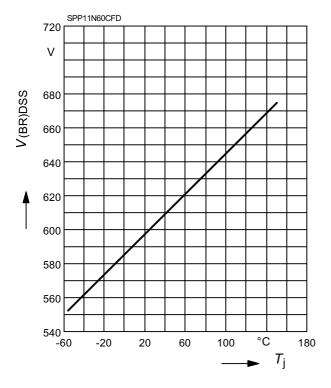

15 Typ. capacitances

 $C = f(V_{DS})$


parameter: VGS=0V, f=1 MHz

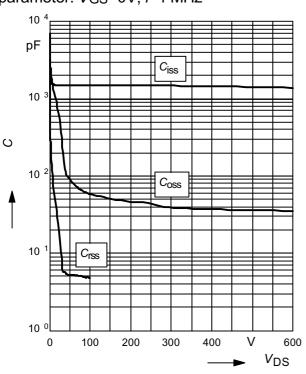

14 Avalanche power losses


 $P_{AR} = f(f)$

parameter: E_{AR}=0.6mJ

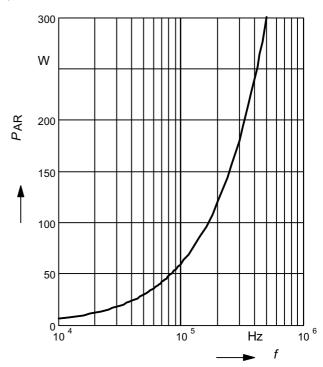

16 Typ. C_{OSS} stored energy

 $E_{\text{oss}} = f(V_{\text{DS}})$

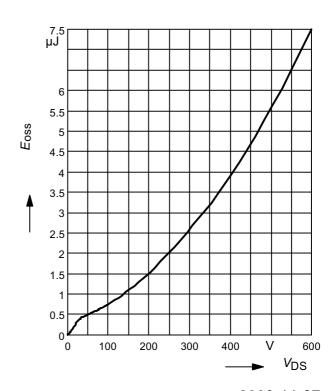






17 Typ. reverse recovery charge

$$Q_{rr} = f(T_J)$$


parameter: $I_D = 11A$

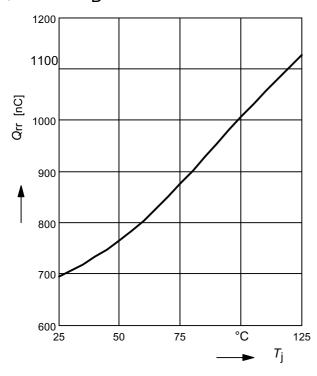

18 Typ. reverse recovery charge

$$Q_{rr} = f(I_D)$$


parameter: di/dt = 100 A/μs

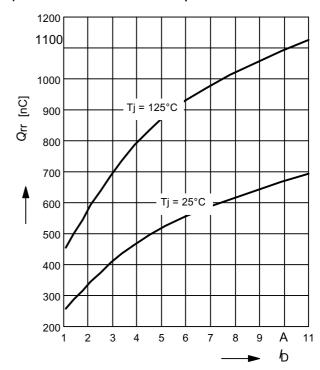

19 Typ. reverse recovery charge


$$Q_{rr} = f(di/dt)$$

parameter: $I_D = 11 \text{ A}$

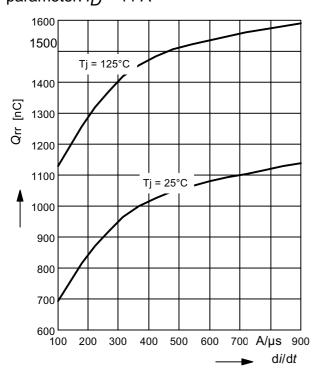




Definition of diodes switching characteristics





PG-TO-220-3-1, PG-TO220-3-21

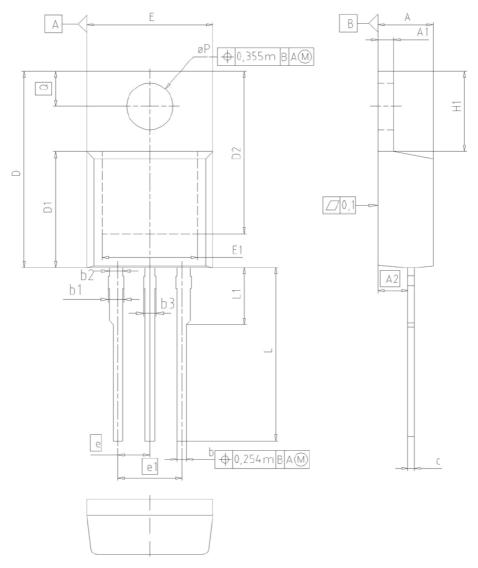

DIM	MILLI	METERS	INCI	HES
DIM	MIN	MAX	MIN	MAX
Α	4.30	4.57	0.169	0.180
A1	1.17	1.40	0.046	0.055
A2	2.15	2.72	0.085	0.107
b	0.65	0.86	0.026	0.034
b1	0.95	1.40	0.037	0.055
b2	0.95	1.15	0.037	0.045
b3	0.65	1.15	0.026	0.045
C	0.33	0.60	0.013	0.024
D	14.81	15.95	0.583	0.628
D1	8.51	9.45	0.335	0.372
D2	12.19	13.10	0.480	0.516
E	9.70	10.36	0.382	0.408
E1	6.50	8.60	0.256	0.339
e	2	.54	0.1	100
e1	5	.08	0.2	200
N		3	;	3
H1	5.90	6.90	0.232	0.272
L	13.00	14.00	0.512	0.551
L1	-	4.80	-	0.189
øΡ	3.60	3.89	0.142	0.153
Q	2.60	3.00	0.102	0.118

DOCUMEN Z8B00003	
SCALE	0
0 2.5	2.5 5mm
EUROPEAN PI	ROJECTION
ISSUE D 23-08-2	
REVISI 05	ON





Published by Infineon Technologies AG 81726 Munich, Germany © 2007 Infineon Technologies AG All Rights Reserved.

Legal Disclaimer

The information given in this document shall in no event be regarded as a guarantee of conditions or characteristics. With respect to any examples or hints given herein, any typical values stated herein and/or any information regarding the application of the device, Infineon Technologies hereby disclaims any and all warranties and liabilities of any kind, including without limitation, warranties of non-infringement of intellectual property rights of any third party.

Information

For further information on technology, delivery terms and conditions and prices, please contact the nearest Infineon Technologies Office (www.infineon.com).

Warnings

Due to technical requirements, components may contain dangerous substances. For information on the types in question, please contact the nearest Infineon Technologies Office. The Infineon Technologies component described in this Data Sheet may be used in life-support devices or systems and/or automotive, aviation and aerospace applications or systems only with the express written approval of Infineon Technologies, if a failure of such components can reasonably be expected to cause the failure of that life-support, automotive, aviation and aerospace device or system or to affect the safety or effectiveness of that device or system. Life support devices or systems are intended to be implanted in the human body or to support and/or maintain and sustain and/or protect human life. If they fail, it is reasonable to assume that the health of the user or other persons may be endangered.