MOSFET – Power, Single

P-Channel -60 V, -6 A, 260 mΩ

Features

- Small Footprint (3.3 x 3.3 mm) for Compact Design
- Low R_{DS(on)} to Minimize Conduction Losses
- Low Q_G and Capacitance to Minimize Driver Losses
- NVTFS5124PLWF Wettable Flanks Product
- AEC-Q101 Qualified and PPAP Capable
- These Devices are Pb-Free and are RoHS Compliant

MAXIMUM RATINGS (T_J = 25°C unless otherwise noted)

Parar	Symbol	Value	Unit		
Drain-to-Source Voltag	V_{DSS}	-60	٧		
Gate-to-Source Voltage)		V _{GS}	±20	V
Continuous Drain Cur-		T _{mb} = 25°C	I _D	-6.0	Α
rent R $_{\Psi J-mb}$ (Notes 1, 2, 3, 4)	Steady	T _{mb} = 100°C		-4.0	
Power Dissipation	State	T _{mb} = 25°C	P_{D}	18	W
$R_{\Psi J-mb}$ (Notes 1, 2, 3)		T _{mb} = 100°C		9.0	
Continuous Drain Cur-		T _A = 25°C	I _D	-2.4	Α
rent $R_{\theta JA}$ (Notes 1, 3, 4)	Steady	T _A = 100°C		-1.7	
Power Dissipation	State	T _A = 25°C	P_{D}	3.0	W
R _{θJA} (Notes 1, 3)		T _A = 100°C		1.5	
Pulsed Drain Current	T _A = 25	°C, t _p = 10 μs	I _{DM}	-24	Α
Operating Junction and	T _J , T _{stg}	-55 to +175	°C		
Source Current (Body D	I _S	-18	Α		
Single Pulse Drain-to-S Energy (T _J = 25°C, V _{DD} $I_{L(pk)}$ = -13 A, L = 0.1 m	E _{AS}	8.5	mJ		
Lead Temperature for Soldering Purposes (1/8" from case for 10 s)			T _L	260	°C

Stresses exceeding Maximum Ratings may damage the device. Maximum Ratings are stress ratings only. Functional operation above the Recommended Operating Conditions is not implied. Extended exposure to stresses above the Recommended Operating Conditions may affect device reliability.

THERMAL RESISTANCE MAXIMUM RATINGS (Note 1)

Parameter	Symbol	Value	Unit
Junction-to-Mounting Board (top) - Steady State (Note 2 and 3)	$R_{\Psi J-mb}$	8.4	°C/W
Junction-to-Ambient - Steady State (Note 3)	$R_{\theta JA}$	49.2	

- The entire application environment impacts the thermal resistance values shown, they are not constants and are only valid for the particular conditions noted.
- 2. Psi (Ψ) is used as required per JESD51-12 for packages in which substantially less than 100% of the heat flows to single case surface.
- 3. Surface-mounted on FR4 board using a 650 mm², 2 oz. Cu pad.
- Continuous DC current rating. Maximum current for pulses as long as 1 second is higher but is dependent on pulse duration and duty cycle.




ON Semiconductor®

http://onsemi.com


V _{(BR)DSS}	R _{DS(on)} MAX	I _D MAX	
-60 V	260 mΩ @ -10 V	-6 A	
	380 mΩ @ -4.5 V	-0A	

P-Channel MOSFET





WDFN8 (μ8FL) CASE 511AB



MARKING DIAGRAM

XXXX = Specific Device Code
A = Assembly Location
Y = Year

Y = Year

WW = Work Week

= Pb-Free Package

(Note: Microdot may be in either location)

ORDERING INFORMATION


See detailed ordering, marking and shipping information in the package dimensions section on page 5 of this data sheet.

ELECTRICAL CHARACTERISTICS ($T_J = 25^{\circ}C$ unless otherwise noted)

Parameter	Symbol	Test Condition		Min	Тур	Max	Unit
OFF CHARACTERISTICS					-	•	-
Drain-to-Source Breakdown Voltage	V _{(BR)DSS}	$V_{GS} = 0 \text{ V}, I_D = -250 \mu\text{A}$		-60			V
Zero Gate Voltage Drain Current	I _{DSS}	V _{GS} = 0 V, V _{DS} = -60 V	T _J = 25°C			-1.0	μА
			T _J = 125°C			-10	
Gate-to-Source Leakage Current	I _{GSS}	V _{DS} = 0 V, V _{GS}	s = ±20 V			±100	nA
ON CHARACTERISTICS (Note 5)							
Gate Threshold Voltage	V _{GS(TH)}	$V_{GS} = V_{DS}, I_D$	= -250 μA	-1.5		-2.5	V
Drain-to-Source On Resistance	R _{DS(on)}	$V_{GS} = -10 \text{ V},$	I _D = -3 A		200	260	mΩ
		$V_{GS} = -4.5 V$	I _D = -3 A		290	380	
Forward Transconductance	9FS	$V_{DS} = -15 V$,	I _D = -5 A	4			S
CHARGES AND CAPACITANCES							
Input Capacitance	C _{iss}				250		
Output Capacitance	C _{oss}	$V_{GS} = 0 \text{ V, f} = V_{DS} = -2$			27		рF
Reverse Transfer Capacitance	C _{rss}	v DS50 v			17		1
Total Gate Charge	Q _{G(TOT)}	$V_{GS} = -4.5 \text{ V}, V_{DS} = -48 \text{ V},$ $I_{D} = -3 \text{ A}$ $V_{GS} = -10 \text{ V}, V_{DS} = -48 \text{ V},$ $I_{D} = -3 \text{ A}$			3.5		
Threshold Gate Charge	Q _{G(TH)}				0.4		nC
Gate-to-Source Charge	Q_{GS}				1.2		
Gate-to-Drain Charge	Q_{GD}				1.9		
Total Gate Charge	Q _{G(TOT)}				6		
SWITCHING CHARACTERISTICS (No	te 6)				•	•	
Turn-On Delay Time	t _{d(on)}				7		
Rise Time	t _r	V _{GS} = -4.5 V. V	ne = -48 V.		14		ns
Turn-Off Delay Time	t _{d(off)}	$V_{GS} = -4.5 \text{ V, V}$ $I_D = -3 \text{ A, R}_0$	$_{3}$ = 2.5 Ω		13		
Fall Time	t _f				10		1
DRAIN-SOURCE DIODE CHARACTER	RISTICS				•	•	
Forward Diode Voltage	V _{SD}	$V_{GS} = 0 V$, $I_S = -3 A$	T _J = 25°C		-0.87	-1.0	V
			T _J = 125°C		-0.74		
Reverse Recovery Time	t _{RR}		<u> </u>		17		ns
Charge Time	ta	$V_{GS} = 0 \text{ V},$ $dI_{S}/dt = 100 \text{ A}/\mu\text{s},$ $I_{S} = -3 \text{ A}$			14		1
Discharge Time	t _b				3		1
Reverse Recovery Charge	Q _{RR}				19		nC

^{5.} Pulse Test: Pulse Width ≤ 300 μs, Duty Cycle ≤ 2%.
6. Switching characteristics are independent of operating junction temperatures.

TYPICAL CHARACTERISTICS

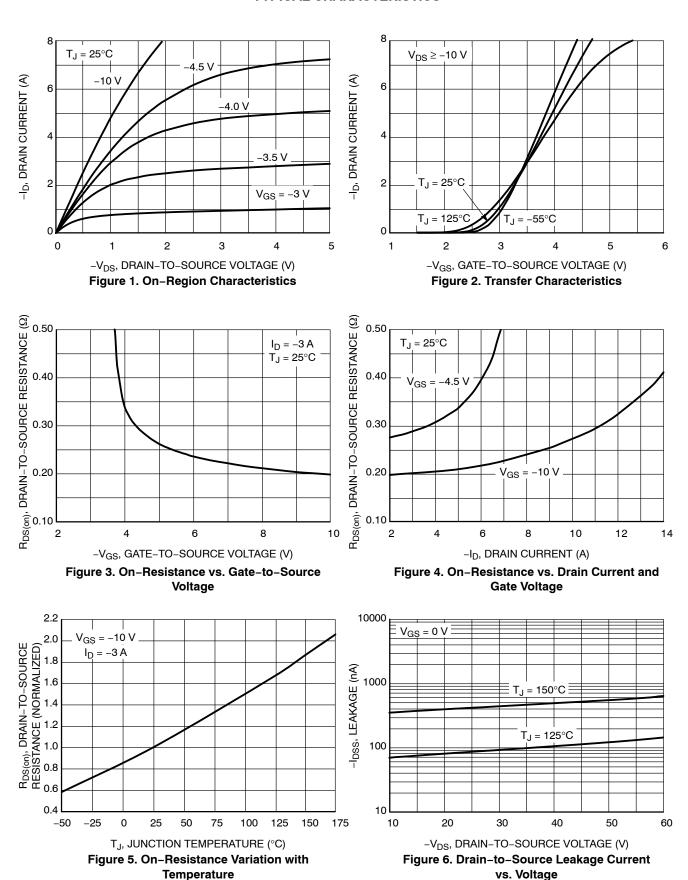

TYPICAL CHARACTERISTICS

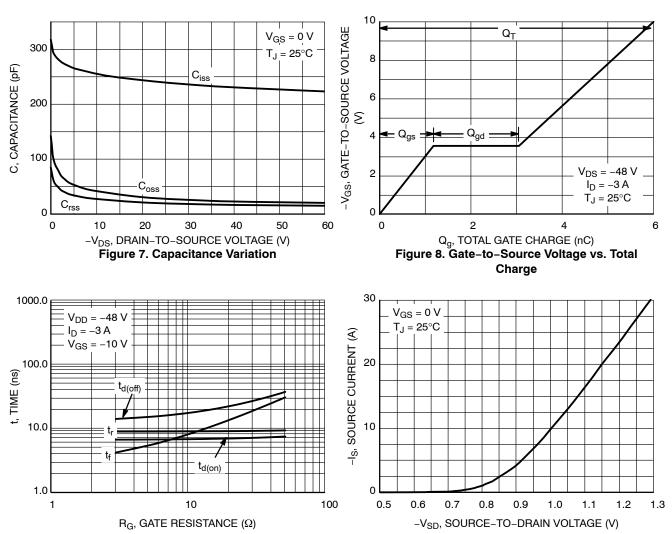


Figure 9. Resistive Switching Time Variation vs. Gate Resistance

Figure 11. Diode Forward Voltage vs. Current

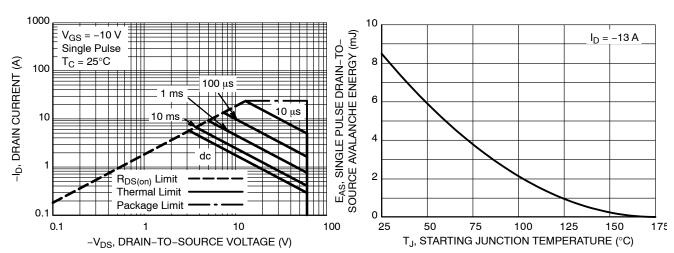


Figure 10. Maximum Rated Forward Biased Safe Operating Area

Figure 12. Maximum Avalanche Energy vs. Starting Junction Temperature

TYPICAL CHARACTERISTICS

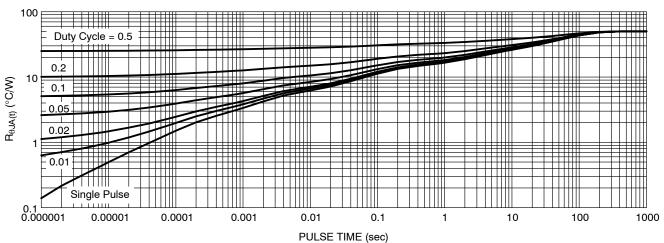


Figure 13. Thermal Response

DEVICE ORDERING INFORMATION

Device	Marking	Package	Shipping [†]
NVTFS5124PLTAG	5124	WDFN8 (Pb-Free)	1500 / Tape & Reel
NVTFS5124PLWFTAG	24LW	WDFN8 (Pb-Free)	1500 / Tape & Reel
NVTFS5124PLTWG	5124	WDFN8 (Pb-Free)	5000 / Tape & Reel
NVTFS5124PLWFTWG	24LW	WDFN8 (Pb-Free)	5000 / Tape & Reel

[†]For information on tape and reel specifications, including part orientation and tape sizes, please refer to our Tape and Reel Packaging Specifications Brochure, BRD8011/D.







SCALE 2:1

WDFN8 3.3x3.3, 0.65P CASE 511AB ISSUE D

DATE 23 APR 2012



NOTES:

- DIMENSIONING AND TOLERANCING PER ASME Y14.5M, 1994.
 CONTROLLING DIMENSION: MILLIMETERS.
 DIMENSION D1 AND E1 DO NOT INCLUDE MOLD FLASH
 PROTRUSIONS OR GATE BURRS.

	MILLIMETERS			INCHES		
DIM	MIN	NOM	MAX	MIN	NOM	MAX
Α	0.70	0.75	0.80	0.028	0.030	0.031
A1	0.00		0.05	0.000		0.002
b	0.23	0.30	0.40	0.009	0.012	0.016
С	0.15	0.20	0.25	0.006	0.008	0.010
D		3.30 BSC 0.			.130 BSC	;
D1	2.95	3.05	3.15	0.116	0.120	0.124
D2	1.98	2.11	2.24	0.078	0.083	0.088
E	3.30 BSC			0.130 BSC		
E1	2.95	3.05	3.15	0.116	0.120	0.124
E2	1.47	1.60	1.73	0.058	0.063	0.068
E3	0.23	0.30	0.40	0.009	0.012	0.016
е		0.65 BSC	;	0.026 BSC		
G	0.30	0.41	0.51	0.012	0.016	0.020
K	0.65	0.80	0.95	0.026	0.032	0.037
L	0.30	0.43	0.56	0.012	0.017	0.022
L1	0.06	0.13	0.20	0.002	0.005	0.008
М	1.40	1.50	1.60	0.055	0.059	0.063
θ	0 °		12 °	0 °		12 °



GENERIC MARKING DIAGRAM*



XXXXX = Specific Device Code Α = Assembly Location

= Year WW = Work Week = Pb-Free Package



DIMENSION: MILLIMETERS

*For additional information on our Pb-Free strategy and soldering details, please download the onsemi Soldering and Mounting Techniques Reference Manual, SOLDERRM/D.

DOCUMENT NUMBER:	98AON30561E	Electronic versions are uncontrolled except when accessed directly from the Document Reposi Printed versions are uncontrolled except when stamped "CONTROLLED COPY" in red.			
DESCRIPTION:	WDFN8 3.3X3.3, 0.65P		PAGE 1 OF 1		

onsemi and ONSEMI. are trademarks of Semiconductor Components Industries, LLC dba onsemi or its subsidiaries in the United States and/or other countries. onsemi reserves the right to make changes without further notice to any products herein. onsemi makes no warranty, representation or guarantee regarding the suitability of its products for any particular purpose, nor does onsemi assume any liability arising out of the application or use of any product or circuit, and specifically disclaims any and all liability, including without limitation special, consequential or incidental damages. onsemi does not convey any license under its patent rights nor the rights of others.

^{*}This information is generic. Please refer to device data sheet for actual part marking. Pb-Free indicator, "G" or microdot "■", may or may not be present. Some products may not follow the Generic Marking.

onsemi, Onsemi, and other names, marks, and brands are registered and/or common law trademarks of Semiconductor Components Industries, LLC dba "onsemi" or its affiliates and/or subsidiaries in the United States and/or other countries. onsemi owns the rights to a number of patents, trademarks, copyrights, trade secrets, and other intellectual property. A listing of onsemi's product/patent coverage may be accessed at www.onsemi.com/site/pdf/Patent-Marking.pdf. Onsemi reserves the right to make changes at any time to any products or information herein, without notice. The information herein is provided "as-is" and onsemi makes no warranty, representation or guarantee regarding the accuracy of the information, product features, availability, functionality, or suitability of its products for any particular purpose, nor does onsemi assume any liability arising out of the application or use of any product or circuit, and specifically disclaims any and all liability, including without limitation special, consequential or incidental damages. Buyer is responsible for its products and applications using onsemi products, including compliance with all laws, regulations and safety requirements or standards, regardless of any support or applications information provided by onsemi. "Typical" parameters which may be provided in onsemi data sheets and/or specifications can and do vary in different applications and actual performance may vary over time. All operating parameters, including "Typicals" must be validated for each customer application by customer's technical experts. onsemi does not convey any license under any of its intellectual property rights nor the rights of others. onsemi products are not designed, intended, or authorized for use as a critical component in life support systems or any FDA class 3 medical devices with a same or similar classification in a foreign jurisdiction or any devices intended for implantation in the human body. Should Buyer purchase

ADDITIONAL INFORMATION

TECHNICAL PUBLICATIONS:

 $\textbf{Technical Library:} \ \underline{www.onsemi.com/design/resources/technical-documentation}$

onsemi Website: www.onsemi.com

ONLINE SUPPORT: www.onsemi.com/support

For additional information, please contact your local Sales Representative at

www.onsemi.com/support/sales