IXYS

High Voltage HiPerFET Power MOSFET

IXFH 6N120

V_{DSS} = 1200 V
$I_{D(cont)}$ = 6 A
$R_{DS(on)}$ = 2.6 Ω
t_{rr} ≤ 300 ns

N-Channel Enhancement Mode
Avalanche Rated

Preliminary Data Sheet



Symbol	Test Conditions	Maximum Ratings	
V_{DSS}	T_J = 25°C to 150°C	1200	V
V_{DGR}	T_J = 25°C to 150°C; R_{GS} = 1 MΩ	1200	V
V_{GS}	Continuous	±20	V
V_{GSM}	Transient	±30	V
I_{D25}	T_C = 25°C	6	A
I_{DM}	T_C = 25°C, pulse width limited by T_{JM}	24	A
I_{AR}	T_C = 25°C	6	A
E_{AR}	T_C = 25°C	25	mJ
E_{AS}	T_C = 25°C	500	mJ
dv/dt	$I_S \le I_{DM}$, di/dt ≤ 100 A/µs, $V_{DD} \le V_{DSS}$, $T_J \le 150°C$, R_G = 2 Ω	10	V/ns
P_D	T_C = 25°C	300	W
T_J		-55 ... +150	°C
T_{JM}		150	°C
T_{stg}		-55 ... +150	°C
T_L	1.6 mm (0.062 in.) from case for 10 s	300	°C
M_d	Mounting torque	1.13/10	Nm/lb.in.
Weight	TO-247 AD	6	g

TO-247 AD (IXTH)



G = Gate, D = Drain,
S = Source, TAB = Drain

Features

- International standard packages
- Low $R_{DS\ (on)}$ HDMOS™ process
- Rugged polysilicon gate cell structure
- Unclamped Inductive Switching (UIS) rated
- Low package inductance
  - easy to drive and to protect

Advantages

- Easy to mount
- Space savings
- High power density

Symbol	Test Conditions (T_J = 25°C, unless otherwise specified)		Characteristic Values Min.	Typ.	Max.	
V_{DSS}	V_{GS} = 0 V, I_D = 250 µA		1200			V
$V_{GS(th)}$	$V_{DS} = V_{GS}$, I_D = 2.5 mA		3.0		5.0	V
I_{GSS}	V_{GS} = ±20 V_{DC}, V_{DS} = 0				±100	nA
I_{DSS}	$V_{DS} = V_{DSS}$	T_J = 25°C			50	µA
	V_{GS} = 0 V	T_J = 125°C			1500	µA
$R_{DS(on)}$	V_{GS} = 10 V, $I_D = 0.5\ I_{D25}$ Pulse test, t ≤ 300 µs, duty cycle d ≤ 2 %				2.6	Ω

Symbol	Test Conditions (T_J = 25°C, unless otherwise specified)	Characteristic Values Min.	Typ.	Max.	
g_{fs}	V_{DS} = 20 V; I_D = 0.5 I_{D25}, pulse test	3	5		S
C_{iss}	V_{GS} = 0 V, V_{DS} = 25 V, f = 1 MHz		1950		pF
C_{oss}			175		pF
C_{rss}			60		pF
$t_{d(on)}$	V_{GS} = 10 V, V_{DS} = 0.5 V_{DSS}, I_D = 0.5 I_{D25} R_G = 4.7 Ω (External)		28		ns
t_r			33		ns
$t_{d(off)}$			42		ns
t_f			18		ns
$Q_{g(on)}$	V_{GS} = 10 V, V_{DS} = 0.5 V_{DSS}, I_D = 0.5 I_{D25}		56		nC
Q_{gs}			13		nC
Q_{gd}			25		nC
R_{thJC}				0.42	K/W
R_{thCK}	(TO-247)		0.21		K/W

Source-Drain Diode

Symbol	Test Conditions (T_J = 25°C, unless otherwise specified)	Characteristic Values min.	typ.	max.	
I_S	V_{GS} = 0 V			6	A
I_{SM}	Repetitive			24	A
V_{SD}	$I_F = I_S$, V_{GS} = 0 V, Pulse test, t ≤ 300 µs, duty cycle d ≤ 2 %			1.5	V
t_{rr}	I_F = 6 A, di/dt ≤ 100 A/µs			300	ns
Q_{RM}			0.6		uC
I_{RM}			3.0		A

TO-247 AD Outline



Terminals: 1 - Gate 2 - Drain
3 - Source Tab - Drain

Dim.	Millimeter Min.	Max.	Inches Min.	Max.
A	4.7	5.3	.185	.209
A_1	2.2	2.54	.087	.102
A_2	2.2	2.6	.059	.098
b	1.0	1.4	.040	.055
b_1	1.65	2.13	.065	.084
b_2	2.87	3.12	.113	.123
C	.4	.8	.016	.031
D	20.80	21.46	.819	.845
E	15.75	16.26	.610	.640
e	5.20	5.72	0.205	0.225
L	19.81	20.32	.780	.800
L1		4.50		.177
∅P	3.55	3.65	.140	.144
Q	5.89	6.40	0.232	0.252
R	4.32	5.49	.170	.216
S	6.15 BSC		242 BSC	

Fig. 1. Output Characteristics @ 25 Deg. C

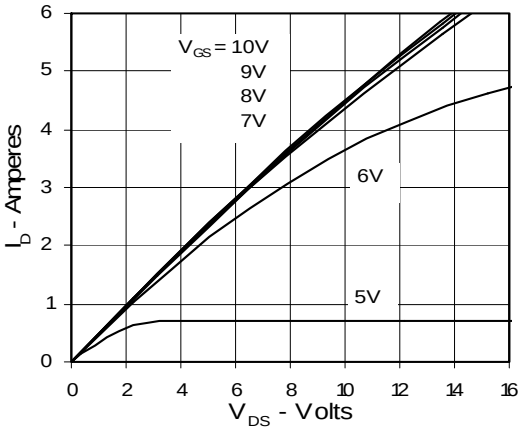

Fig. 2. Extended Output Characteristics @ 25 deg. C

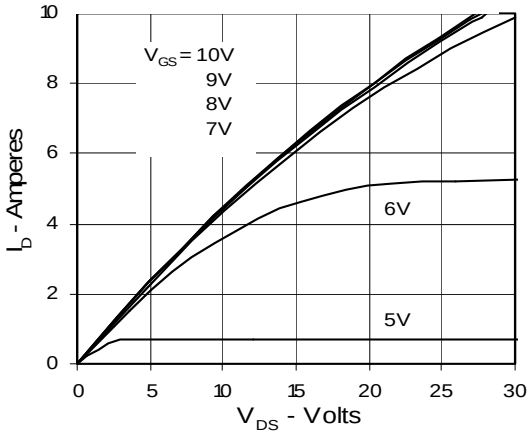

Fig. 3. Output Characteristics @ 125 Deg. C

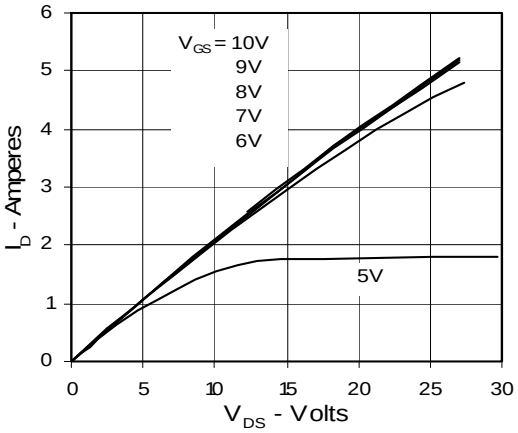

Fig. 4. $R_{DS(on)}$ Normalized to I_{D25} Value vs. Junction Temperature

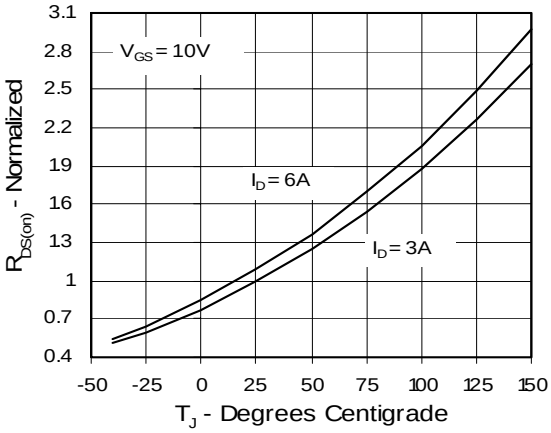

Fig. 5. $R_{DS(on)}$ Normalized to I_{D25} Value vs. I_D

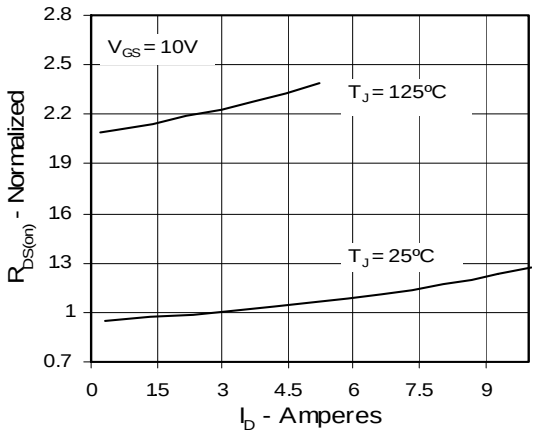

Fig. 6. Drain Current vs. Case Temperature

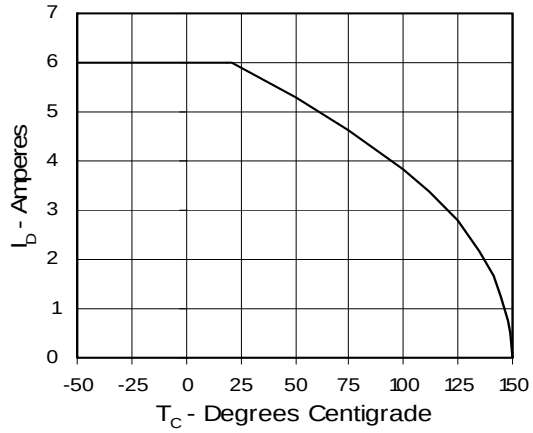

Fig. 7. Input Admittance

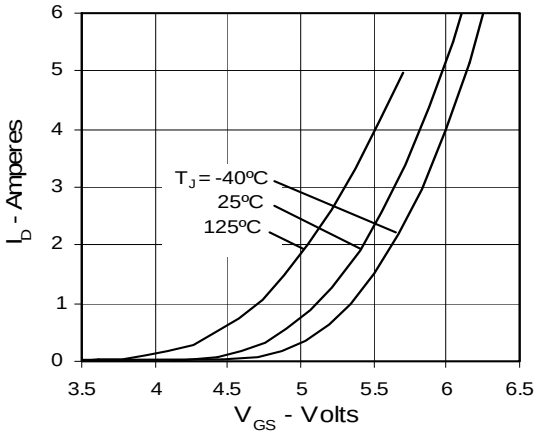

Fig. 8. Transconductance

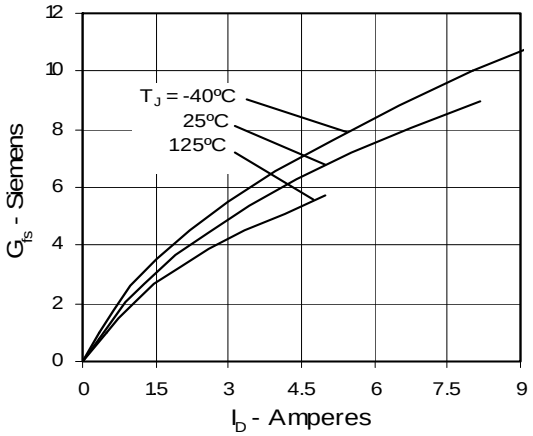

Fig. 9. Source Current vs. Source-To-Drain Voltage

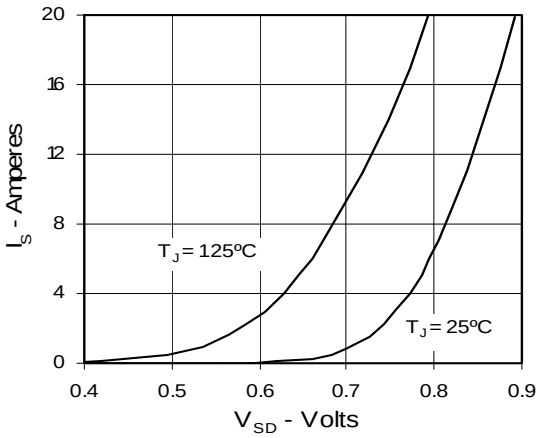

Fig. 10. Gate Charge

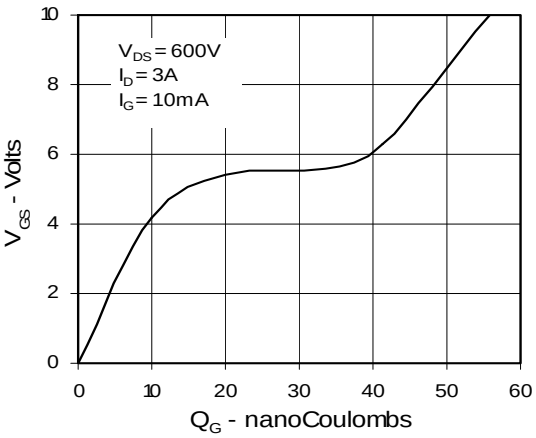

Fig. 11. Capacitance

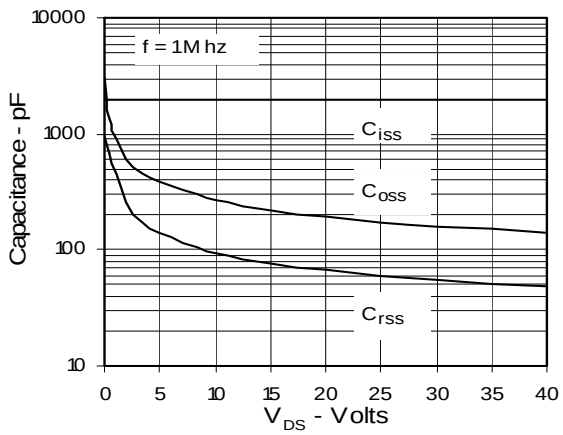

Fig. 12. Maximum Transient Thermal Resistance