NVMYS7D3N04CL

MOSFET – Power, Single N-Channel
40 V, 7.3 mΩ, 52 A

ON Semiconductor®

www.onsemi.com

$V_{(BR)DSS}$	$R_{DS(on)}$ MAX	I_D MAX
40 V	7.3 mΩ @ 10 V	52 A
	12 mΩ @ 4.5 V	

Features
- Small Footprint (5x6 mm) for Compact Design
- Low $R_{DS(on)}$ to Minimize Conduction Losses
- Low Capacitance to Minimize Driver Losses
- LFPAK4 Package, Industry Standard
- AEC−Q101 Qualified and PPAP Capable
- These Devices are Pb−Free and are RoHS Compliant

N−Channel



MAXIMUM RATINGS (T_J = 25°C unless otherwise noted)

Parameter			Symbol	Value	Unit
Drain−to−Source Voltage			V_{DSS}	40	V
Gate−to−Source Voltage			V_{GS}	±20	V
Continuous Drain Current $R_{\theta JC}$ (Notes 1, 2, 3, 4)	Steady State	T_C = 25°C	I_D	52	A
		T_C = 100°C		29	
Power Dissipation $R_{\theta JC}$ (Notes 1, 2, 3)		T_C = 25°C	P_D	38	W
		T_C = 100°C		12	
Continuous Drain Current $R_{\theta JA}$ (Notes 1 & 3, 4)	Steady State	T_A = 25°C	I_D	17	A
		T_A = 100°C		12	
Power Dissipation $R_{\theta JA}$ (Notes 1, 3)		T_A = 25°C	P_D	3.8	W
		T_A = 100°C		1.9	
Pulsed Drain Current	T_A = 25°C, t_p = 10 μs		I_{DM}	269	A
Operating Junction and Storage Temperature			T_J, T_{stg}	−55 to +175	°C
Source Current (Body Diode)			I_S	31	A
Single Pulse Drain−to−Source Avalanche Energy ($I_{L(pk)}$ = 2.9 A)			E_{AS}	65	mJ
Lead Temperature for Soldering Purposes (1/8″ from case for 10 s)			T_L	260	°C

Stresses exceeding those listed in the Maximum Ratings table may damage the device. If any of these limits are exceeded, device functionality should not be assumed, damage may occur and reliability may be affected.

THERMAL RESISTANCE MAXIMUM RATINGS (Note 1)

Parameter	Symbol	Value	Unit
Junction−to−Case − Steady State (Note 3)	$R_{\theta JC}$	4.0	°C/W
Junction−to−Ambient − Steady State (Note 3)	$R_{\theta JA}$	39	

1. The entire application environment impacts the thermal resistance values shown, they are not constants and are only valid for the particular conditions noted.
2. Psi (Ψ) is used as required per JESD51−12 for packages in which substantially less than 100% of the heat flows to single case surface.
3. Surface−mounted on FR4 board using a 650 mm^2, 2 oz. Cu pad.
4. Continuous DC current rating. Maximum current for pulses as long as 1 second is higher but is dependent on pulse duration and duty cycle.

LFPAK4
CASE 760AB

MARKING DIAGRAM



7D3N04CL	= Specific Device Code
A	= Assembly Location
WL	= Wafer Lot
Y	= Year
W	= Work Week

ORDERING INFORMATION
See detailed ordering, marking and shipping information in the package dimensions section on page 5 of this data sheet.

ELECTRICAL CHARACTERISTICS (T_J = 25°C unless otherwise noted)

Parameter	Symbol	Test Condition		Min	Typ	Max	Unit
OFF CHARACTERISTICS							
Drain−to−Source Breakdown Voltage	$V_{(BR)DSS}$	V_{GS} = 0 V, I_D = 250 μA		40			V
Drain−to−Source Breakdown Voltage Temperature Coefficient	$V_{(BR)DSS}/T_J$				25		mV/°C
Zero Gate Voltage Drain Current	I_{DSS}	V_{GS} = 0 V, V_{DS} = 40 V	T_J = 25°C			10	μA
			T_J = 125°C			250	
Gate−to−Source Leakage Current	I_{GSS}	V_{DS} = 0 V, V_{GS} = 20 V				100	nA
ON CHARACTERISTICS (Note 5)							
Gate Threshold Voltage	$V_{GS(TH)}$	V_{GS} = V_{DS}, I_D = 30 μA		1.2		2.0	V
Drain−to−Source On Resistance	$R_{DS(on)}$	V_{GS} = 10 V, I_D = 10 A			6.1	7.3	mΩ
		V_{GS} = 4.5 V, I_D = 10 A			9.7	12	
Forward Transconductance	g_{FS}	V_{DS} = 15 V, I_D = 10 A			33		S
CHARGES AND CAPACITANCES							
Input Capacitance	C_{iss}	V_{GS} = 0 V, f = 1.0 MHz, V_{DS} = 25 V			860		pF
Output Capacitance	C_{oss}				360		
Reverse Transfer Capacitance	C_{rss}				15		
Total Gate Charge	$Q_{G(TOT)}$	V_{GS} = 4.5 V, V_{DS} = 32 V, I_D = 10 A			7.0		nC
Threshold Gate Charge	$Q_{G(TH)}$	V_{GS} = 10 V, V_{DS} = 32 V, I_D = 10 A			1.8		nC
Gate−to−Source Charge	Q_{GS}				3.3		
Gate−to−Drain Charge	Q_{GD}				2.5		
Total Gate Charge	$Q_{G(TOT)}$	V_{GS} = 10 V, V_{DS} = 32 V, I_D = 10 A			16		nC
SWITCHING CHARACTERISTICS (Note 6)							
Turn−On Delay Time	$t_{d(on)}$	V_{GS} = 10 V, V_{DS} = 32 V, I_D = 10 A, R_G = 1 Ω			8.0		ns
Rise Time	t_r				24		
Turn−Off Delay Time	$t_{d(off)}$				29		
Fall Time	t_f				6.0		
DRAIN−SOURCE DIODE CHARACTERISTICS							
Forward Diode Voltage	V_{SD}	V_{GS} = 0 V, I_S = 10 A	T_J = 25°C		0.84	1.2	V
			T_J = 125°C		0.71		
Reverse Recovery Time	t_{RR}	V_{GS} = 0 V, dI_S/dt = 100 A/μs, I_S = 10 A			24		ns
Charge Time	t_a				11		
Discharge Time	t_b				12		
Reverse Recovery Charge	Q_{RR}				11		nC

Product parametric performance is indicated in the Electrical Characteristics for the listed test conditions, unless otherwise noted. Product performance may not be indicated by the Electrical Characteristics if operated under different conditions.

5. Pulse Test: Pulse Width ≤ 300 μs, Duty Cycle ≤ 2%.
6. Switching characteristics are independent of operating junction temperatures.

TYPICAL CHARACTERISTICS

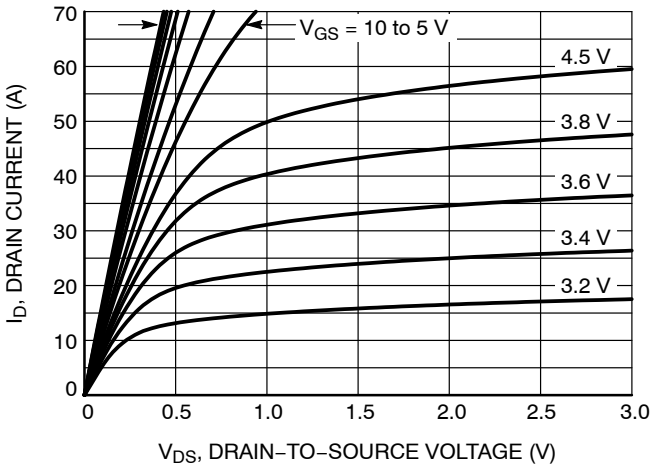

Figure 1. On−Region Characteristics

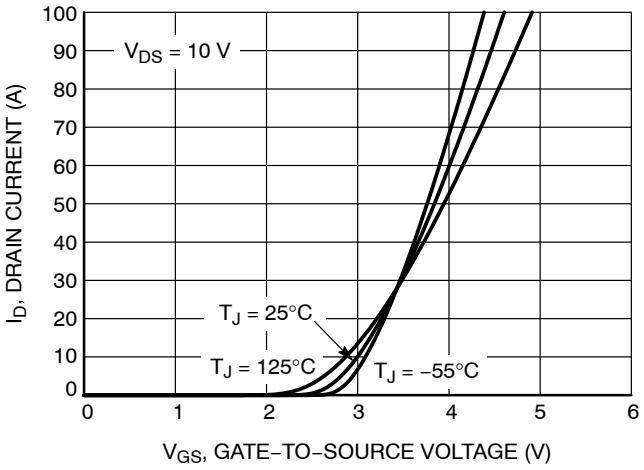

Figure 2. Transfer Characteristics

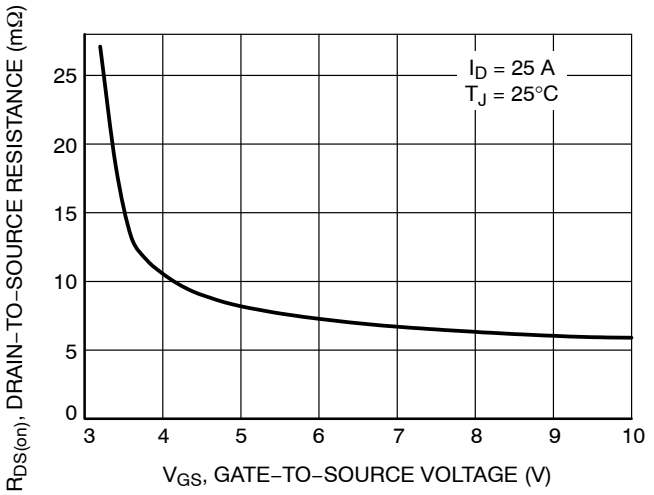

Figure 3. On−Resistance vs. Gate−to−Source Voltage

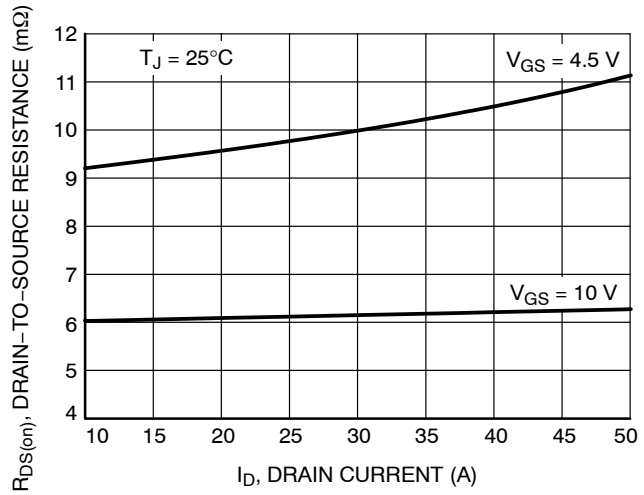

Figure 4. On−Resistance vs. Drain Current and Gate Voltage

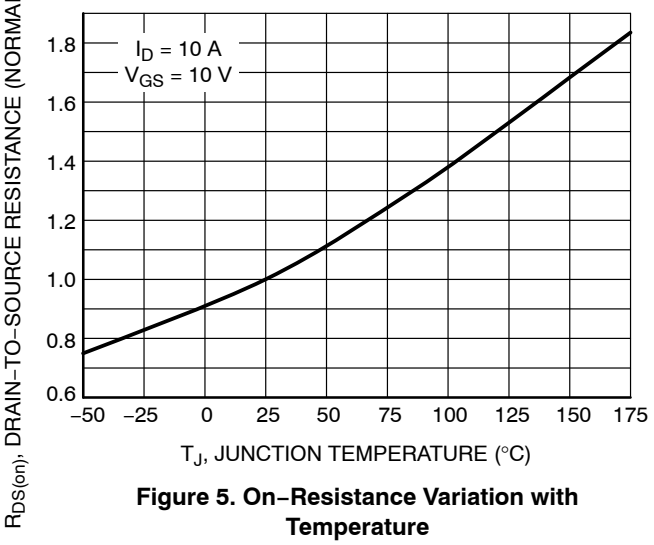

Figure 5. On−Resistance Variation with Temperature

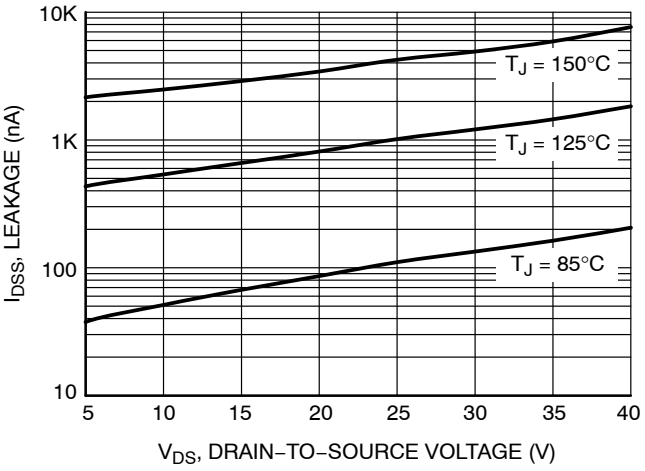

Figure 6. Drain−to−Source Leakage Current vs. Voltage

TYPICAL CHARACTERISTICS

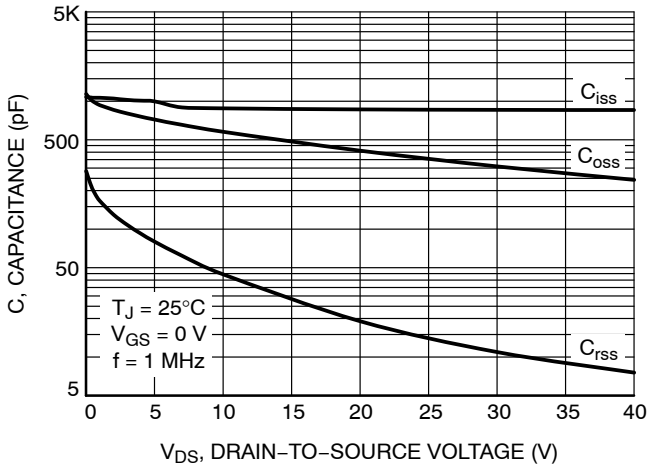

Figure 7. Capacitance Variation

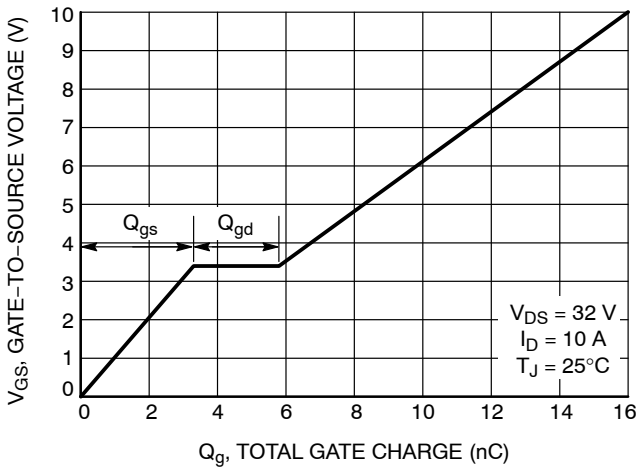

Figure 8. Gate−to−Source vs. Total Charge

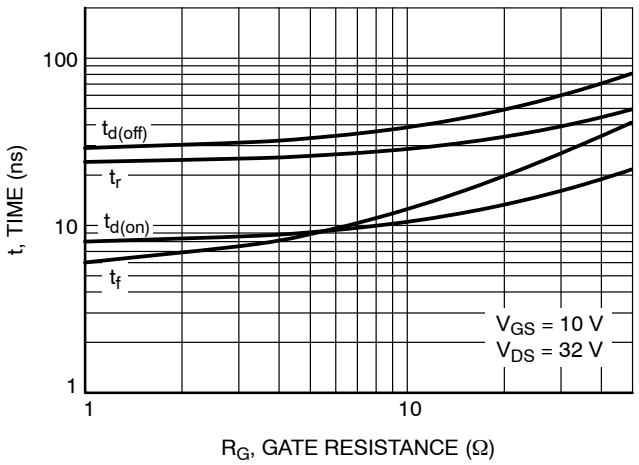

Figure 9. Resistive Switching Time Variation vs. Gate Resistance

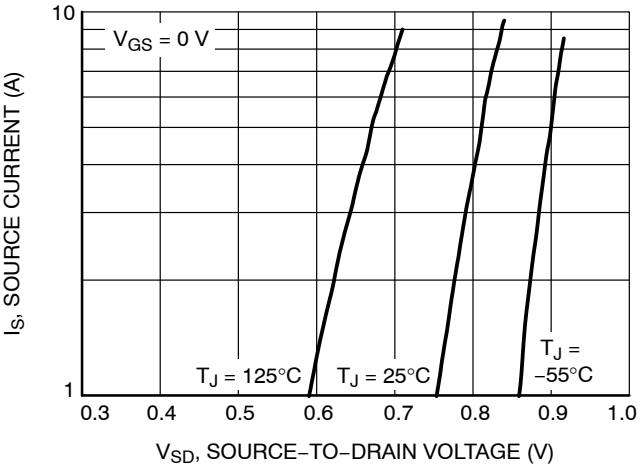

Figure 10. Diode Forward Voltage vs. Current

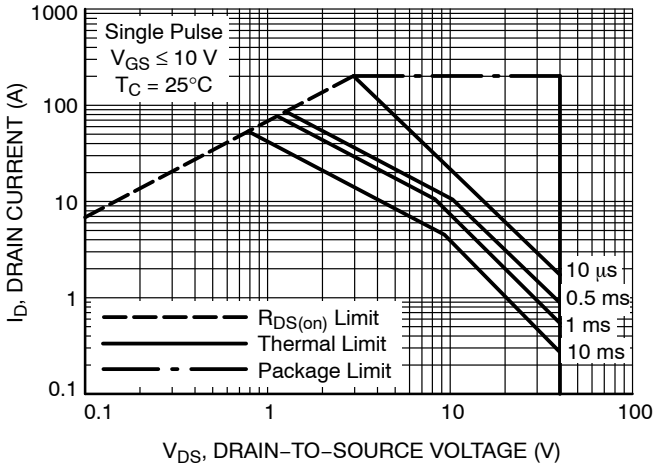

Figure 11. Maximum Rated Forward Biased Safe Operating Area

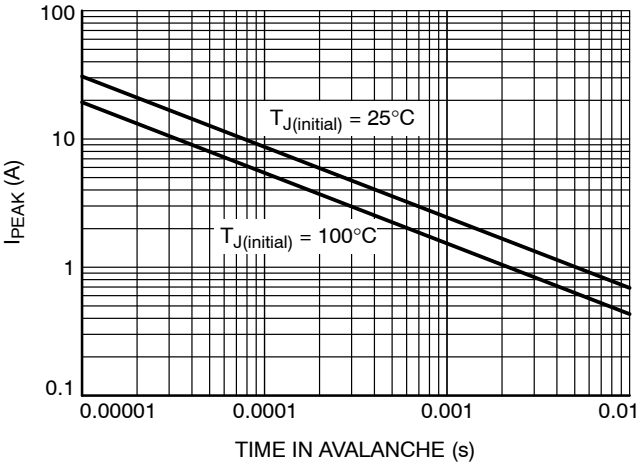

Figure 12. Maximum Drain Current vs. Time in Avalanche

TYPICAL CHARACTERISTICS

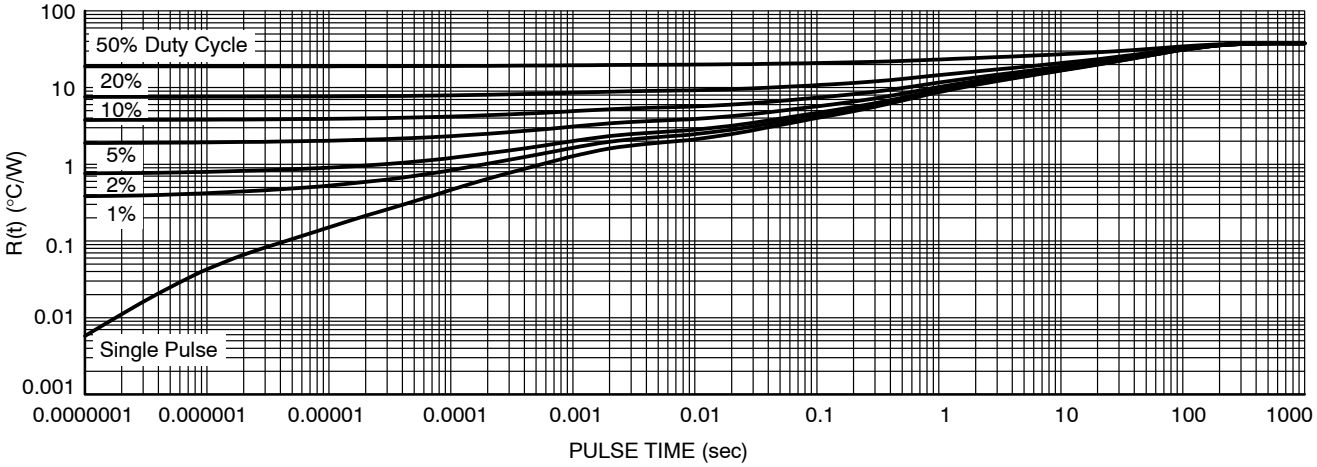

Figure 13. Thermal Characteristics

DEVICE ORDERING INFORMATION

Device	Marking	Package	Shipping†
NVMYS7D3N04CLTWG	7D3N04CL	LFPAK4 (Pb−Free)	3000 / Tape & Reel

†For information on tape and reel specifications, including part orientation and tape sizes, please refer to our Tape and Reel Packaging Specifications Brochure, BRD8011/D.

LFPAK4 4.90x4.15x1.15MM, 1.27P
CASE 760AB
ISSUE D

DATE 22 MAY 2024



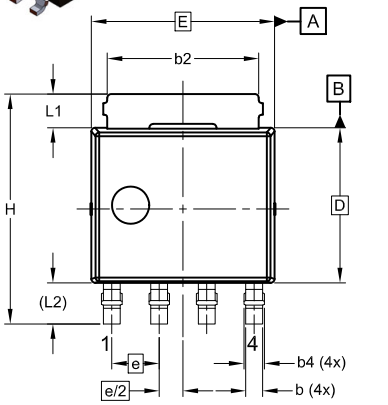

TOP VIEW

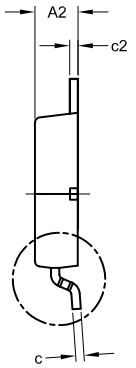

SIDE VIEW

NOTES:
1. DIMENSIONING AND TOLERANCING PER ASME Y14.5M, 2018.
2. CONTROLLING DIMENSION: MILLIMETERS.
3. DIMENSIONS D AND E DO NOT INCLUDE MOLD FLASH, PROTRUSIONS, OR BURRS. MOLD FLASH PROTRUSIONS OR GATE BURRS SHALL NOT EXCEED 0.150mm PER SIDE.
4. DIMENSIONS D AND E ARE DETERMINED AT THE OUTERMOST EXTREMES OF THE PLASTIC BODY.

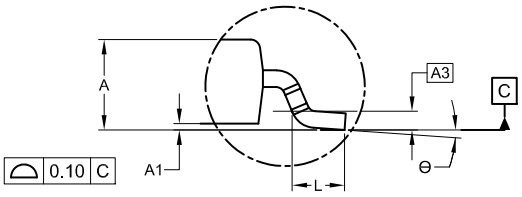

DETAIL 'A'
SCALE: 2:1

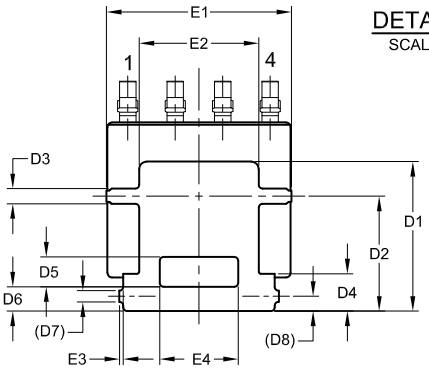

BOTTOM VIEW

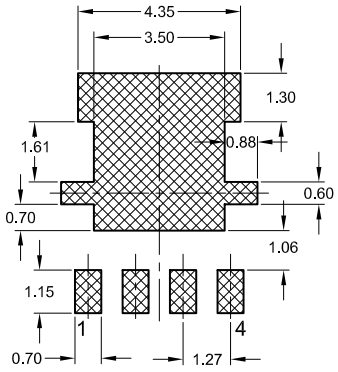

RECOMMENDED LAND PATTERN

*FOR ADDITIONAL INFORMATION ON OUR PB−FREE STRATEGY AND SOLDERING DETAILS, PLEASE DOWNLOAD THE ONSEMI SOLDERING AND MOUNTING TECHNIQUES REFERENCE MANUAL, SOLDERRM/D.

MILLIMETER			
DIM	MIN	NOM	MAX
A	1.10	1.20	1.30
A1	0.00	0.08	0.15
A2	1.10	1.15	1.20
A3		0.25 BSC	
b	0.40	0.45	0.50
b2	3.80	4.10	4.40
b4	0.45	0.55	0.65
c	0.19	0.22	0.25
c2	0.19	0.22	0.25
D		4.15 BSC	
D1	3.80	4.00	4.20
D2	3.00	3.10	3.20
D3	0.30	0.40	0.50
D4	0.90	1.00	1.10
D5	0.70	0.80	0.90
D6	0.55	0.65	0.75
D7		0.31 REF	
D8		0.40 REF	
E		4.90 BSC	
E1	4.85	4.95	5.05
E2	3.10	3.20	3.30
E3	0.00	0.10	0.20
E4	2.00	2.10	2.20
e		1.27 BSC	
e/2		0.635 BSC	
e1		0.40 REF	
H	6.00	6.15	6.30
L	0.50	0.70	0.90
L1	0.80	0.90	1.00
L2		1.10 REF	
Θ	0°	4°	8°

GENERIC MARKING DIAGRAM*



XXXXXX = Specific Device Code
A = Assembly Location
WL = Wafer Lot
Y = Year
W = Work Week

*This information is generic. Please refer to device data sheet for actual part marking. Some products may not follow the Generic Marking.

DOCUMENT NUMBER:	**98AON82777G**	Electronic versions are uncontrolled except when accessed directly from the Document Repository. Printed versions are uncontrolled except when stamped "CONTROLLED COPY" in red.	
DESCRIPTION:	**LFPAK4 4.90x4.15x1.15MM, 1.27P**		**PAGE 1 OF 1**

ADDITIONAL INFORMATION

TECHNICAL PUBLICATIONS:
Technical Library: www.onsemi.com/design/resources/technical−documentation
onsemi Website: www.onsemi.com

ONLINE SUPPORT: www.onsemi.com/support
For additional information, please contact your local Sales Representative at www.onsemi.com/support/sales