

AOD4454

150V N-Channel MOSFET

General Description

The AOD4454 combines advanced trench MOSFET technology with a low resistance package to provide extremely low $R_{\text{DS(ON)}}$. This device is ideal for boost converters and synchronous rectifiers for consumer, telecom, industrial power supplies and LED backlighting.


Product Summary


 $\begin{array}{ll} V_{DS} & 150V \\ I_D \text{ (at V_{GS}=$10V)} & 20A \\ R_{DS(ON)} \text{ (at V_{GS}=$10V)} & < 94m\Omega \\ R_{DS(ON)} \text{ (at V_{GS}=$7V)} & < 110m\Omega \end{array}$

 $100\% \ UIS \ Tested \\ 100\% \ R_g \ Tested$









Absolute Maximum Ratings T_A=25℃ unless otherwise noted

Parameter		Symbol	Maximum	Units	
Drain-Source Voltage		V _{DS}	150	V	
Gate-Source Voltage		V _{GS}	±20	V	
Continuous Drain Current	T _C =25℃		20	A	
	T _C =100℃	'D	14		
Pulsed Drain Current C		I _{DM}	40		
Continuous Drain Current	T _A =25℃		3	A	
	T _A =70℃	IDSM	2.5	A	
Avalanche Current ^C		I _{AS} , I _{AR}	5	Α	
Avalanche energy L=0.1mH ^C		E _{AS} , E _{AR}	1.3	mJ	
Power Dissipation ^B	T _C =25℃	В	100	10/	
	T _C =100℃	-P _D	50	W	
	T _A =25℃	Б	2.5	10/	
Power Dissipation A	T _A =70℃	P _{DSM}	1.6	W	
Junction and Storage Temperature Range		T _J , T _{STG}	-55 to 175	С	

Thermal Characteristics									
Parameter	Symbol	Тур	Max	Units					
Maximum Junction-to-Ambient A	t ≤ 10s	D	16	20	°C/W				
Maximum Junction-to-Ambient AD	Steady-State	$R_{\theta JA}$	41	50	€/W				
Maximum Junction-to-Case	Steady-State	$R_{\theta JC}$	1.2	1.5	℃/W				



Electrical Characteristics (T_J=25℃ unless otherwise noted)

Symbol	Parameter	Conditions		Min	Тур	Max	Units		
STATIC PARAMETERS									
BV _{DSS}	Drain-Source Breakdown Voltage	$I_D = 250 \mu A, V_{GS} = 0 V$		150			V		
I _{DSS}	Zero Gate Voltage Drain Current	V _{DS} =150V, V _{GS} =0V				1			
	Zero Gate Voltage Drain Gurrent		T _J =55℃			5	μΑ		
I _{GSS}	Gate-Body leakage current	V_{DS} =0V, V_{GS} = ±20V				±100	nA		
$V_{GS(th)}$	Gate Threshold Voltage	$V_{DS}=V_{GS} I_{D}=250\mu A$		3.4	4	4.6	V		
I _{D(ON)}	On state drain current	V _{GS} =10V, V _{DS} =5V		40			Α		
R _{DS(ON)}	Static Drain-Source On-Resistance	V _{GS} =10V, I _D =10A			75.5	94	mΩ		
			T _J =125℃		151	188			
		V_{GS} =7V, I_D =10A			84	110	mΩ		
g _{FS}	Forward Transconductance	V _{DS} =5V, I _D =10A			20		S		
V_{SD}	Diode Forward Voltage	I _S =1A,V _{GS} =0V		0.72	1	V			
Is	Maximum Body-Diode Continuous Current ^G					46	Α		
DYNAMIC	PARAMETERS								
C _{iss}	Input Capacitance			655	820	985	pF		
C _{oss}	Output Capacitance	V_{GS} =0V, V_{DS} =75V, f=1MHz		50	70	90	pF		
C_{rss}	Reverse Transfer Capacitance		13	22	31	pF			
R_g	Gate resistance	V _{GS} =0V, V _{DS} =0V, f=1MHz		0.7	1.4	2.1	Ω		
SWITCHI	NG PARAMETERS								
Q _g (10V)	Total Gate Charge	V _{GS} =10V, V _{DS} =75V, I _D =10A		10	15	20	nC		
Q_{gs}	Gate Source Charge				4		nC		
Q_{gd}	Gate Drain Charge				4.4		nC		
t _{D(on)}	Turn-On DelayTime				10.5		ns		
t _r	Turn-On Rise Time	V_{GS} =10V, V_{DS} =75V, R_L =7.5 Ω , R_{GEN} =3 Ω			5.5		ns		
t _{D(off)}	Turn-Off DelayTime				14.5		ns		
t _f	Turn-Off Fall Time				3		ns		
t _{rr}	Body Diode Reverse Recovery Time	I _F =10A, dI/dt=500A/μs		20	32.5	45	ns		
Q_{rr}	Body Diode Reverse Recovery Charge	I _F =10A, dI/dt=500A/μs		160	230	300	nC		

A. The value of $R_{\theta JA}$ is measured with the device mounted on 1in² FR-4 board with 2oz. Copper, in a still air environment with T_A =25°C. The Power dissipation P_{DSM} is based on $R_{\theta JA}$ and the maximum allowed junction temperature of 150°C. The value in any given application depends on the user's specific board design, and the maximum temperature of 175°C may be used if the PCB allows it.

- D. The $R_{\theta JA}$ is the sum of the thermal impedence from junction to case $R_{\theta JC}$ and case to ambient.
- E. The static characteristics in Figures 1 to 6 are obtained using <300µs pulses, duty cycle 0.5% max.
- F. These curves are based on the junction-to-case thermal impedence which is measured with the device mounted to a large heatsink, assuming a maximum junction temperature of $T_{J(MAX)}$ =175°C. The SOA curve provides a single pulse ratin g.
- G. The maximum current rating is package limited.
- H. These tests are performed with the device mounted on 1 in FR-4 board with 2oz. Copper, in a still air environment with T_A =25°C.

THIS PRODUCT HAS BEEN DESIGNED AND QUALIFIED FOR THE CONSUMER MARKET. APPLICATIONS OR USES AS CRITICAL COMPONENTS IN LIFE SUPPORT DEVICES OR SYSTEMS ARE NOT AUTHORIZED. AOS DOES NOT ASSUME ANY LIABILITY ARISING OUT OF SUCH APPLICATIONS OR USES OF ITS PRODUCTS. AOS RESERVES THE RIGHT TO IMPROVE PRODUCT DESIGN, FUNCTIONS AND RELIABILITY WITHOUT NOTICE.

Rev 0: February 2011 www.aosmd.com Page 2 of 6

B. The power dissipation P_D is based on $T_{J(MAX)}$ =175°C, using junction-to-case thermal resistance, and is more useful in setting the upper dissipation limit for cases where additional heatsinking is used.

C. Repetitive rating, pulse width limited by junction temperature $T_{J(MAX)}$ =175°C. Ratings are based on low frequency and duty cycles to keep initial T_J =25°C.



TYPICAL ELECTRICAL AND THERMAL CHARACTERISTICS





Fig 1: On-Region Characteristics (Note E)






Figure 3: On-Resistance vs. Drain Current and Gate Voltage (Note E)






Figure 4: On-Resistance vs. Junction Temperature (Note E)








Figure 6: Body-Diode Characteristics (Note E)



TYPICAL ELECTRICAL AND THERMAL CHARACTERISTICS

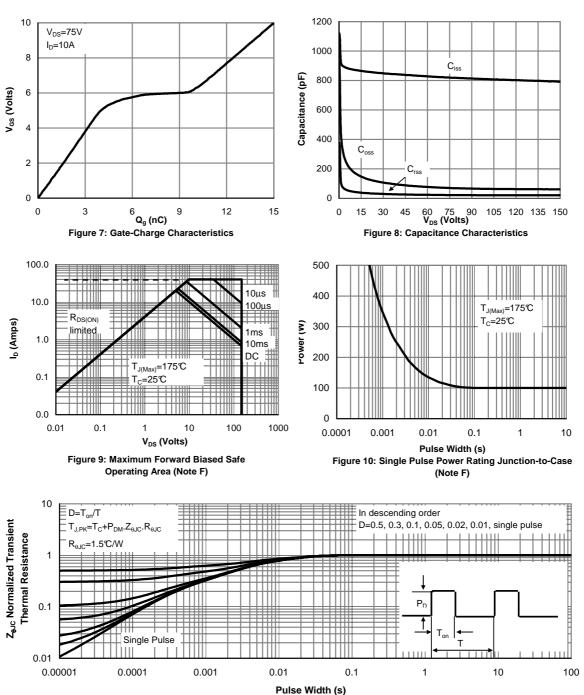


Figure 11: Normalized Maximum Transient Thermal Impedance (Note F)

Rev 0: February 2011 www.aosmd.com Page 4 of 6



TYPICAL ELECTRICAL AND THERMAL CHARACTERISTICS


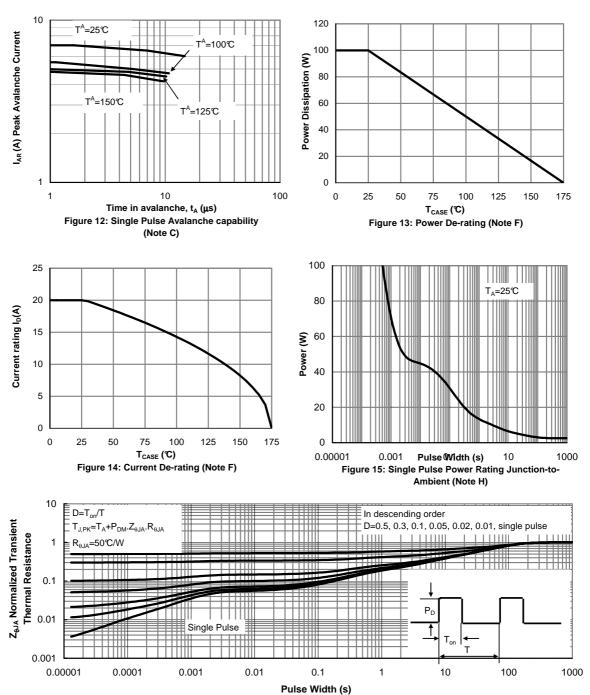



Figure 16: Normalized Maximum Transient Thermal Impedance (Note H)

Rev 0: February 2011 www.aosmd.com Page 5 of 6





Gate Charge Test Circuit & Waveform







Resistive Switching Test Circuit & Waveforms



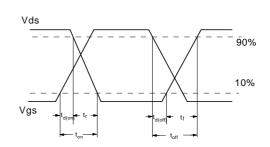

Unclamped Inductive Switching (UIS) Test Circuit & Waveforms





Diode Recovery Test Circuit & Waveforms

