

Document Title	Specification of Bulk NvData Manager
Document Owner	AUTOSAR
Document Responsibility	AUTOSAR
Document Identification No	949

Document Status	published
Part of AUTOSAR Standard	Classic Platform
Part of Standard Release	R22-11

Document Change History			
Date	Release	Changed by Description	
2022-11-24	R22-11	AUTOSAR Release Management	editorial changes
2021-11-25	R21-11	AUTOSAR Release Management	No content changes
2020-11-30	R20-11	AUTOSAR Release Management	 callback functions renamed limitation added specification item prefix adapted editorial changes
2019-11-28	R19-11	AUTOSAR Release Management	Initial release



Disclaimer

This work (specification and/or software implementation) and the material contained in it, as released by AUTOSAR, is for the purpose of information only. AUTOSAR and the companies that have contributed to it shall not be liable for any use of the work.

The material contained in this work is protected by copyright and other types of intellectual property rights. The commercial exploitation of the material contained in this work requires a license to such intellectual property rights.

This work may be utilized or reproduced without any modification, in any form or by any means, for informational purposes only. For any other purpose, no part of the work may be utilized or reproduced, in any form or by any means, without permission in writing from the publisher.

The work has been developed for automotive applications only. It has neither been developed, nor tested for non-automotive applications.

The word AUTOSAR and the AUTOSAR logo are registered trademarks.



Contents

1	Introduction and functional overview				
2	Acronyms and Abbreviations	6			
3	Related documentation				
	3.1 Input documents & related standards and norms	7 7			
4	Constraints and assumptions	8			
	4.1 Limitations	8			
5	Dependencies to other modules	9			
6	Requirements Tracing	10			
7	Functional specification	11			
	7.1 Error Classification 7.1.1 Development Errors 7.1.2 Runtime Errors 7.1.3 Transient Faults 7.1.4 Production Errors 7.1.5 Extended Production Errors	13 13 13 13 13			
8	API specification	14			
	8.1 Imported types 8.2 Type definitions	14 14 14 14 15			
	8.3 Function definitions 8.3.1 BndM_Init 8.3.2 BndM_GetVersionInfo 8.3.3 BndM_GetBlockPtr 8.3.4 BndM_WriteStart 8.3.5 BndM_WriteBlock 8.3.6 BndM_WriteFinalize 8.3.7 BndM_WriteCancel	15 16 16 17 17 18 18			
	8.4 Callback notifications	19 19 19			
	8.5 Scheduled functions	20			
	8.6 Expected interfaces	20			

Specification of Bulk NvData Manager AUTOSAR CP R22-11



	8.6.1 Mandatory interfaces	20
	8.6.2 Optional interfaces	20
	8.6.3 Configurable interfaces	21
	8.6.3.1 xxx_BndMWriteStartFinish	21
	8.6.3.2 xxx_BndMWriteBlockFinish	22
	8.6.3.3 xxx_BndMWriteFinalizeFinish	22
	8.7 Service Interfaces	22
9	Sequence diagrams	23
10	Configuration specification	24
	10.1 How to read this chapter	24
	10.2 Containers and configuration parameters	
	10.2.1 BndM	
	10.2.2 BndMGeneral	
	10.2.3 BndMBlockDescriptor	26
	10.2.4 BndMCallbackBlock	
	10.2.5 BndMCallbackGeneral	28
	10.3 Published Information	
Α	Not applicable requirements	30



1 Introduction and functional overview

This specification describes the functionality, API and the configuration for the AUTOSAR Basic Software module BulkNvDataManager.

The demand of non-volatile bulk data is increasing for use-case like variant-coding ¹. Such data is used frequently, but rarely updated. The BulkNvDataManager offers in contrast to the NvM an API to read the data directly from flash memory. In consequence a RAM mirror is avoided, but the writing of the data is more complex.

Remark: The whole memory stack in AUTOSAR Classic Platform will have a systematic review within the upcoming release 20/11. This could result in a changed architecture like the integration of the BndM functionality into NvM.

¹Variant coding is a vehicle specific dataset which is calculated in the production for each vehicle (and of course stored in the production).



2 Acronyms and Abbreviations

The glossary below includes acronyms and abbreviations relevant to the BulkNvData-Manager that are not included in the [1, AUTOSAR glossary].



3 Related documentation

3.1 Input documents & related standards and norms

- [1] Glossary
 AUTOSAR_TR_Glossary
- [2] General Specification of Basic Software Modules AUTOSAR SWS BSWGeneral

3.2 Related specification

AUTOSAR provides a General Specification on Basic Software modules [2, SWS BSW General], which is also valid for BulkNvDataManager.

Thus, the specification SWS BSW General shall be considered as additional and required specification for BulkNvDataManager.



4 Constraints and assumptions

4.1 Limitations

The synchronization of a potential parallel access (e.g. FlashEEPROMEmulation) to the underlying flash driver is not part of this AUTOSAR release.

Currently only PFlash writing with A/B Sector switch, present in high end microcontrollers, is supported. This limits the applicability of BndM to architectures supporting this feature.

4.2 Applicability to car domains



5 Dependencies to other modules

This module depends on the capabilities of the underlying flash driver.



6 Requirements Tracing

The following tables reference the requirements specified in <CITA-TIONS_OF_CONTRIBUTED_DOCUMENTS> and links to the fulfillment of these. Please note that if column "Satisfied by" is empty for a specific requirement this means that this requirement is not fulfilled by this document.

Requirement	Description	Satisfied by
[RS_Diag_04243]	Update of constant parameters	[SWS_BndM_00001]
	through diagnostics	[SWS_BndM_00002]
		[SWS_BndM_00003]
		[SWS_BndM_00004]
		[SWS_BndM_00005]
		[SWS_BndM_00007]
		[SWS_BndM_00008]
		[SWS_BndM_00009]
		[SWS_BndM_00010]
		[SWS_BndM_00011]
		[SWS BndM 00012]
		[SWS BndM 00013]
		[SWS_BndM_00014]



7 Functional specification

In general the concept how the BulkNvDataManager will manage its flash memory is vendor-specific.

The base idea is to have an A/B switching of the data blocks. This means the complete Bulk NvData will be stored in partition A. When the writing is started (BndM_WriteS-tart) the B partition needs to be erased. The updated blocks (BndM_WriteBlock) will be written to partition B. The finalization (BndM_WriteFinalize) will finally make partition B consistent (e.g. by coping the not updated blocks over to partition B) and switch the active partition to B (further calls to BndM_GetBlockPtr will point to the data in the partition B). Nevertheless the vendor solution could consider alternative solutions like an update through a FlashBootloader.

[SWS_BndM_00001] [The BndM shall manage its BndM blocks (BndMBlockDescriptor) in the direct accessible memory (i.e. via pointer). | (RS_Diag_04243)

[SWS_BndM_00002] [A call of BndM_GetBlockPtr shall deliver the base pointer to the corresponding BndM block (BndMBlockDescriptor) in the currently active partition. | (RS Diag 04243)

[SWS_BndM_00003] [A call of BndM_WriteStart shall trigger the preparation of the 2nd (free) partition. | (RS Diag 04243)

Note: Depending on the implemented strategy the preparation takes more time. This could be coordinated within the <code>BndM_MainFunction</code>. Note: In case of direct writing access to flash the flash-page needs to be erased.

Caveat: Depending on the hardware a parallel read and write access to code flash is not possible. In this case the overall ECU needs to be in a writing mode (e.g. Flash-Bootloader context or all other tasks are interrupted/stopped).

[SWS_BndM_00007] [After preparation of the 2nd (free) partition [SWS_BndM_00003] is successfully finished (writing to the 2nd partition is possible) the callback Xxx_BndMWriteStartFinish with the result set to E_OK shall be triggered in the context of the BndM_MainFunction.|(RS Diag 04243)

[SWS_BndM_00014] [A call of BndM_WriteStart shall be rejected with the error-Code E_NOT_OK, if the call is done within an active writing phase (phase between BndM_WriteStart and BndM_WriteFinalize).|(RS Diag 04243)

[SWS_BndM_00004] [A call of BndM_WriteBlock shall trigger the writing of the data to the 2nd (unused) partition. The data (ImplementationDataType) shall be not modified to allow a pointer access. | (RS_Diag_04243)

[SWS_BndM_00008] [After writing of [SWS_BndM_00004] the 2nd (free) partition is finished the callback Xxx_BndMWriteBlockFinish with the result set to E_OK shall be triggered in the context of the BndM_MainFunction. | (RS_Diag_04243)

[SWS_BndM_00011] [A call of BndM_WriteBlock shall be rejected with the error-Code E_NOT_OK, if the call is done without a previous call of BndM_WriteStart. or

11 of 30



while another writing of the same or another block is ongoing or the call is done within the finalization mode of the BndM. | (RS Diag 04243)

[SWS_BndM_00012] [A call of BndM_WriteBlock shall be rejected with the error-Code E_NOT_OK, if the call is done while another writing of the same or another block is ongoing. | (RS_Diag_04243)

[SWS_BndM_00013] [A call of BndM_WriteBlock shall be rejected with the error-Code E_NOT_OK, if the call is done within or after the finalization mode of the BndM.] (RS Diag 04243)

[SWS_BndM_00005] [A call of BndM_WriteFinalize shall trigger the finalization of the 2nd (unused) partition. In background the BndM shall make the 2nd (unused) partition consistent by coping all unchanged BndMBlockDescriptor to the 2nd (unused) partition. If the finalization is successful the BndM shall make the 2nd (unused) partition to the active partition and trigger the callback Xxx_BndMWriteFinalizeFinish with the result set to E_OK.] (RS_Diag_04243) Note: Further calls to BndM_GetBlockPtr will point to the data in the 2nd (now active) partition after the finalization is successful.

[SWS_BndM_00009] [If the finalization is NOT successful (the 2nd partition is not consistent and could therefore not be used) the BndM shall keep the current active partition as the active partition and trigger the callback $Xxx_BndMWriteFinalizeFinish$ with the result set to $E_NOT_OK.$ | (RS Diag 04243)

[SWS_BndM_00010] [A call of BndM_WriteFinalize without a previously called BndM_WriteStart or within the finalization mode of the BndM the DET BndM_E_-WRONG_SEQUENCE error shall be thrown.] (RS_Diag_04243)

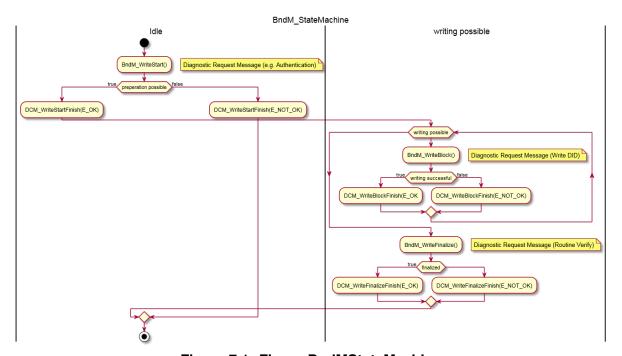


Figure 7.1: Figure BndMStateMachine



7.1 Error Classification

Section 7.2 "Error Handling" of the document "General Specification of Basic Software Modules" describes the error handling of the Basic Software in detail. Above all, it constitutes a classification scheme consisting of five error types which may occur in BSW modules.

Based on this foundation, the following section specifies particular errors arranged in the respective subsections below.

7.1.1 Development Errors

[SWS_BndM_00006] [

Type of error	Related error code	Error value
API service called with wrong parameter	BNDM_E_PARAM	0x01
API called in wrong sequence	BNDM_E_WRONG_SEQUENCE	0x02

10

7.1.2 Runtime Errors

There are no runtime errors.

7.1.3 Transient Faults

There are no transient faults.

7.1.4 Production Errors

There are no production errors.

7.1.5 Extended Production Errors

There are no extended production errors.



8 API specification

8.1 Imported types

In this chapter all types included from the following files are listed.

8.2 Type definitions

8.2.1 BndM_ConfigType

[SWS_BndM_01001] [

Name	BndM_ConfigType	
Kind	Structure	
Elements	implementation specific	
	Type –	
	Comment	-
Description	This type of the external data structure shall contain the post build initialization data for the BndM.	
Available via	bndm.h	

10

8.2.2 BndM_BlockIdType

[SWS_BndM_01002] [

Name	BndM_BlockIdType		
Kind	Туре		
Derived from	uint16		
Range	065535	_	_
Description	Unique identification of an bulk nv block. The BndM_BlockId is assigned by the BndM.		
Available via	bndm.h		

]()

8.2.3 BndM_Block<BlockId.Shortname>Type

[SWS_BndM_01003] [

Name	BndM_Block{BlockId.Shortname}Type	
Kind	Structure	
Description	The elements of this structure data type is the C-structured representation of the configured ImplementationDataPrototype.	
Available via	bndm_externals.h	



]()

8.2.4 BndM_Result

[SWS_BndM_01017] [

Name	BndM_ResultType		
Kind	Туре		
Derived from	uint8		
Range	E_OK	0x00	Result of the asynchronous job finish notifications
	E_NOT_OK	0x01	_
Description	Result of the asynchronous job finish notifications		
Available via	bndm.h		

]()

8.3 Function definitions

8.3.1 BndM Init

[SWS_BndM_01004] [

Service Name	BndM_Init	BndM_Init		
Syntax	_	<pre>void BndM_Init (const BndM_ConfigType* ConfigPtr)</pre>		
Service ID [hex]	0x1			
Sync/Async	Synchronous	Synchronous		
Reentrancy	Non Reentrant	Non Reentrant		
Parameters (in)	ConfigPtr	ConfigPtr Pointer to the configuration set in VARIANT-POST-BUILD.		
Parameters (inout)	None	None		
Parameters (out)	None	None		
Return value	None	None		
Description	Initializes or reinitiali	Initializes or reinitializes this module.		
Available via	BndM.h			



8.3.2 BndM_GetVersionInfo

[SWS_BndM_01005] [

Service Name	BndM_GetVersionInfo		
Syntax	<pre>void BndM_GetVersionInfo (Std_VersionInfoType* versioninfo)</pre>		
Service ID [hex]	0x2		
Sync/Async	Synchronous	Synchronous	
Reentrancy	Non Reentrant		
Parameters (in)	None		
Parameters (inout)	None	None	
Parameters (out)	versioninfo	Pointer to where to store the version information of this module.	
Return value	None		
Description	Returns the version information of this module. API Availability: This API will be available only if (ecuc BndM/BndMGeneral.BndMVersionInfoApi) == true)		
Available via	BndM.h		

]()

8.3.3 BndM_GetBlockPtr

[SWS_BndM_01006] [

Service Name	BndM_GetBlockPtr_ <blockid.shortname></blockid.shortname>	
Syntax	Std_ReturnType BndM_GetBlockPtr_ <blockid.shortname> (BndM_BlockIdType BlockId, BndM_Block{BlockId.Shortname}Type** BndM_BlockPtr)</blockid.shortname>	
Service ID [hex]	0x3	
Sync/Async	Synchronous	
Reentrancy	Reentrant Returns an pointer to the structure in flash	
Parameters (in)	Blockld Blockld	
Parameters (inout)	None	
Parameters (out)	BndM_BlockPtr • BndM_BlockPtr	
Return value	Std_ReturnType -	
Description	-	
Available via	BndM_Externals.h	



8.3.4 BndM_WriteStart

[SWS_BndM_01007] [

Service Name	BndM_WriteStart	
Syntax	<pre>Std_ReturnType BndM_WriteStart (void)</pre>	
Service ID [hex]	0x4	
Sync/Async	Asynchronous	
Reentrancy	Non Reentrant	
Parameters (in)	None	
Parameters (inout)	None	
Parameters (out)	None	
Return value	Std_ReturnType	
Description	Will trigger the start of writing phase. The finish of asynchronous processing will trigger the callback xxx_BndMWriteStartFinish including the result of this operation	
Available via	BndM.h	

]()

Note: It is up to the stack-vendor what can run in parallel while the writing to BndM is possible or not (e.g. FEE might not work anymore).

8.3.5 BndM_WriteBlock

[SWS_BndM_01008] [

Service Name	BndM_WriteBlock_ <blockid.shortname></blockid.shortname>	
Syntax	Std_ReturnType BndM_WriteBlock_ <blockid.shortname> (BndM_BlockIdType BlockId, const BndM_Block{BlockId.Shortname}Type* BndM_SrcPtr)</blockid.shortname>	
Service ID [hex]	0x5	
Sync/Async	Asynchronous	
Reentrancy	Non Reentrant	
Parameters (in)	Blockld -	
	BndM_SrcPtr	_
Parameters (inout)	None	
Parameters (out)	None	
Return value	Std_ReturnType	
Description	Will persist the data in flash, that it can later directly accessed via BndM_GetBlockPtr API. The writing take a while and is finished after the successful callback xxx_BndMWriteBlockFinish	
Available via	BndM_Externals.h	



Note: BndM_WriteStart needs to be called in advance

8.3.6 BndM_WriteFinalize

[SWS_BndM_01009] [

Service Name	BndM_WriteFinalize	
Syntax	Std_ReturnType BndM_WriteFinalize (void)	
Service ID [hex]	0x6	
Sync/Async	Asynchronous	
Reentrancy	Reentrant Finalize the writing. After the successful callback xxx_BndMWriteFinalizeFinish the finalization is finished (i.e. the new stored data is available).	
Parameters (in)	None	
Parameters (inout)	None	
Parameters (out)	None	
Return value	Std_ReturnType E_OK The finalization request is accepted. E_NOT_OK The finalization request is rejected.	
Description	Will trigger the finalization of writing phase. The finish of asynchronous processing will trigger the callback xxx_BndMWriteFinalizeFinish including the result of this operation.	
Available via	BndM.h	

]()

8.3.7 BndM_WriteCancel

[SWS_BndM_01010] [

Service Name	BndM_WriteCancel
Syntax	<pre>void BndM_WriteCancel (void)</pre>
Service ID [hex]	0x7
Sync/Async	Asynchronous
Reentrancy	Reentrant
Parameters (in)	None
Parameters (inout)	None
Parameters (out)	None
Return value	None
Description	Cancels the writing
Available via	BndM.h



8.4 Callback notifications

This is a list of functions provided for FLS module.

8.4.1 BndM_JobEndNotification

[SWS_BndM_01011] [

Service Name	BndM_JobEndNotification	
Syntax	<pre>void BndM_JobEndNotification (void</pre>	
Service ID [hex]	0x8	
Sync/Async	Synchronous	
Reentrancy	Non Reentrant	
Parameters (in)	None	
Parameters (inout)	None	
Parameters (out)	None	
Return value	None	
Description	This callback function is called when a FLS job has been finished with positive result.	
Available via	BndM.h	

]()

8.4.2 BndM_JobErrorNotification

[SWS_BndM_01012] [

Service Name	BndM_JobErrorNotification	
Syntax	<pre>void BndM_JobErrorNotification (void)</pre>	
Service ID [hex]	0x9	
Sync/Async	Synchronous	
Reentrancy	Non Reentrant	
Parameters (in)	None	
Parameters (inout)	None	
Parameters (out)	None	
Return value	None	
Description	This callback function is called when a FLS job has been canceled or finished with negative result.	
Available via	BndM.h	



8.5 Scheduled functions

These functions are directly called by Basic Software Scheduler. The following functions shall have no return value and no parameter. All functions shall be non re-entrant.

8.5.1 BndM MainFunction

[SWS BndM 01013] [

Service Name	BndM_MainFunction	
Syntax	<pre>void BndM_MainFunction (void)</pre>	
Service ID [hex]	0x55	
Description	Schedule function for the background processing.	
Available via	SchM_BndM.h	

10

8.6 Expected interfaces

In this chapter all interfaces required from other modules are listed.

8.6.1 Mandatory interfaces

[SWS_BndM_01019] [

API Function	Header File	Description
There are no mandatory interfaces.		

10

Note: This section defines all interfaces, which are required to fulfill the core functionality of the module.

8.6.2 Optional interfaces

This section defines all interfaces, which are required to fulfill an optional functionality of the module.



[SWS_BndM_01020]

API Function	Header File	Description
Det_ReportRuntimeError	Det.h	Service to report runtime errors. If a callout has been configured then this callout shall be called.
Fls_Cancel	Fls.h	Cancels an ongoing job.
Fls_Compare	Fls_Com.h	Compares the contents of an area of flash memory with that of an application data buffer.
Fls_Erase	Fls.h	Erases flash sector(s).
Fls_GetJobResult	Fls.h	Returns the result of the last job.
Fls_GetStatus	Fls.h	Returns the driver state.
Fls_Read	Fls.h	Reads from flash memory.
Fls_SetMode	Fls.h	Sets the flash driver's operation mode.
Fls_Write	Fls.h	Writes one or more complete flash pages.

10

8.6.3 Configurable interfaces

In this section, all interfaces are listed where the target function could be configured. The target function is usually a callback function. The names of this kind of interfaces are not fixed because they are configurable.

8.6.3.1 xxx_BndMWriteStartFinish

[SWS_BndM_01016] [

Service Name	Xxx_BndMWriteStartFin	Xxx_BndMWriteStartFinish	
Syntax	BndM_BlockIdType	<pre>void Xxx_BndMWriteStartFinish (BndM_BlockIdType BlockId, BndM_ResultType result)</pre>	
Service ID [hex]	0x56		
Sync/Async	Synchronous	Synchronous	
Reentrancy	Non Reentrant	Non Reentrant	
Parameters (in)	BlockId	Blockld -	
	result	result -	
Parameters (inout)	None	None	
Parameters (out)	None	None	
Return value	None	None	
Description	This callback function is	This callback function is called when BndM_WriteStart is finished.	
Available via	BndM_Externals.h	BndM_Externals.h	

10



8.6.3.2 xxx_BndMWriteBlockFinish

[SWS_BndM_01014] [

Service Name	Xxx_BndMWriteBlockFinish		
Syntax	<pre>void Xxx_BndMWriteBlockFinish (BndM_BlockIdType BlockId, BndM_ResultType result)</pre>		
Service ID [hex]	0x57		
Sync/Async	Synchronous		
Reentrancy	Non Reentrant		
Parameters (in)	BlockId	Blockld -	
	result -		
Parameters (inout)	None		
Parameters (out)	None		
Return value	None		
Description	This callback function is called when BndM_WriteBlock is finished.		
Available via	BndM_Externals.h		

10

8.6.3.3 xxx_BndMWriteFinalizeFinish

[SWS_BndM_01015] [

Service Name	Xxx_BndMWriteFinalizeFinish			
Syntax	<pre>void Xxx_BndMWriteFinalizeFinish (BndM_BlockIdType BlockId, BndM_ResultType result)</pre>			
Service ID [hex]	0x58			
Sync/Async	Synchronous	Synchronous		
Reentrancy	Non Reentrant			
Parameters (in)	BlockId	Blockld -		
	result -			
Parameters (inout)	None			
Parameters (out)	None			
Return value	None			
Description	This callback function is called when BndM_WriteFinalize is finished.			
Available via	BndM_Externals.h			

]()

8.7 Service Interfaces

The BndM does not have service interfaces.



9 Sequence diagrams

No content.



10 Configuration specification

In general, this chapter defines configuration parameters and their clustering into containers. In order to support the specification Chapter 10.1 describes fundamentals. It also specifies a template (table) you shall use for the parameter specification. We intend to leave Chapter 10.1 in the specification to guarantee comprehension.

Chapter 10.2 specifies the structure (containers) and the parameters of the module BndM.

Chapter 10.3 specifies published information of the module BndM.

10.1 How to read this chapter

For details refer to the chapter 10.1 "Introduction to configuration specification" in SWS BSWGeneral.

10.2 Containers and configuration parameters

The following chapters summarize all configuration parameters. The detailed meanings of the parameters describe Chapter 7 and Chapter 8.

10.2.1 BndM

SWS Item	[ECUC_BndM_00001]
Module Name	BndM
Description	Configuration of the BulkNvDataManager module.
Post-Build Variant Support	false
Supported Config Variants	VARIANT-PRE-COMPILE

Included Containers				
Container Name Multiplicity Scope / Dependency		Scope / Dependency		
BndMBlockDescriptor	0*	Each container defines a Bulk NV Block which can be individually accessed.		
BndMCallbackBlock	0*	This container contains the block-specific callbacks.		
BndMCallbackGeneral	01	This container contains the general callbacks		
BndMGeneral	1	Container for common configuration options.		



10.2.2 BndMGeneral

SWS Item	[ECUC_BndM_00002]
Container Name	BndMGeneral
Parent Container	BndM
Description	Container for common configuration options.
Configuration Parameters	

SWS Item	[ECUC_BndM_00003]			
Parameter Name	BndMDevErrorDetect			
Parent Container	BndMGeneral			
Description	Switches the development error det	ection an	d notification on or off.	
	true: detection and notificat	ion is en	abled.	
	false: detection and notification	tion is di	sabled.	
Multiplicity	1	1		
Туре	EcucBooleanParamDef			
Default value	false	false		
Post-Build Variant Value	false			
Value Configuration Class	Pre-compile time X All Variants			
	Link time –			
	Post-build time –			
Scope / Dependency	scope: local			

SWS Item	[ECUC_BndM_00004]			
Parameter Name	BndMMainFunctionPeriod			
Parent Container	BndMGeneral			
Description	The period between successive call	s to the r	nain function in seconds.	
Multiplicity	1			
Туре	EcucFloatParamDef			
Range]0 INF[]0 INF[
Default value	-			
Post-Build Variant Value	false			
Value Configuration Class	Pre-compile time X All Variants			
	Link time –			
	Post-build time –			
Scope / Dependency	scope: ECU			

SWS Item	[ECUC_BndM_00005]		
Parameter Name	BndMVersionInfoApi		
Parent Container	BndMGeneral		
Description	Pre-processor switch to enable / disable the API to read out the modules version information.		
	true: Version info API enabled. false: Version info API disabled.		
Multiplicity	1		
Туре	EcucBooleanParamDef		
Default value	false		
Post-Build Variant Value	false		
Value Configuration Class	Pre-compile time X All Variants		





	Link time	_	
	Post-build time	_	
Scope / Dependency	scope: local		

No Included Containors	
No Included Containers	

10.2.3 BndMBlockDescriptor

SWS Item	[ECUC_BndM_00014]
Container Name	BndMBlockDescriptor
Parent Container	BndM
Description	Each container defines a Bulk NV Block which can be individually accessed.
Configuration Parameters	

SWS Item	[ECUC_BndM_00007]			
Parameter Name	BndMBlockIdentifier			
Parent Container	BndMBlockDescriptor			
Description	Unique identification of the block.			
Multiplicity	1			
Туре	EcucIntegerParamDef (Symbolic Name generated for this parameter)			
Range	0 65535	0 65535		
Default value	-			
Post-Build Variant Value	false	false		
Value Configuration Class	Pre-compile time X All Variants			
	Link time –			
	Post-build time –			
Scope / Dependency	scope: local			

SWS Item	[ECUC_BndM_00006]			
Parameter Name	BndMBlockDescriptor	BndMBlockDescriptor		
Parent Container	BndMBlockDescriptor	BndMBlockDescriptor		
Description	This parameter defines the data str	This parameter defines the data structure of the block.		
Multiplicity	1			
Туре	Foreign reference to IMPLEMENTATION-DATA-TYPE			
Post-Build Variant Value	false			
Value Configuration Class	Pre-compile time	X	All Variants	
	Link time	_		
	Post-build time	_		
Scope / Dependency	scope: local			

SWS Item	[ECUC_BndM_00013]	
Parameter Name	BndMCallbackRef	
Parent Container	BndMBlockDescriptor	
Description	Reference to the block-specific callback function.	





Multiplicity	01		
Туре	Reference to BndMCallbackBlock		
Post-Build Variant Multiplicity	false		
Post-Build Variant Value	false		
Multiplicity Configuration Class	Pre-compile time X All Variants		All Variants
	Link time	_	
	Post-build time	_	
Value Configuration Class	Pre-compile time	X	All Variants
	Link time	_	
	Post-build time	_	
Scope / Dependency	scope: local	•	

SWS Item	[ECUC_BndM_00008]		
Parameter Name	BndMDeviceIndex		
Parent Container	BndMBlockDescriptor		
Description	Reference to the FLS device this bl	ock is sto	red in.
Multiplicity	01		
Туре	Symbolic name reference to FlsGer	neral	
Post-Build Variant Multiplicity	false		
Post-Build Variant Value	false		
Multiplicity Configuration Class	Pre-compile time X All Variants		
	Link time	_	
	Post-build time	_	
Value Configuration Class	Pre-compile time	X	All Variants
	Link time	_	
	Post-build time	_	
Scope / Dependency			

No Included Containers

10.2.4 BndMCallbackBlock

SWS Item	[ECUC_BndM_00011]
Container Name	BndMCallbackBlock
Parent Container	BndM
Description	This container contains the block-specific callbacks.
Post-Build Variant Multiplicity	false
Configuration Parameters	

SWS Item	[ECUC_BndM_00012]
Parameter Name	BndMWriteBlockFinishFnc
Parent Container	BndMCallbackBlock
Description	Callback function for the WriteBlockFinish callback.
Multiplicity	1





Туре	EcucFunctionNameDef		
Default value	-		
Regular Expression	-		
Post-Build Variant Value	false		
Value Configuration Class	Pre-compile time X All Variants		
	Link time	_	
	Post-build time	_	
Scope / Dependency	scope: local		

No Included Containers

10.2.5 BndMCallbackGeneral

SWS Item	[ECUC_BndM_00015]
Container Name	BndMCallbackGeneral
Parent Container	BndM
Description	This container contains the general callbacks
Configuration Parameters	

SWS Item	[ECUC_BndM_00010]			
Parameter Name	BndMWriteFinalizeFinishFnc	BndMWriteFinalizeFinishFnc		
Parent Container	BndMCallbackGeneral			
Description	Callback function for the WriteFinali	zeFinish (callback.	
Multiplicity	1	1		
Туре	EcucFunctionNameDef			
Default value	-			
Regular Expression	-			
Post-Build Variant Value	false			
Value Configuration Class	Pre-compile time	X	All Variants	
	Link time	_		
	Post-build time	_		
Scope / Dependency	scope: local			

SWS Item	[ECUC_BndM_00009]		
Parameter Name	BndMWriteStartFinishFnc		
Parent Container	BndMCallbackGeneral		
Description	Callback function for the WriteStartF	Finish cal	back.
Multiplicity	1		
Туре	EcucFunctionNameDef		
Default value	-		
Regular Expression	_		
Post-Build Variant Value	false		
Value Configuration Class	Pre-compile time	X	All Variants
	Link time	_	
	Post-build time		





Scope / Dependency	scope: local
No Included Containers	

10.3 Published Information

For details refer to the chapter 10.3 "Published Information" in SWS_BSWGeneral.



A Not applicable requirements

[SWS_BndM_00999] [These requirements are not applicable to this specification. | ()