Document Title	Specification of Diagnostic over IP
Document Owner	AUTOSAR
Document Responsibility	AUTOSAR
Document Identification No	418

Document Status	published
Part of AUTOSAR Standard	Classic Platform
Part of Standard Release	R22-11

Document Change History			
Date	**Release**	**Changed by**	**Description**
2022-11-24	R22-11	AUTOSAR Release Management	• No content changes
2021-11-25	R21-11	AUTOSAR Release Management	• Most APIs reporting development errors no longer return with E_NOT_OK • Removed obsolete elements • Editorial changes
2020-11-30	R20-11	AUTOSAR Release Management	• CONC 649 DoIP Extension fully incorporated • Added internal tester support • Harmonized IP interface concept with ISO 13400 • Duplicate service IDs fixed • Harmonized error classification

2019-11-28	R19-11	AUTOSAR Release Management	• Introduced CONC 649 DoIP Extension in draft state • Updated the functionality of routing activation for security use-cases • Increased multiplicity of DoIP target address so more than 255 DoIP addresses could be used • Minor corrections / clarifications / editorial changes; for details please refer to the ChangeDocumentation • Changed Document Status from Final to published
2018-10-31	4.4.0	AUTOSAR Release Management	• Updated the functionality to receive vehicle announcements • Support to add an increased number of DoIP target addresses • DoIP header file clean-up • Minor corrections / clarifications / editorial changes; for details please refer to the ChangeDocumentation
2017-12-08	4.3.1	AUTOSAR Release Management	• Support for DoIP UDP Connections with limited broadcast IP addresses • Support for Further Action Code values for vehicle identification and vehicle announcement • Alignment of routing activation confirmation with ISO 13400 • Editorial changes
2016-11-30	4.3.0	AUTOSAR Release Management	• Support for DoIP Activation line switch • Support for UDP multicast vehicle announcement • Introduction of reliable TxConfirmation • Harmonization of identical APIs functions within BSW
2015-07-31	4.2.2	AUTOSAR Release Management	• DET Renaming and Extension Incorporation • Support for parallel diagnostic sessions

2014-10-31	4.2.1	AUTOSAR Release Management	• Harmonization of identical APIs within BSW • Handling UUDT messages within DoIP • Harmonization of callback functions and configuration parameter names • Editorial changes
2014-03-31	4.1.3	AUTOSAR Release Management	• Harmonization of identical APIs • Multiplicity of some configuration parameters were updated • Editorial changes
2013-10-31	4.1.2	AUTOSAR Release Management	• Formalization of Service Interfaces • Revised return values of Service Interfaces • Editorial changes
2013-03-15	4.1.1	AUTOSAR Release Management	• Initial Release

Disclaimer

This work (specification and/or software implementation) and the material contained in it, as released by AUTOSAR, is for the purpose of information only. AUTOSAR and the companies that have contributed to it shall not be liable for any use of the work.

The material contained in this work is protected by copyright and other types of intellectual property rights. The commercial exploitation of the material contained in this work requires a license to such intellectual property rights.

This work may be utilized or reproduced without any modification, in any form or by any means, for informational purposes only. For any other purpose, no part of the work may be utilized or reproduced, in any form or by any means, without permission in writing from the publisher.

The work has been developed for automotive applications only. It has neither been developed, nor tested for non-automotive applications.

The word AUTOSAR and the AUTOSAR logo are registered trademarks.

Contents

1 Introduction and functional overview

The intent of this document is to specify the functionality, API and the configuration of the AUTOSAR Basic Software module Diagnostic over IP (DoIP).

For detailed introduction and information about DoIP please refer to ISO 13400 documents set.

AUTOSAR as SW standard can provide a standardized solution of the ISO DoIP specification in the already existing Ethernet architecture as depict in Figure 1.1.
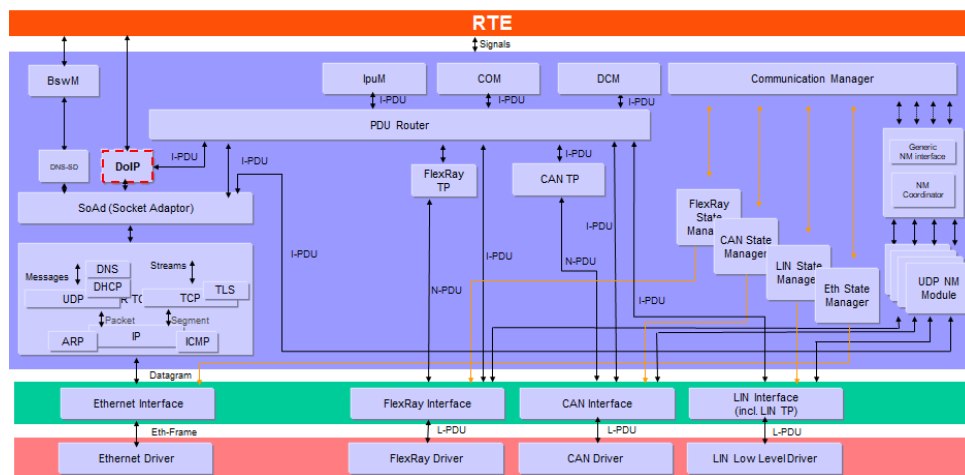
Figure 1.1: DoIP in the AUTOSAR ComStack Stack Architecture

2 Acronyms and abbreviations

Abbreviation / Acronym:	Description:
ARP	Address Resolution Protocol
DHCP	Diagnostic Host Configuration Protocol
EID	Entity identifier
GID	Group identifier
ICMP	Internet Control Message Protocol
IP	Internet Protocol
IPv4	Internet Protocol version 4
IPv6	Internet Protocol version 6
TCP	Transmission Control Protocol
TCP/IP	A family of communication protocols used in computer networks
VIN	Vehicle Identification Number
UDP	User Datagram Protocol

3 Related documentation

3.1 Input documents & related standards and norms

[1] General Specification of Basic Software Modules
AUTOSAR_SWS_BSWGeneral

[2] Specification of Socket Adaptor
AUTOSAR_SWS_SocketAdaptor

[3] Specification of TCP/IP Stack
AUTOSAR_SWS_TcpIp

[4] Specification of PDU Router
AUTOSAR_SWS_PDURouter

[5] Specification of Diagnostic Communication Manager
AUTOSAR_SWS_DiagnosticCommunicationManager

[6] Specification of Default Error Tracer
AUTOSAR_SWS_DefaultErrorTracer

[7] Road vehicles – Diagnostic communication over Internet Protocol (DoIP)
http://www.iso.org

[8] Specification of RTE Software
AUTOSAR_SWS_RTE

3.2 Related standards and norms

1. ISO 13400-2, Road vehicles - Diagnostic communication over Internet Protocol (DoIP) - Part 2: Transport protocol and network layer services

3.3 Related specification

AUTOSAR provides a General Specification on Basic Software modules [1] (SWS BSW General), which is also valid for the DoIP module.

Thus, the specification SWS BSW General [1] shall be considered as additional and required specification for the DoIP module.

4 Constraints and assumptions

4.1 Applicability to car domains

The DoIP basic software module may be used for all car domains.

5 Dependencies to other modules

This section describes the relations and dependencies between the DoIP module and other AUTOSAR Basic Software modules. It describes briefly the services and interfaces required from other modules and how they call the DoIP module and how they are called by the DoIP module.
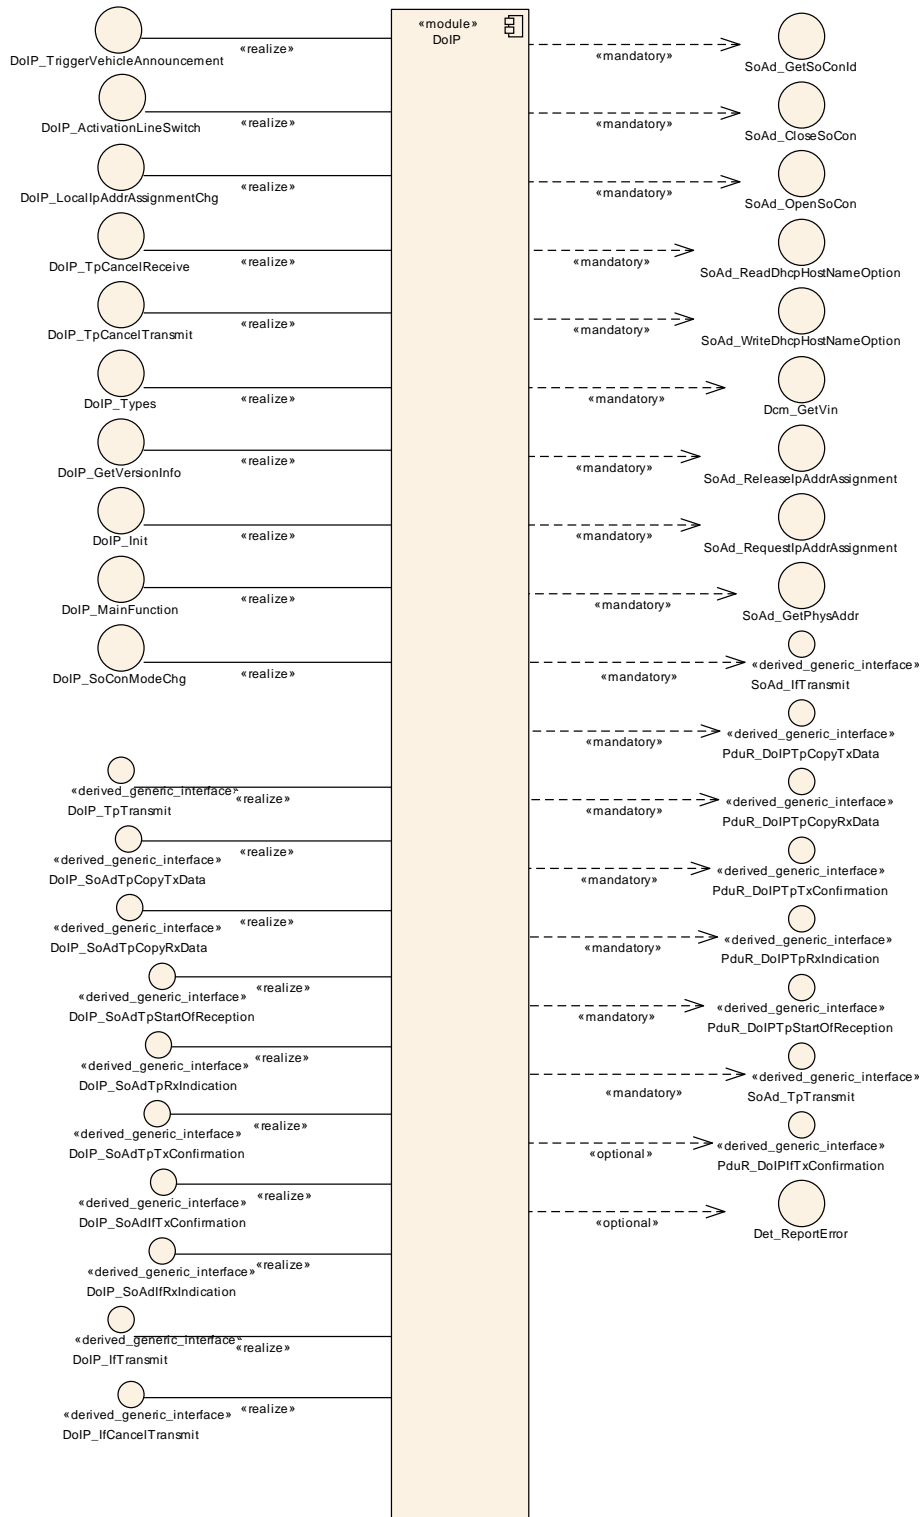
Figure 5.1: DoIPBSWInterfaces

5.1 Socket Adaptor (SoAd)

The Socket Adaptor [2] is the lower layer module of the DoIP module. It provides:

- Interfaces and callbacks for Socket connection establishment and notification

- Transmission of Data via multiple socket connection

- Reception of Data via multiple socket connection

- Notification on Socket status changes

- Notification on IP Address status changes

The Socket Adaptor is the interfacing module for the TCP/IP Stack [3] that supports IP, TCP, UDP,IPv4, IPv6 and address assignment mechanisms like AutoIP and DHCP.

5.2   Pdu Router (PduR)

The Pdu Router [4] is the module used by the DoIP module to connect to the rest of the communication stack. It provides:

- Forward diagnostic messages from the DoIP module to other modules (i.e. internal Dcm or other TP module)

- Forward diagnostic messages from Dcm or other TP modules to the DoIP module.

The PduR is the module to route the diagnostic message from the DoIP module to their according destination and back.

5.3   Diagnostic Communication Manager (Dcm)

The Diagnostic Communication Manager [5] is the module providing the VIN to the Do IP module. Additionally the Dcm will execute the ECU local diagnostic routed via Pdu R.

5.4   Default Error Tracer (Det)

If the configuration parameter DoIPDevelopmentErrorDetect is set to true and a DoIP API is called with incorrect parameters, the Default Error Tracer [6] is called with an error ID.

5.5   File structure

5.5.1   Code file structure

For details refer to chapter 5.1.6 "Code file structure" in SWS_BSWGeneral [1].

6 Requirements Tracing

Requirement	Description	Satisfied by
[SRS_BSW_00407]	Each BSW module shall provide a function to read out the version information of a dedicated module implementation	[SWS_DoIP_00027]
[SRS_BSW_00411]	All AUTOSAR Basic Software Modules shall apply a naming rule for enabling/disabling the existence of the API	[SWS_DoIP_00027]
[SRS_Eth_00024]	DoIP messages shall be bi-directionally routed	[SWS_DoIP_00022] [SWS_DoIP_00023] [SWS_DoIP_00024] [SWS_DoIP_00026] [SWS_DoIP_00031] [SWS_DoIP_00032] [SWS_DoIP_00033] [SWS_DoIP_00037] [SWS_DoIP_00038] [SWS_DoIP_00197] [SWS_DoIP_00198] [SWS_DoIP_00200] [SWS_DoIP_00207] [SWS_DoIP_00208] [SWS_DoIP_00209] [SWS_DoIP_00210] [SWS_DoIP_00212] [SWS_DoIP_00214] [SWS_DoIP_00216] [SWS_DoIP_00217] [SWS_DoIP_00218] [SWS_DoIP_00219] [SWS_DoIP_00220] [SWS_DoIP_00221]

Requirement	Description	Satisfied by
		[SWS_DoIP_00223] [SWS_DoIP_00224] [SWS_DoIP_00225] [SWS_DoIP_00226] [SWS_DoIP_00228] [SWS_DoIP_00229] [SWS_DoIP_00230] [SWS_DoIP_00231] [SWS_DoIP_00232] [SWS_DoIP_00233] [SWS_DoIP_00244] [SWS_DoIP_00245] [SWS_DoIP_00253] [SWS_DoIP_00254] [SWS_DoIP_00257] [SWS_DoIP_00259] [SWS_DoIP_00260] [SWS_DoIP_00277] [SWS_DoIP_00278] [SWS_DoIP_00279] [SWS_DoIP_00284] [SWS_DoIP_00311]
[SRS_Eth_00025]	Valid DoIP messages shall be recognized	[SWS_DoIP_00004] [SWS_DoIP_00005] [SWS_DoIP_00006] [SWS_DoIP_00007] [SWS_DoIP_00008] [SWS_DoIP_00009] [SWS_DoIP_00010] [SWS_DoIP_00012] [SWS_DoIP_00013] [SWS_DoIP_00014] [SWS_DoIP_00016] [SWS_DoIP_00017] [SWS_DoIP_00018] [SWS_DoIP_00019] [SWS_DoIP_00292] [SWS_DoIP_00293]

Requirement	Description	Satisfied by
[SRS_Eth_00026]	DoIP Vehicle Identification shall be provided	[SWS_DoIP_00015] [SWS_DoIP_00050] [SWS_DoIP_00051] [SWS_DoIP_00056] [SWS_DoIP_00057] [SWS_DoIP_00059] [SWS_DoIP_00060] [SWS_DoIP_00061] [SWS_DoIP_00062] [SWS_DoIP_00063] [SWS_DoIP_00064] [SWS_DoIP_00065] [SWS_DoIP_00066] [SWS_DoIP_00067] [SWS_DoIP_00068] [SWS_DoIP_00069] [SWS_DoIP_00070] [SWS_DoIP_00071] [SWS_DoIP_00072] [SWS_DoIP_00073] [SWS_DoIP_00074] [SWS_DoIP_00075] [SWS_DoIP_00076] [SWS_DoIP_00077] [SWS_DoIP_00078] [SWS_DoIP_00079] [SWS_DoIP_00080] [SWS_DoIP_00081] [SWS_DoIP_00082] [SWS_DoIP_00083] [SWS_DoIP_00084] [SWS_DoIP_00086] [SWS_DoIP_00087] [SWS_DoIP_00088] [SWS_DoIP_00089] [SWS_DoIP_00205] [SWS_DoIP_00263] [SWS_DoIP_00264] [SWS_DoIP_00287] [SWS_DoIP_00288] [SWS_DoIP_00289] [SWS_DoIP_00290] [SWS_DoIP_00291]

Requirement	Description	Satisfied by
[SRS_Eth_00027]	DoIP diagnostic message shall have a format	[SWS_DoIP_00121] [SWS_DoIP_00122] [SWS_DoIP_00123] [SWS_DoIP_00124] [SWS_DoIP_00125] [SWS_DoIP_00126] [SWS_DoIP_00127] [SWS_DoIP_00128] [SWS_DoIP_00129] [SWS_DoIP_00130] [SWS_DoIP_00131] [SWS_DoIP_00132] [SWS_DoIP_00133] [SWS_DoIP_00134] [SWS_DoIP_00135] [SWS_DoIP_00136] [SWS_DoIP_00137] [SWS_DoIP_00138] [SWS_DoIP_00173]
[SRS_Eth_00028]	Multiple DoIP sockets shall be allowed on a single port	[SWS_DoIP_00002] [SWS_DoIP_00039] [SWS_DoIP_00040] [SWS_DoIP_00058] [SWS_DoIP_00085] [SWS_DoIP_00115] [SWS_DoIP_00201] [SWS_DoIP_00202] [SWS_DoIP_00204] [SWS_DoIP_00234] [SWS_DoIP_00235] [SWS_DoIP_00241] [SWS_DoIP_00243] [SWS_DoIP_00296] [SWS_DoIP_00297] [SWS_DoIP_00298] [SWS_DoIP_00306] [SWS_DoIP_00358]
[SRS_Eth_00047]	DoIP shall be able to access the DHCP host name option.	[SWS_DoIP_00154] [SWS_DoIP_00155] [SWS_DoIP_00156]
[SRS_Eth_00080]	DoIP shall implement a mechanism to retrieve diagnostic power mode	[SWS_DoIP_00047] [SWS_DoIP_00054] [SWS_DoIP_00090] [SWS_DoIP_00091] [SWS_DoIP_00092] [SWS_DoIP_00093] [SWS_DoIP_00261]

Requirement	Description	Satisfied by
[SRS_Eth_00081]	DoIP shall be able to dynamically maintain connection to different testers	[SWS_DoIP_00001] [SWS_DoIP_00002] [SWS_DoIP_00039] [SWS_DoIP_00040] [SWS_DoIP_00058] [SWS_DoIP_00085] [SWS_DoIP_00115] [SWS_DoIP_00201] [SWS_DoIP_00202] [SWS_DoIP_00204] [SWS_DoIP_00234] [SWS_DoIP_00235] [SWS_DoIP_00241] [SWS_DoIP_00243] [SWS_DoIP_00296] [SWS_DoIP_00297] [SWS_DoIP_00298] [SWS_DoIP_00306] [SWS_DoIP_00358]
[SRS_Eth_00082]	DoIP shall implement a mechanism to retrieve Entity Status	[SWS_DoIP_00094] [SWS_DoIP_00095] [SWS_DoIP_00096] [SWS_DoIP_00097] [SWS_DoIP_00098] [SWS_DoIP_00099] [SWS_DoIP_00100]
[SRS_Eth_00083]	DoIP shall implement a mechanism to check if diagnostic testers are alive	[SWS_DoIP_00058] [SWS_DoIP_00105] [SWS_DoIP_00107] [SWS_DoIP_00115] [SWS_DoIP_00139] [SWS_DoIP_00140] [SWS_DoIP_00141] [SWS_DoIP_00142] [SWS_DoIP_00143] [SWS_DoIP_00144] [SWS_DoIP_00145] [SWS_DoIP_00146] [SWS_DoIP_00159] [SWS_DoIP_00358]

Requirement	Description	Satisfied by
[SRS_Eth_00084]	DoIP shall implement routing activation mechanism	[SWS_DoIP_00048] [SWS_DoIP_00049] [SWS_DoIP_00055] [SWS_DoIP_00101] [SWS_DoIP_00102] [SWS_DoIP_00103] [SWS_DoIP_00104] [SWS_DoIP_00105] [SWS_DoIP_00106] [SWS_DoIP_00107] [SWS_DoIP_00108] [SWS_DoIP_00109] [SWS_DoIP_00110] [SWS_DoIP_00111] [SWS_DoIP_00112] [SWS_DoIP_00113] [SWS_DoIP_00114] [SWS_DoIP_00116] [SWS_DoIP_00117] [SWS_DoIP_00118] [SWS_DoIP_00119] [SWS_DoIP_00120] [SWS_DoIP_00160] [SWS_DoIP_00161] [SWS_DoIP_00262] [SWS_DoIP_00274] [SWS_DoIP_00294] [SWS_DoIP_00295]

7 Functional specification

This specification provides the AUTOSAR representation of ISO 13400-2 as specified in the following chapters.

7.1 DoIP usage scenarios

This chapter gives only a brief overview of some use cases. For detailed information about DoIP usage scenarios please refer to ISO 13400-1.

The use cases for usage of DoIP differ from the single connection of external test equipment (see Figure 7.1) to a brought interconnectivity of the car or single ECUs with the environment (see Figure 7.2).
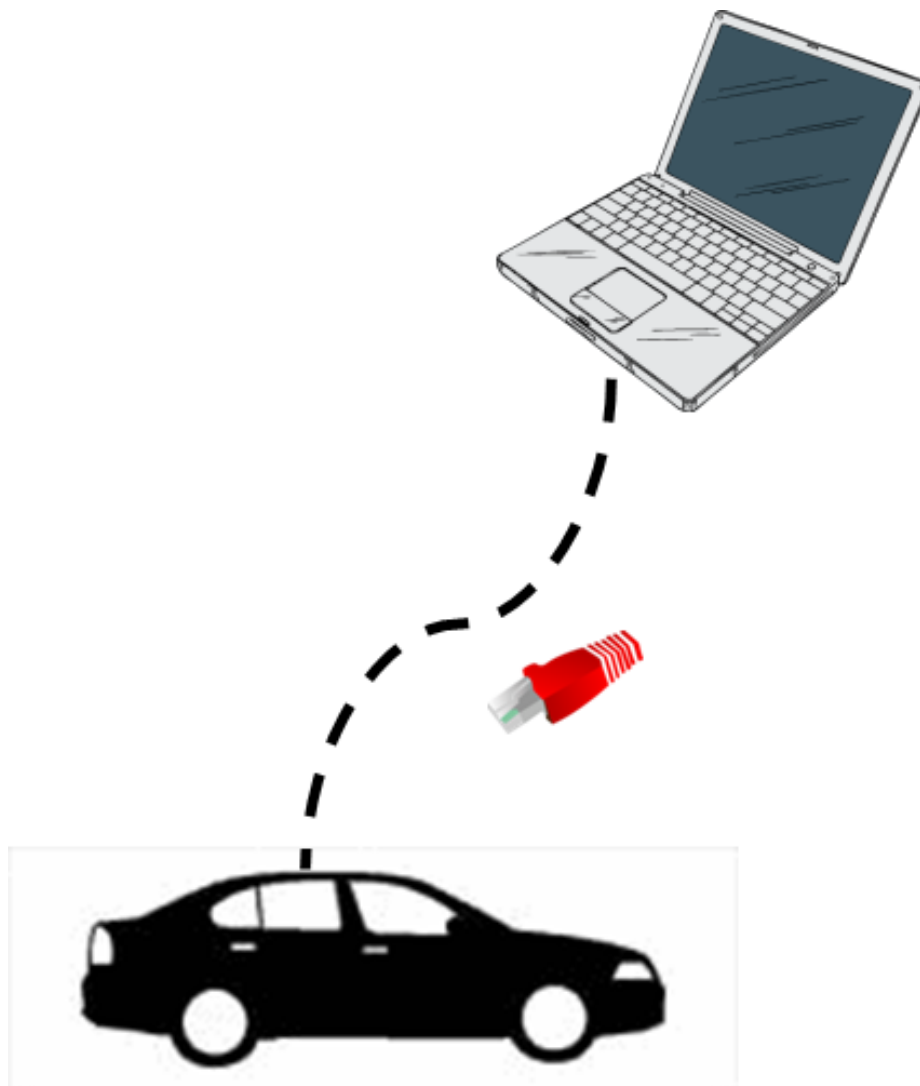
Figure 7.1: Connection of an external test equipment directly to the car (see ISO 13400-1 [7])

The DoIP is using for this interaction a protocol that executes several services within the single DoIP entities to fulfil the service related requirements of the DoIP ISO 13400 [7]:

Some of the DoIP services are exemplarily:

- Vehicle identification and announcement: Is necessary to detect who is participating in the DoIP communication

- Routing Activation: Allows that single Diagnostic Message pathes are activated or not to treat different protocols different (like UDS and OBD) and to also treat single testers different

- Node information: Provides general information of the single DoIP entity. Usually used by the testers to get the current DoIP protocol relevant information from the single DoIPEntities

- Alive mechanism: Is used to maintain different tester connections
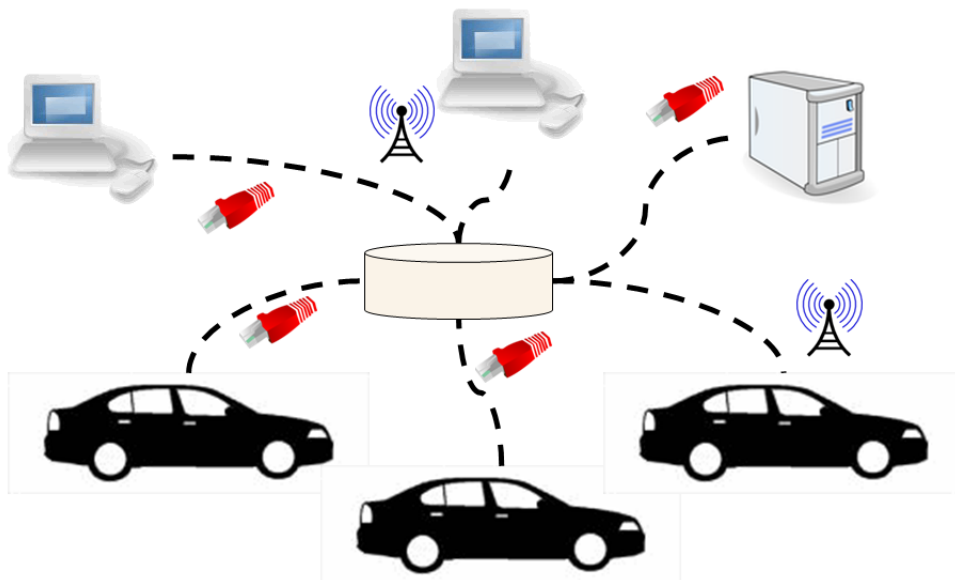
Figure 7.2: Highly interconnected system of several Cars via the DoIP protocol (see ISO 13400-1 [7])

7.1.1 DoIP Internal Tester Functionality Extension (DRAFT)

Note: Related to CONC_649 DoIP Extension. Everything that is implemented in this section is in DRAFT state.

This usecase covers the possibility of in vehicle DoIP communication. The tester(s) can also reside within the vehicle network.

The requirement to be able to communicate with EXTERNAL and INTERNAL test equipment via DoIP can be generalized as:

An ECU/DoIP node might be "multi-homed". I.e. it can have multiple logical IP interfaces (maybe sharing the same physical Ethernet interface/MAC address).

In this case, the ECU shall be able to "communicate" on each of its IP interfaces via DoIP independently. I.e. DoIP functionalities on each IP interface have to be isolated from each other. That f.i. means that:

- An "Activation-Line-Low" trigger is something restricted to a certain IP interface. So not ALL DoIP connections on ALL interfaces are closed down then, but just the one aggregated to the IP interface for which an "Activation-Line-Low" happened. (so each interface has its own logical activation line)

- During the routing activation, checks for a SA that has already been registered/activated shall also be restricted to that interface! So, it would be possible, that a tester with SA X can have a valid routing activation on two different interfaces (but not on two different connections of the same interface)

DoIP communication on the vehicle internal IP interface typically differs from the one on the external interface:

- Internal IP interface is typically always active/enabled through the lifecycle of the ECU

- Internal IP interface has typically a static IP address assigned.

- Internal IP interface therefore typically has no assigned "Activation-Line" semantics. I.e. on an abstract level for internal IP interface, the "Activation-Line" is always "high".

To break this down to the more general notion of "multi-homed" ECUs/DoIP nodes, this means:

There shall be the possibility for a DoIP module (CP or AP) to

- Configure on which interfaces it shall "work"

- Per interface configure

o Whether Activation Line functionality plays a role/is needed

o Whether dynamic IP assignment shall take place

o Whether Vehicle announcement shall be done or not (and when it shall be done)

7.2   Connection establishment

This chapter describes the maintenance of the socket connections of the DoIp module

[SWS_DoIP_00201] ⌈The DoIP module shall determine the DoIP Activation Line status by the calls to DoIP_ActivationLineSwitch (uint8 InterfaceId, boolean *Active) based on the value of the boolean parameter Active per DoIPInterface with a given InterfaceId. The Activation Line status is considered "active", if the boolean value in the call is set

to TRUE. The Activation Line status is considered "inactive", if the boolean value in the call is set to FALSE.⌋*(SRS_Eth_00081, SRS_Eth_00028)*

[SWS_DoIP_00202] ⌈If data is received from SoAd or PduR (i.e. communication related interfaces are called) via PduIds related to a certain DoIPInterface configured with DoIPInterfaceActLineCtrl = TRUE, where the status of the Activation Line of this DoIPInterface is currently inactive, the DoIP module shall ignore all these requests and return a negative return value as return value.⌋*(SRS_Eth_00081, SRS_Eth_00028)*

Note: The return value depends on the API that is called. If it is Std_ReturnType it shall return E_NOT_OK, if it is BufReq_ReturnType it shall return BUFREQ_NOT_OK.

[SWS_DoIP_00204] ⌈For activation line controlled DoIP Interfaces with DoIPInterface ActLineCtrl = TRUE, DoIP shall establish the corresponding connections for these interfaces according to [SWS_DoIP_00306] if corresponding Activation Line Status switches to "active". (SRS_Eth_00081, SRS_Eth_00028, SRS_Eth_00026).⌋*(SRS_- Eth_00081, SRS_Eth_00028)*

[SWS_DoIP_00296] ⌈For non activation line controlled DoIP Interfaces with DoIPInterfaceActLineCtrl = FALSE, DoIP shall establish the corresponding connections for these interfaces according to [SWS_DoIP_00306] in context of first call to DoIP_Main Function(). (SRS_Eth_00081, SRS_Eth_00028, SRS_Eth_00026).⌋*(SRS_Eth_00081, SRS_Eth_00028)*

[SWS_DoIP_00234] ⌈If the Activation Line status of a DoIPInterface switches to "inactive", the DoIP module shall shall loop over all DoIPTcpConnection, DoIPUdpConnection, and DoIPUdpVehicleAnnouncementConnections. For each of these DoIPConnections the DoIP module shall retrieve the corresponding SoConId via call to the So Ad_GetSoConId and close all the connection by a call to SoAd_CloseSoCon with the retrieved SoConId.⌋*(SRS_Eth_00081, SRS_Eth_00028)*

[SWS_DoIP_00235] ⌈In addition to [SWS_DoIP_00234], the DoIP module shall release the corresponding IP Address assignment via the call to SoAd_ReleaseIpAddr Assignment for those connections, which belong to the DoIPInterface for which the Activation Line status switched to "inactive", that have DoIPRequestAddressAssignment set to true.⌋*(SRS_Eth_00081, SRS_Eth_00028)*

[SWS_DoIP_00306] ⌈To open the socket connections (triggered by SWS_DoIP_00204 or SWS_DoIP_00296) of an DoIP interface the DoIP module shall loop over all its associated DoIPTcpConnection, DoIPUdpConnection and DoIPUdpVehicleAnnouncementConnections. For each DoIP connections belonging to respective DoIP Interfaces which has a DoIPRequestAddressAssignment set to true the DoIP module shall retrieve the corresponding SoConId via call to the SoAd_GetSoConId() and trigger the IP Address assignment via subsequent calls to SoAd_RequestIpAddrAssignment() with the retrieved SoConId, LocalIpAddrPtr and DefaultRouterPtr set to NULL_PTR, Netmask set to 0, and Type set to TCPIP_IPADDR_ASSIGNMENT_ALL. For each of these DoIP connections (irrespective of the value of DoIPRequestAddressAssignment) the DoIP module shall open the respective connection by an according call to SoAd_Open

SoCon(). (SRS_Eth_00081, SRS_Eth_00028, SRS_Eth_00026).⌋*(SRS_Eth_00081, SRS_Eth_00028)*

[SWS_DoIP_00001] ⌈The DoIP module shall maintain the following information of the configured DoIPUdpConnection (for UDP communication):

(a) State of the SocketConnection⌋*(SRS_Eth_00081)*

[SWS_DoIP_00002] ⌈The DoIP module shall be able to maintain DoIPMaxTesterConnections configured connections with the following information:

(a) DoIPSoAdTcpRxPduId, describes the connection to the SocketConnection

(b) Source Address (SA) as soon as the information is available for the DoIP module

(c) All Routing activation status of this socket connection

(d) Status of the SocketConnection

(f) Time since last TCP communication (Rx or Tx)

(g) Information if the connection is active or not⌋*(SRS_Eth_00081, SRS_Eth_00028)*

[SWS_DoIP_00241] ⌈If the DoIP module is called with DoIP_SoConModeChg and the Mode set to SOAD_SOCON_ONLINE the state of the socket connection shall be considered as online and the DoIP module shall behave as described in [SWS_DoIP_00143].⌋*(SRS_Eth_00081, SRS_Eth_00028)*

[SWS_DoIP_00243] ⌈If the DoIP module is called with DoIP_SoConModeChg and the Mode set to something else than SOAD_SOCON_ONLINE the state of the socket connection shall be considered as offline and the DoIP module shall behave as described in [SWS_DoIP_00115].⌋*(SRS_Eth_00081, SRS_Eth_00028)*

[SWS_DoIP_00205] ⌈If the function DoIP_SoConModeChg is called with Mode set to SOAD_SOCON_ONLINE for a UDP vehicle announcement connection, the DoIP module shall send the vehicle announcement message via the corresponding Tx PDU configured in the DoIPUdpVehicleAnnouncementConnection and belonging to the reported socket connection.⌋*(SRS_Eth_00026)*

[SWS_DoIP_00058] ⌈If a connection needs to be closed based on DoIP specific behavior, the DoIP module shall call the function SoAd_CloseSoCon with the parameter abort set to FALSE and the SoConId determined by a call to the function SoAd_GetSoConId for the corresponding DoIPSoAdTcpTxPdu. Additionally, the inactivity timer shall be stopped.⌋*(SRS_Eth_00081, SRS_Eth_00028, SRS_Eth_00083)*

[SWS_DoIP_00358] ⌈If a connection needs to be reset based on DoIP specific behavior, the DoIP module shall call the function SoAd_CloseSoCon with the parameter abort set to TRUE and the SoConId determined by a call to the function SoAd_GetSoConId for the corresponding DoIPSoAdTcpTxPdu. Additionally, the inactivity timer shall be stopped.⌋*(SRS_Eth_00081, SRS_Eth_00028, SRS_Eth_00083)*

[SWS_DoIP_00076] ⌈If the parameter DoIPVinGIDMaster is set to true and the Container DoIPTriggerGIDSynchronization is configured, the DoIP module shall call the

<User>_DoIPTriggerGIDSynchronization function (after successful IP Address assignment, see [SWS_DoIP_00306]) and repeat this call within the DoIP_MainFunction until its return value equals to E_OK or until the complete connection is closed for any other reason.⌋*(SRS_Eth_00026)*

[SWS_DoIP_00085] ⌈If a change in the IP address assignment indicated by DoIP_LocalIpAddrAssignmentChg with another TCP_IpAddrStateType then TCPIP_IPADDR_STATE_ASSIGNED, the function to start GID synchronisation as described in [SWS_DoIP_00076] shall not be called any longer independent from the before return value.⌋*(SRS_Eth_00028, SRS_Eth_00081)*

[SWS_DoIP_00115] ⌈If a TCP socket connection gets closed (after the DoIP_SoConModeChg was called with different mode value than SOAD_SOCON_ONLINE or any other reason described by [SWS_DoIP_00058] or [SWS_DoIP_00358]) the DoIP module shall

- unregister and release the socket connection to the related Tester,

- discard the ongoing diagnostic message processing and

- reset the inactivity timer of the given socket connection.⌋*(SRS_Eth_00028, SRS_Eth_00081, SRS_Eth_00083)*

Note: This includes cleaning up all the buffers/internal variables and scheduled asynchronous or pending function calls as well as reducing the amount of tester connected by 1.

[SWS_DoIP_00142] ⌈The DoIP module shall maintain an inactivity timer for each registered TCP connection.⌋*(SRS_Eth_00083)*

[SWS_DoIP_00143] ⌈After a successful TCP socket connection (i.e. DoIP_SoConModeChg) the DoIP module shall start the inactivity timer.⌋*(SRS_Eth_00083)*

[SWS_DoIP_00144] ⌈If no Routing Activation request was received on a new opened socket within the configured DoIPInitialInactivityTime, the DoIP module shall reset the socket connection as described in [SWS_DoIP_00358].⌋*(SRS_Eth_00083)*

[SWS_DoIP_00159] ⌈If a Routing Activation request was received on a new opened socket before the inactivity timer elapsed (i.e. the configured DoIPInitialInactivityTime did not pass) the DoIP module shall reset the inactivity timer to 0.⌋*(SRS_Eth_00083)*

[SWS_DoIP_00145] ⌈After a routing activation has been performed (see [SWS_DoIP_00159]), the DoIP module shall reset the inactivity timer to 0 always when data communication is performed on the socket (send or receive).⌋*(SRS_Eth_00083)*

[SWS_DoIP_00146] ⌈If the inactivity timer reaches the time configured in DoIPGeneralInactivityTime, the corresponding socket connection shall be reset as described in [SWS_DoIP_00358].⌋*(SRS_Eth_00083)*

[SWS_DoIP_00154] ⌈If the API DoIP_LocalIpAddrAssignmentChg is called with the State set to TCPIP_IPADDR_STATE_ASSIGNED, the DoIP module shall call the func-

tion SoAd_ReadDhcpHostNameOption with the received SoConId to get the currently set host name option. The returned Byte buffer shall be considered as ASCII buffer and shall start with "DoIP-". ⌋ *(SRS_Eth_00047)*

[SWS_DoIP_00155] ⌈If the ASCII buffer returned in [SWS_DoIP_00154] does not start with "DoIP-" and the configuration parameter DoIPDhcpOptionVinUse is set to FALSE the DoIP module shall call the SoAd_WriteDhcpHostNameOption with a pointer to the string "DoIP-" in order to set the hostname. ⌋ *(SRS_Eth_00047)*

[SWS_DoIP_00156] ⌈If the ASCII buffer returned in [SWS_DoIP_00154] does not start with "DoIP-" and the configuration parameter DoIPDhcpOptionVinUse is set to TRUE the DoIP module shall call the SoAd_WriteDhcpHostNameOption with a pointer to to the ASCII buffer "DoIP-VIN<vinnumberinascii>" with <vinnumberinascii> representing the ASCII representation of the VIN that is retrieved via Dcm_GetVin. If no valid VIN could be retrieved the DoIP shall use the configured DoIPVinInvalidityPattern in ASCII representation. ⌋ *(SRS_Eth_00047)*

[SWS_DoIP_00294] ⌈When receiving a routing activation request on a TCP connection where DoIPTcpConnection/DoIPTcpConnectionSecurityRequired is not set or set to FALSE, the DoIP module shall search for a DoIPTester with an assigned container that matches DoIPTesterSA. If such a DoIPTester container was found and the matching DoIPRoutingActivation container (refer to [SWS_DoIP_00108]) has the attribute DoIPRoutingActivationSecurityRequired not set or set to FALSE, the connection will be established.

If such a DoIPTester container was found and the matching DoIPRoutingActivation container (refer to [SWS_DoIP_00108]) has the attribute DoIPRoutingActivationSecurityRequired is set to TRUE, the connection shall be rejected with the response code "0x07". ⌋ *(SRS_Eth_00084)*

[SWS_DoIP_00295] ⌈When receiving a routing activation request on a TCP connection where DoIPTcpConnection/DoIPTcpConnectionSecurityRequired set to TRUE, the DoIP module shall search for a DoIPTester with an assigned container that matches DoIPTesterSA.

If such a DoIPTester container was found, the connection will be established. ⌋ *(SRS_Eth_00084)*

Rationale: A secure TCP connection can be established with a DoIPTester that requests a secure or unsecured connection.

7.3 DoIP Message layout according ISO 13400-2

A DoIP message can be identified by its generic DoIP header structure, which is described in the chapter 7.3.1.

7.3.1 Generic DoIP header

All Pdus received or sent via the SoAd shall support the the DoIP header structure as defined in the ISO 13400-2 [7] table 11. The DoIP header is described in this chapter.

[SWS_DoIP_00004] ⌈The first 8 Bytes of a DoIP message shall contain the DoIP Header followed by the actual payload data.

⌋*(SRS_Eth_00025)*

Item	Position (Byte)	Length (Byte)
Generic DoIP header synchronization pattern		
Protocol version	0	1
Inverse protocol version	1	1
Generic DoIP payload type and payload length		
Payload type	2	2
Payload length	4	4
Payload type specific message content	8	...

Table 7.1: DoIP message Generic header Layout

[SWS_DoIP_00005] ⌈Byte 0 of the DoIP header has to contain the protocol version e.g. 0x02.⌋*(SRS_Eth_00025)*

[SWS_DoIP_00006] ⌈The Byte 1 of the DoIP header shall contain the inverse protocol version e.g. 0xFD value shall be added if the protocol version is 0x02.⌋*(SRS_Eth_-00025)*

[SWS_DoIP_00007] ⌈Byte 2 and Byte 3 shall contain the PayloadType.⌋*(SRS_Eth_-00025)*

[SWS_DoIP_00008] ⌈The following PayloadTypes shall be supported for reception of DoIP messages:

⌋*(SRS_Eth_00025)*

Payload Type value	Payload type name	Chapter in DoIP SWS	Connection Kind
0x0000	Generic DoIP header negative acknowledge	7.3.2.1	UDP/TCP
0x0001	Vehicle Identification request message	7.3.2.2.1	UDP
0x0002	Vehicle identification request message with EID	7.3.2.2.2	UDP
0x0003	Vehicle identification request message with VIN	7.3.2.2.3	UDP
0x0004	Vehicle announcement message/vehicle identification response message	7.3.2.2.1	UDP
0x0005	Routing activation request	7.3.2.3.1	TCP

▽

△

0x0008	Alive Check response	7.3.2.4.2	TCP
0x4001	DoIP entity status request	7.3.2.5.3	UDP
0x4003	Diagnostic power mode information request	7.3.2.5.1	UDP
0x8001	Diagnostic message	7.3.2.6.1	TCP

Table 7.2: DoIP payload types received by a DoIP entity, chapter reference and the connection type they are received on

[SWS_DoIP_00009] ⌈The following PayloadTypes shall be supported for sending of DoIP messages:

⌋*(SRS_Eth_00025)*

Payload Type value	Payload type name	Chapter in DoIP SWS	Connection Kind
0x0000	Generic DoIP header negative acknowledge	7.3.2.1	UDP/TCP
0x0004	Vehicle announcement message/vehicle identification response	7.3.2.2.4	UDP
0x0006	Routing activation response	7.3.2.3.2	TCP
0x0007	Alive Check request	7.3.2.4.1	TCP
0x4002	DoIP entity status response	7.3.2.5.4	UDP
0x4004	Diagnostic power mode information response	7.3.2.5.2	UDP
0x8002	Diagnostic message positive acknowledgement	7.3.2.6.2	TCP
0x8003	Diagnostic message negative acknowledgement	7.3.2.6.3	TCP

Table 7.3: DoIP payload types transmitted by a DoIP entity, chapter reference and the connection type they are transmitted on

[SWS_DoIP_00010] ⌈Bytes 4 to 7 shall contain the payload length in Bytes not including the length of the DoIP header information (i.e. if a DoIP message is received with Payload length set to 2 it means that 10 Bytes in total were received).⌋*(SRS_Eth_-00025)*

7.3.2 Payload types

This chapter describes the different Payload types in detail.

7.3.2.1 Generic acknowledge

This chapter contains the check of the DoIP header with the according negative acknowledge messages with payload type 0x0000 for an invalid DoIP header.

[SWS_DoIP_00012] ⌈If an invalid DoIP header was received, a DoIP message with payload type 0x0000 shall be transmitted with the payload described in [SWS_DoIP_00013] on the TxPdu which is related to the RxPdu the message was received on, if the according SocketConnection status has not changed since the reception of the DoIP message⌋*(SRS_Eth_00025)*

[SWS_DoIP_00013] ⌈The payload of the generic DoIP header shall contain the corresponding NACK code (1 Byte) as specified from [SWS_DoIP_00014] to [SWS_DoIP_00019].⌋*(SRS_Eth_00025)*

[SWS_DoIP_00014] ⌈If the Protocol information is incorrect, (see [SWS_DoIP_00005], [SWS_DoIP_00006] and [SWS_DoIP_00015] for valid information) the NACK code 0x00 shall be sent and the according socket shall be closed (see [SWS_DoIP_00058]).⌋*(SRS_Eth_00025)*

[SWS_DoIP_00016] ⌈If a payload type is not supported (see [SWS_DoIP_00008] for valid payload types) the DoIP module shall send the NACK code 0x01 to indicate that a unkown payload type was requested. The message shall be discarded for further processing.⌋*(SRS_Eth_00025)*

[SWS_DoIP_00017] ⌈If the payload length exceeds the value configured by DoIPMax RequestBytes, the DoIP module shall send the NACK code 0x02 to indicate that the message is too large. The message shall be discarded for further processing.⌋*(SRS_-Eth_00025)*

[SWS_DoIP_00018] ⌈If the DoIP module is called with DoIP_SoAdTpStartOfReception() and the indicated payload length exceeds the currently available buffer size, the function must return with BUFREQ_E_OVFL value (No buffer of the required length can be provided) and trigger a Negative Response (NACK) with value 0x03.

The currently available buffer size calculation shall be based on Payload Type. If the DoIP message is processed internally (see [SWS_DoIP_00008]) the locally avalailable buffer, other case the upper layer (PduR_DoIPTpStartOfReception) provided buffer size shall be the base for the response.⌋*(SRS_Eth_00025)*

[SWS_DoIP_00019] ⌈If the DoIP module is called with a payload length that is not valid for the specifc payload type, the NACK code 0x04 shall be sent and the according socket shall be closed (see [SWS_DoIP_00058]).⌋*(SRS_Eth_00025)*

Note: The single valid payload length ranges for the single payload types are described in the single subchapters of the payloads (see [SWS_DoIP_00008] for the list of all receive payload types and the according chapter references).

[SWS_DoIP_00292] ⌈If a DoIP message with payload Type 0x0000 is received on a configured DoIPUdpConnection or DoIPTcpConnection, the message shall be discarded.⌋*(SRS_Eth_00025)*

7.3.2.2 Vehicle Identification

[SWS_DoIP_00015] ⌈On a vehicle identification request the Protocol Type 0xFF and the inverse Protocol Type 0x00 shall be supported as default values, additionally to the ProtocolType described in [SWS_DoIP_00005] and [SWS_DoIP_00006].⌋*(SRS_Eth_00026)*

7.3.2.2.1 Vehicle Identification request (payload type 0x0001)

[SWS_DoIP_00061] ⌈When the module receives a DoIP message with payload type 0x0001 on a connection different than a configured DoIPUdpConnection, the module shall discard the DoIP message.⌋*(SRS_Eth_00026)*

Note: This also means that it is not allowed to receive this payload type on a TCP connection.

[SWS_DoIP_00059] ⌈The expected payload length (see [SWS_DoIP_00019]) for vehicle identification request message with payload type 0x0001 shall be exactly 0.⌋*(SRS_Eth_00026)*

[SWS_DoIP_00060] ⌈If a DoIP message with payload Type 0x0001 is received on the configured DoIPUdpConnection, the DoIP module shall respond with a vehicle identification response/vehicle announcement message after the configured DoIPInitialVehicleAnnouncementTime with payload type 0x0004.⌋*(SRS_Eth_00026)*

7.3.2.2.2 Vehicle Identification request with EID (payload type 0x0002)

The payload data structure of a vehicle identification request message with EID shall be supported as described in Table 7.4:

Item	Position (Byte)	Length (Byte)
Payload type vehicle identification request message with EID		
EID	0	6

Table 7.4: Vehicle identification request with EID payload data

[SWS_DoIP_00062] ⌈When the module receives a DoIP message with payload Type 0x0002 on a connection different than a configured DoIPUdpConnection, the module shall discard the DoIP message.⌋*(SRS_Eth_00026)*

Note: This also means that it is not allowed to receive this payload type on a TCP connection.

[SWS_DoIP_00063] ⌈The expected payload length (see [SWS_DoIP_00019]) for vehicle identification request message with payload type 0x0002 shall be exactly 6.⌋*(SRS_Eth_00026)*

[SWS_DoIP_00064] ⌈If a DoIP message with payload Type 0x0002 is received on the configured DoIPUdpConnection, the DoIP module shall further process the message.⌋ *(SRS_Eth_00026)*

[SWS_DoIP_00065] ⌈If the Parameter DoIPUseMacAdressForIdentification is set to true the received "EID" 6 payload data bytes shall be compared to the MacAddress received via SoAd_GetPhysAddr . If they match the DoIP module shall respond with a vehicle identification response/vehicle announcement message with payload type 0x0004.⌋ *(SRS_Eth_00026)*

[SWS_DoIP_00066] ⌈If the Parameter DoIPUseMacAdressForIdentification is set to false the received "EID" 6 payload data bytes shall be compared to the configured Do IPEID. If they match the DoIP module shall respond with a vehicle identification response/vehicle announcement message with payload type 0x0004.⌋ *(SRS_Eth_00026)*

7.3.2.2.3 Vehicle Identification request with VIN (payload type 0x003)

The payload data structure of a vehicle identification request message with VIN shall be supported as described in Table 7.5:

Item	Position (Byte)	Length (Byte)
Payload type vehicle identification request message with VIN		
VIN	0	17

Table 7.5: Vehicle identification request with VIN payload data

[SWS_DoIP_00067] ⌈When the module receives a DoIP message with payload Type 0x0003 on a connection different than a configured DoIPUdpConnection, the module shall discard the DoIP message.⌋ *(SRS_Eth_00026)*

Note: This also means that it is not allowed to receive this payload type on a TCP connection.

[SWS_DoIP_00068] ⌈The expected payload length (see [SWS_DoIP_00019]) for vehicle identification request message with payload type 0x0003, shall be exactly 17.⌋ *(SRS_Eth_00026)*

[SWS_DoIP_00069] ⌈If a DoIP message with payload Type 0x0003 is received on the configured DoIPUdpConnection the DoIP module shall further process the message.⌋ *(SRS_Eth_00026)*

[SWS_DoIP_00070] ⌈The DoIP 17 payload data bytes shall be compared to the data retrieved by the function Dcm_GetVin. If the function returns E_OK, the VIN pointer is considered to contain valid information. If the function returns E_NOT_OK or the returned VIN do not match the requested VIN, the DoIP message with payload Type 0x0003 shall be ignored. If the requested VIN matches the derived VIN, the DoIP module shall respond with a vehicle identification response/vehicle announcement message with payload type 0x0004.⌋ *(SRS_Eth_00026)*

7.3.2.2.4 Vehicle Identification response/vehicle announcement (payload type 0x0004)

[SWS_DoIP_00297] ⌈For a DoIP Interface with DoIPInterfaceAnnouncementStart = DOIP_AUTOMATIC_ANNOUNCE, the DoIP module shall start Vehicle announcement according to [SWS_DoIP_00205].⌋*(SRS_Eth_00081, SRS_Eth_00028)*

[SWS_DoIP_00298] ⌈For a DoIP Interface with DoIPInterfaceAnnouncementStart = DOIP_ONTRIGGER_ANNOUNCE, the sending of vehicle announcement only starts if DoIP_TriggerVehicleAnnouncement () has been called for that Interface.⌋*(SRS_Eth_-00081, SRS_Eth_00028)*

[SWS_DoIP_00299] ⌈If DoIP_TriggerVehicleAnnouncement() is called, but the corresponding socket is not yet ONLINE then the request shall be remembered and vehicle announcement shall be sent as soon as the socket goes ONLINE.⌋*()*

[SWS_DoIP_00071] ⌈If the DoIP module needs to send a vehicle announcement message (see [SWS_DoIP_00205] and [SWS_DoIP_00298]), it shall send the vehicle announcement message via the configured DoIPUdpVehicleAnnouncementConnection after DoIPInitialVehicleAnnouncementTime. This message shall be sent DoIPVehicleAnnouncementCount times with a delay of DoIPVehicleAnnouncementInterval between each message. The last "VIN/GID Status" byte of the Vehicle identification response message is optional as defined in the ISO 13400-2 standard. It shall exist only if the "DoIPUseVehicleIdentificationSyncStatus" configuration parameter is set to True. (See [SWS_DoIP_00086]).⌋*(SRS_Eth_00026)*

The payload data structure of a vehicle identification response/vehicle announcement message shall be supported as described in Table 7.6.

Item	Position (Byte)	Length (Byte)
Vehicle identification number		
VIN	0	17
DoIP entity logical address information		
Logical Address	17	2
Entity identification		
EID	19	6
Group identification		
GID	25	6
Further action byte	31	1
VIN/GID Status	32	1

Table 7.6: Vehicle identification response/vehicle announcement message payload data

[SWS_DoIP_00072] ⌈The "VIN" of a vehicle identification response/vehicle announcement message shall be derived by calling Dcm_GetVin. If Dcm_GetVin returns E_OK, the 17 Bytes in the pointer shall be used, if the callback returns E_NOT_OK the 17 Bytes shall be filled with the configured DoIPVinInvalidityPattern with "Further Action Required" field set to 0x00 and VIN/GID sync. Status field set to 0x10 if (DoIPUse VehicleIdentificationSyncStatus) is set to true.⌋*(SRS_Eth_00026)*

[SWS_DoIP_00073] ⌈The "LA" of a vehicle identification response/vehicle announcement message shall contain the configured DoIPLogicalAddress.⌋*(SRS_Eth_00026)*

[SWS_DoIP_00074] ⌈The "EID" of a vehicle identification response/vehicle announcement message shall contain the MAC address derived by Soad_GetPhysAddr if the configuration parameter DoIPUseMacAdressForIdentification is set to true.⌋*(SRS_-Eth_00026)*

[SWS_DoIP_00075] ⌈The "EID" of a vehicle identification response/vehicle announcement message shall contain the configured DoIPEID if the configuration parameter DoIPUseMacAdressForIdentification is set to false.⌋*(SRS_Eth_00026)*

[SWS_DoIP_00077] ⌈The "GID" of a vehicle identification response/vehicle announcement message shall contain the same value as for the EID, if both configuration parameter and DoIPUseEIDasGID are set to true (see [SWS_DoIP_00074] and [SWS_DoIP_00075]).⌋*(SRS_Eth_00026)*

[SWS_DoIP_00078] ⌈The "GID" of a vehicle identification response/vehicle announcement message shall contain the configured DoIPGID value, if the configuration parameter DoIPVinGIDMaster is set to true, the configuration parameter DoIPUseEIDasGID is set to false and the parameter DoIPGID is configured.⌋*(SRS_Eth_00026)*

[SWS_DoIP_00079] ⌈The "GID" of a vehicle identification response/vehicle announcement message shall contain the value retrieved by the configured DoIPGetGidCallback function(for the signature see <User>_DoIPGetGidcallback, [SWS_DoIP_00051]), if the configuration parameter DoIPVinGIDMaster is set to true, the configuration parameter DoIPUseEIDasGID is set to false and the parameter DoIPGID is not configured. If the function does not return E_OK the GID shall consist of 6 Bytes according to the configured DoIPGIDInvalidityPattern.⌋*(SRS_Eth_00026)*

[SWS_DoIP_00080] ⌈The "GID" of a vehicle identification response/vehicle announcement message shall contain the configured DoIPGID value, if the configuration parameter DoIPVinGIDMaster is set to false and the parameter DoIPGID is configured.⌋*(SRS_Eth_00026)*

[SWS_DoIP_00081] ⌈The "GID" of a vehicle identification response/vehicle announcement message shall contain the value retrieved by the configured DoIPGetGID function, if the configuration parameter DoIPVinGIDMaster is set to false and the parameter DoIPGID is not configured. If the function does not return E_OK, the GID shall consist of 6 Bytes according to the configured DoIPGIDInvalidityPattern.⌋*(SRS_Eth_00026)*

[SWS_DoIP_00082] ⌈The "Further action" byte of a vehicle identification response/vehicle announcement message shall contain the value 0x10 if any DoIPRoutingActivation with DoIPRoutingActivationNumber equal to 0xE0 is configured and the according RoutingActivation was not yet successfully performed.⌋*(SRS_Eth_00026)*

[SWS_DoIP_00083] ⌈The "Further action" byte of a vehicle identification response/vehicle announcement message shall contain the value 0x00, if no DoIPRoutingActivation with DoIPRoutingActivationNumber equal to 0xE0 is configured.⌋*(SRS_Eth_00026)*

[SWS_DoIP_00084] ⌈The "Further action" byte of a vehicle identification response/vehicle announcement message shall contain the value 0x00, if any DoIPRoutingActivation with DoIPRoutingActivationNumber equal to 0xE0 is configured and the according RoutingActivation was successfully performed.⌋*(SRS_Eth_00026)*

[SWS_DoIP_00086] ⌈If the configuration parameter DoIPUseVehicleIdentificationSync Status is set to true, the "VIN/GID status" byte shall be additionally added to the vehicle identification response/vehicle announcement message.⌋*(SRS_Eth_00026)*

[SWS_DoIP_00087] ⌈If a valid VIN could be requested in [SWS_DoIP_00072], the value of the "VIN/GID status" byte shall be 0x00.⌋*(SRS_Eth_00026)*

[SWS_DoIP_00088] ⌈If no valid VIN could be requested in [SWS_DoIP_00072] and the vehicle GID synchronization was not yet successful as described in [SWS_DoIP_00076], the value of the "VIN/GID status" byte shall be 0x10.⌋*(SRS_-Eth_00026)*

[SWS_DoIP_00089] ⌈If no valid VIN could be requested in [SWS_DoIP_00072] and the vehicle GID synchronization was already successful as described in [SWS_DoIP_00076], the value of the "VIN/GID status" byte shall be 0x00.⌋*(SRS_-Eth_00026)*

[SWS_DoIP_00291] ⌈The "Further action" byte of a vehicle identification response/vehicle announcement message shall contain the 1 Byte value retrieved by a call to the configured DoIPFurtherActionByteCallback (if configured, for the signature see <User>_DoIPGetFurtherActionByteCallback, [SWS_DoIP_00288]). If the function returns E_OK, the "Further action" byte shall be set to the retrieved value of FurtherAction Byte. If the function returns E_NOT_OK, the "Further action" byte shall be set according to [SWS_DoIP_00082], [SWS_DoIP_00083] or [SWS_DoIP_00084].⌋*(SRS_Eth_-00026)*

[SWS_DoIP_00293] ⌈If a DoIP message with payload Type 0x0004 is received on a configured DoIPUdpConnection, the message shall be discarded.⌋*(SRS_Eth_00025)*

7.3.2.3 Routing activation

7.3.2.3.1 Routing activation request (payload type 0x0005)

The payload data structure of a routing activation request message shall be supported as described in Table 7.7:

Item	Position (Byte)	Length (Byte)
External test equipment address information		
Source address	0	2
Activation Type	2	1
Reserved and OEM specific data		

▽

△

Reserved by the ISO (0x00000000)	3	4
OEM specific	7	4

Table 7.7: Routing activation request message payload data

[SWS_DoIP_00101] ⌈When the module receives a DoIP message with payload Type 0x0005 on a connection different than a configured DoIPTcpConnection, the module shall discard the DoIP message.⌋*(SRS_Eth_00084)*

Note: That means that it is also not allowed to receive this payload type on a UDP connection,

[SWS_DoIP_00117] ⌈The expected payload length (see [SWS_DoIP_00019]) for Routing Activation Request Message with payload type 0x0005 shall be either exactly 7 or 11.⌋*(SRS_Eth_00084)*

[SWS_DoIP_00102] ⌈If a routing activation request message is received with a valid DoIP header, the DoIP module shall process further to [SWS_DoIP_00103], if the field "Source address" matches a configured DoIPTesterSA.⌋*(SRS_Eth_00084)*

[SWS_DoIP_00106] ⌈If a routing activation request message is received with a valid "Source address" but the connection this Routing activation was received on is already registered to another source address, the DoIP module shall send a routing activation response message on the same connection the request was received on, with the routing activation response code set to 0x02. Additionally the socket connection shall be closed as defined in [SWS_DoIP_00058].⌋*(SRS_Eth_00084)*

[SWS_DoIP_00104] ⌈If a routing activation request message is received with a "Source address" that does not match a configured DoIPTesterSA, the routing activation response message shall be sent on the same connection as the received request with the routing activation response code 0x00. Additionally the socket connection shall be closed as defined in [SWS_DoIP_00058].⌋*(SRS_Eth_00084)*

[SWS_DoIP_00103] ⌈The DoIP module shall always continue with processing as defined in [SWS_DoIP_00105], either if the received "Source Address" is already registered to a connection as described in [SWS_DoIP_00002] and it is the same socket connection this routing activation request was received on, or if the received "Source Address" is not registered to a connection yet.⌋*(SRS_Eth_00084)*

[SWS_DoIP_00105] ⌈If the received "Source Address" is already registered to another connection, belonging to the same DoIPInterface, an alive check request to this connection shall be triggered as described in [SWS_DoIP_00139] and [SWS_DoIP_00140] and it shall be waiting for the alive check response message or until the time configured in parameter DoIPAliveCheckResponseTimeout expired. If the alive check response was received within the configured time, the DoIP module shall send a routing activation response message with the activation response code set to 0x03. Additionally the socket connection shall be closed as defined in [SWS_DoIP_00058]. If the "Source Address" is not already registered or the DoIPAliveCheckResponseTimeout expired without receiving an alive check response message

the DoIP module shall continue with [SWS_DoIP_00107].⌋ *(SRS_Eth_00084, SRS_-
Eth_00083)*

[SWS_DoIP_00107] ⌈If the amount of registered connections is smaller than the
configured DoIPMaxTesterConnections, the DoIP module shall proceed with the
message as described in [SWS_DoIP_00108] otherwise an alive check request
shall be sent to all registered connections as described in [SWS_DoIP_00139] and
[SWS_DoIP_00140]. If none of the alive checks times out (i.e. all tester respond with
a valid alive check response within the configured DoIPAliveCheckResponseTimeout)
the DoIP module shall send a routing activation response message with the activa-
tion response code set to 0x01. Additionally the socket connection shall be closed
as defined in [SWS_DoIP_00058]. If at least one of them times out the DoIp module
shall close the socket connection and continue as described in [SWS_DoIP_00108].⌋
(SRS_Eth_00084, SRS_Eth_00083)

[SWS_DoIP_00108] ⌈If the "Activation type" bytes matches the DoIPRoutingActiva-
tionNumber of one of the DoIPRoutingActivationRef of the "Source Address" (i.e.
DoIPTester has a DoIPRoutingActivationRef configured which has the DoIPRouting
ActivationNumber equal to "Activation type") the DoIP module shall proceed with
[SWS_DoIP_00109].⌋ *(SRS_Eth_00084)*

[SWS_DoIP_00160] ⌈If the "Activation type" bytes do not fulfill the [SWS_DoIP_00108]
requirement, the DoIP module shall send a routing activation response message with
the activation response code set to 0x06. In this case the socket connection shall be
closed as defined in [SWS_DoIP_00058].⌋ *(SRS_Eth_00084)*

[SWS_DoIP_00109] ⌈If an DoIPRoutingActivationAuthenticationCallback is configured
for the referenced DoIPRoutingActivation, the DoIP module shall call this callback (for
the signature see <User>_DoIPRoutingActivationAuthentication, [SWS_DoIP_00049]).
If the DoIPRoutingActivationAuthenticationReqLength is not configured to 0, the Do
IP module shall handle additionally the first DoIPRoutingActivationAuthenticationReq
Length bytes of the optional field "OEM specific".⌋ *(SRS_Eth_00084)*

[SWS_DoIP_00161] ⌈If the DoIPRoutingActivationAuthenticationCallback returns with
E_OK the routing activation authentication shall be considered as successful. If the Do
IPRoutingActivationAuthenticationResLength is not set to 0 the first DoIPRoutingAc-
tivationAuthenticationResLength byte shall be attached in routing activation response
message in the field "OEM specific" as described in [SWS_DoIP_00120].⌋ *(SRS_Eth_-
00084)*

[SWS_DoIP_00110] ⌈If the DoIPRoutingActivationAuthenticationCallback returns
DOIP_E_PENDING the DoIP module shall trigger the callback at next DoIP_MainFunc-
tion call again until something else than DOIP_E_PENDING is returned. Additionally
the socket connection shall be considered as registered to this DoIPTesterSA without
activating the routing.⌋ *(SRS_Eth_00084)*

[SWS_DoIP_00111] ⌈If the DoIPRoutingActivationAuthenticationCallback returns
something else (e.g. E_NOT_OK) the DoIP module shall send a routing activation
response message with the activation response code set to 0x04 and the socket con-

nection shall be considered as registered to this DoIPTesterSA without activating the routing.⌋*(SRS_Eth_00084)*

[SWS_DoIP_00112] ⌈If a DoIPRoutingActivationConfirmationCallback is configured for the referenced DoIPRoutingActivation, the DoIp module shall call this callback (for the signature see <User>_DoIPRoutingActivationConfirmation, [SWS_DoIP_00048]). If the DoIPRoutingActivationConfirmationReqLength is not configured to 0, the Do IP module shall handle additionally the last DoIPRoutingActivationConfirmationReq Length bytes of the optional field "OEM specific". If the Callback returns with E_OK the routing activation confirmation shall be considered as successful and if the Do IPRoutingActivationConfirmationResLengthis not set to 0, the last DoIPRoutingActivationConfirmationResLength bytes shall be attached in routing activation response message in the field "OEM specific" as described in [SWS_DoIP_00120].⌋*(SRS_Eth_-00084)*

[SWS_DoIP_00114] ⌈If the DoIPRoutingActivationConfirmationCallback returns DOIP_E_PENDING, the DoIP module shall send a routing activation response message once with the activation response code set to 0x11.⌋*(SRS_Eth_00084)*

[SWS_DoIP_00274] ⌈If the DoIPRoutingActivationConfirmationCallback returns E_NOT_OK, the DoIP module shall send a routing activation response message with the activation response code set to 0x05 and the socket connection shall be closed as defined in [SWS_DoIP_00058].⌋*(SRS_Eth_00084)*

[SWS_DoIP_00113] ⌈If no response was sent because of the before mentioned checks this DoIPRoutingActivation is confirmed, authorized and valid so the DoIP module shall send a routing activation response message with the activation response code set to 0x10 and the socket connection shall be considered as registered to this DoIPTester SA and enable the routing for this routing activation. From now on the routing to the configured DoIPTargetAdressRef are active and valid so the diagnostic request messages related to the specified DoIPTargetAdress received via this socket connection are active.⌋*(SRS_Eth_00084)*

7.3.2.3.2   Routing activation response (payload type 0x0006)

The payload data structure of a routing activation response message shall be supported as described in Table 7.8:

Item	Position (Byte)	Length (Byte)
External test equipment address information		
Logical Address Tester	0	2
Routing activation status information		
Logical address of DoIP entity	2	2
Routing activation response code	4	1
Reserved by ISO (0x00000000)	5	4
OEM specific	9	4

Table 7.8: Routing activation response message payload data

[SWS_DoIP_00116] ⌈The "Logical Address Tester" field shall be set to the Tester SA the according routing activation request message was received from.⌋*(SRS_Eth_-00084)*

[SWS_DoIP_00118] ⌈The "Logical Address DoIP entity" shall be set to the configured parameter DoIPLogicalAddress.⌋*(SRS_Eth_00084)*

[SWS_DoIP_00119] ⌈The "Routing activation response code shall be set according to the response conditions specified in [SWS_DoIP_00106], [SWS_DoIP_00104], [SWS_DoIP_00105], [SWS_DoIP_00107], [SWS_DoIP_00160], [SWS_DoIP_00111], [SWS_DoIP_00114], [SWS_DoIP_00274] and [SWS_DoIP_00113].⌋*(SRS_Eth_-00084)*

[SWS_DoIP_00120] ⌈The "OEM specific" field shall be filled with the optional values as defined in chapter 7.3.2.2.1. if the according DoIPRoutingActivationAuthenticationResLength and/or DoIPRoutingActivationConfirmationResLength is used.⌋*(SRS_-Eth_00084)*

7.3.2.4 Alive check

7.3.2.4.1 Alive check request (payload type 0x0007)

[SWS_DoIP_00139] ⌈If the DoIP module needs to send a alive check request, it shall have no payload data but only the generic DoIP header and the payload type set 0x0007.⌋*(SRS_Eth_00083)*

[SWS_DoIP_00140] ⌈After sending an alive check request the DoIP module shall wait the configured time DoIPAliveCheckResponseTimeout to receive a valid alive check response and [SWS_DoIP_00141]. If it does not receive an alive check response, the socket connection on which the alive check request was sent shall be reset as described in [SWS_DoIP_00358].⌋*(SRS_Eth_00083)*

7.3.2.4.2 Alive check response (payload type 0x0008)

The payload data structure of a alive check response message shall be supported as described in Table 7.9:

Item	Position (Byte)	Length (Byte)
External test equipment address information		
Source address	0	2

Table 7.9: Alive check response message payload data

[SWS_DoIP_00141] ⌈If the received Alive check response field "SourceAddress" matches the registered Source Address of the socket connection the response was received on, the DoIP module shall do nothing. Otherwise it shall reset the socket connection as described in [SWS_DoIP_00358].⌋*(SRS_Eth_00083)*

Note: The alive check response can always be sent (not only after an according request): With this method the test equipment can reset the inactivity time.

7.3.2.5 Node information

7.3.2.5.1 Diagnostic power mode information request (payload type 0x4003)

[SWS_DoIP_00090] ⌈When the module receives a DoIP message with payload Type 0x4003 on a connection different than a configured DoIPUdpConnection, the module shall discard the DoIP message.⌋ *(SRS_Eth_00080)*

Note: This means also that it is not allowed to receive this payload type on a TCP connection.

[SWS_DoIP_00091] ⌈The expected payload length (see [SWS_DoIP_00019]) for diagnostic power mode information request message with payload type 0x4003 shall be exactly 0.⌋ *(SRS_Eth_00080)*

[SWS_DoIP_00092] ⌈After a valid Diagnostic power mode request message, the DoIP module shall send a Diagnostic Power mode information response message ([SWS_DoIP_00093]) on the configured DoIPUdpConnection.⌋ *(SRS_Eth_00080)*

7.3.2.5.2 Diagnostic power mode information response (payload type 0x4004)

The payload data structure of a diagnostic power mode information response shall be supported as described in Table 7.10:

Item	Position (Byte)	Length (Byte)
Diagnostic Power Mode		
Diagnostic power mode	0	1

Table 7.10: Diagnostic power mode information response message payload data

[SWS_DoIP_00093] ⌈The "Diagnostic Power Mode" byte of diagnostic power mode information response message contains the 1 Byte value retrieved by a call to the configured DoIPPowerModeCallback (for the signature see <User>DoIPGetPowerModeStatus, [SWS_DoIP_00047]). If the function returns E_OK, the "Diagnostic Power Mode" shall be set to the retrieved value of PowerStateReady, otherwise it shall be set to 0x00 to indicate that the power mode is not ready.⌋ *(SRS_Eth_00080)*

7.3.2.5.3 Diagnostic entity status request (payload type 0x4001)

[SWS_DoIP_00094] ⌈When the module receives a DoIP message with payload Type 0x4001 on a connection different than a configured DoIPUdpConnection, the module shall discard the DoIP message.⌋ *(SRS_Eth_00082)*

Note: This means also that it is not allowed to receive this payload type on a TCP connection.

[SWS_DoIP_00095] ⌈The expected payload length (see [SWS_DoIP_00019]) for diagnostic entity status request message with payload type 0x4001 shall be exactly 0.⌋ *(SRS_Eth_00082)*

[SWS_DoIP_00096] ⌈After a valid Diagnostic entity status request message, the DoIP module shall send a Diagnostic entity status response message (see Table 7.11) on the configured DoIPUdpConnection.⌋*(SRS_Eth_00082)*

7.3.2.5.4 Diagnostic entity status response (payload type 0x4002)

The payload data structure of a diagnostic entity status response message shall be supported as described in Table 7.11:

Item	Position (Byte)	Length (Byte)
DoIP Entity Status Response		
Node Type	0	1
Max open sockets	1	1
Currently open socket	2	1
Max. data size	3	4

Table 7.11: Diagnostic entity status response message payload data

[SWS_DoIP_00097] ⌈The "Node Type" byte of a diagnostic entity status response message shall contain the configured DoIPNodeType, whereas DOIP_GATEWAY shall be represented by 0x00 and DOIP_NODE shall be represented by 0x01.⌋*(SRS_Eth_-00082)*

[SWS_DoIP_00098] ⌈The "Max open sockets" byte of a diagnostic entity status response message shall contain the configured DoIPMaxTesterConnections. This parameter represents the maximum number of concurrent TCP_DATA sockets allowed with this DoIP entity, excluding the reserve socket required for socket handling as defined in the ISO 13400-2 standard.⌋*(SRS_Eth_00082)*

[SWS_DoIP_00099] ⌈The "Currently open sockets" byte of a diagnostic entity status response message shall contain the currently active connections, based on the information described in [SWS_DoIP_00002].⌋*(SRS_Eth_00082)*

[SWS_DoIP_00100] ⌈The "Max data size" bytes are only supported if the configuration parameter DoIPEntityStatusMaxByteFieldUse is set to TRUE. In this case, the diagnostic entity status response message shall contain the configured DoIPMaxRequestBytes in the "Max data size" field.⌋*(SRS_Eth_00082)*

7.3.2.6   Diagnostic Message

For enhanced diagnostic as well as for emissions related diagnostic communication, the DoIP module uses the same diagnostic message structure and payload types. Additionally it provides an acknowledge mechanism to provide early feedback to the tester wether the diagnostic message was received and successfully received for the internal ECU or sent out to the target network.

7.3.2.6.1   Diagnostic message (for request and response) (payload type 0x8001)

The payload data structure of a diagnostic message shall be supported as described in Table 7.12:

Item	Position (Byte)	Length (Byte)
Logical address information		
Source address	0	2
Target address	2	2
Diagnostic message data		
User data	4	...

Table 7.12: Diagnostic message payload data

[SWS_DoIP_00121] ⌈When the module receives a DoIP message with payload Type 0x8001 on a connection different than a configured DoIPTcpConnection, the module shall discard the DoIP message.⌋ *(SRS_Eth_00027)*

Note: This means also that it is not allowed to receive this payload type on a UDP connection.

[SWS_DoIP_00122] ⌈The expected payload length (see [SWS_DoIP_00019]) for diagnostic messages with payload type 0x8001 shall be at least 5 byte.⌋ *(SRS_Eth_00027)*

[SWS_DoIP_00123] ⌈If the DoIP module receives a diagnostic message with a "Source Address" (equals DoIPTesterSA) which is not registered on an established socket connection, the DoIP modules shall send a diagnostic message negative acknowledge message with the diagnostic message negative acknowledge code set to 0x02. Additionally the socket connection shall be closed as described in [SWS_DoIP_00058].⌋ *(SRS_Eth_00027)*

[SWS_DoIP_00124] ⌈If the DoIP module receives a diagnostic message with a "Target Addess" (equals DoIPTargetAdressValue) which is not connected via DoIPRoutingActivationRef and DoIPTargetAdressRef to the received valid DoIPTesterSA, than the DoIP module shall send a diagnostic message negative acknowledge message with the diagnostic message negative acknowledge code set to 0x03. Additionally the message shall be discarded.⌋ *(SRS_Eth_00027)*

[SWS_DoIP_00125] ⌈If the DoIP module receives a diagnostic message with the payload data length in the DoIP header is set to a value bigger than DoIPMaxRequest

Bytes-4, than the DoIP module shall send a diagnostic message negative acknowledge message with the diagnostic message negative acknowledge code set to 0x04. Additionally the message shall be discarded.⌋*(SRS_Eth_00027)*

[SWS_DoIP_00126] ⌈If the DoIP module receives a diagnostic message and [SWS_DoIP_00125] does not apply but the current buffer size is not sufficient to receive the message, than the DoIP module shall send a diagnostic message negative acknowledge message with the diagnostic message negative acknowledge code set to 0x05. Additionally the message shall be discarded.⌋*(SRS_Eth_00027)*

Note: This means that the PduR_DoIPTpStartOfReception is not accepting the buffer.

[SWS_DoIP_00127] ⌈If the DoIP module receives a diagnostic message and the according "TargetAddress" was not activated by routing activation as described in [SWS_DoIP_00113], the DoIP module shall send a diagnostic message negative acknowledge message with the diagnostic message negative acknowledge code set to 0x06. Additionally the message shall be discarded.⌋*(SRS_Eth_00027)*

[SWS_DoIP_00128] ⌈If no negative acknowledge was sent the DoIP module shall evaluate the message and forward the content (i.e. all UDS Data, not the TargetAddress and SourceAddress) to the DoIPPduRRxPdu connected to the received TargetAddress/SourceAddress combination as configured in DoIPChannel⌋*(SRS_Eth_00027)*

Note: For how to proceed with the communication please refer to the TCP communication described in chapter 7.5.1

[SWS_DoIP_00129] ⌈If the PduR accepted all Data, the DoIP module shall send a diagnostic acknowledge message as described in Table 7.13.⌋*(SRS_Eth_00027)*

[SWS_DoIP_00130] ⌈The DoIP module will get a diagnostic response message (i.e DoIP_TpTransmit or DoIP_IfTransmit is called with DoIPPduRTxPdu which matches to the DoIPPduRRxPdu that handled the data to the PduR) via the upper layer connection to the PduR, so it has to monitor whether the socket connection the request was received on is still established. If the socket connection has been closed, the response shall be discarded and the DoIP shall return with E_NOT_OK in the return value.⌋*(SRS_Eth_-00027)*

[SWS_DoIP_00131] ⌈If the DoIP module is called with DoIPPduRTxPdu in the DoIP_TpTransmit or DoIP_IfTransmit as described in [SWS_DoIP_00130] and the according socket connection has not been closed since the reception of the according diagnostic message, the DoIP module shall prepare a diagnostic message via the according socket connection with the "SourceAddress" set to the DoIPTargetAdressValue of the request and the "TargetAddress" set to the DoIPTesterSA.⌋*(SRS_Eth_00027)*

[SWS_DoIP_00173] ⌈The field "User data" of the [SWS_DoIP_00131] message contains the actual diagnostic payload data which shall not be modified by DoIP.⌋*(SRS_-Eth_00027)*

Note: The reception and transmission of diagnostic payload data is described more in detail in chapter 7.5, the diagnostic communication related part of this specification

Note: Because of enhanced diagnostic and emissions related diagnostic communication behavior, several responses to the tester could be sent out before the final response is sent. The DoIP module is not evaluating the content or the amount of responses or requests to the target address. It is just routing the diagnostic data from SoAd to PduR and back.

7.3.2.6.2 Diagnostic acknowledge message (payload type 0x8002)

The payload data structure of a diagnostic acknowledge message shall be supported as described in Table 7.13:

Item	Position (Byte)	Length (Byte)
Logical address information		
Source address	0	2
Target address	2	2
Diagnostic message acknowledge information		
ACK code (0x00)	4	1
Previous diagnostic message	5	...

Table 7.13: Diagnostic acknowledge message payload data

[SWS_DoIP_00132] ⌈If the DoIP module needs to send a diagnostic acknowledge message the "Source Address" shall be set to the according "TargetAddress" of the received message.⌋*(SRS_Eth_00027)*

[SWS_DoIP_00133] ⌈If the DoIP module needs to send a diagnostic acknowledge message the "Target Address" shall be set to the according "SourceAddress" of the received message.⌋*(SRS_Eth_00027)*

[SWS_DoIP_00134] ⌈If the DoIP module needs to send a diagnostic acknowledge message the field "previous diag message" shall be filled with the number of bytes of the original request message as configured in the parameter DoIPNumByteDiagAck Nack for the DoIPTester the request was received on.⌋*(SRS_Eth_00027)*

7.3.2.6.3 Diagnostic negative acknowledge message (payload type 0x8003)

The payload data structure of a diagnostic negative acknowledge message shall be supported as described in Table 7.14:

Item	Position (Byte)	Length (Byte)
Logical address information		
Source address	0	2
Target address	2	2
Diagnostic message acknowledge information		

▽

△

Diagnostic message negative acknowledge code	4	1
Previous diagnostic message	5	...

Table 7.14: Diagnostic negative acknowledge payload data

[SWS_DoIP_00135] ⌈If the DoIP module needs to send a diagnostic negative acknowledge message the "Source Address" shall be set to the according "TargetAddress" of the received message.⌋*(SRS_Eth_00027)*

[SWS_DoIP_00136] ⌈If the DoIP module needs to send a diagnostic negative acknowledge message the "Target Address" shall be set to the according "SourceAddress" of the received message.⌋*(SRS_Eth_00027)*

[SWS_DoIP_00137] ⌈If the DoIP module needs to send a diagnostic negative acknowledge message, the "Diagnostic message negative acknowledge code" shall be set to the value specified by the specification item that is triggering the diagnostic negative acknowledge message.⌋*(SRS_Eth_00027)*

[SWS_DoIP_00138] ⌈If the DoIP module needs to send a diagnostic negative acknowledge message the field "previous diag message" shall be filled with the configured number of the original request message as configured in the parameter DoIPNumByte DiagAckNack for the DoIPTester the request was received on.⌋*(SRS_Eth_00027)*

7.4 UDP communication

DoIP messages that are communicated via UDP connection are communicated on the SoAd Interface APIs. So all messages which are received via UDP as described in Table 2 and sent via UDP as described in Table 3 shall be treated as described in this chapter.

[SWS_DoIP_00197] ⌈If the SoAd calls the DoIP module via the Interface DoIP_SoAdIf RxIndication, the DoIP module shall copy the message into the internal UDP buffer for further processing.⌋*(SRS_Eth_00024)*

Note: Further processing depends on the header information and on the payload type. For details refer to chapter 7.3.2. Which messages are expected to be received on UDP connection is described in Table 2.

[SWS_DoIP_00198] ⌈If the DoIP module shall send a DoIP message via UDP it shall call the SoAd_IfTransmit with the TxPduId set to the SoAd internal TxPduId that is retrieved via the according configured DoIPSoAdUdpTxPduRef, the PduInfoPtr shall contain the length of the message and the pointer to the to be transmitted message buffer and additionally the buffer shall be locked.⌋*(SRS_Eth_00024)*

Note: The events that lead to the sending of UDP DoIP messages are described in the rest of the specification. Which DoIP message shall use UDP connection is described in Table 3.

[SWS_DoIP_00199] ⌈If the SoAd calls the DoIP module via the Interface DoIP_So AdIfTxConfirmation, the DoIP module shall release the buffer which is related to the received TxPduId.⌋*()*

[SWS_DoIP_00286] ⌈DoIP module shall consider the announcement successful and process DoIPVehicleAnnouncementCount if the SoAd calls the DoIP module via the interface DoIP_SoAdIfTxConfirmation with Result set to E_OK for the announcement related SoAd_IfTransmit() call i.e. if E_NOT_OK is returned for the last announcement message, it will not be considered an announcement.⌋*()*

[SWS_DoIP_00276] ⌈If DoIP receives more UDP requests on a connection than the configured amount of DoIPMaxUDPRequestPerConnection, only DoIPMaxUDPRequestPerConnection requests (including the request that has just been accepted) shall be processed and responded. DoIP shall silently discard the request messages that cannot be processed.⌋*()*

Note: Tester will detect discarded UDP requests via timeout handling.

[SWS_DoIP_00310] ⌈If a UDP message contains more than one DoIP requests, DoIP shall process and respond to the first DoIP request and discard the remaining requests.⌋*()*

Note: Tester will detect discarded UDP requests via timeout handling.

7.5 TCP communication

DoIP messages that are communicated via TCP connection are communicated on the SoAd Tp APIs. So all messages which are received via TCP as described in Table 2 and sent via TCP as described in Table 3 shall be treated as described in this chapter.

7.5.1 Reception of a TCP DoIP message

[SWS_DoIP_00207] ⌈If the function DoIP_SoAdTpStartOfReception is called with TpSduLength set to 0, the DoIP module shall fill in the bufferSizePtr the available buffer size in the DoIP for the reception of the TCP message, lock the according buffer for other TCP connections and return BUFREQ_OK.⌋*(SRS_Eth_00024)*

Note: The API will be called from SoAd only once per TCP connection, directly when the socket is connected. All the data will be transferred to DoIP via the API DoIP_SoAdTpCopyRxData.

[SWS_DoIP_00208] ⌈If the function DoIP_SoAdTpCopyRxData is called at the start of a new DoIP message (e.g. directly after DoIPSoAdTpStartOfReception succeeded or previous DoIP message processed completely) with info.SduLength set to 0 the DoIP module shall return in the parameter bufferSizePtr the length to the maximum necessary bytes to evaluate the DoIP relevant data for routing of diagnostic data.⌋
(SRS_Eth_00024)

Note: The DoIP module knows internal when a new DoIP message is started because of the DoIP protocol payload length information (see chapter Generic DoIP header 7.3.1).

[SWS_DoIP_00209] ⌈If the function DoIP_SoAdTpCopyRxData is called at the start of a new DoIP message (e.g. directly after DoIPSoAdTpStartOfReception succeeded or previous DoIP message processed completely) with info.SduLength is not set to 0 and the DoIP TCP buffer is big enough to copy all the data, the DoIP module shall copy the received data to the internal TCP buffer, return the parameter bufferSizePtr set to the available buffer after copying and return BUFREQ_OK.⌋*(SRS_Eth_00024)*

[SWS_DoIP_00210] ⌈If the function DoIP_SoAdTpCopyRxData is called at the start of a new DoIP message (e.g. directly after DoIPSoAdTpStartOfReception succeeded or previous DoIP message processed completely) with info.SduLength is not set to 0 and the DoIP TCP buffer is not big enough to copy all the data, the DoIP module shall return BUFREQ_E_NOT_OK.⌋*(SRS_Eth_00024)*

[SWS_DoIP_00214] ⌈If the DoIP module has received sufficient data to evaluate the DoIP header and the payload type is not diagnostic message the DoIP shall copy all data of this DoIP message to the internal DoIP TCP buffer, lock the according buffer for other TCP connections and process the DoIP message as described in [SWS_DoIP_00219].⌋*(SRS_Eth_00024)*

Note: The length of the DoIP message is encoded in the DoIP header. It has to be considered that after the first DoIP message, there can be more in one single TCP stream.

[SWS_DoIP_00212] ⌈If the DoIP module has received sufficient data to evaluate the DoIP header, the payload type is diagnostic message and the Routing was already activated for the SourceAddress/TargetAddress combination on this DoIPInterface, the DoIP module shall call the PduR_DoIPTpStartOfReception with the according id set to the DoIPPduRRxPduId matching the SourceAddress/TargetAddress combination of the diagnostic message on this DoIPInterface, set the info.SduLength to the already received diagnostic data, set the info->SduDataPtr to the buffer containing the received diagnostic data and set the TpSduLength to the total size of the diagnostic message extracted from DoIP Header.⌋*(SRS_Eth_00024)*

Note: For the SourceAddress/TargetAddress combinations refer to configuration container DoIPChannel.

[SWS_DoIP_00260] ⌈If PduR_DoIPTpStartOfReception returns BUFREQ_OK the reception was accepted and the DoIP module shall forward already received data of the diagnostic message to the upper layer by subsequent calls to PduR_DoIPTpCopyRxData.⌋*(SRS_Eth_00024)*

[SWS_DoIP_00218] ⌈If PduR_DoIPTpStartOfReception returns BUFREQ_OK the reception was accepted and the DoIP shall forward all subsequent calls to DoIP_SoAdTpCopyRxData directly to PduR_DoIPTpCopyRxData until all diagnostic data was handed to the PduR.⌋*(SRS_Eth_00024)*

[SWS_DoIP_00259] ⌈At the end of the copy procedure via PduR_DoIPTpCopyRxData to PduR, the DoIP module has to modify the available buffer size pointer returned to SoAd in order to stop before the next DoIP header.⌋*(SRS_Eth_00024)*

[SWS_DoIP_00253] ⌈If the buffer size reported by PduR_DoIPTpStartOfReception does not suffice for already received data, DoIP shall abort the reception and call Pdu R_DoIPTpRxIndication with E_NOT_OK.⌋*(SRS_Eth_00024)*

[SWS_DoIP_00216] ⌈If PduR_DoIPTpStartOfReception returns BUFREQ_E_NOT_ OK, the DoIP module shall send a diagnostic negative acknowledge message with the diagnostic message negative acknowledge code set to 0x08 and discard all the TCP data until the next DoIP message.⌋*(SRS_Eth_00024)*

Note: PduR_DoIPTpRxIndication() will not be called when PduR_DoIPStartOfReception() does not return BUFREQ_OK.

[SWS_DoIP_00311] ⌈If PduR_DoIPTpStartOfReception returns BUFREQ_E_OVFL, the DoIP module shall send a diagnostic negative acknowledge message with the diagnostic message negative acknowledge code set to 0x05 and discard all the TCP data until the next DoIP message.⌋*(SRS_Eth_00024)*

[SWS_DoIP_00217] ⌈If PduR_DoIPTpCopyRxData returns BUFREQ_E_NOT_OK, the DoIP module shall discard all the TCP data until the next DoIP message and call the PduR_DoIPTpRxIndication with the according PduId and the result set to E_NOT_ OK.⌋*(SRS_Eth_00024)*

[SWS_DoIP_00221] ⌈If all diagnostic data was successfully forwarded to the PduR (see [SWS_DoIP_00216]) the DoIP module shall call the PduR_DoIPTpRxIndication with the according PduId and the result set to E_OK.⌋*(SRS_Eth_00024)*

[SWS_DoIP_00219] ⌈If the DoIP module has received with the DoIP_SoAdTpCopy RxData operations enough data to evaluate the DoIP header and the payload type is not diagnostic message (see [SWS_DoIP_00214]), the DoIP module shall receive via subsequent calls to DoIP_SoAdTpCopyRxData all data for the DoIP message and process it.⌋*(SRS_Eth_00024)*

Note: The possible DoIP messages on TCP are described in Table 2 and in the according chapters in this specification.

[SWS_DoIP_00200] ⌈If the function DoIP_SoAdTpRxIndication is called the DoIp module shall release all data connected to the reception and forward the result to PduR_ DoIPTpRxIndication if a reception for diagnostic message is currently ongoing.⌋*(SRS_- Eth_00024)*

Note: The function DoIP_SoAdTpRxIndication is only called once when the socket is closed.

[SWS_DoIP_00258] ⌈If the DoIP module is called with DoIP_TpCancelReceive, the DoIP module shall call the SoAd_TpCancelReceive function with the RxPduId that is retrieved via the according configured DoIPSoAdTcpRxPduRef.⌋*()*

7.5.2 Transmission of a TCP DoIP message

[SWS_DoIP_00220] ⌈If the DoIP module needs to send a DoIP message that is not a diagnostic message on the TCP connection, the DoIP shall call the SoAd_TpTransmit with the TxPduId containing the Id of the according socket, the PduInfoPtr.SduLength set to the size of the data to be transmitted and lock the buffer to send.⌋*(SRS_Eth_-00024)*

Note: If the call to SoAd_TpTransmit returns E_OK the DoIP module shall consider that the data will be transmitted by subsequent calls to the DoIP_SoAdTpCopyTxData.

[SWS_DoIP_00223] ⌈If the call to SoAd_TpTransmit returns E_NOT_OK the DoIP module shall discard the DoIP message.⌋*(SRS_Eth_00024)*

[SWS_DoIP_00224] ⌈If the function DoIP_SoAdCopyTxData is called after a sucess-full call to SoAd_TpTransmit, with a valid id and the info.SduLength is set to 0 the DoIP shall return BUFREQ_OK and set the parameter availableDataPtr to the total available data size of the current DoIP message to be transmitted.⌋*(SRS_Eth_00024)*

[SWS_DoIP_00225] ⌈If the function DoIP_SoAdCopyTxData is called after a sucess-full call to SoAd_TpTransmit, with a valid id and the info.SduLength is not set to 0, the DoIP module shall copy the bytes specified in the info.SduLength to the info->SduData Ptr, return BUFREQ_OK and set the parameter availableDataPtr to the total available data size of the current DoIP message after the copy process.⌋*(SRS_Eth_00024)*

[SWS_DoIP_00229] ⌈If the function DoIP_SoAdTpTxConfirmation is called the DoIP module shall release the buffer related to the id.⌋*(SRS_Eth_00024)*

[SWS_DoIP_00230] ⌈If the function DoIP_TpTransmit or DoIP_IfTransmit is called and the data package is allowed to be sent according to the current DoIP protocol related information, the DoIP module shall return E_OK.

1.) If the connection to the SoAd is idle, the DoIP shall call the SoAd_TpTransmit function according to [SWS_DoIP_00284].

2.) If the connection to the SoAd is not idle, the DoIP shall store the transmission request and call SoAd_TpTransmit according to [SWS_DoIP_00284] as soon as the connection is idle again.⌋*(SRS_Eth_00024)*

[SWS_DoIP_00284] ⌈To transmit a DoIP diagnostic message the DoIP shall assemble the DoIP header considering the information of the handed PduInfoPtr.SduLength and call SoAd_TpTransmit with the TxPduId set to the according PduId of the socket connection and the PduInfoPtr.SduLength set to the sum of the following lengths: DoIP header (8 Byte), the DoIP diagnostic message specific data (4 Byte) and received length of the call to DoIP_TpTransmit or DoIP_IfTransmit (PduInfoPtr.SduLength).⌋ *(SRS_Eth_00024)*

[SWS_DoIP_00226] ⌈If the function DoIP_TpTransmit or DoIP_IfTransmit is called and the data package is not allowed according to the current DoIP protocol related infor-mation, the DoIP module shall return E_NOT_OK.⌋*(SRS_Eth_00024)*

[SWS_DoIP_00279] ⌈If the DoIPPduType of a DoIPPduRTxPdu is DOIP_IFPDU, the content of the PDU provided by DoIP_IfTransmit shall be stored completely in the Do IP internal buffer. If the buffer is too small, E_NOT_OK shall be returned immediately.⌋ *(SRS_Eth_00024)*

Note: If the function SoAd_TpTransmit returns for the use case "diagnostic message" E_OK, the DoIP module shall consider that the data will be transmitted by subsequent calls to the DoIP_SoAdTpCopyTxData.

[SWS_DoIP_00228] ⌈If the call to SoAd_TpTransmit returns for the use case "diagnostic message" E_NOT_OK the DoIP module shall discard the DoIP message and, in case the DoIPPduType of the corresponding DoIPPduRTxPdu is DOIP_TPPDU, call the PduR_DoIPTpTxConfirmation with result set to E_NOT_OK.⌋ *(SRS_Eth_00024)*

[SWS_DoIP_00231] ⌈If the function DoIP_SoAdCopyTxData is called after a sucessfull call to SoAd_TpTransmit for the use case "diagnostic message", with a valid id and the info.SduLength is set to 0 the DoIP shall return BUFREQ_OK and set the parameter availableDataPtr to the total available data size of the current buffered DoIP message to be transmitted.⌋ *(SRS_Eth_00024)*

Note: This means that only the length for the created DoIP header and the diagnostic SourceAddress/TargetAddress is returned and not the total data length.

[SWS_DoIP_00232] ⌈If the function DoIP_SoAdCopyTxData is called after a sucessfull call to SoAd_TpTransmit for the use case "diagnostic message" with a valid id and the info.SduLength is not set to 0, the DoIP module shall copy the bytes specified in the info.SduLength to the info->SduDataPtr. If the requested bytes are more than in the Do IP internal buffer, the DoIP shall call the PduR_DoIPTpCopyTxData with the info.Sdu Length set to the remaining requested data bytes and the info-> SduDataPtr set to the position where the PduR shall continue to copy the data.⌋ *(SRS_Eth_00024)*

[SWS_DoIP_00254] ⌈If the call to PduR_DoIPTpCopyTxData returns BUFREQ_OK or all the requested data was part of the DoIP internal buffer, the DoIP module shall return BUFREQ_OK and set the parameter availableDataPtr to the remaining data size of the DoIP header and diagnostic SourceAddress/TargetAddress if they have not been copied completely or to the remaining data size returned from PduR_DoIPTpCopyTx Data.⌋ *(SRS_Eth_00024)*

[SWS_DoIP_00233] ⌈If the DoIP module has copied via subsequent calls to DoIP_So AdTpCopyTxData for the use case "diagnostic message" all information stored in the DoIP internal buffer, the DoIP module shall forward all subsequent calls to DoIP_SoAd TpCopyTxData/DoIP_SoAdTpTxConfirmation for this transmission directly to the PduR using PduR_DoIPTpCopyTxData/PduR_DoIPTpTxConfirmation in case the DoIPPdu RTxPdu is DOIP_TPPDU and PduR_DoIPIfTxConfirmation otherwise, and release the internal buffer for this transmission.⌋ *(SRS_Eth_00024)*

[SWS_DoIP_00257] ⌈If the DoIP module is called with DoIP_TpCancelTransmit or Do IP_IfCancelTransmit, the DoIP module shall call the SoAd_TpCancelTransmit function of the according SoAdTxPduId.⌋ *(SRS_Eth_00024)*

)

7.6 Error classification

7.6.1 Development Errors

[SWS_DoIP_00148] ⌈

Type of error	Related error code	Error value
API service call without module initialization	DOIP_E_UNINIT	0x01
NULL-Pointer on any API call	DOIP_E_PARAM_POINTER	0x02
Wrong Lower Layer (SoAd) or Upper Layer (Pdu Router) Id received	DOIP_E_INVALID_PDU_SDU_ID	0x03
API call with invalid Parameter	DOIP_E_INVALID_PARAMETER	0x04
DoIP Init service call failure	DOIP_E_INIT_FAILED	0x05

⌋*()*

7.6.2 Runtime Errors

There are no runtime errors.

7.6.3 Transient Faults

There are no transient faults.

7.6.4 Production Errors

There are no production errors.

7.6.5 Extended Production Errors

There are no extended production errors.

8 API specification

8.1 Imported types

The follwing types shall be imported by the DoIP module from the modules given:

[SWS_DoIP_00020] ⌈

Module	Header File	Imported Type
ComStack_Types	ComStack_Types.h	BufReq_ReturnType
	ComStack_Types.h	PduIdType
	ComStack_Types.h	PduInfoType
	ComStack_Types.h	PduLengthType
	ComStack_Types.h	RetryInfoType
	ComStack_Types.h	TpDataStateType
SoAd	SoAd.h	SoAd_SoConIdType
	SoAd.h	SoAd_SoConModeType
Std	Std_Types.h	Std_ReturnType
	Std_Types.h	Std_VersionInfoType
TcpIp	TcpIp.h	TcpIp_DomainType
	TcpIp.h	TcpIp_IpAddrAssignmentType
	TcpIp.h	TcpIp_IpAddrStateType
	TcpIp.h	TcpIp_SockAddrType

⌋*()* The following types are contained in the Rte_DoIP_Type.h header file, which is generated by the RTE generator:

[SWS_DoIP_00266] ⌈

Name	DoIP_PowerStateType		
Kind	Type		
Derived from	uint8		
Range	DOIP_NOT_READY	0x00	DoIP Power Mode "not ready"
	DOIP_READY	0x01	DoIP Power Mode "ready"
	DOIP_NOT_SUPPORTED	0x02	DoIP Power Mode "not supported"
	0x03-0xFF	0x03-0xFF	Reserved
Description	Used for handling of the PowerMode in DoIP entity status requests		
Variation	–		
Available via	Rte_DoIP_Type.h		

⌋*()*

[SWS_DoIP_00267] ⌈

Name	AuthenticationReqDataType_{Name}		
Kind	Array	**Element type**	uint8
Size	{ecuc(DoIP/DoIPConfigSet/DoIPInterface/DoIPRoutingActivation/DoIPRoutingActivation AuthenticationCallback.DoIPRoutingActivationAuthenticationReqLength)} Elements		
Description	–		
Variation	Name = {ecuc(DoIP/DoIPConfigSet/DoIPInterface/DoIPRoutingActivation.SHORT-NAME)}		
Available via	Rte_DoIP_Type.h		

⌋ *()*

[SWS_DoIP_00268] ⌈

Name	AuthenticationResDataType_{Name}		
Kind	Array	**Element type**	uint8
Size	{ecuc(DoIP/DoIPConfigSet/DoIPRoutingActivation/DoIPRoutingActivationAuthentication Callback.DoIPRoutingActivationAuthenticationResLength)} Elements		
Description	–		
Variation	Name = {ecuc(DoIP/DoIPConfigSet/DoIPRoutingActivation.SHORT-NAME)}		
Available via	Rte_DoIP_Type.h		

⌋ *()*

[SWS_DoIP_00269] ⌈

Name	ConfirmationReqDataType_{Name}		
Kind	Array	**Element type**	uint8
Size	{ecuc(DoIP/DoIPConfigSet/DoIPRoutingActivation/DoIPRoutingActivationConfirmationCallback.Do IPRoutingActivationConfirmationReqLength)} Elements		
Description	–		
Variation	Name = {ecuc(DoIP/DoIPConfigSet/DoIPRoutingActivation.SHORT-NAME)}		
Available via	Rte_DoIP_Type.h		

⌋ *()*

[SWS_DoIP_00270] ⌈

Name	ConfirmationResDataType_{Name}		
Kind	Array	**Element type**	uint8
Size	{ecuc(DoIP/DoIPConfigSet/DoIPRoutingActivation/DoIPRoutingActivationConfirmationCallback.Do IPRoutingActivationConfirmationResLength)} Elements		
Description	–		
Variation	Name = {ecuc(DoIP/DoIPConfigSet/DoIPRoutingActivation.SHORT-NAME)}		
Available via	Rte_DoIP_Type.h		

⌋ *()*

[SWS_DoIP_00287] ⌈

Name	DoIP_FurtherActionByteType		
Kind	Type		
Derived from	uint8		
Range	0x11..0xFF	–	Available for additional OEM-specific use
Description	Used to get the OEM specific Further Action Byte for the DoIP vehicle identification response/ vehicle announcement.		
Variation	–		
Available via	Rte_DoIP_Type.h		

⌋*(SRS_Eth_00026)*

8.2 Type definitions

[SWS_DoIP_00272] ⌈The value of DOIP_E_PENDING shall be 0x10.⌋ *()*

The following Data Types shall be used for the functions defined in this specification.

8.2.1 DoIP_ConfigType

[SWS_DoIP_00025] ⌈

Name	DoIP_ConfigType	
Kind	Structure	
Elements	Implementation specific	
	Type	–
	Comment	The content of the configuration data structure is implementation specific
Description	Configuration data structure of the DoIP module	
Available via	DoIP.h	

⌋*()*

8.3 Function definitions

This chapter contains a list of functions provided to upper layer modules.

8.3.1 DoIP_TpTransmit

[SWS_DoIP_00022] ⌈

Service Name	DoIP_TpTransmit

Syntax	`Std_ReturnType DoIP_TpTransmit (`
	`  PduIdType TxPduId,`
	`  const PduInfoType* PduInfoPtr`
	`)`

Service ID [hex]	0x53
Sync/Async	Synchronous
Reentrancy	Reentrant for different PduIds. Non reentrant for the same PduId.
Parameters (in)	TxPduId	Identifier of the PDU to be transmitted
	PduInfoPtr	Length of and pointer to the PDU data and pointer to MetaData.
Parameters (inout)	None	
Parameters (out)	None	
Return value	Std_ReturnType	E_OK: Transmit request has been accepted. E_NOT_OK: Transmit request has not been accepted.
Description	Requests transmission of a PDU.	
Available via	DoIP.h	

⌋*(SRS_Eth_00024)*

[SWS_DoIP_00162] ⌈If development error detection is enabled: The function shall check that the service DoIP_Init was previously called. If the check fails, the function shall raise the development error DOIP_E_UNINIT.⌋*()*

[SWS_DoIP_00163] ⌈If development error detection is enabled: The function shall check if the TxPduId matches a configured DoIPPduRTxPduId. If the check fails the function shall raise the development error DOIP_E_INVALID_PDU_SDU_ID.⌋*()*

[SWS_DoIP_00164] ⌈If development error detection is enabled: The function shall check if the PduInfoPtr is not a NULL_PTR. If the check fails the function shall raise the development error DOIP_E_PARAM_POINTER.⌋*()*

8.3.2 DoIP_TpCancelTransmit

[SWS_DoIP_00023] ⌈

Service Name	DoIP_TpCancelTransmit

Syntax	`Std_ReturnType DoIP_TpCancelTransmit (`
	`  PduIdType TxPduId`
	`)`

Service ID [hex]	0x54
Sync/Async	Synchronous Reentrant for different PduIds. Non reentrant for the same PduId.
Reentrancy	Non Reentrant
Parameters (in)	TxPduId	–
Parameters (inout)	None	

▽

△

Parameters (out)	None	
Return value	Std_ReturnType	E_OK: Cancellation was executed successfully by the destination module. E_NOT_OK: Cancellation was rejected by the destination module.
Description	Requests cancellation of an ongoing transmission of a PDU in a lower layer communication module. The call of this API to cancel an ongoing transmission will close the used TCP connection.	
Available via	DoIP.h	

⌋*(SRS_Eth_00024)*

[SWS_DoIP_00166] ⌈If development error detection is enabled: The function shall check that the service DoIP_Init was previously called. If the check fails, the function shall raise the development error DOIP_E_UNINIT.⌋*()*

[SWS_DoIP_00167] ⌈If development error detection is enabled: The function shall check if the TxPduId matches a configured DoIPPduRTxPduId. If the check fails the function shall raise the development error DOIP_E_INVALID_PDU_SDU_ID.⌋*()*

8.3.3 DoIP_TpCancelReceive

[SWS_DoIP_00024] ⌈

Service Name	DoIP_TpCancelReceive	

Syntax	`Std_ReturnType DoIP_TpCancelReceive (`
	`  PduIdType RxPduId`
	`)`	

Service ID [hex]	0x4c	
Sync/Async	Synchronous	
Reentrancy	Non Reentrant	
Parameters (in)	RxPduId	Identification of the PDU to be cancelled.
Parameters (inout)	None	
Parameters (out)	None	
Return value	Std_ReturnType	E_OK: Cancellation was executed successfully by the destination module. E_NOT_OK: Cancellation was rejected by the destination module.
Description	Requests cancellation of an ongoing reception of a PDU in a lower layer transport protocol module. The call of this API to cancel an ongoing reception will close the used TCP connection.	
Available via	DoIP.h	

⌋*(SRS_Eth_00024)*

[SWS_DoIP_00169] ⌈If development error detection is enabled: The function shall check that the service DoIP_Init was previously called. If the check fails, the function shall raise the development error DOIP_E_UNINIT.⌋*()*

[SWS_DoIP_00170] ⌈If development error detection is enabled: The function shall check if the RxPduId matches a configured DoIPPduRRxPduId. If the check fails the function shall raise the development error DOIP_E_INVALID_PDU_SDU_ID.⌋*()*

8.3.4 DoIP_IfTransmit

[SWS_DoIP_00277] ⌈

Service Name	DoIP_IfTransmit	

Syntax	`Std_ReturnType DoIP_IfTransmit (`
	`  PduIdType TxPduId,`
	`  const PduInfoType* PduInfoPtr`
	`)`	

Service ID [hex]	0x49	
Sync/Async	Synchronous	
Reentrancy	Reentrant for different PduIds. Non reentrant for the same PduId.	
Parameters (in)	TxPduId	Identifier of the PDU to be transmitted
	PduInfoPtr	Length of and pointer to the PDU data and pointer to MetaData.
Parameters (inout)	None	
Parameters (out)	None	
Return value	Std_ReturnType	E_OK: Transmit request has been accepted. E_NOT_OK: Transmit request has not been accepted.
Description	Requests transmission of a PDU.	
Available via	DoIP.h	

⌋*(SRS_Eth_00024)*

8.3.5 DoIP_IfCancelTransmit

[SWS_DoIP_00278] ⌈

Service Name	DoIP_IfCancelTransmit	

Syntax	`Std_ReturnType DoIP_IfCancelTransmit (`
	`  PduIdType TxPduId`
	`)`	

Service ID [hex]	0x4a	
Sync/Async	Synchronous	
Reentrancy	Reentrant for different PduIds. Non reentrant for the same PduId.	
Parameters (in)	TxPduId	Identification of the PDU to be cancelled.
Parameters (inout)	None	
Parameters (out)	None	
Return value	Std_ReturnType	E_OK: Cancellation was executed successfully by the destination module. E_NOT_OK: Cancellation was rejected by the destination module.
Description	Requests cancellation of an ongoing transmission of a PDU in a lower layer communication module.	
Available via	DoIP.h	

⌋*(SRS_Eth_00024)*

8.3.6 DoIP_Init

[SWS_DoIP_00026] ⌈

Service Name	DoIP_Init	

Syntax	`void DoIP_Init (`
	`  const DoIP_ConfigType* DoIPConfigPtr`
	`)`	

Service ID [hex]	0x01	
Sync/Async	Synchronous	
Reentrancy	Non Reentrant	
Parameters (in)	DoIPConfigPtr	Pointer to the configuration data of the DoIP module
Parameters (inout)	None	
Parameters (out)	None	
Return value	None	
Description	This service initializes all global variables of the DoIP module. After return of this service the DoIP module is operational.	
Available via	DoIP.h	

⌋*(SRS_Eth_00024)*

8.3.7 DoIP_GetVersionInfo

[SWS_DoIP_00027] ⌈

Service Name	DoIP_GetVersionInfo	

Syntax	`void DoIP_GetVersionInfo (`
	`  Std_VersionInfoType* versioninfo`
	`)`	

Service ID [hex]	0x00	
Sync/Async	Synchronous	
Reentrancy	Reentrant	
Parameters (in)	None	
Parameters (inout)	None	
Parameters (out)	versioninfo	Pointer to where to store the version information of this module.
Return value	None	
Description	Returns the version information of this module.	
Available via	DoIP.h	

⌋*(SRS_BSW_00407, SRS_BSW_00411)*

[SWS_DoIP_00172] ⌈If development error detection is enabled: The function shall check if the versioninfo is not a NULL_PTR. If the check fails the function shall raise the development error DOIP_E_PARAM_POINTER.⌋*()*

((SRS_BSW_00323, SRS_BSW_00386)

[SWS_DoIP_00030] ⌈If source code for caller and callee of DoIP_GetVersionInfo is available, the DoIP module should realize DoIP_GetVersionInfo as a macro, defined in the module's header file.⌋*()*

8.3.8 DoIP_ActivationLineSwitch

[SWS_DoIP_91000] ⌈

Service Name	DoIP_ActivationLineSwitch

Syntax	`void DoIP_ActivationLineSwitch (`
	`  uint8 InterfaceId  ,`
	`  boolean* Active`
	`)`

Service ID [hex]	0x0e
Sync/Async	Synchronous
Reentrancy	Non Reentrant
Parameters (in)	InterfaceId	Indentifier of the DoIP interface for which DoIP_ActivationLine Switch function is called.
Parameters (inout)	Active	Boolean value acting as input parameter to request active/ inactive status of the given DoIP Interface and acts as an output parameter indicating the activation line status.
Parameters (out)	None	
Return value	None	
Description	This function is to be used by integrators to inform the DoIP implementation about the status of the activation line of a DoIP interface with given InterfaceId.	
Available via	DoIP.h	

⌋*()*

[SWS_DoIP_00285] ⌈If development error detection is enabled: The function shall check that the service DoIP_Init was previously called. If the check fails, the function shall raise the development error DOIP_E_UNINIT.⌋*()*

[SWS_DoIP_00302] ⌈If development error detection is enabled DoIP_ ActivationLine Switch (InterfaceId,*Active) shall check if interface identified by InterfaceId actually exists and DoIPInterfaceActLineCtrl is set to TRUE. If the check fails, the function shall raise the development error DOIP_E_INVALID_PARAMETER.⌋*()*

[SWS_DoIP_00303] ⌈If development error detection is enabled call to DoIP_ ActivationLineSwitch shall check if the interface identified by InterfaceId actually exists. If the check fails, the function shall raise the development error DOIP_E_INVALID_PARAMETER.⌋*()*

8.3.9 DoIP_ TriggerVehicleAnnouncement

[SWS_DoIP_91002] ⌈

Service Name	DoIP_TriggerVehicleAnnouncement

Syntax	`void DoIP_TriggerVehicleAnnouncement (`
	`  uint8 InterfaceId`
	`)`

Service ID [hex]	0x0d
Sync/Async	Asynchronous

▽

$\triangle$

Reentrancy	Non Reentrant	
Parameters (in)	InterfaceId	Indentifier of the DoIP interface for which DoIP_TriggerVehicle Announcement is called.
Parameters (inout)	None	
Parameters (out)	None	
Return value	None	
Description	This function is used to notify the DoIP module to start vehicle announcement for DoIP interfaces with given InterfaceId. This function is just a trigger to start the DoIPInitialVehicle AnnouncementTime timeout.	
Available via	DoIP.h	

$\rfloor$*()*

[SWS_DoIP_00304] $\lceil$If development error detection is enabled DoIP_ TriggerVehicle Announcement shall check if the interface identified by InterfaceId is configured with DoIPInterfaceActLineCtrl set to FALSE. If the check fails the function shall raise the development error DOIP_E_INVALID_PARAMETER.$\rfloor$*()*

[SWS_DoIP_00305] $\lceil$If development error detection is enabled call to DoIP_ Trigger VehicleAnnouncement shall check if the interface identified by InterfaceId actually exists. If the check fails, the function shall raise the development error DOIP_E_INVALID_ PARAMETER.$\rfloor$*()*

8.4 Call-back notifications

In AUTOSAR, the functions a module provides to layers which are placed below the module in the AUTOSAR software layer model, are called 'call-back functions'. Generally, a software entity A (DoIP), which, in order to be informed about some event C in software entity B (SoAd), is registered as interested in event C at software entity B by calling a register mechanism B provides, and is called by entity B if event C occurs.

This chapter contains a list of Call-Back functions which are called by the lower layer SoAd module.

8.4.1 DoIP_SoAdTpCopyTxData

[SWS_DoIP_00031] $\lceil$

Service Name	DoIP_SoAdTpCopyTxData
Syntax	```BufReq_ReturnType DoIP_SoAdTpCopyTxData (
PduIdType id,
const PduInfoType* info,
const RetryInfoType* retry,
PduLengthType* availableDataPtr
)```
Service ID [hex]	0x43

$\triangledown$

$\triangle$

Sync/Async	Synchronous	
Reentrancy	Reentrant	
Parameters (in)	id	Identification of the transmitted I-PDU.
	info	Provides the destination buffer (SduDataPtr) and the number of bytes to be copied (SduLength). If not enough transmit data is available, no data is copied by the upper layer module and BUFREQ_E_BUSY is returned. The lower layer module may retry the call. An SduLength of 0 can be used to indicate state changes in the retry parameter or to query the current amount of available data in the upper layer module. In this case, the Sdu DataPtr may be a NULL_PTR.
	retry	This parameter is used to acknowledge transmitted data or to retransmit data after transmission problems.
		If the retry parameter is a NULL_PTR, it indicates that the transmit data can be removed from the buffer immediately after it has been copied. Otherwise, the retry parameter must point to a valid RetryInfoType element.
		If TpDataState indicates TP_CONFPENDING, the previously copied data must remain in the TP buffer to be available for error recovery. TP_DATACONF indicates that all data that has been copied before this call is confirmed and can be removed from the TP buffer. Data copied by this API call is excluded and will be confirmed later. TP_DATARETRY indicates that this API call shall copy previously copied data in order to recover from an error. In this case TxTpDataCnt specifies the offset in bytes from the current data copy position.
Parameters (inout)	None	
Parameters (out)	availableDataPtr	Indicates the remaining number of bytes that are available in the upper layer module's Tx buffer. availableDataPtr can be used by TP modules that support dynamic payload lengths (e.g. FrIsoTp) to determine the size of the following CFs.
Return value	BufReq_ReturnType	BUFREQ_OK: Data has been copied to the transmit buffer completely as requested. BUFREQ_E_BUSY: Request could not be fulfilled, because the required amount of Tx data is not available. The lower layer module may retry this call later on. No data has been copied. BUFREQ_E_NOT_OK: Data has not been copied. Request failed.
Description	This function is called to acquire the transmit data of an I-PDU segment (N-PDU). Each call to this function provides the next part of the I-PDU data unless retry->TpDataState is TP_DATARETRY. In this case the function restarts to copy the data beginning at the offset from the current position indicated by retry->TxTpDataCnt. The size of the remaining data is written to the position indicated by availableDataPtr.	
Available via	DoIP.h	

$\rfloor$(*SRS_Eth_00024*)

[SWS_DoIP_00175] $\lceil$If development error detection is enabled: The function shall check that the service DoIP_Init was previously called. If the check fails, the function shall raise the development error DOIP_E_UNINIT.$\rfloor$*()*

[SWS_DoIP_00176] $\lceil$If development error detection is enabled: The function shall check if the id matches a configured DoIPSoAdTcpTxPduId. If the check fails the function shall raise the development error DOIP_E_INVALID_PDU_SDU_ID.$\rfloor$*()*

[SWS_DoIP_00177] $\lceil$If development error detection is enabled: The function shall check that neither the info nor the availableDataPtr are a NULL_PTR. If the check fails the function shall raise the development error DOIP_E_PARAM_POINTER.$\rfloor$*()*

[SWS_DoIP_00178] ⌈If development error detection is enabled: The function shall check if the retry is a NULL_PTR. If the check fails the function shall raise the development error DOIP_E_INVALID_PARAMETER.⌋*()*

8.4.2 DoIP_SoAdTpTxConfirmation

[SWS_DoIP_00032] ⌈

Service Name	DoIP_SoAdTpTxConfirmation

Syntax	`void DoIP_SoAdTpTxConfirmation (`
	`  PduIdType id,`
	`  Std_ReturnType result`
	`)`

Service ID [hex]	0x48
Sync/Async	Synchronous
Reentrancy	Reentrant
Parameters (in)	id — Identification of the transmitted I-PDU.
	result — E_OK: The PDU was transmitted. E_NOT_OK: Transmission of the PDU failed.
Parameters (inout)	None
Parameters (out)	None
Return value	None
Description	This function is called after the I-PDU has been transmitted on its network, the result indicates whether the transmission was successful or not.
Available via	DoIP.h

⌋*(SRS_Eth_00024)*

[SWS_DoIP_00180] ⌈If development error detection is enabled: The function shall check that the service DoIP_Init was previously called. If the check fails, the function shall raise the development error DOIP_E_UNINIT.⌋*()*

[SWS_DoIP_00181] ⌈If development error detection is enabled: The function shall check if the id matches a configured DoIPSoAdTcpTxPduId. If the check fails the function shall raise the development error DOIP_E_INVALID_PDU_SDU_ID.⌋*()*

[SWS_DoIP_00182] ⌈If development error detection is enabled: The function shall check if the result is valid. If the check fails the function shall raise the development error DOIP_E_INVALID_PARAMETER.⌋*()*

8.4.3 DoIP_SoAdTpCopyRxData

[SWS_DoIP_00033] ⌈

Service Name	DoIP_SoAdTpCopyRxData	

Syntax	`BufReq_ReturnType DoIP_SoAdTpCopyRxData (`
	`  PduIdType id,`
	`  const PduInfoType* info,`
	`  PduLengthType* bufferSizePtr`
	`)`	

Service ID [hex]	0x44	
Sync/Async	Synchronous	
Reentrancy	Reentrant	
Parameters (in)	id	Identification of the received I-PDU.
	info	Provides the source buffer (SduDataPtr) and the number of bytes to be copied (SduLength). An SduLength of 0 can be used to query the current amount of available buffer in the upper layer module. In this case, the SduDataPtr may be a NULL_PTR.
Parameters (inout)	None	
Parameters (out)	bufferSizePtr	Available receive buffer after data has been copied.
Return value	BufReq_ReturnType	BUFREQ_OK: Data copied successfully BUFREQ_E_NOT_OK: Data was not copied because an error occurred.
Description	This function is called to provide the received data of an I-PDU segment (N-PDU) to the upper layer. Each call to this function provides the next part of the I-PDU data. The size of the remaining buffer is written to the position indicated by bufferSizePtr.	
Available via	DoIP.h	

⌋*(SRS_Eth_00024)*

[SWS_DoIP_00183] ⌈If development error detection is enabled: The function shall check that the service DoIP_Init was previously called. If the check fails, the function shall raise the development error DOIP_E_UNINIT.⌋*()*

[SWS_DoIP_00036] ⌈If development error detection is enabled: The function shall check if the id matches a configured DoIPSoAdTcpRxPduId. If the check fails the function shall raise the development error DOIP_E_INVALID_PDU_SDU_ID.⌋*()*

[SWS_DoIP_00184] ⌈If development error detection is enabled: The function shall check that neither the info nor the bufferSizePtr are a NULL_PTR. If the check fails, the function shall raise the development error DOIP_E_PARAM_POINTER.⌋*()*

8.4.4 DoIP_SoAdTpStartOfReception

[SWS_DoIP_00037] ⌈

Service Name	DoIP_SoAdTpStartOfReception

Syntax	`BufReq_ReturnType DoIP_SoAdTpStartOfReception (`
	`  PduIdType id,`
	`  const PduInfoType* info,`
	`  PduLengthType TpSduLength,`
	`  PduLengthType* bufferSizePtr`
	`)`

Service ID [hex]	0x46
Sync/Async	Synchronous
Reentrancy	Reentrant
Parameters (in)	id	Identification of the I-PDU.
	info	Pointer to a PduInfoType structure containing the payload data (without protocol information) and payload length of the first frame or single frame of a transport protocol I-PDU reception, and the MetaData related to this PDU. If neither first/single frame data nor MetaData are available, this parameter is set to NULL_PTR.
	TpSduLength	Total length of the N-SDU to be received.
Parameters (inout)	None	
Parameters (out)	bufferSizePtr	Available receive buffer in the receiving module. This parameter will be used to compute the Block Size (BS) in the transport protocol module.
Return value	BufReq_ReturnType	BUFREQ_OK: Connection has been accepted. bufferSizePtr indicates the available receive buffer; reception is continued. If no buffer of the requested size is available, a receive buffer size of 0 shall be indicated by bufferSizePtr. BUFREQ_E_NOT_OK: Connection has been rejected; reception is aborted. bufferSizePtr remains unchanged. BUFREQ_E_OVFL: No buffer of the required length can be provided; reception is aborted. bufferSizePtr remains unchanged.
Description	This function is called at the start of receiving an N-SDU. The N-SDU might be fragmented into multiple N-PDUs (FF with one or more following CFs) or might consist of a single N-PDU (SF). The service shall provide the currently available maximum buffer size when invoked with TpSduLength equal to 0.
Available via	DoIP.h

⌋(*SRS_Eth_00024*)

[SWS_DoIP_00186] ⌈If development error detection is enabled: The function shall check that the service DoIP_Init was previously called. If the check fails, the function shall raise the development error DOIP_E_UNINIT.⌋*()*

[SWS_DoIP_00187] ⌈If development error detection is enabled: The function shall check if the id matches a configured DoIPSoAdTcpRxPduId. If the check fails the function shall raise the development error DOIP_E_INVALID_PDU_SDU_ID.⌋*()*

[SWS_DoIP_00188] ⌈If development error detection is enabled: The function shall check if the bufferSizePtr is not a NULL_PTR. If the check fails the function shall raise the development error DOIP_E_PARAM_POINTER.⌋*()*

[SWS_DoIP_00189] ⌈If development error detection is enabled: The function shall check if the TpSduLength is not 0. If TpSduLength is not 0 the function shall raise the development error DOIP_E_INVALID_PARAMETER.⌋*()*

Note: This is because SoAd will call the DoIP module only once with the TpSduLength set to 0 after the TCP connection has been established.

8.4.5 DoIP_SoAdTpRxIndication

[SWS_DoIP_00038] ⌈

Service Name	DoIP_SoAdTpRxIndication	

Syntax	`void DoIP_SoAdTpRxIndication (`
	`  PduIdType id,`
	`  Std_ReturnType result`
	`)`	

Service ID [hex]	0x45	
Sync/Async	Synchronous	
Reentrancy	Reentrant	
Parameters (in)	id	Identification of the received I-PDU.
	result	E_OK: The PDU was received. E_NOT_OK: Reception of the PDU failed.
Parameters (inout)	None	
Parameters (out)	None	
Return value	None	
Description	Called after an I-PDU has been received via the TP API, the result indicates whether the transmission was successful or not.	
Available via	DoIP.h	

⌋*(SRS_Eth_00024)*

[SWS_DoIP_00190] ⌈If development error detection is enabled: The function shall check that the service DoIP_Init was previously called. If the check fails, the function shall raise the development error DOIP_E_UNINIT.⌋*()*

[SWS_DoIP_00191] ⌈If development error detection is enabled: The function shall check if the id matches a configured DoIPSoAdTcpRxPduId. If the check fails the function shall raise the development error DOIP_E_INVALID_PDU_SDU_ID.⌋*()*

[SWS_DoIP_00192] ⌈If development error detection is enabled: The function shall check if the result is valid. If the check fails the function shall raise the development error DOIP_E_INVALID_PARAMETER.⌋*()*

8.4.6 DoIP_SoAdIfRxIndication

[SWS_DoIP_00244] ⌈

Service Name	DoIP_SoAdIfRxIndication	

Syntax	`void DoIP_SoAdIfRxIndication (`
	`  PduIdType RxPduId,`
	`  const PduInfoType* PduInfoPtr`
	`)`	

Service ID [hex]	0x42	
Sync/Async	Synchronous	
Reentrancy	Reentrant for different PduIds. Non reentrant for the same PduId.	
Parameters (in)	RxPduId	ID of the received PDU.
	PduInfoPtr	Contains the length (SduLength) of the received PDU, a pointer to a buffer (SduDataPtr) containing the PDU, and the MetaData related to this PDU.
Parameters (inout)	None	
Parameters (out)	None	
Return value	None	
Description	Indication of a received PDU from a lower layer communication interface module.	
Available via	DoIP.h	

⌋(*SRS_Eth_00024*)

[SWS_DoIP_00246] ⌈If development error detection is enabled: The function shall check that the service DoIP_Init was previously called. If the check fails, the function shall raise the development error DOIP_E_UNINIT.⌋*()*

[SWS_DoIP_00247] ⌈If development error detection is enabled: The function shall check if the RxPduId matches a configured DoIPSoAdUdpRxPduId. If the check fails the function shall raise the development error DOIP_E_INVALID_PDU_SDU_ID.⌋*()*

[SWS_DoIP_00248] ⌈If development error detection is enabled: The function shall check the validity of the PduInfoPtr and call the DET with DOIP_E_PARAM_POINTER error id if it is a NULL_PTR.⌋*()*

8.4.7 DoIP_SoAdIfTxConfirmation

[SWS_DoIP_00245] ⌈

Service Name	DoIP_SoAdIfTxConfirmation	

Syntax	`void DoIP_SoAdIfTxConfirmation (`
	`  PduIdType TxPduId,`
	`  Std_ReturnType result`
	`)`	

Service ID [hex]	0x40	
Sync/Async	Synchronous	
Reentrancy	Reentrant for different PduIds. Non reentrant for the same PduId.	
Parameters (in)	TxPduId	ID of the PDU that has been transmitted.

▽

△

result	E_OK: The PDU was transmitted. E_NOT_OK: Transmission of the PDU failed.	
Parameters (inout)	None	
Parameters (out)	None	
Return value	None	
Description	The lower layer communication interface module confirms the transmission of a PDU, or the failure to transmit a PDU.	
Available via	DoIP.h	

⌋*(SRS_Eth_00024)*

[SWS_DoIP_00249] ⌈If development error detection is enabled: The function shall check that the service DoIP_Init was previously called. If the check fails, the function shall raise the development error DOIP_E_UNINIT.⌋*()*

[SWS_DoIP_00250] ⌈If development error detection is enabled: The function shall check if the TxPduId matches a configured DoIPSoAdUdpTxPduId. If the check fails the function shall raise the development error DOIP_E_INVALID_PDU_SDU_ID.⌋*()*

8.4.8 DoIP_SoConModeChg

[SWS_DoIP_00039] ⌈

Service Name	DoIP_SoConModeChg	

Syntax	`void DoIP_SoConModeChg (`
	`  SoAd_SoConIdType SoConId,`
	`  SoAd_SoConModeType Mode`
	`)`	

Service ID [hex]	0x0b	
Sync/Async	Synchronous	
Reentrancy	Reentrant for different SoConIds. Non reentrant for the same SoConId.	
Parameters (in)	SoConId	socket connection index specifying the socket connection with the mode change.
	Mode	new mode
Parameters (inout)	None	
Parameters (out)	None	
Return value	None	
Description	Notification about a SoAd socket connection state change, e.g. socket connection gets online	
Available via	DoIP.h	

⌋*(SRS_Eth_00081, SRS_Eth_00028)*

[SWS_DoIP_00193] ⌈If development error detection is enabled: The function shall check that the service DoIP_Init was previously called. If the check fails, the function shall raise the development error DOIP_E_UNINIT.⌋*()*

[SWS_DoIP_00194] ⌈If development error detection is enabled: The function shall check if the SoConId and Mode are valid. If the check fails the function shall raise the development error DOIP_E_INVALID_PARAMETER.⌋*()*

8.4.9 DoIP_LocalIpAddrAssignmentChg

[SWS_DoIP_00040] ⌈

Service Name	DoIP_LocalIpAddrAssignmentChg

Syntax	`void DoIP_LocalIpAddrAssignmentChg (`
	`  SoAd_SoConIdType SoConId,`
	`  TcpIp_IpAddrStateType State`
	`)`

Service ID [hex]	0x0c
Sync/Async	Synchronous
Reentrancy	Reentrant for different SoConIds. Non reentrant for the same SoConId.
Parameters (in)	SoConId	socket connection index specifying the socket connection where the IP address assigment has changed
	State	state of IP address assignment
Parameters (inout)	None
Parameters (out)	None
Return value	None
Description	This function gets called by the SoAd if an IP address assignment related to a socket connection changes (i.e. new address assigned or assigned address becomes invalid).
Available via	DoIP.h

⌋*(SRS_Eth_00081, SRS_Eth_00028)*

[SWS_DoIP_00195] ⌈If development error detection is enabled: The function shall check that the service DoIP_Init was previously called. If the check fails, the function shall raise the development error DOIP_E_UNINIT.⌋*()*

[SWS_DoIP_00196] ⌈If development error detection is enabled: The function shall check if the SoConId and State are valid. If the check fails the function shall raise the development error DOIP_E_INVALID_PARAMETER.⌋*()*

8.5 Scheduled functions

The Basic Software Scheduler within the Rte [8] directly calls these functions. The following functions shall have no return value and no parameter. All functions shall be non reentrant.

8.5.1 DoIP_MainFunction

[SWS_DoIP_00041] ⌈

Service Name	DoIP_MainFunction

Syntax	`void DoIP_MainFunction (`
	`  void`
	`)`

▽

△

Service ID [hex]	0x02
Description	Schedules the Diagnostic over IP module. (Entry point for scheduling)
Available via	SchM_DoIP.h

⌋*()*

[SWS_DoIP_00042] ⌈The main function for scheduling the DoIP module (Entry point for scheduling) shall be called by the Schedule Manager according to the configured call period.⌋*()*

[SWS_DoIP_00043] ⌈The call period of the DoIP_MainFunction() is determined by the configuration parameter DoIPMainFunctionPeriod.⌋*()*

8.6 Expected Interfaces

In this chapter all interfaces required from other modules are listed.

8.6.1 Mandatory Interfaces

This chapter defines all interfaces which are required to fulfill the core functionality of the module.

[SWS_DoIP_00044] ⌈

API Function	Header File	Description
Dcm_GetVin	Dcm.h	Function to get the VIN (as defined in SAE J1979-DA)
PduR_DoIPTpCopyRxData	PduR_DoIPTp.h	This function is called to provide the received data of an I-PDU segment (N-PDU) to the upper layer. Each call to this function provides the next part of the I-PDU data. The size of the remaining buffer is written to the position indicated by bufferSizePtr.
PduR_DoIPTpCopyTxData	PduR_DoIPTp.h	This function is called to acquire the transmit data of an I-PDU segment (N-PDU). Each call to this function provides the next part of the I-PDU data unless retry->TpDataState is TP_DATARETRY. In this case the function restarts to copy the data beginning at the offset from the current position indicated by retry->TxTpDataCnt. The size of the remaining data is written to the position indicated by availableDataPtr.
PduR_DoIPTpRxIndication	PduR_DoIPTp.h	Called after an I-PDU has been received via the TP API, the result indicates whether the transmission was successful or not.

▽

$\triangle$

API Function	Header File	Description
PduR_DoIPTpStartOfReception	PduR_DoIPTp.h	This function is called at the start of receiving an N-SDU. The N-SDU might be fragmented into multiple N-PDUs (FF with one or more following CFs) or might consist of a single N-PDU (SF). The service shall provide the currently available maximum buffer size when invoked with TpSdu Length equal to 0.
PduR_DoIPTpTxConfirmation	PduR_DoIPTp.h	This function is called after the I-PDU has been transmitted on its network, the result indicates whether the transmission was successful or not.
SoAd_CloseSoCon	SoAd.h	This service closes the socket connection specified by SoConId.
SoAd_GetPhysAddr	SoAd.h	Retrieves the physical source address of the EthIf controller used by the SoAd socket connection specified by SoConId.
SoAd_GetSoConId	SoAd.h	Returns socket connection index related to the specified TxPduId.
SoAd_IfTransmit	SoAd.h	Requests transmission of a PDU.
SoAd_OpenSoCon	SoAd.h	This service opens the socket connection specified by SoConId.
SoAd_ReadDhcpHostNameOption	SoAd.h	By this API service an upper layer of the SoAd can read the currently configured hostname, i.e. FQDN option in the DHCP submodule of the TCP/IP stack.
SoAd_ReleaseIpAddrAssignment	SoAd.h	By this API service the local IP address assignment used for the socket connection specified by SoConId is released.
SoAd_RequestIpAddrAssignment	SoAd.h	By this API service the local IP address assignment which shall be used for the socket connection specified by SoConId is initiated.
SoAd_TpTransmit	SoAd.h	Requests transmission of a PDU.
SoAd_WriteDhcpHostNameOption	SoAd.h	By this API service an upper layer of the SoAd can set the hostname, i.e. FQDN option in the DHCP submodule of the TCP/IP stack.

$\rfloor$*()*

8.6.2 Optional Interfaces

This chapter defines all interfaces which are required by the DoIP module to fulfill an optional functionality of the DoIP module.

[SWS_DoIP_00045] $\lceil$

API Function	Header File	Description
Det_ReportError	Det.h	Service to report development errors.
PduR_DoIPIfTxConfirmation	PduR_DoIPIf.h	The lower layer communication interface module confirms the transmission of a PDU, or the failure to transmit a PDU.

$\rfloor$*()* Note: The PduR_DoIPIfTxConfirmation optional interface is needed only if the Do IPPduType is set to DOIP_IFPDU for at least one Tx PDU, which is the case when UUDT frames are sent via Ethernet

8.6.3 Configurable interfaces

In this chapter all interfaces are listed where the target function could be configured. The target function is usually a call-back function. The names of these kind of interfaces is not fixed because they are configurable.

8.6.3.1 <User>_DoIPGetPowerModeCallback

[SWS_DoIP_00047] ⌈

Service Name	<User>_DoIPGetPowerModeCallback	

Syntax	`Std_ReturnType <User>_DoIPGetPowerModeCallback (`
	`  DoIP_PowerStateType* PowerStateReady`
	`)`	

Sync/Async	Synchronous	
Reentrancy	Don't care	
Parameters (in)	None	
Parameters (inout)	None	
Parameters (out)	PowerStateReady	Pointer containing the information of the PowerModeStatus. Only valid if the return value equals E_OK.
Return value	Std_ReturnType	E_OK: PowerStateReady contains valid information E_NOT_OK: PowerStateReady contains no valid information
Description	Callback function to check if the PowerMode of the DoIP entity is ready or not.	
Available via	DoIP_Externals.h	

⌋*(SRS_Eth_00080)*

8.6.3.2 <User>_DoIPRoutingActivationConfirmation

[SWS_DoIP_00048] ⌈

Service Name	<User>_DoIPRoutingActivationConfirmation	

Syntax	`Std_ReturnType <User>_DoIPRoutingActivationConfirmation (`
	`  boolean* Confirmed,`
	`  const uint8* ConfirmationReqData,`
	`  uint8* ConfirmationResData`
	`)`	

Sync/Async	Synchronous	
Reentrancy	Don't care	
Parameters (in)	ConfirmationReqData	Pointer to OEM specific bytes for Routing activation request. Only needed if DoIPRoutingActivationConfirmationReqLength is not 0.
Parameters (inout)	None	
Parameters (out)	Confirmed	Pointer containing the information if Confirmation was successful (TRUE) or not (FALSE). Only valid if the return value equals E_OK.

▽

△

	ConfirmationResData	Pointer to OEM specific bytes for Response on Routing activation. Only needed if DoIPRoutingActivationConfirmationRes Length if not 0. Contains valid data if function return with E_OK.
Return value	Std_ReturnType	E_OK: Confirmed and ConfirmationResData contain valid Data. DOIP_E_PENDING: Confirmation still running. Call next DoIP_ MainFunction cycle again. E_NOT_OK: Confirmed and/or ConfirmationResData do not contain valid information.
Description	Callback function to get the confirmation for the Routing Activation.	
Available via	DoIP_Externals.h	

⌋*(SRS_Eth_00084)*

8.6.3.3 <User>_DoIPRoutingActivationAuthentication

[SWS_DoIP_00049] ⌈

Service Name	<User>_DoIPRoutingActivationAuthentication	
Syntax	```Std_ReturnType <User>_DoIPRoutingActivationAuthentication (boolean* Authentified, const uint8* AuthenticationReqData, uint8* AuthenticationResData)```	
Sync/Async	Synchronous	
Reentrancy	Don't care	
Parameters (in)	AuthenticationReqData	Pointer to OEM specific bytes for Routing activation request. Only needed if DoIPRoutingActivationAuthenticationReqLength is not 0.
Parameters (inout)	None	
Parameters (out)	Authentified	Pointer containing the information if Confirmation was successful (TRUE) or not (FALSE). Only valid if the return value equals E_ OK.
	AuthenticationResData	Pointer to OEM specific bytes for Response on Routing activation. Only needed if DoIPRoutingActivationAuthenticationResLength if not 0. Contains valid data if function return with E_OK.
Return value	Std_ReturnType	E_OK: Authentified and AuthenticationResData contain valid Data. DOIP_E_PENDING: Authentication still running. Call next DoIP_ MainFunction cycle again. E_NOT_OK: Authentified and/or AuthenticationResData do not contain valid information.
Description	Callback function to get the confirmation for the Routing Activation.	
Available via	DoIP_Externals.h	

⌋*(SRS_Eth_00084)*

8.6.3.4 <User>_DoIPTriggerGidSyncCallback

[SWS_DoIP_00050] ⌈

Service Name	<User>_DoIPTriggerGidSyncCallback	

Syntax	`Std_ReturnType <User>_DoIPTriggerGidSyncCallback (`
	  `void`
	`)`	

Sync/Async	Synchronous	
Reentrancy	Don't care	
Parameters (in)	None	
Parameters (inout)	None	
Parameters (out)	None	
Return value	Std_ReturnType	E_OK: GroupIdentifier Synchronization was triggered E_NOT_OK: GroupIdentifier Synchronization could not be triggered so try again next MainFunction
Description	Function is used in the case that DoIPVinGIDMaster is set to true and a container DoIPTrigger GidSyncCallback is configured to trigger the synchronization process of the GroupIdentifier.	
Available via	DoIP_Externals.h	

⌋*(SRS_Eth_00026)*

8.6.3.5 <User>_DoIPGetGidCallback

[SWS_DoIP_00051] ⌈

Service Name	<User>_DoIPGetGidCallback	

Syntax	`Std_ReturnType <User>_DoIPGetGidCallback (`
	  `uint8* GroupId`
	`)`	

Sync/Async	Synchronous	
Reentrancy	Don't care	
Parameters (in)	None	
Parameters (inout)	None	
Parameters (out)	GroupId	Pointer to GroupIdentifier
Return value	Std_ReturnType	E_OK: GroupId contains a valid value E_NOT_OK: GroupId does not contain a valid value
Description	Function is used in the case that DoIPVinGIDMaster is set to false and DoIPGetGidCallback is configured to get on a vehicle identification the GID. If the return value is not E_OK the DoIP shall use the default GID.	
Available via	DoIP_Externals.h	

⌋*(SRS_Eth_00026)*

8.6.3.6 <User>_DoIPGetFurtherActionByteCallback

[SWS_DoIP_00288] ⌈

Service Name	<User>_DoIPGetFurtherActionByteCallback

Syntax	`Std_ReturnType <User>_DoIPGetFurtherActionByteCallback (`
	`  DoIP_FurtherActionByteType* FurtherActionByte`
	`)`

Sync/Async	Synchronous
Reentrancy	Don't care
Parameters (in)	None
Parameters (inout)	None
Parameters (out)	FurtherActionByte	Pointer containing the information of the FurtherActionByte. Only valid if the return value equals E_OK.
Return value	Std_ReturnType	E_OK: FurtherActionByte contains valid information E_NOT_OK: FurtherActionByte contains no valid information
Description	Callback function to get the OEM specific Further Action Byte for the DoIP vehicle identification response/vehicle announcement.
Available via	DoIP_Externals.h

⌋*(SRS_Eth_00026)*

8.6.4 DoIP Service Component

The following section describes the DoIP service representation and the condition for which configuration Services have to be requested and provided by the DoIP module.

[SWS_DoIP_00052] ⌈A DoIP Service Component with the ShortName DoIP shall be provided based on the configuration of the DoIP module.⌋*()*

The DoIP Service Component shall provide the interface CallbackGetPowerMode as described below to request the value of the Power mode for DoIP diagnostic power mode handling.

[SWS_DoIP_00054] ⌈

Name	CallbackGetPowerMode		
Comment	–		
IsService	true		
Variation	{ecuc(DoIP/DoIPGeneral/DoIPPowerModeCallback/DoIPPowerModeDirect)} == NULL		
Possible Errors	0	E_OK	Operation successful
	1	E_NOT_OK	Operation failed

Operation	GetPowerMode
Comment	–
Mapped to API	<User>_DoIPGetPowerModeCallback
Variation	–
Parameters	PowerStateReady

▽

△

	Type	DoIP_PowerStateType
	Direction	OUT
	Comment	–
	Variation	–
Possible Errors	E_OK E_NOT_OK	

⌋(*SRS_Eth_00080*) The DoIP Service Component shall be equipped with a service port as described below to request the value of the Power mode for DoIP diagnostic power mode handling.

[SWS_DoIP_00261] ⌈

Name	CBGetPowerMode		
Kind	RequiredPort	Interface	CallbackGetPowerMode
Description	–		
Variation	{ecuc(DoIP/DoIPGeneral/DoIPPowerModeCallback/DoIPPowerModeDirect)} == NULL		

⌋(*SRS_Eth_00080*) The DoIP Service Component shall provide the service port interface <NameOfRoutingActivation>_RoutingActivation as described below for each DoIPRoutingActivation that has at least DoIPRoutingActivationConfirmationCallback or DoIPRoutingActivationAuthenticationCallback configured without direct Callback functions.

[SWS_DoIP_00055] ⌈

Name	{Name}_RoutingActivation		
Comment	–		
IsService	true		
Variation	((({ecuc(DoIP/DoIPConfigSet/DoIPInterface/DoIPRoutingActivation/DoIPRoutingActivationAuthenticationCallback)} != null) && ({ecuc(DoIP/DoIPConfigSet/DoIPInterface/DoIPRoutingActivation/DoIPRoutingActivationAuthenticationCallback/DoIPRoutingActivationAuthenticationFunc)} == "")) || (({ecuc(DoIP/DoIPConfigSet/DoIPInterface/DoIPRoutingActivation/DoIPRoutingActivationConfirmationCallback)} != null) && ({ecuc(DoIP/DoIPConfigSet/DoIPInterface/DoIPRoutingActivation/DoIPRoutingActivationConfirmationCallback/DoIPRoutingActivationConfirmationFunc)} == "")) Name = {ecuc(DoIP/DoIPConfigSet/DoIPInterface/DoIPRoutingActivation.SHORT-NAME)}		
Possible Errors	0	E_OK	Operation successful
	1	E_NOT_OK	Operation failed
	16	DOIP_E_PENDING	RoutingActivation still pending.

Operation	RoutingActivationAuthentication	
Comment	–	
Mapped to API	<User>_DoIPRoutingActivationAuthentication	
Variation	((({ecuc(DoIP/DoIPConfigSet/DoIPInterface/DoIPRoutingActivation/DoIPRoutingActivationAuthenticationCallback)} != NULL) && ({ecuc(DoIP/DoIPConfigSet/DoIPInterface/DoIPRoutingActivation/DoIPRoutingActivationAuthenticationCallback/DoIPRoutingActivationAuthenticationFunc)} ==NULL))	
Parameters	Authentified	
	Type	boolean

▽

	Direction	OUT
	Comment	–
	Variation	–
	AuthenticationReqData	
	Type	AuthenticationReqDataType_{Name}
	Direction	IN
	Comment	–
	Variation	{ecuc(DoIP/DoIPConfigSet/DoIPInterface/DoIPRoutingActivation/DoIPRouting ActivationAuthenticationCallback.DoIPRoutingActivationAuthenticationReq Length)} > 0 Name = {ecuc(DoIP/DoIPConfigSet/DoIPInterface/DoIPRouting Activation.SHORT-NAME)}
	AuthenticationResData	
	Type	AuthenticationResDataType_{Name}
	Direction	OUT
	Comment	–
	Variation	{ecuc(DoIP/DoIPConfigSet/DoIPInterface/DoIPRoutingActivation/DoIPRouting ActivationAuthenticationCallback.DoIPRoutingActivationAuthenticationRes Length)} > 0 Name = {ecuc(DoIP/DoIPConfigSet/DoIPInterface/DoIPRouting Activation.SHORT-NAME)}
Possible Errors	E_OK E_NOT_OK DOIP_E_PENDING	

Operation	RoutingActivationConfirmation	
Comment	–	
Mapped to API	<User>_DoIPRoutingActivationConfirmation	
Variation	((({ecuc(DoIP/DoIPConfigSet/DoIPInterface/DoIPRoutingActivation/DoIPRoutingActivation ConfirmationCallback)} != NULL) && ({ecuc(DoIP/DoIPConfigSet/DoIPInterface/DoIPRouting Activation/DoIPRoutingActivationConfirmationCallback/DoIPRoutingActivationConfirmation Func)} ==NULL))	
Parameters	Confirmed	
	Type	boolean
	Direction	OUT
	Comment	–
	Variation	–
	ConfirmedReqData	
	Type	ConfirmationReqDataType_{Name}
	Direction	IN
	Comment	–
	Variation	{ecuc(DoIP/DoIPConfigSet/DoIPInterface/DoIPRoutingActivation/DoIPRouting ActivationConfirmationCallback.DoIPRoutingActivationConfirmationReq Length)} > 0 Name = {ecuc(DoIP/DoIPConfigSet/DoIPInterface/DoIPRouting Activation.SHORT-NAME)}
	ConfirmedResData	
	Type	ConfirmationResDataType_{Name}
	Direction	OUT
	Comment	–

$\triangle$

Variation	{ecuc(DoIP/DoIPConfigSet/DoIPInterface/DoIPRoutingActivation/DoIPRouting ActivationConfirmationCallback.DoIPRoutingActivationConfirmationRes Length)} > 0 Name = {ecuc(DoIP/DoIPConfigSet/DoIPInterface/DoIPRouting Activation.SHORT-NAME)}	
Possible Errors	E_OK E_NOT_OK DOIP_E_PENDING	

⌋*(SRS_Eth_00084)* The DoIP Service Component shall be equipped with a service port as described below for each DoIPRoutingActivation that has at least DoIPRouting ActivationConfirmationCallback or DoIPRoutingActivationAuthenticationCallback configured without direct Callback functions.

[SWS_DoIP_00262] ⌈

Name	CB{Name}RoutingActivation		
Kind	RequiredPort	**Interface**	{Name}_RoutingActivation
Description	–		
Variation	Name = {ecuc(DoIP/DoIPConfigSet/DoIPInterface/DoIPRoutingActivation.SHORT-NAME)}		

⌋*(SRS_Eth_00084)* The DoIP Service Component shall provide the service port interface CallbackTriggerGIDSyncronization as described below if the container DoIPTriggerGIDSyncCallback is configured without direct Callback function.

[SWS_DoIP_00056] ⌈

Name	CallbackTriggerGIDSynchronization		
Comment	–		
IsService	true		
Variation	({ecuc(DoIP/DoIPGeneral/DoIPTriggerGidSyncCallback)} != NULL) && ({ecuc(DoIP/DoIPGeneral/DoIPTriggerGidSyncCallback/DoIPTriggerGidSyncDirect)} == NULL) && ({ecuc(DoIP/DoIPGeneral/DoIPVinGidMaster)} == TRUE)		
Possible Errors	0	E_OK	Operation successful
	1	E_NOT_OK	Operation failed

Operation	TriggerGIDSynchronization
Comment	–
Mapped to API	<User>_DoIPTriggerGidSyncCallback
Variation	–
Possible Errors	E_OK E_NOT_OK

⌋*(SRS_Eth_00026)* The DoIP Service Component shall be equipped with a service port as described below if the container DoIPTriggerGIDSyncCallback is configured without direct Callback function.

[SWS_DoIP_00263] ⌈

Name	CBTriggerGIDSynchronization		
Kind	RequiredPort	**Interface**	CallbackTriggerGIDSynchronization
Description	–		
Variation	({ecuc(DoIP/DoIPGeneral/DoIPTriggerGidSyncCallback)} != NULL) && ({ecuc(DoIP/DoIPGeneral/ DoIPTriggerGidSyncCallback/DoIPTriggerGidSyncDirect)} == NULL) && ({ecuc(DoIP/Do IPGeneral/DoIPVinGidMaster)} == TRUE)		

⌋*(SRS_Eth_00026)* The DoIP Service Component shall provide the service port interface CallbackGetGID as described below to request the GID if the container DoIPGet GidCallback is configured without direct Callback function.

[SWS_DoIP_00057] ⌈

Name	CallbackGetGID		
Comment	–		
IsService	true		
Variation	({ecuc(DoIP/DoIPGeneral/DoIPGetGidCallback)} != NULL) && ({ecuc(DoIP/DoIPGeneral/Do IPGetGidCallback/DoIPGetGidDirect)} == NULL)		
Possible Errors	0	E_OK	Operation successful
	1	E_NOT_OK	Operation failed

Operation	GetGID		
Comment	–		
Mapped to API	<User>_DoIPGetGidCallback		
Variation	–		
Parameters	Data		
	Type	uint8	
	Direction	OUT	
	Comment	–	
	Variation	–	
Possible Errors	E_OK E_NOT_OK		

⌋*(SRS_Eth_00026)* The DoIP Service Component shall provide the service port as described below to request the GID if the container DoIPGetGidCallback is configured without direct Callback function

[SWS_DoIP_00264] ⌈

Name	CBGetGID		
Kind	RequiredPort	**Interface**	CallbackGetGID
Description	–		
Variation	({ecuc(DoIP/DoIPGeneral/DoIPGetGidCallback)} != NULL) && ({ecuc(DoIP/DoIPGeneral/DoIPGet GidCallback/DoIPGetGidDirect)} == NULL)		

⌋*(SRS_Eth_00026)* The DoIP Service Component shall provide the interface DoIPActivationLineStatus as described below to be informed on the transition of the Activation Line for DoIP.

The DoIP Service Component shall provide the interface CallbackGetFurtherAction Byte as described below to request the value of the OEM specific Further Action Byte for the DoIP vehicle identification response/vehicle announcement.

[SWS_DoIP_00290] ⌈

Name	CallbackGetFurtherActionByte		
Comment	–		
IsService	true		
Variation	{ecuc(DoIP/DoIPConfigSet/DoIPInterface/DoIPFurtherActionByteCallback/DoIPFurtherAction ByteDirect)} == NULL		
Possible Errors	0	E_OK	Operation successful
	1	E_NOT_OK	Operation failed

Operation	GetFurtherActionByte		
Comment	–		
Mapped to API	<User>_DoIPGetFurtherActionByteCallback		
Variation	–		
Parameters	FurtherActionByte		
	Type	DoIP_FurtherActionByteType	
	Direction	OUT	
	Comment	–	
	Variation	–	
Possible Errors	E_OK E_NOT_OK		

⌋*(SRS_Eth_00026)* The DoIP Service Component shall be equipped with a service port per DoIPInterface as described below to request the value of the Further Action Byte for DoIP diagnostic vehicle identification response/vehicle announcement.

[SWS_DoIP_00289] ⌈

Name	CBGetfurtherActionByte*_{DoIPInterface_short_name}*		
Kind	RequiredPort	*Interface*	CallbackGetFurtherActionByte
Description	–		
Variation	{ecuc(DoIP/DoIPConfigSet/DoIPInterface/DoIPFurtherActionByteCallback/DoIPFurtherActionByte Direct)} == NULL		

⌋*(SRS_Eth_00026)*

9 Sequence diagrams

9.1 UDP DoIP communication
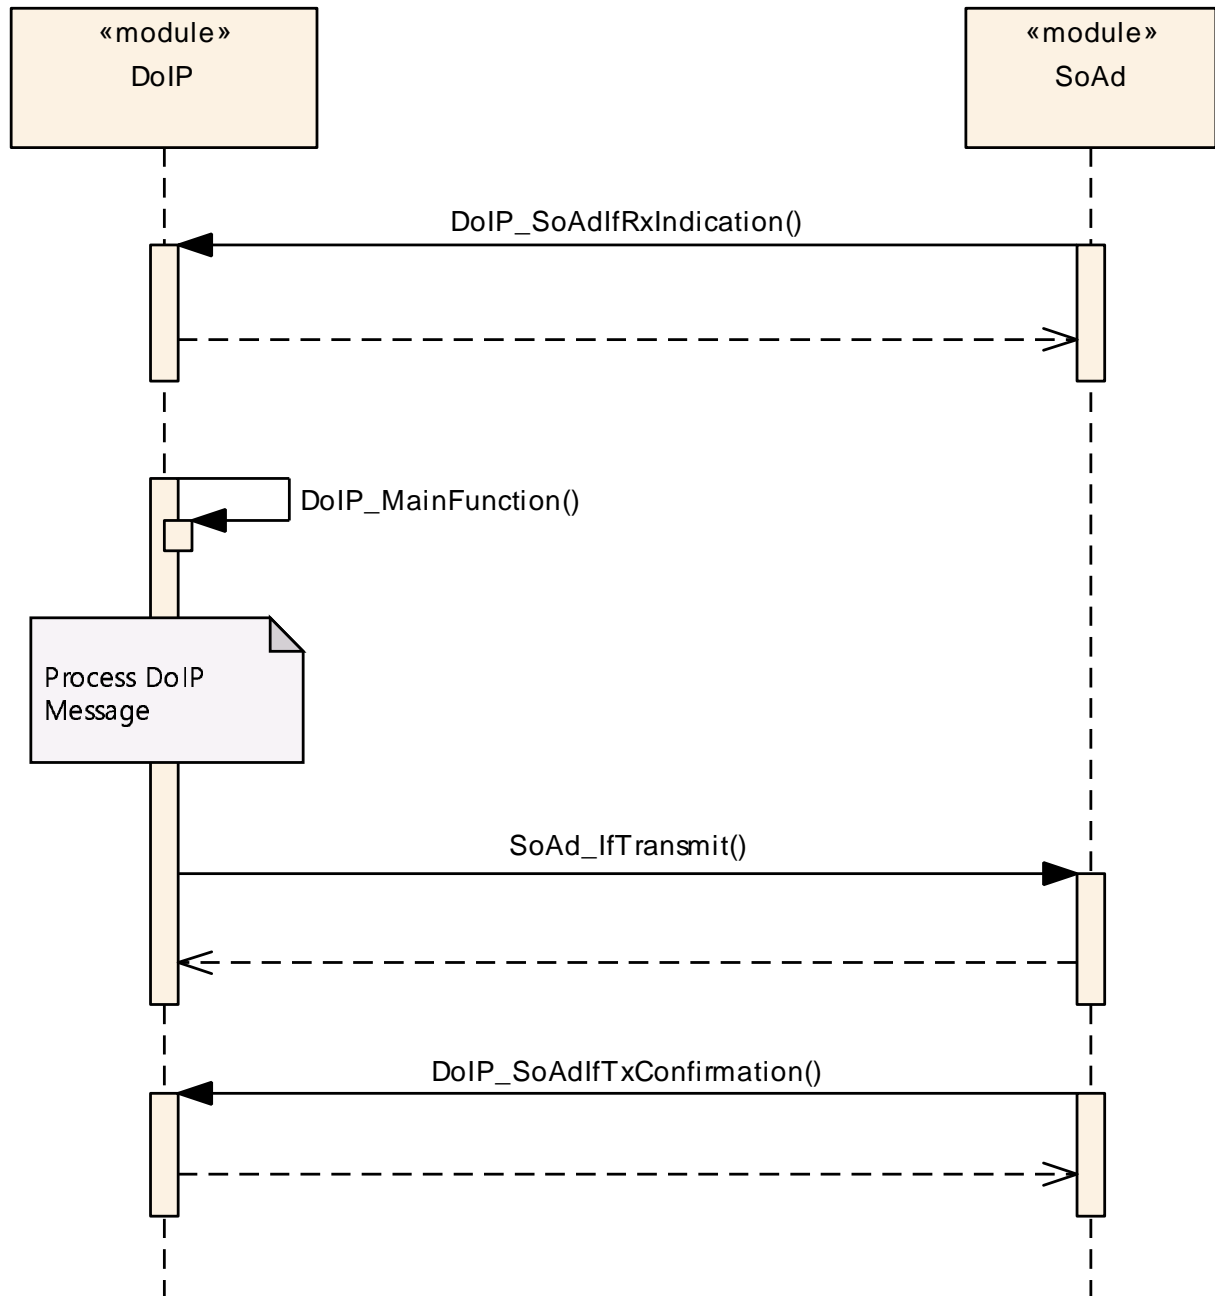
Figure 9.1: DoIP UDP communication

9.2 Rx TCP message
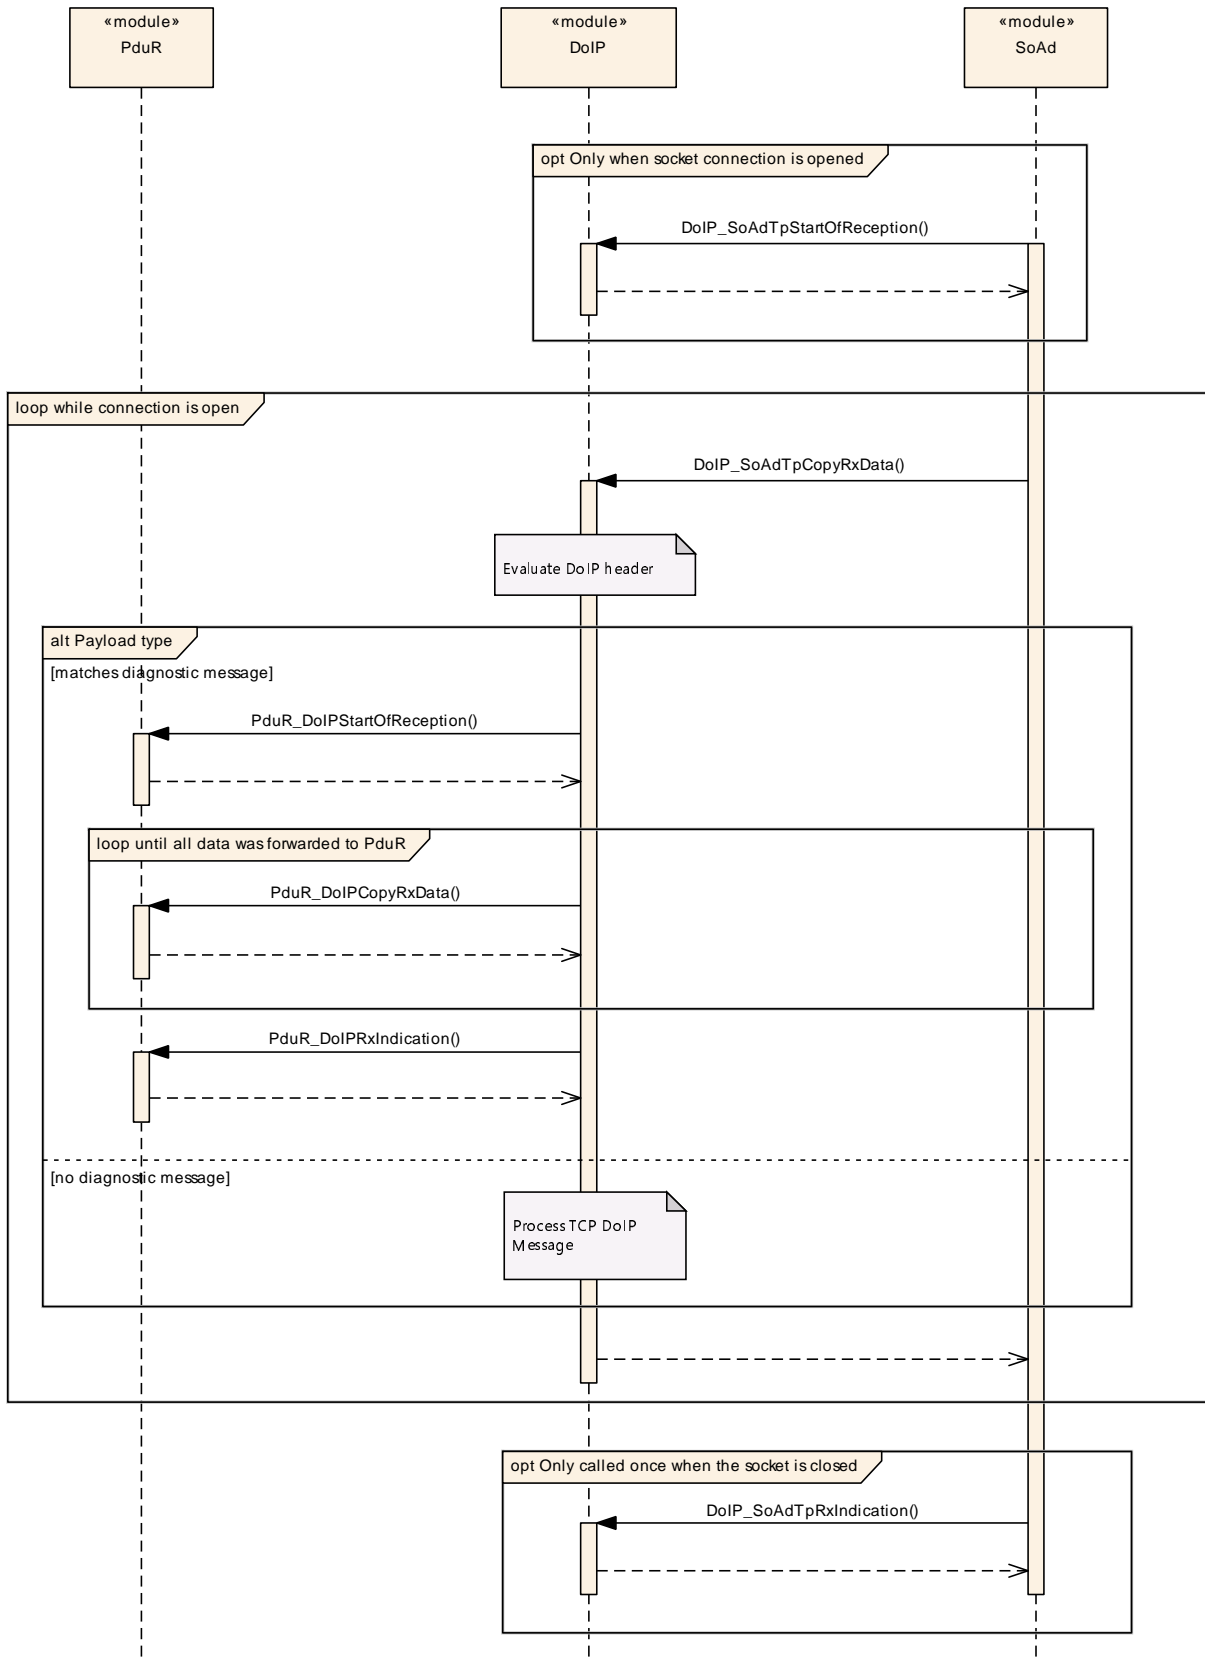
Figure 9.2: DoIP TCP message reception

Note that more than one CopyRxData could provide the data of one request, but to reduce complexity this detail was omitted.

9.3 Tx TCP message
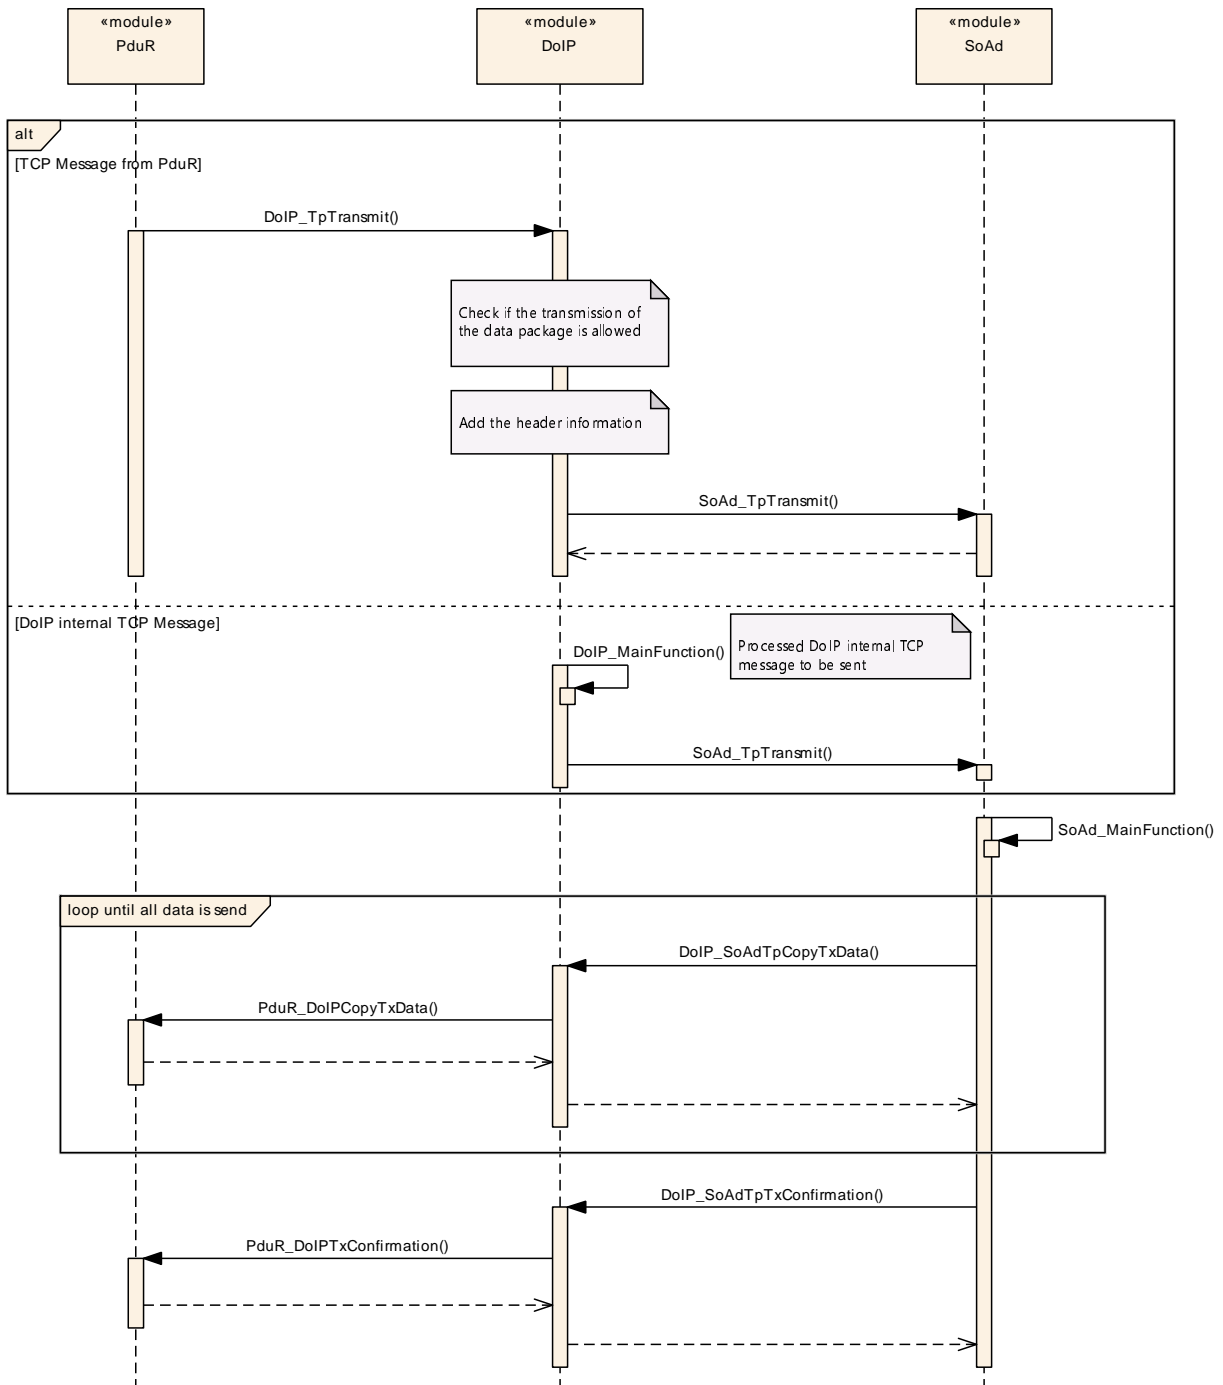
Figure 9.3: DoIP TCP message transmission

9.4 Activation Line Handling - Active
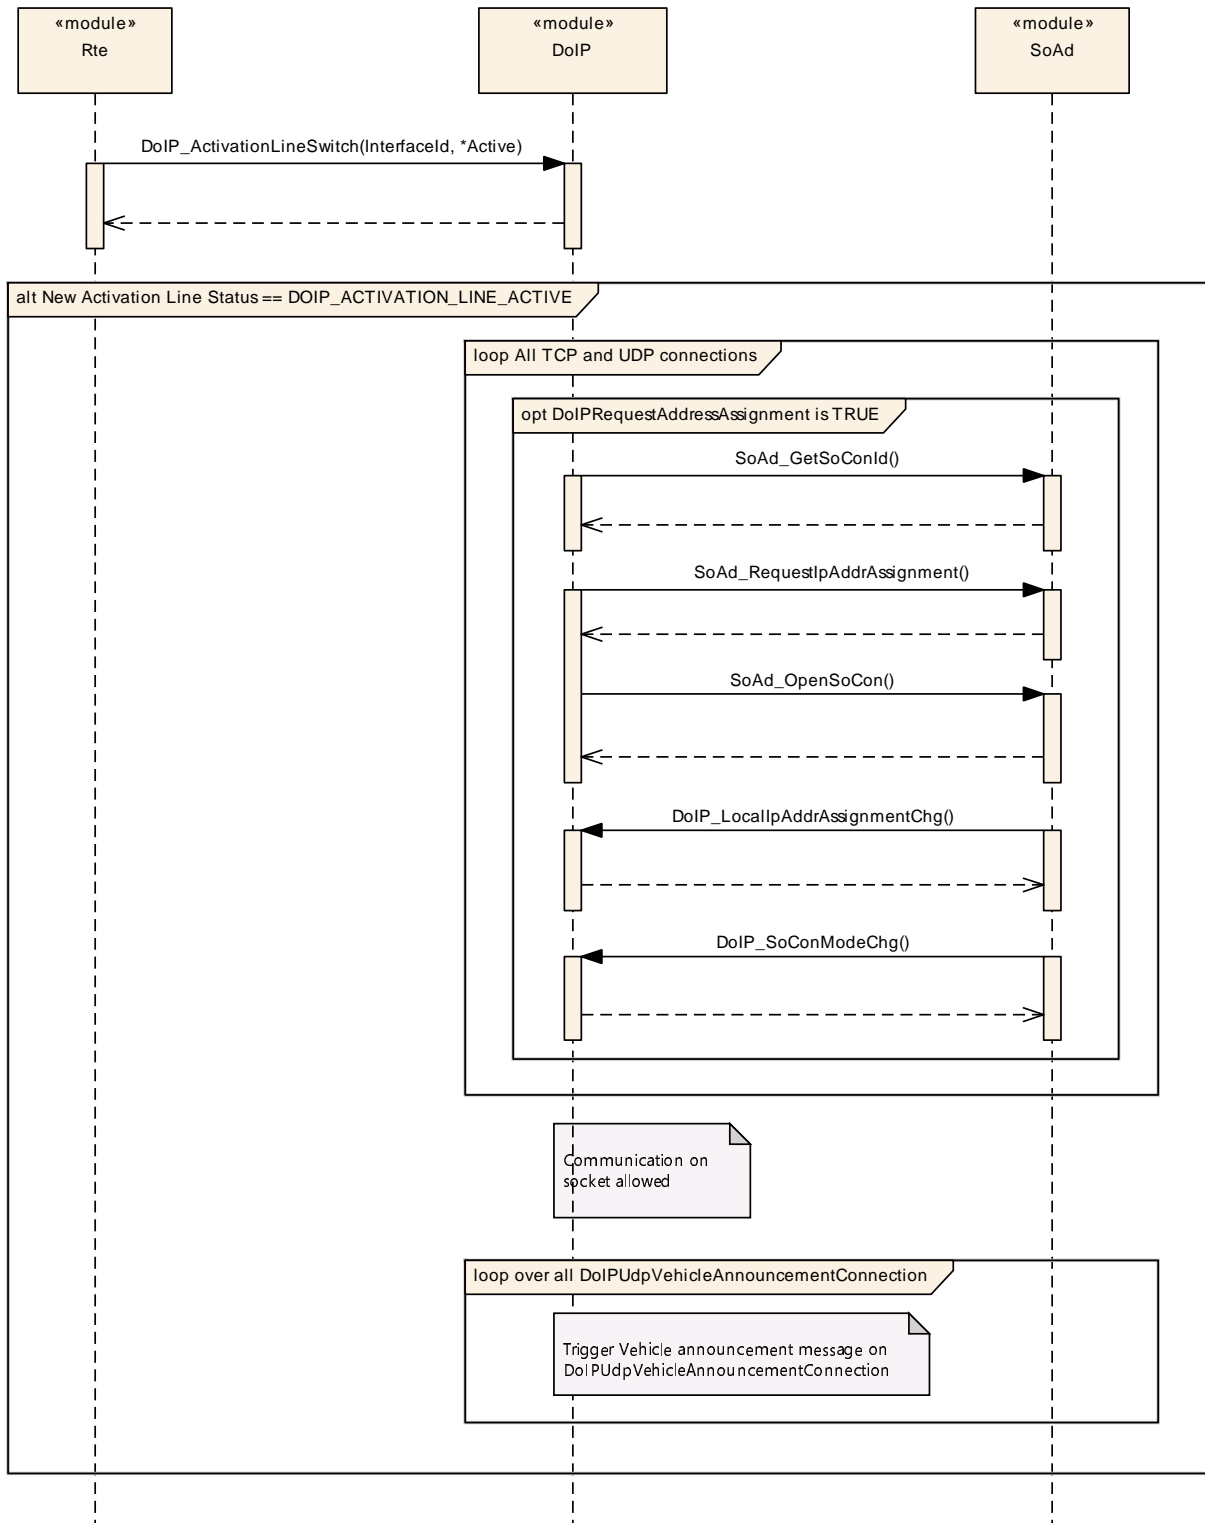
Figure 9.4: Activation Line Handling - Active

9.5 Activation Line Handling - Inactive
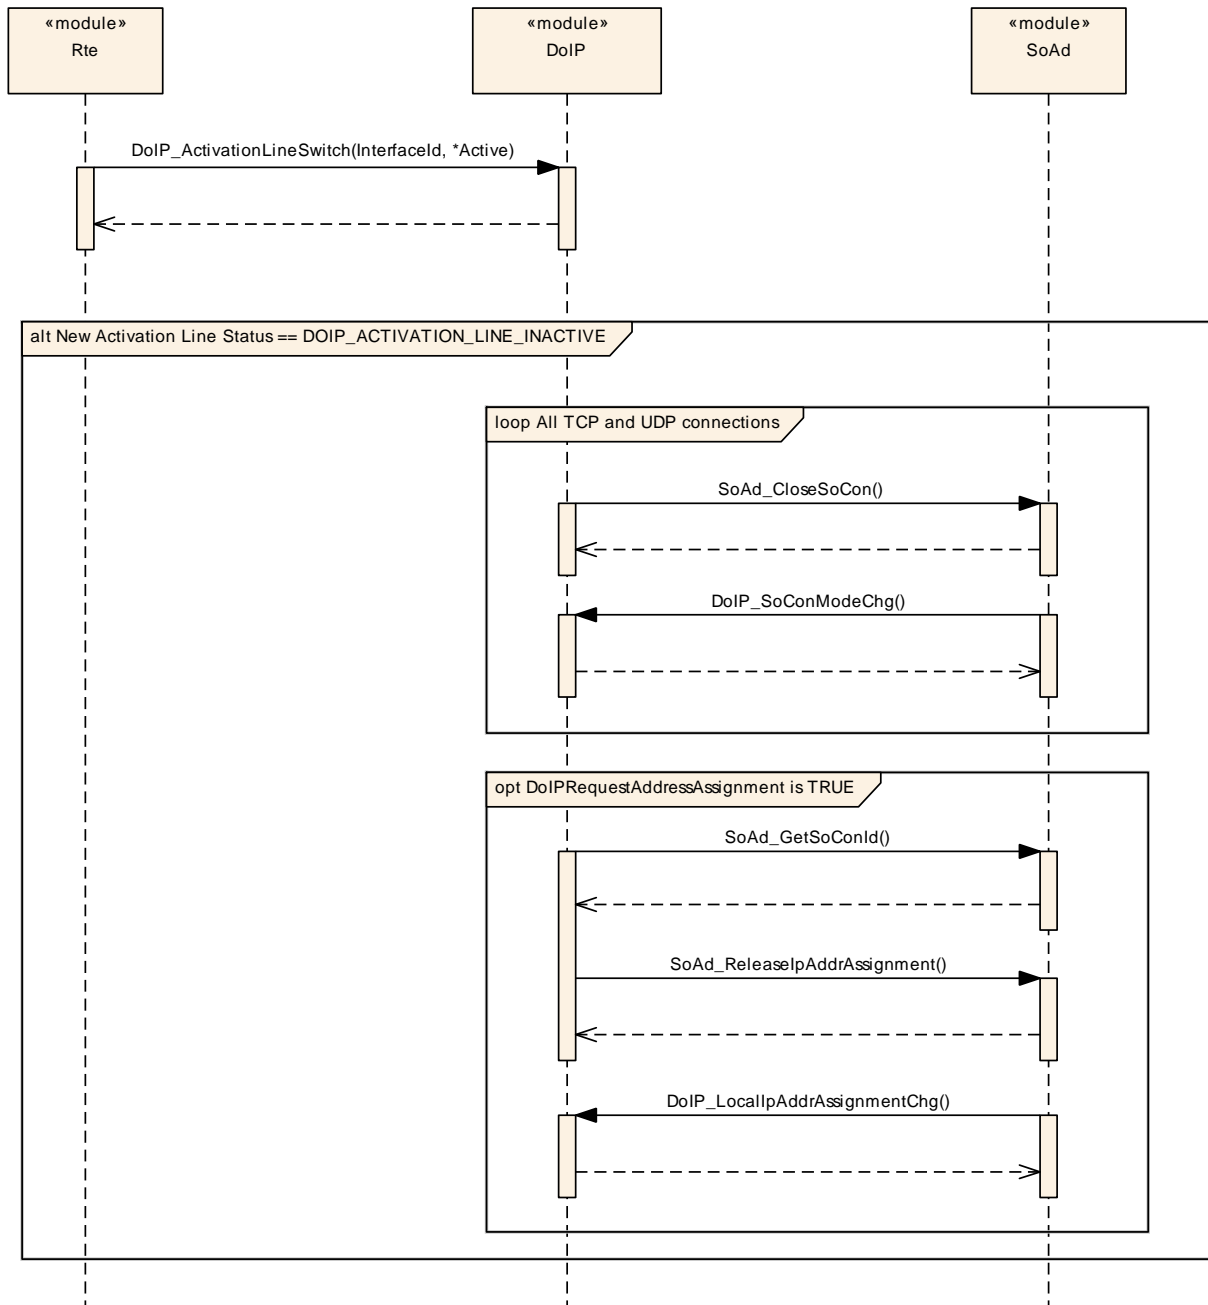
Figure 9.5: Activation Line Handling - Inactive

10 Configuration specification

In general, this chapter defines configuration parameters and their clustering into containers. In order to support the specification, Chapter 10.1 describes fundamentals. It also specifies a template (table) you shall use for the parameter specification. We intend to leave Chapter 10.1 in the specification to guarantee comprehension.

Chapter 10.2 specifies the structure (containers) and the parameters of the module

DoIP.

10.1 How to read this chapter

For details refer to the chapter 10.1 "Introduction to configuration specification" in SWS_BSWGeneral [1].

10.2 Configuration and configuration parameters

The following chapters summarize all configuration parameters. For a detailed description of parameters please refer to chapter 7 and chapter 8.

10.2.1 Variants

For details refer to the chapter 10.1.2 "Variants" in SWS_BSWGeneral [1].

10.2.2 DoIP

SWS Item	[ECUC_DoIP_00001]
Module Name	DoIP
Description	Configuration of the DoIP (Diagnostic over IP) module.
Post-Build Variant Support	true
Supported Config Variants	VARIANT-LINK-TIME, VARIANT-POST-BUILD, VARIANT-PRE-COMPILE

Included Containers		
Container Name	**Multiplicity**	**Scope / Dependency**
DoIPConfigSet	1	This container contains the configuration parameters and sub containers of the AUTOSAR DoIP module.
DoIPGeneral	1	This container specifies the general configuration parameters of the DoIP module.
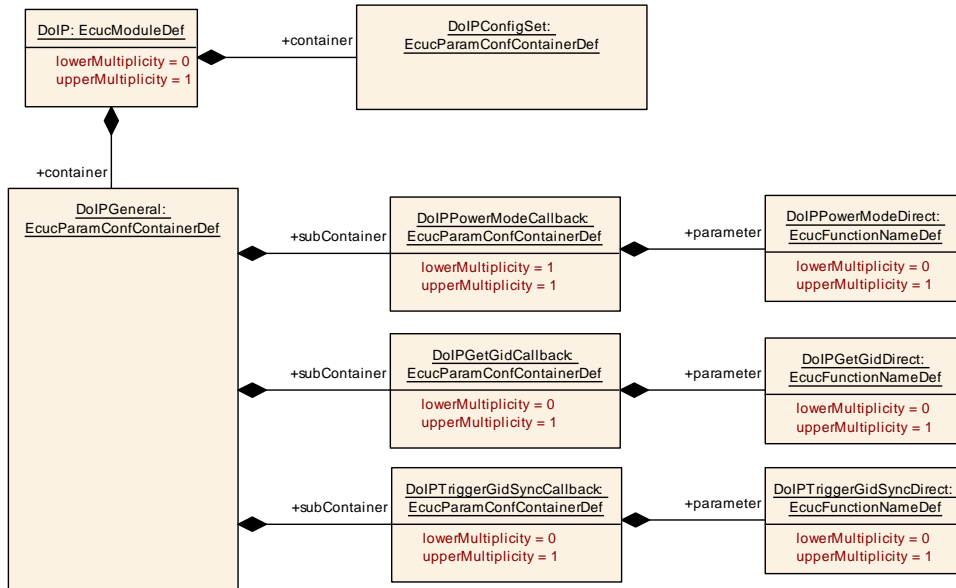
Figure 10.1: DoIPConfig

10.2.3 DoIPGeneral

SWS Item	[ECUC_DoIP_00002]
Container Name	DoIPGeneral
Parent Container	DoIP
Description	This container specifies the general configuration parameters of the DoIP module.
Configuration Parameters	

SWS Item	[ECUC_DoIP_00004]		
Parameter Name	DoIPDevelopmentErrorDetect		
Parent Container	DoIPGeneral		
Description	Switches the development error detection and notification on or off. • true: detection and notification is enabled. • false: detection and notification is disabled.		
Multiplicity	1		
Type	EcucBooleanParamDef		
Default value	–		
Post-Build Variant Value	false		
Value Configuration Class	Pre-compile time	X	All Variants
	Link time	–	
	Post-build time	–	
Scope / Dependency	scope: local		

SWS Item	[ECUC_DoIP_00067]
Parameter Name	DoIPDhcpOptionVinUse
Parent Container	DoIPGeneral

▽

△

Description	If DoIPDhcpOptionVinUse is set to true the DoIP module will add the VIN to the Dhcp host name if no valid Dhcp host name is already set.		
Multiplicity	1		
Type	EcucBooleanParamDef		
Default value	–		
Post-Build Variant Value	false		
Value Configuration Class	Pre-compile time	X	All Variants
	Link time	–	
	Post-build time	–	
Scope / Dependency	scope: local		

SWS Item	[ECUC_DoIP_00064]		
Parameter Name	DoIPEntityStatusMaxByteFieldUse		
Parent Container	DoIPGeneral		
Description	This parameter is used to distinguish the optional support of the Max data size element of a diagnostic entity status response.		
Multiplicity	1		
Type	EcucBooleanParamDef		
Default value	–		
Post-Build Variant Value	false		
Value Configuration Class	Pre-compile time	X	All Variants
	Link time	–	
	Post-build time	–	
Scope / Dependency	scope: local		

SWS Item	[ECUC_DoIP_00065]		
Parameter Name	DoIPGIDInvalidityPattern		
Parent Container	DoIPGeneral		
Description	Specifies the Byte pattern that is used for response messages if no valid GID could be retrieved. Only the value '0' or '255' is allowed".		
Multiplicity	1		
Type	EcucIntegerParamDef		
Range	0 .. 255		
Default value	–		
Post-Build Variant Value	false		
Value Configuration Class	Pre-compile time	X	All Variants
	Link time	–	
	Post-build time	–	
Scope / Dependency	scope: local		

SWS Item	[ECUC_DoIP_00073]	
Parameter Name	DoIPHostNameSizeMax	
Parent Container	DoIPGeneral	
Description	Maximum Size of the DHCP HostName in ASCII. This parameter is necessary to reserve the correct amount of bytes for working with the DHCP HostName option. Minimum range is 5 because Dhcp Host Name should be at least "DoIP-" on any configuration.	

▽

△

Multiplicity	1		
Type	EcucIntegerParamDef		
Range	5 .. 255		
Default value	–		
Post-Build Variant Value	false		
Value Configuration Class	Pre-compile time	X	All Variants
	Link time	–	
	Post-build time	–	
Scope / Dependency	scope: local		

SWS Item	[ECUC_DoIP_00006]		
Parameter Name	DoIPMainFunctionPeriod		
Parent Container	DoIPGeneral		
Description	Determines the frequency at which the DoIP_MainFunction() is called in [s].		
Multiplicity	1		
Type	EcucFloatParamDef		
Range	]0 .. INF[		
Default value	–		
Post-Build Variant Value	false		
Value Configuration Class	Pre-compile time	X	All Variants
	Link time	–	
	Post-build time	–	
Scope / Dependency	scope: local		

SWS Item	[ECUC_DoIP_00019]		
Parameter Name	DoIPMaxRequestBytes		
Parent Container	DoIPGeneral		
Description	Specifies the maximum allowed bytes of a DoIP message request without the DoIP header.		
Multiplicity	1		
Type	EcucIntegerParamDef		
Range	1 .. 4294967295		
Default value	–		
Post-Build Variant Value	false		
Value Configuration Class	Pre-compile time	X	All Variants
	Link time	–	
	Post-build time	–	
Scope / Dependency	scope: local		

SWS Item	[ECUC_DoIP_00074]		
Parameter Name	DoIPMaxUDPRequestPerConnection		
Parent Container	DoIPGeneral		
Description	This parameter captures the maximum amount of UDP Requests necessary to handle parallel within a single UDP connection.		
Multiplicity	1		
Type	EcucIntegerParamDef		
Range	1 .. 255		

▽

$\triangle$

Default value	–
Post-Build Variant Value	false
Value Configuration Class	Pre-compile time	X	All Variants
	Link time	–	
	Post-build time	–	
Scope / Dependency	scope: local		

SWS Item	[ECUC_DoIP_00021]		
Parameter Name	DoIPNodeType		
Parent Container	DoIPGeneral		
Description	Describes the Type of the DoIP node.		
Multiplicity	1		
Type	EcucEnumerationParamDef		
Range	DOIP_GATEWAY	The DoIP Entity is a DoIP Gateway.	
	DOIP_NODE	The DoIP Entity is a DoIP Node.	
Post-Build Variant Value	false		
Value Configuration Class	Pre-compile time	X	All Variants
	Link time	–	
	Post-build time	–	
Scope / Dependency	scope: local		

SWS Item	[ECUC_DoIP_00018]		
Parameter Name	DoIPUseEIDasGID		
Parent Container	DoIPGeneral		
Description	Specifies if the DoIP entity shall use its EID if it is the Master for vehicle identification gid on the vehicle identification/vehicle announcement.		
Multiplicity	1		
Type	EcucBooleanParamDef		
Default value	–		
Post-Build Variant Value	false		
Value Configuration Class	Pre-compile time	X	All Variants
	Link time	–	
	Post-build time	–	
Scope / Dependency	scope: local		

SWS Item	[ECUC_DoIP_00005]		
Parameter Name	DoIPVersionInfoApi		
Parent Container	DoIPGeneral		
Description	Activates the DoIP_GetVersionInfo() API. TRUE: Enables the DoIP_GetVersionInfo() API. FALSE: DoIP_GetVersionInfo() API is not included.		
Multiplicity	1		
Type	EcucBooleanParamDef		
Default value	false		
Post-Build Variant Value	false		
Value Configuration Class	Pre-compile time	X	All Variants
	Link time	–	
	Post-build time	–	
Scope / Dependency	scope: local		

SWS Item	[ECUC_DoIP_00017]		
Parameter Name	DoIPVinGidMaster		
Parent Container	DoIPGeneral		
Description	Specifies if the DoIP entity is the Vehicle identification Master for the GID (Group ID).		
Multiplicity	1		
Type	EcucBooleanParamDef		
Default value	–		
Post-Build Variant Value	false		
Value Configuration Class	Pre-compile time	X	All Variants
	Link time	–	
	Post-build time	–	
Scope / Dependency	scope: local		
	dependency: DoIPUseEIDasGID, DoIPTriggerGIDSynchronization		

SWS Item	[ECUC_DoIP_00066]		
Parameter Name	DoIPVinInvalidityPattern		
Parent Container	DoIPGeneral		
Description	Specifies the Byte pattern that is used for response messages if no valid VIN could be retrieved. Only the value '0' or '255' is allowed".		
Multiplicity	1		
Type	EcucIntegerParamDef		
Range	0 .. 255		
Default value	–		
Post-Build Variant Value	false		
Value Configuration Class	Pre-compile time	X	All Variants
	Link time	–	
	Post-build time	–	
Scope / Dependency	scope: local		

Included Containers		
Container Name	Multiplicity	Scope / Dependency
DoIPGetGidCallback	0..1	This container describes the usage of a callback function to get the GID. (If this container is not present no callback function shall be used by DoIP module to retrive the GID.)
DoIPPowerModeCallback	1	This container describes the usage of a callback function to retrieve the current power mode. This container shall always be present.
DoIPTriggerGidSyncCallback	0..1	This container describes the usage of a callback function to trigger the GID synchronization. (If this container does not exist no callback function shall be used by DoIP module to trigger the GID synchronization.)

Figure 10.2: DoIPGeneral

10.2.4 DoIPFurtherActionByteCallback

SWS Item	[ECUC_DoIP_00092]
Container Name	DoIPFurtherActionByteCallback
Parent Container	DoIPInterface
Description	This container describes the Callbackfunction to get the Further Action byte. This container shall always be present. If the DoIPFurtherActionByteDirect parameter is not present, the DoIP module will use an RPort of ServiceInterface CallbackGetFurther ActionByte with the name "CBGetFurtherActionByte_<shortname of enclosing Do IPInterface container>".
Configuration Parameters	

SWS Item	[ECUC_DoIP_00093]		
Parameter Name	DoIPFurtherActionByteDirect		
Parent Container	DoIPFurtherActionByteCallback		
Description	Direct C Callback function to get the OEM specific Further Action Byte for the DoIP vehicle identification response/vehicle announcement. If the DoIPFurtherActionByte Direct parameter is present, the DoIP module will not use an RPort of ServiceInterface "CBGetFurtherActionByte" but will call the configured function.		
Multiplicity	0..1		
Type	EcucFunctionNameDef		
Default value	–		
Regular Expression	–		
Value Configuration Class	Pre-compile time	X	VARIANT-PRE-COMPILE
	Link time	X	VARIANT-LINK-TIME, VARIANT-POST-BUILD
	Post-build time	–	
Scope / Dependency	scope: local		

No Included Containers

10.2.5 DoIPGetGidCallback

SWS Item	[ECUC_DoIP_00024]
Container Name	DoIPGetGidCallback
Parent Container	DoIPGeneral
Description	This container describes the usage of a callback function to get the GID. (If this container is not present no callback function shall be used by DoIP module to retrive the GID.)
Configuration Parameters	

SWS Item	[ECUC_DoIP_00028]
Parameter Name	DoIPGetGidDirect
Parent Container	DoIPGetGidCallback

▽

△

Description	If the DoIPGetGidDirect parameter exist the DoIP module shall call the configured callback function (<User>_DoIPGetGID) direct. (It is not needed to specify a service port to the DoIP service component.) If the DoIPGetGidDirect parameter does NOT exist the DoIP module shall use a RPort with a CallbackGetGID type of client-server port interface to retrive the GID.		
Multiplicity	0..1		
Type	EcucFunctionNameDef		
Default value	–		
Regular Expression	–		
Post-Build Variant Multiplicity	false		
Post-Build Variant Value	false		
Multiplicity Configuration Class	Pre-compile time	X	VARIANT-PRE-COMPILE
	Link time	X	VARIANT-LINK-TIME, VARIANT-POST-BUILD
	Post-build time	–	
Value Configuration Class	Pre-compile time	X	VARIANT-PRE-COMPILE
	Link time	X	VARIANT-LINK-TIME, VARIANT-POST-BUILD
	Post-build time	–	
Scope / Dependency	scope: local		

No Included Containers

10.2.6 DoIPPowerModeCallback

SWS Item	[ECUC_DoIP_00023]
Container Name	DoIPPowerModeCallback
Parent Container	DoIPGeneral
Description	This container describes the usage of a callback function to retrieve the current power mode. This container shall always be present.
Configuration Parameters	

SWS Item	[ECUC_DoIP_00027]		
Parameter Name	DoIPPowerModeDirect		
Parent Container	DoIPPowerModeCallback		
Description	If the DoIPPowerModeDirect parameter exist the DoIP module shall call the configured callback function (<User>_DoIPGetPowerModeCallback) direct. (It is not needed to specify a service port to the DoIP service component.) If the DoIPPowerModeDirect parameter does NOT present the DoIP module shall use a RPort with a CallbackGet PowerMode type of client-server port interface to retrive the current power mode.		
Multiplicity	0..1		
Type	EcucFunctionNameDef		
Default value	–		
Regular Expression	–		
Post-Build Variant Multiplicity	false		
Post-Build Variant Value	false		
Multiplicity Configuration Class	Pre-compile time	X	VARIANT-PRE-COMPILE

▽

△

	Link time	X	VARIANT-LINK-TIME, VARIANT-POST-BUILD
	Post-build time	–	
Value Configuration Class	Pre-compile time	X	VARIANT-PRE-COMPILE
	Link time	X	VARIANT-LINK-TIME, VARIANT-POST-BUILD
	Post-build time	–	
Scope / Dependency	scope: local		

No Included Containers

10.2.7 DoIPTriggerGidSyncCallback

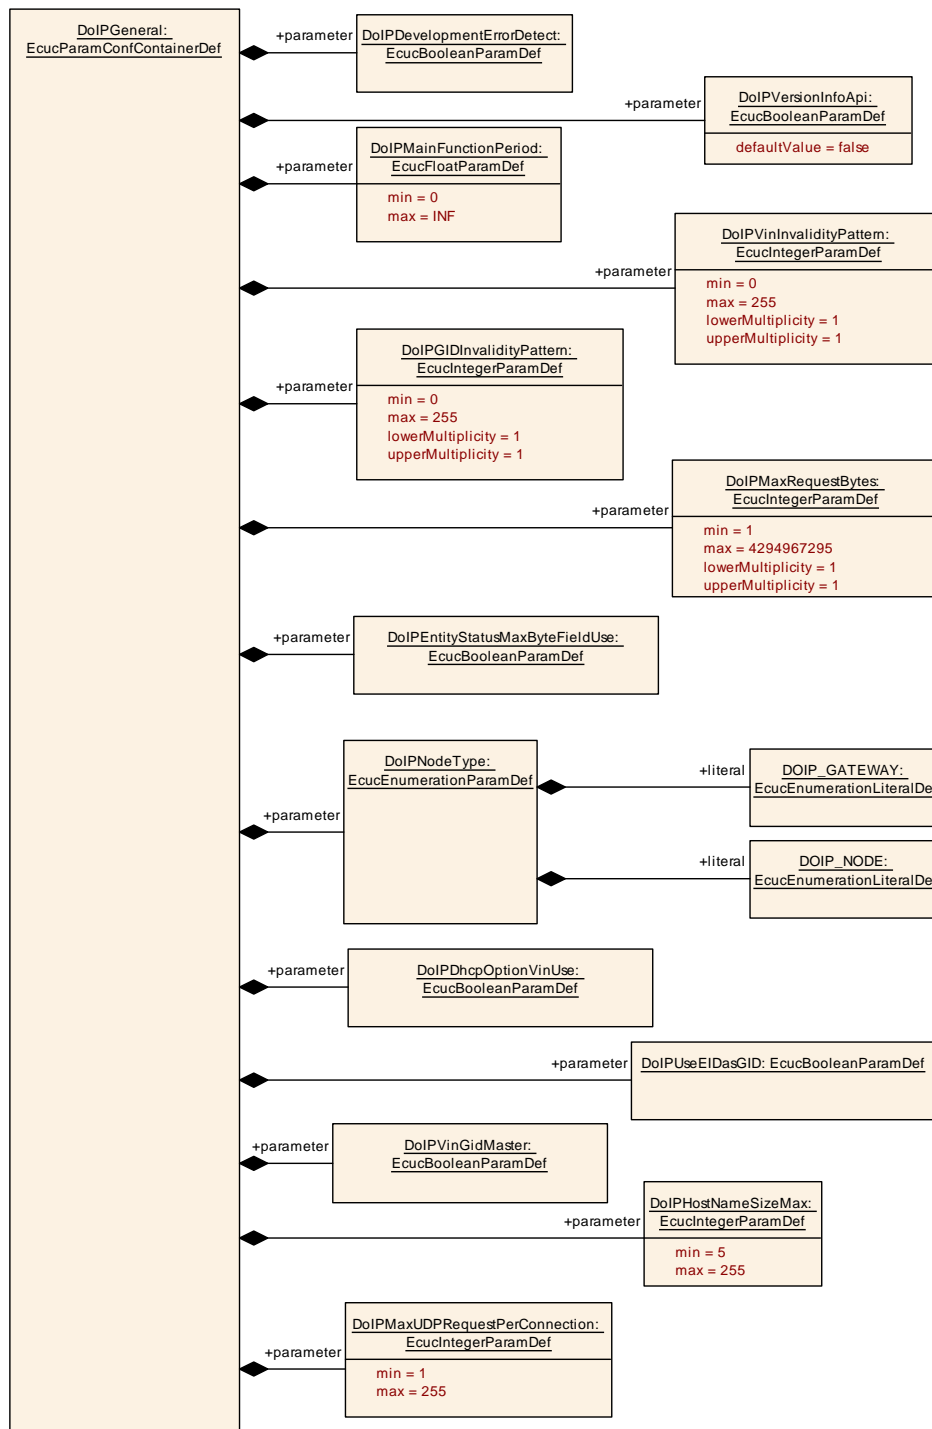| **SWS Item**	**[ECUC_DoIP_00025]**
Container Name	DoIPTriggerGidSyncCallback
Parent Container	DoIPGeneral
Description	This container describes the usage of a callback function to trigger the GID synchronization. (If this container does not exist no callback function shall be used by DoIP module to trigger the GID synchronization.)
Configuration Parameters	

SWS Item	**[ECUC_DoIP_00029]**		
Parameter Name	DoIPTriggerGidSyncDirect		
Parent Container	DoIPTriggerGidSyncCallback		
Description	If the DoIPTriggerGidSyncDirect parameter exist the DoIP module shall call the configured callback function (<User>_DoIPTriggerGidSyncCallback) direct. (It is not needed to specify a service port to the DoIP service component.) If the DoIPTriggerGid SyncDirect parameter does NOT present the DoIP module shall use a RPort with a CallbackTriggerGIDSynchnonization type of client-server port interface to trigger the GID synchronization.		
Multiplicity	0..1		
Type	EcucFunctionNameDef		
Default value	–		
Regular Expression	–		
Post-Build Variant Multiplicity	false		
Post-Build Variant Value	false		
Multiplicity Configuration Class	Pre-compile time	X	VARIANT-PRE-COMPILE
	Link time	X	VARIANT-LINK-TIME, VARIANT-POST-BUILD
	Post-build time	–	
Value Configuration Class	Pre-compile time	X	VARIANT-PRE-COMPILE
	Link time	X	VARIANT-LINK-TIME, VARIANT-POST-BUILD
	Post-build time	–	
Scope / Dependency	scope: local		

No Included Containers

10.2.8 DoIPConfigSet

SWS Item	[ECUC_DoIP_00003]
Container Name	DoIPConfigSet
Parent Container	DoIP
Description	This container contains the configuration parameters and sub containers of the AUTOSAR DoIP module.
Configuration Parameters	

SWS Item	[ECUC_DoIP_00014]			
Parameter Name	DoIPEid			
Parent Container	DoIPConfigSet			
Description	Configured EID (Entity ID of) for vehicle identification/vehicle announcement. Only necessary if DoIPUseMacAddressForIdentification is set to FALSE.			
Multiplicity	0..1			
Type	EcucIntegerParamDef			
Range	0 .. 281474976710655			
Default value	–			
Post-Build Variant Multiplicity	true			
Post-Build Variant Value	true			
Multiplicity Configuration Class	Pre-compile time	X	VARIANT-PRE-COMPILE	
	Link time	X	VARIANT-LINK-TIME	
	Post-build time	X	VARIANT-POST-BUILD	
Value Configuration Class	Pre-compile time	X	VARIANT-PRE-COMPILE	
	Link time	X	VARIANT-LINK-TIME	
	Post-build time	X	VARIANT-POST-BUILD	
Scope / Dependency	scope: local			
	dependency: DoIPUseMacAdressForIdentification			

SWS Item	[ECUC_DoIP_00015]			
Parameter Name	DoIPGid			
Parent Container	DoIPConfigSet			
Description	Configured GID (Group ID of) for vehicle identification/vehicle announcement.			
Multiplicity	0..1			
Type	EcucIntegerParamDef			
Range	0 .. 281474976710655			
Default value	–			
Post-Build Variant Multiplicity	true			
Post-Build Variant Value	true			
Multiplicity Configuration Class	Pre-compile time	X	VARIANT-PRE-COMPILE	
	Link time	X	VARIANT-LINK-TIME	
	Post-build time	X	VARIANT-POST-BUILD	
Value Configuration Class	Pre-compile time	X	VARIANT-PRE-COMPILE	
	Link time	X	VARIANT-LINK-TIME	
	Post-build time	X	VARIANT-POST-BUILD	
Scope / Dependency	scope: local			
	dependency: DoIPUseEIDasGID, DoIPVinGIDMaster, DoIPGetGID			

SWS Item	**[ECUC_DoIP_00020]**		
Parameter Name	DoIPLogicalAddress		
Parent Container	DoIPConfigSet		
Description	Describes the logical address of the DoIP entity, i.e. the LA that will route diagnostic requests to the Dcm of the DoIP entity.		
Multiplicity	1		
Type	EcucIntegerParamDef		
Range	0 .. 65535		
Default value	–		
Post-Build Variant Value	true		
Value Configuration Class	**Pre-compile time**	X	VARIANT-PRE-COMPILE
	Link time	X	VARIANT-LINK-TIME
	Post-build time	X	VARIANT-POST-BUILD
Scope / **Dependency**	scope: local		

Included Containers		
Container Name	**Multiplicity**	**Scope** / **Dependency**
DoIPInterface	1..255	This container defines a logical IP interface and collects properties to configure this interface.
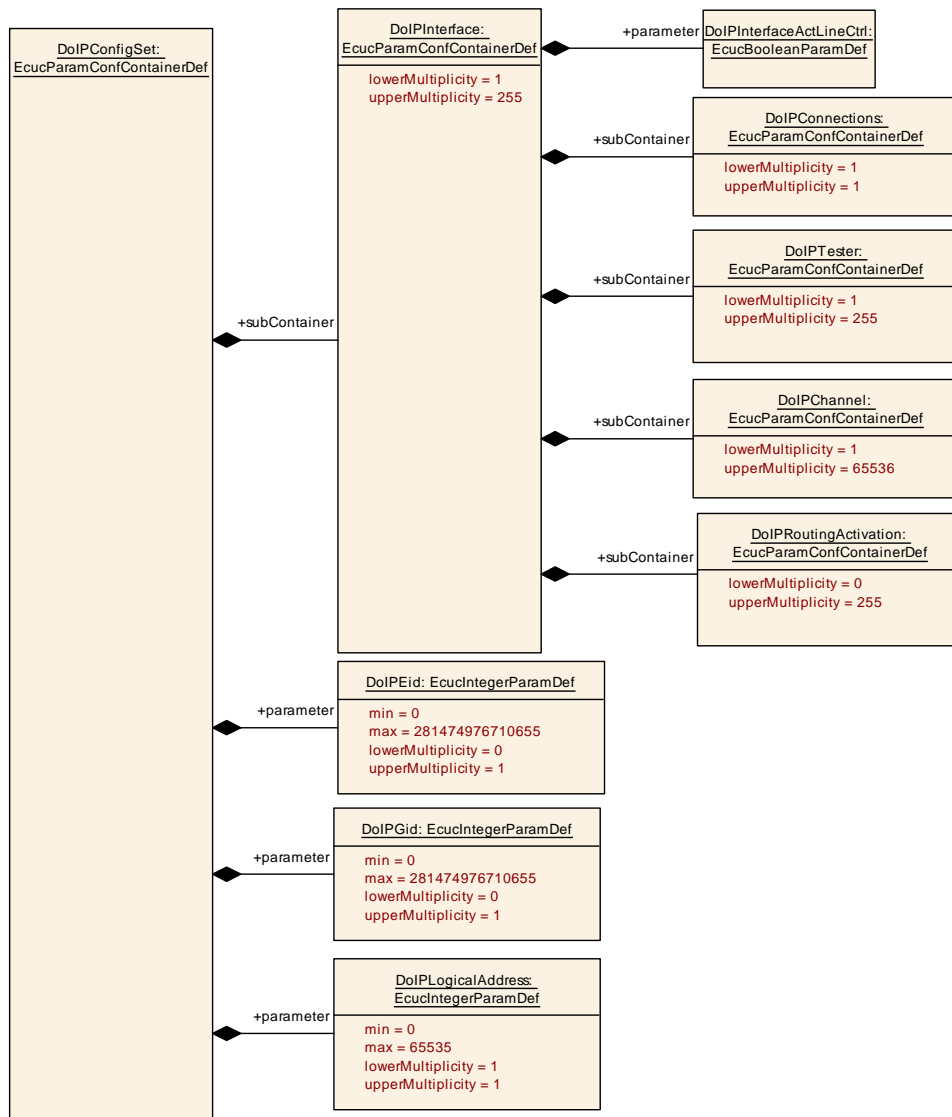
Figure 10.3: `DoIPConfigSet`

10.2.9 DoIPInterface

SWS Item	[ECUC_DoIP_00100]
Container Name	DoIPInterface
Parent Container	DoIPConfigSet
Description	This container defines a logical IP interface and collects properties to configure this interface.
Post-Build Variant Multiplicity	false
Configuration Parameters	

SWS Item	[ECUC_DoIP_00009]		
Parameter Name	DoIPAliveCheckResponseTimeout		
Parent Container	DoIPInterface		
Description	Timeout in [s] for waiting for a response to an Alive Check request before the connection is considered to be disconnected. Represents parameter T_TCP_Alive Check of ISO 13400-2:2012.		
Multiplicity	1		
Type	EcucFloatParamDef		
Range	[0 .. INF]		
Default value	–		
Post-Build Variant Value	false		
Value Configuration Class	Pre-compile time	X	All Variants
	Link time	–	
	Post-build time	–	
Scope / Dependency	scope: local		

SWS Item	[ECUC_DoIP_00068]		
Parameter Name	DoIPGeneralInactivityTime		
Parent Container	DoIPInterface		
Description	Timeout in [s] for maximum inactivity of a TCP socket connection before the DoIP module will close the according socket connection. Represents parameter T_TCP_ General_Inactivity of ISO 13400-2:2012		
Multiplicity	1		
Type	EcucFloatParamDef		
Range	]0 .. INF[		
Default value	–		
Post-Build Variant Value	false		
Value Configuration Class	Pre-compile time	X	All Variants
	Link time	–	
	Post-build time	–	
Scope / Dependency	scope: local		

SWS Item	[ECUC_DoIP_00010]		
Parameter Name	DoIPInitialInactivityTime		
Parent Container	DoIPInterface		
Description	Timeout in [s] used for initial inactivity of a connected TCP socket connection directly after socket connection. Represents parameter T_TCP_Initial_Inactivity of ISO 13400-2:2012		
Multiplicity	1		
Type	EcucFloatParamDef		
Range	]0 .. INF[		
Default value	–		
Post-Build Variant Value	false		
Value Configuration Class	Pre-compile time	X	All Variants
	Link time	–	
	Post-build time	–	
Scope / Dependency	scope: local		

SWS Item	[ECUC_DoIP_00008]		
Parameter Name	DoIPInitialVehicleAnnouncementTime		
Parent Container	DoIPInterface		
Description	Time to wait in [s] for sending first vehicle anouncement message after IP address assignment. Represents parameter A_DoIP_Announce_Wait of ISO 13400-2:2012		
Multiplicity	1		
Type	EcucFloatParamDef		
Range	[0 .. INF]		
Default value	–		
Post-Build Variant Value	false		
Value Configuration Class	Pre-compile time	X	All Variants
	Link time	–	
	Post-build time	–	
Scope / Dependency	scope: local		

SWS Item	[ECUC_DoIP_00101]		
Parameter Name	DoIPInterfaceActLineCtrl		
Parent Container	DoIPInterface		
Description	This attribute defines whether the network interface • is started "on-demand" when an activation line is sensed (TRUE) or • is always available (FALSE).		
Multiplicity	1		
Type	EcucBooleanParamDef		
Default value	–		
Post-Build Variant Multiplicity	false		
Post-Build Variant Value	false		
Value Configuration Class	Pre-compile time	X	All Variants
	Link time	–	
	Post-build time	–	
Scope / Dependency	scope: local		

SWS Item	[ECUC_DoIP_00099]		
Parameter Name	DoIPInterfaceAnnouncementStart		
Parent Container	DoIPInterface		
Description	This attribute defines, when vehicle announcement is started on a DoIPInterface • Automatic: As soon as the underlying UDP vehicle announcement connection switches to SOAD_SOCON_ONLINE • OnTrigger: As soon as the API DoIP_TriggerVehicleAnnouncement is called for the given DoIPInterface instance		
Multiplicity	1		
Type	EcucEnumerationParamDef		
Range	DOIP_AUTOMATIC_ANNOUNCE	AUTOMATIC announcement	
	DOIP_ONTRIGGER_ ANNOUNCE	TRIGGERED announcement	
Default value	DOIP_AUTOMATIC_ANNOUNCE		
Post-Build Variant Value	false		
Value Configuration Class	Pre-compile time	X	All Variants
	Link time	–	

▽

△

Post-build time	–	
Scope / Dependency	scope: local	

SWS Item	**[ECUC_DoIP_00098]**		
Parameter Name	DoIPInterfaceId		
Parent Container	DoIPInterface		
Description	This parameter is an identifier of the DoIPInterface. The value of this parameter will be assigned to the symbolic name derived from the container short name.		
Multiplicity	1		
Type	EcucIntegerParamDef (Symbolic Name generated for this parameter)		
Range	0 .. 255		
Default value	–		
Post-Build Variant Multiplicity	false		
Post-Build Variant Value	false		
Value Configuration Class	Pre-compile time	X	All Variants
	Link time	–	
	Post-build time	–	
Scope / Dependency	scope: local		

SWS Item	**[ECUC_DoIP_00012]**		
Parameter Name	DoIPMaxTesterConnections		
Parent Container	DoIPInterface		
Description	Maximum amount of tester connections that shall be maintained at one time before alive check is performed.		
Multiplicity	1		
Type	EcucIntegerParamDef		
Range	1 .. 255		
Default value	–		
Post-Build Variant Value	false		
Value Configuration Class	Pre-compile time	X	All Variants
	Link time	–	
	Post-build time	–	
Scope / Dependency	scope: local		

SWS Item	**[ECUC_DoIP_00013]**		
Parameter Name	DoIPUseMacAddressForIdentification		
Parent Container	DoIPInterface		
Description	Provided the information if a configured EID at vehicle identification response/vehicle announcment is used or the MAC address. TRUE: Use MAC Address instead of EID for Vehicle identification/announcement. FALSE: Use configured EID for vehicle identification/announcement. Dependencies: DoIPEID		
Multiplicity	1		
Type	EcucBooleanParamDef		
Default value	–		
Post-Build Variant Value	false		
Value Configuration Class	Pre-compile time	X	All Variants
	Link time	–	
	Post-build time	–	
Scope / Dependency	scope: local		

SWS Item	[ECUC_DoIP_00016]		
Parameter Name	DoIPUseVehicleIdentificationSyncStatus		
Parent Container	DoIPInterface		
Description	Defines if the optional VIN/GID synchronization status is used additionally in the vehicle identification/announcement.		
Multiplicity	1		
Type	EcucBooleanParamDef		
Default value	–		
Post-Build Variant Value	false		
Value Configuration Class	Pre-compile time	X	All Variants
	Link time	–	
	Post-build time	–	
Scope / Dependency	scope: local		

SWS Item	[ECUC_DoIP_00094]		
Parameter Name	DoIPVehicleAnnouncementCount		
Parent Container	DoIPInterface		
Description	Number of vehicle announcement messages on IP address assignment. Represents parameter A_DoIP_Announce_Num of ISO 13400-2:2012.		
Multiplicity	0..1		
Type	EcucIntegerParamDef		
Range	1 .. 255		
Default value	–		
Post-Build Variant Value	false		
Value Configuration Class	Pre-compile time	X	All Variants
	Link time	–	
	Post-build time	–	
Scope / Dependency	scope: local		

SWS Item	[ECUC_DoIP_00007]		
Parameter Name	DoIPVehicleAnnouncementInterval		
Parent Container	DoIPInterface		
Description	Time to wait in [s] for sending subsequent vehicle anouncement messages. Represents parameter A_DoIP_Announce_Interval of ISO 13400-2:2012		
Multiplicity	0..1		
Type	EcucFloatParamDef		
Range	[0 .. INF]		
Default value	–		
Post-Build Variant Value	false		
Value Configuration Class	Pre-compile time	X	All Variants
	Link time	–	
	Post-build time	–	
Scope / Dependency	scope: local		

Included Containers		
Container Name	**Multiplicity**	**Scope / Dependency**
DoIPChannel	1..65536	Configuration of one DoIPChannel.
DoIPConnections	1	Container contains all lower layer connection specific information, i.e. the single Pdu References and Handle IDs to the SoAd.
DoIPFurtherActionByteCallback	0..1	This container describes the Callbackfunction to get the Further Action byte. This container shall always be present. If the Do IPFurtherActionByteDirect parameter is not present, the DoIP module will use an RPort of ServiceInterface CallbackGetFurther ActionByte with the name "CBGetFurtherAction Byte_<shortname of enclosing DoIPInterface container>".
DoIPRoutingActivation	0..255	This container describes the routing activation possibilities by representing for each container a possible routing activation request message to the DoIP entity and the according references to the activated diagnostic messages.
DoIPTester	1..255	This container describes the properties of the possible connectable Tester for the DoIP entity.
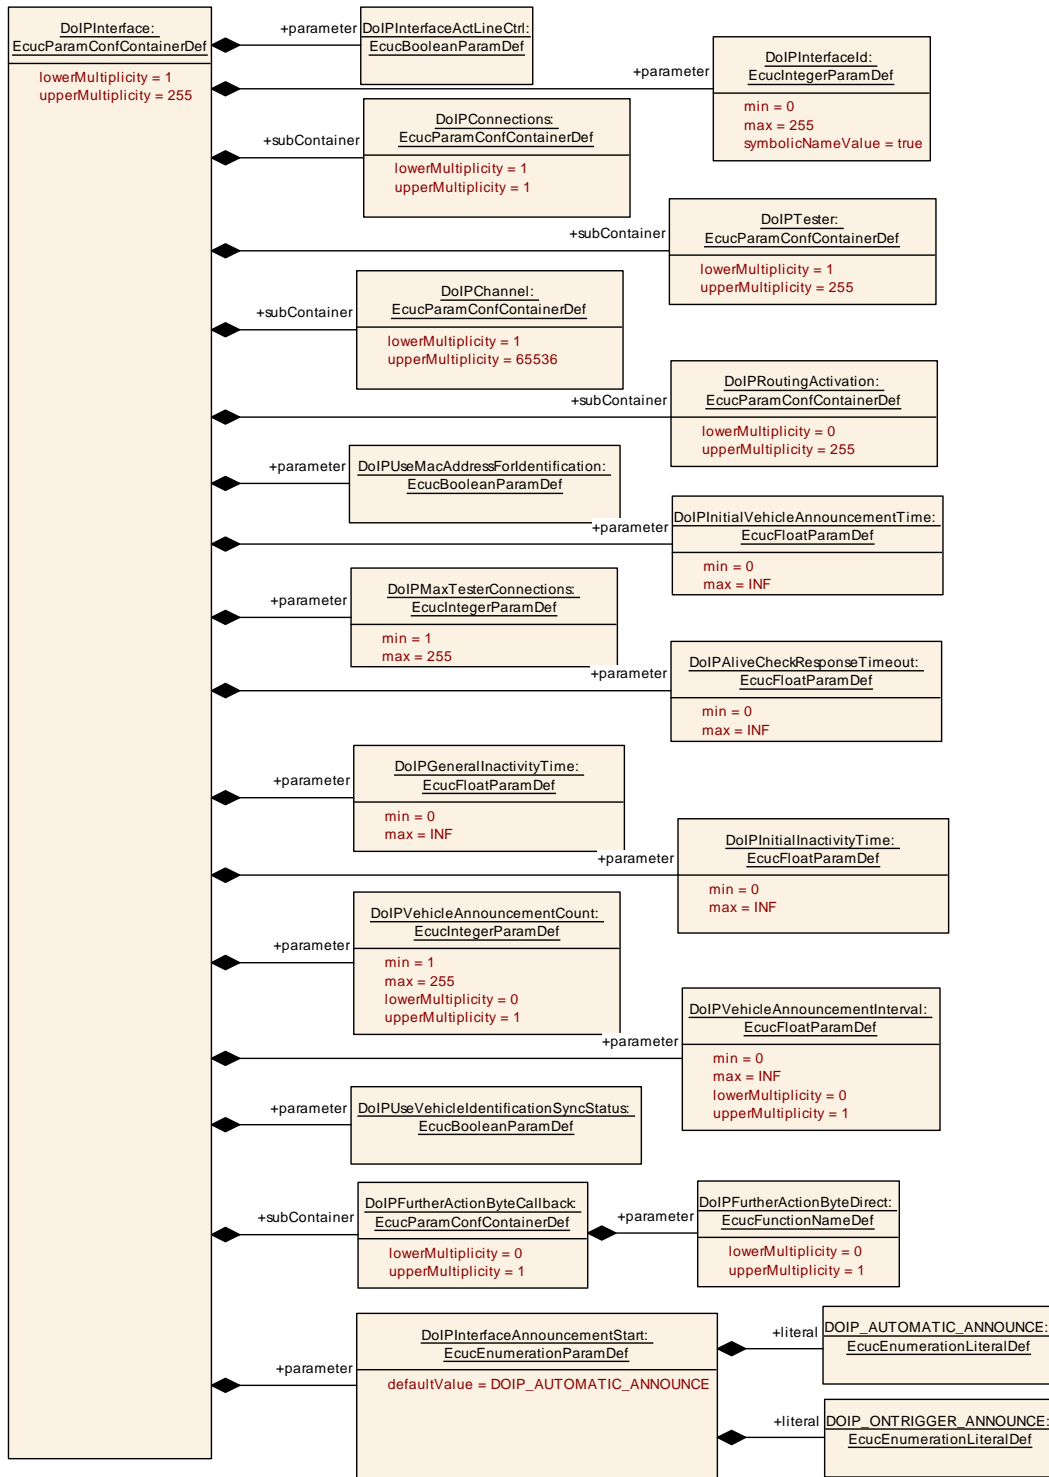
Figure 10.4: `DoIPInterface`

10.2.10 DoIPChannel

SWS Item	[ECUC_DoIP_00069]
Container Name	DoIPChannel
Parent Container	DoIPInterface
Description	Configuration of one DoIPChannel.
Post-Build Variant Multiplicity	false
Configuration Parameters	

SWS Item	[ECUC_DoIP_00070]
Parameter Name	DoIPChannelSARef
Parent Container	DoIPChannel
Description	Reference to the DoIPTester.
Multiplicity	1
Type	Reference to DoIPTester
Post-Build Variant Value	false
Scope / Dependency	

SWS Item	[ECUC_DoIP_00071]
Parameter Name	DoIPChannelTARef
Parent Container	DoIPChannel
Description	Reference to the target address.
Multiplicity	1
Type	Reference to DoIPTargetAddress
Post-Build Variant Value	false
Scope / Dependency	

Included Containers		
Container Name	**Multiplicity**	**Scope / Dependency**
DoIPPduRRxPdu	0..1	This container contains the Rx Pdus to connect with the Rx Pdus of the PduR.
DoIPPduRTxPdu	0..1	This container contains the Tx Pdus to connect with the Tx Pdus of the PduR. If the parameter is not configured the channel is for functional addressing.
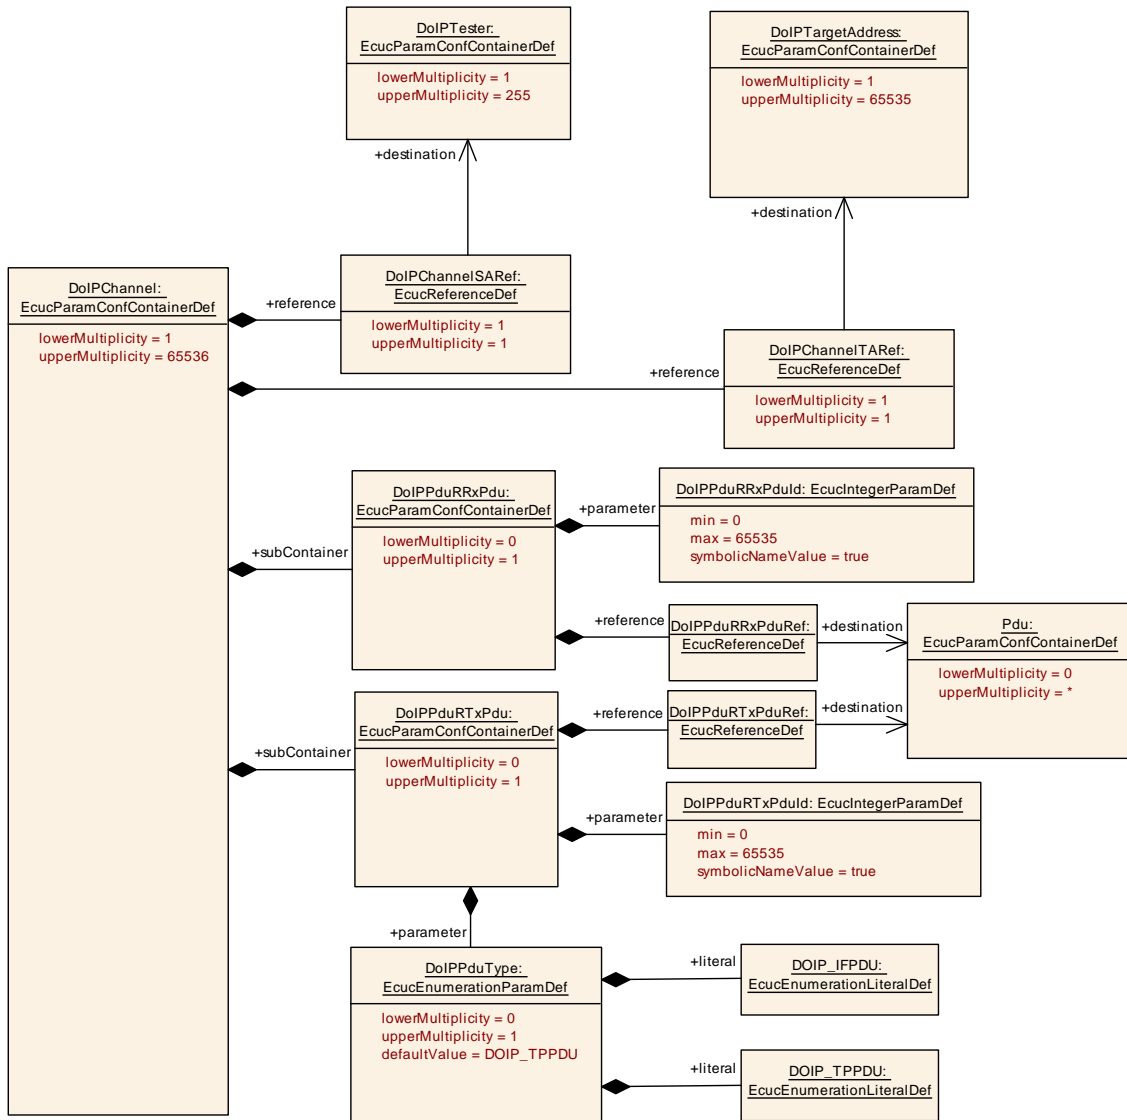
Figure 10.5: `DoIPChannel`

10.2.11 DoIPPduRRxPdu

SWS Item	**[ECUC_DoIP_00055]**
Container Name	DoIPPduRRxPdu
Parent Container	DoIPChannel
Description	This container contains the Rx Pdus to connect with the Rx Pdus of the PduR.
Configuration Parameters	

SWS Item	**[ECUC_DoIP_00057]**
Parameter Name	DoIPPduRRxPduId
Parent Container	DoIPPduRRxPdu

▽

△

Description	The DoIPPduRRxPduId is required by the API call DoIP_TpCancelReceive.
Multiplicity	1
Type	EcucIntegerParamDef (Symbolic Name generated for this parameter)
Range	0 .. 65535	
Default value	–
Post-Build Variant Value	false
Value Configuration Class	Pre-compile time	X	All Variants
	Link time	–	
	Post-build time	–	
Scope / Dependency	scope: ECU

SWS Item	[ECUC_DoIP_00058]
Parameter Name	DoIPPduRRxPduRef
Parent Container	DoIPPduRRxPdu
Description	Reference to the "global" Pdu structure to allow harmonization of handle IDs in the COM-Stack.
Multiplicity	1
Type	Reference to Pdu
Post-Build Variant Value	true
Value Configuration Class	Pre-compile time	X	VARIANT-PRE-COMPILE
	Link time	X	VARIANT-LINK-TIME
	Post-build time	X	VARIANT-POST-BUILD
Scope / Dependency	scope: local

No Included Containers

10.2.12 DoIPPduRTxPdu

SWS Item	[ECUC_DoIP_00056]
Container Name	DoIPPduRTxPdu
Parent Container	DoIPChannel
Description	This container contains the Tx Pdus to connect with the Tx Pdus of the PduR. If the parameter is not configured the channel is for functional addressing.
Configuration Parameters	

SWS Item	[ECUC_DoIP_00060]
Parameter Name	DoIPPduRTxPduId
Parent Container	DoIPPduRTxPdu
Description	The DoIPPduRTxPduId is required by DoIP_TpTransmit or DoIP_IfTransmit and DoIP_TpCancelTransmit.
Multiplicity	1
Type	EcucIntegerParamDef (Symbolic Name generated for this parameter)
Range	0 .. 65535	
Default value	–
Post-Build Variant Value	false

▽

△

Value Configuration Class	Pre-compile time	X	All Variants
	Link time	–	
	Post-build time	–	
Scope / Dependency	scope: ECU		

SWS Item	[ECUC_DoIP_00075]		
Parameter Name	DoIPPduType		
Parent Container	DoIPPduRTxPdu		
Description	API Type to use for communication with PduR. DOIP_IFPDU for UUDT messages, DOIP_TPPDU for all other diagnostic messages.		
Multiplicity	0..1		
Type	EcucEnumerationParamDef		
Range	DOIP_IFPDU	DOIP_IFPDU for UUDT messages,	
	DOIP_TPPDU	DOIP_TPPDU for all other diagnostic messages.	
Default value	DOIP_TPPDU		
Post-Build Variant Multiplicity	true		
Post-Build Variant Value	true		
Multiplicity Configuration Class	Pre-compile time	X	VARIANT-PRE-COMPILE
	Link time	X	VARIANT-LINK-TIME
	Post-build time	X	VARIANT-POST-BUILD
Value Configuration Class	Pre-compile time	X	VARIANT-PRE-COMPILE
	Link time	X	VARIANT-LINK-TIME
	Post-build time	X	VARIANT-POST-BUILD
Scope / Dependency	scope: local		

SWS Item	[ECUC_DoIP_00059]		
Parameter Name	DoIPPduRTxPduRef		
Parent Container	DoIPPduRTxPdu		
Description	Reference to the "global" Pdu structure to allow harmonization of handle IDs in the COM-Stack.		
Multiplicity	1		
Type	Reference to Pdu		
Post-Build Variant Value	true		
Value Configuration Class	Pre-compile time	X	VARIANT-PRE-COMPILE
	Link time	X	VARIANT-LINK-TIME
	Post-build time	X	VARIANT-POST-BUILD
Scope / Dependency	scope: local		

No Included Containers

10.2.13   DoIPConnections

SWS Item	[ECUC_DoIP_00032]
Container Name	DoIPConnections
Parent Container	DoIPInterface

▽

△

Description	Container contains all lower layer connection specific information, i.e. the single Pdu References and Handle IDs to the SoAd.
Post-Build Variant Multiplicity	false
Configuration Parameters	

Included Containers		
Container Name	**Multiplicity**	**Scope / Dependency**
DoIPTargetAddress	1..65535	This container describes a possible TargetAddress that is supported by DoIP.
DoIPTcpConnection	2..255	This container describes a TCP connection to the lower layer So Ad module.
DoIPUdpConnection	1..255	This Container describes a Udp connection to the lower layer So Ad module.
DoIPUdpVehicleAnnouncement Connection	0..255	This container describes the UDP multicast connections to the lower layer SoAd module.
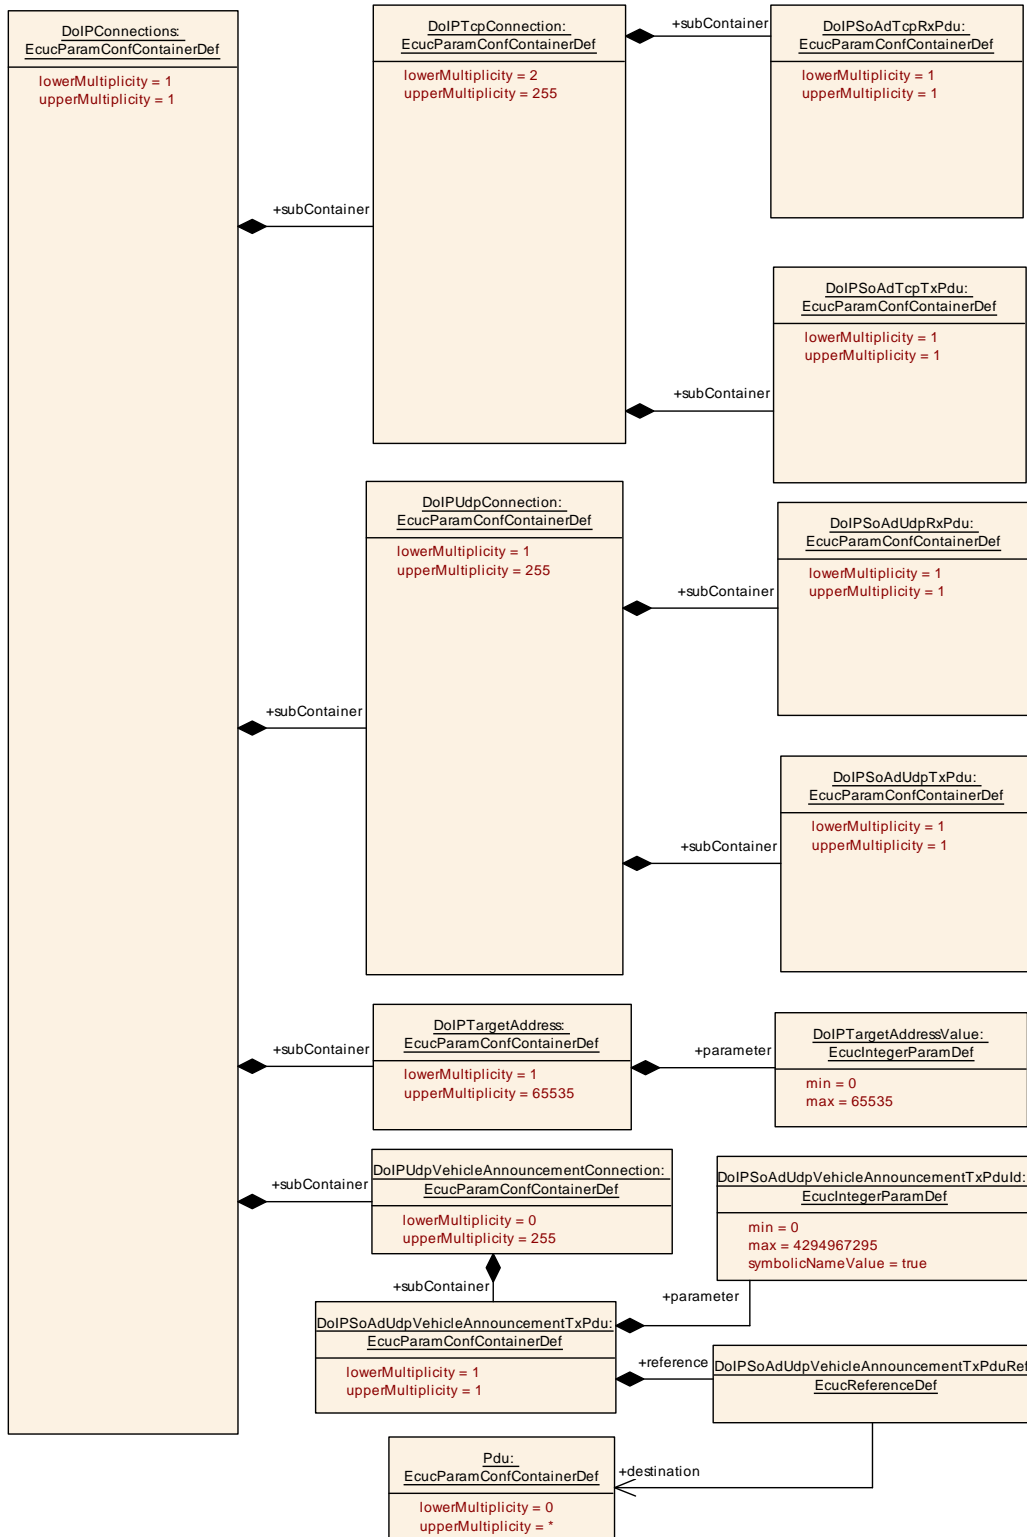
Figure 10.6: `DoIPConnections`

10.2.14 DoIPTargetAddress

SWS Item	[ECUC_DoIP_00053]
Container Name	DoIPTargetAddress
Parent Container	DoIPConnections
Description	This container describes a possible TargetAddress that is supported by DoIP.
Configuration Parameters	

SWS Item	[ECUC_DoIP_00054]		
Parameter Name	DoIPTargetAddressValue		
Parent Container	DoIPTargetAddress		
Description	Valid Target Address of a DoIP target address.		
Multiplicity	1		
Type	EcucIntegerParamDef		
Range	0 .. 65535		
Default value	–		
Post-Build Variant Value	true		
Value Configuration Class	Pre-compile time	X	VARIANT-PRE-COMPILE
	Link time	X	VARIANT-LINK-TIME
	Post-build time	X	VARIANT-POST-BUILD
Scope / Dependency	scope: local		

No Included Containers

10.2.15 DoIPTcpConnection

SWS Item	[ECUC_DoIP_00045]
Container Name	DoIPTcpConnection
Parent Container	DoIPConnections
Description	This container describes a TCP connection to the lower layer SoAd module.
Configuration Parameters	

SWS Item	[ECUC_DoIP_00095]		
Parameter Name	DoIPRequestAddressAssignment		
Parent Container	DoIPTcpConnection		
Description	The DoIP module shall request IP address assignment by calling SoAd_RequestIpAddr Assignment() for the TcpIpLocalAddr related to this DoIpConnection.		
Multiplicity	1		
Type	EcucBooleanParamDef		
Default value	true		
Post-Build Variant Value	false		
Value Configuration Class	Pre-compile time	X	All Variants
	Link time	–	
	Post-build time	–	
Scope / Dependency	scope: local		

SWS Item	[ECUC_DoIP_00097]
Parameter Name	DoIPTcpConnectionSecurityRequired
Parent Container	DoIPTcpConnection
Description	Indicates if the associated TCP socket uses a secure connection (e.g. TLS)
Multiplicity	0..1
Type	EcucBooleanParamDef
Default value	false
Scope / Dependency	scope: local

Included Containers		
Container Name	Multiplicity	Scope / Dependency
DoIPSoAdTcpRxPdu	1	This container describes a Rx PDU received via SoAd over TCP
DoIPSoAdTcpTxPdu	1	This container describes a Tx PDU sent via SoAd over TCP

10.2.16 DoIPSoAdTcpRxPdu

SWS Item	[ECUC_DoIP_00080]
Container Name	DoIPSoAdTcpRxPdu
Parent Container	DoIPTcpConnection
Description	This container describes a Rx PDU received via SoAd over TCP
Configuration Parameters	

SWS Item	[ECUC_DoIP_00082]		
Parameter Name	DoIPSoAdTcpRxPduId		
Parent Container	DoIPSoAdTcpRxPdu		
Description	The DoIPSoAdTcpRxPduId is required by the API call DoIP_SoAdTpRxIndication to receive I-PDUs from the SoAd.		
Multiplicity	1		
Type	EcucIntegerParamDef (Symbolic Name generated for this parameter)		
Range	0 .. 65535		
Default value	–		
Post-Build Variant Value	false		
Value Configuration Class	Pre-compile time	X	All Variants
	Link time	–	
	Post-build time	–	
Scope / Dependency	scope: ECU		

SWS Item	[ECUC_DoIP_00083]
Parameter Name	DoIPSoAdTcpRxPduRef
Parent Container	DoIPSoAdTcpRxPdu
Description	Reference to the "global" Pdu structure to allow harmonization of handle IDs in the COM-Stack.
Multiplicity	1
Type	Reference to Pdu

▽

△

Post-Build Variant Value	true		
Value Configuration Class	Pre-compile time	X	VARIANT-PRE-COMPILE
	Link time	X	VARIANT-LINK-TIME
	Post-build time	X	VARIANT-POST-BUILD
Scope / Dependency	scope: local		

No Included Containers

10.2.17   DoIPSoAdTcpTxPdu

SWS Item	[ECUC_DoIP_00081]
Container Name	DoIPSoAdTcpTxPdu
Parent Container	DoIPTcpConnection
Description	This container describes a Tx PDU sent via SoAd over TCP
Configuration Parameters	

SWS Item	[ECUC_DoIP_00085]		
Parameter Name	DoIPSoAdTcpTxPduId		
Parent Container	DoIPSoAdTcpTxPdu		
Description	The DoIPSoAdTcpTxPduId is required by the API call DoIP_SoAdTpTxConfirmation that is called by the SoAd to confirm that the IPdu has been transmitted successfully.		
Multiplicity	1		
Type	EcucIntegerParamDef (Symbolic Name generated for this parameter)		
Range	0 .. 65535		
Default value	–		
Post-Build Variant Value	false		
Value Configuration Class	Pre-compile time	X	All Variants
	Link time	–	
	Post-build time	–	
Scope / Dependency	scope: ECU		

SWS Item	[ECUC_DoIP_00084]		
Parameter Name	DoIPSoAdTcpTxPduRef		
Parent Container	DoIPSoAdTcpTxPdu		
Description	Reference to the "global" Pdu structure to allow harmonization of handle IDs in the COM-Stack.		
Multiplicity	1		
Type	Reference to Pdu		
Post-Build Variant Value	true		
Value Configuration Class	Pre-compile time	X	VARIANT-PRE-COMPILE
	Link time	X	VARIANT-LINK-TIME
	Post-build time	X	VARIANT-POST-BUILD
Scope / Dependency	scope: local		

No Included Containers

10.2.18 DoIPUdpConnection

SWS Item	[ECUC_DoIP_00052]
Container Name	DoIPUdpConnection
Parent Container	DoIPConnections
Description	This Container describes a Udp connection to the lower layer SoAd module.
Configuration Parameters	

SWS Item	[ECUC_DoIP_00095]		
Parameter Name	DoIPRequestAddressAssignment		
Parent Container	DoIPUdpConnection		
Description	The DoIP module shall request IP address assignment by calling SoAd_RequestIpAddrAssignment() for the TcpIpLocalAddr related to this DoIpConnection.		
Multiplicity	1		
Type	EcucBooleanParamDef		
Default value	true		
Post-Build Variant Value	false		
Value Configuration Class	Pre-compile time	X	All Variants
	Link time	–	
	Post-build time	–	
Scope / Dependency	scope: local		

Included Containers		
Container Name	Multiplicity	Scope / Dependency
DoIPSoAdUdpRxPdu	1	This container describes a Rx PDU received via SoAd over UDP.
DoIPSoAdUdpTxPdu	1	This container describes a Tx PDU sent via SoAd over UDP.

10.2.19 DoIPSoAdUdpRxPdu

SWS Item	[ECUC_DoIP_00046]
Container Name	DoIPSoAdUdpRxPdu
Parent Container	DoIPUdpConnection
Description	This container describes a Rx PDU received via SoAd over UDP.
Configuration Parameters	

SWS Item	[ECUC_DoIP_00048]	
Parameter Name	DoIPSoAdUdpRxPduId	
Parent Container	DoIPSoAdUdpRxPdu	
Description	The DoIPSoAdUdpRxPduId is required by the API call DoIP_SoAdIfRxIndication to receive I-PDUs from the SoAd.	
Multiplicity	1	
Type	EcucIntegerParamDef (Symbolic Name generated for this parameter)	
Range	0 .. 65535	
Default value	–	
Post-Build Variant Value	false	

▽

△

Value Configuration Class	Pre-compile time	X	All Variants
	Link time	–	
	Post-build time	–	
Scope / Dependency	scope: ECU		

SWS Item	[ECUC_DoIP_00049]
Parameter Name	DoIPSoAdUdpRxPduRef
Parent Container	DoIPSoAdUdpRxPdu
Description	Reference to the "global" Pdu structure to allow harmonization of handle IDs in the COM-Stack.
Multiplicity	1
Type	Reference to Pdu
Post-Build Variant Value	true

Value Configuration Class	Pre-compile time	X	VARIANT-PRE-COMPILE
	Link time	X	VARIANT-LINK-TIME
	Post-build time	X	VARIANT-POST-BUILD
Scope / Dependency	scope: local		

No Included Containers

10.2.20 DoIPSoAdUdpTxPdu

SWS Item	[ECUC_DoIP_00047]
Container Name	DoIPSoAdUdpTxPdu
Parent Container	DoIPUdpConnection
Description	This container describes a Tx PDU sent via SoAd over UDP.
Configuration Parameters	

SWS Item	[ECUC_DoIP_00051]
Parameter Name	DoIPSoAdUdpTxPduId
Parent Container	DoIPSoAdUdpTxPdu
Description	The DoIPSoAdUdpTxPduId is required by the API call DoIP_SoAdIfTxConfirmation that is called by the SoAd to confirm that the IPdu has been transmitted successfully.
Multiplicity	1
Type	EcucIntegerParamDef (Symbolic Name generated for this parameter)
Range	0 .. 65535	
Default value	–
Post-Build Variant Value	false

Value Configuration Class	Pre-compile time	X	All Variants
	Link time	–	
	Post-build time	–	
Scope / Dependency	scope: ECU		

SWS Item	[ECUC_DoIP_00050]		
Parameter Name	DoIPSoAdUdpTxPduRef		
Parent Container	DoIPSoAdUdpTxPdu		
Description	Reference to the "global" Pdu structure to allow harmonization of handle IDs in the COM-Stack.		
Multiplicity	1		
Type	Reference to Pdu		
Post-Build Variant Value	true		
Value Configuration Class	**Pre-compile time**	X	VARIANT-PRE-COMPILE
	Link time	X	VARIANT-LINK-TIME
	Post-build time	X	VARIANT-POST-BUILD
Scope / Dependency	scope: local		

No Included Containers

10.2.21   DoIPUdpVehicleAnnouncementConnection

SWS Item	[ECUC_DoIP_00076]
Container Name	DoIPUdpVehicleAnnouncementConnection
Parent Container	DoIPConnections
Description	This container describes the UDP multicast connections to the lower layer SoAd module.
Configuration Parameters	

SWS Item	[ECUC_DoIP_00095]		
Parameter Name	DoIPRequestAddressAssignment		
Parent Container	DoIPUdpVehicleAnnouncementConnection		
Description	The DoIP module shall request IP address assignment by calling SoAd_RequestIpAddrAssignment() for the TcpIpLocalAddr related to this DoIpConnection.		
Multiplicity	1		
Type	EcucBooleanParamDef		
Default value	true		
Post-Build Variant Value	false		
Value Configuration Class	**Pre-compile time**	X	All Variants
	Link time	–	
	Post-build time	–	
Scope / Dependency	scope: local		

Included Containers		
Container Name	**Multiplicity**	**Scope / Dependency**
DoIPSoAdUdpVehicleAnnouncementTxPdu	1	This container describes the vehicle announcement TxPdu sent via the SoAd.

10.2.22 DoIPSoAdUdpVehicleAnnouncementTxPdu

SWS Item	[ECUC_DoIP_00077]
Container Name	DoIPSoAdUdpVehicleAnnouncementTxPdu
Parent Container	DoIPUdpVehicleAnnouncementConnection
Description	This container describes the vehicle announcement TxPdu sent via the SoAd.
Configuration Parameters	

SWS Item	[ECUC_DoIP_00078]		
Parameter Name	DoIPSoAdUdpVehicleAnnouncementTxPduId		
Parent Container	DoIPSoAdUdpVehicleAnnouncementTxPdu		
Description	The DoIPSoAdUdpVehicleAnnouncementTxPduId is required by the API call DoIP_SoAdIfTxConfirmation() that is called by the SoAd to confirm that the IPdu has been transmitted successfully.		
Multiplicity	1		
Type	EcucIntegerParamDef (Symbolic Name generated for this parameter)		
Range	0 .. 4294967295		
Default value	–		
Post-Build Variant Value	false		
Value Configuration Class	Pre-compile time	X	All Variants
	Link time	–	
	Post-build time	–	
Scope / Dependency	scope: ECU		

SWS Item	[ECUC_DoIP_00079]		
Parameter Name	DoIPSoAdUdpVehicleAnnouncementTxPduRef		
Parent Container	DoIPSoAdUdpVehicleAnnouncementTxPdu		
Description	Reference to the "global" PDU structure to allow harmonization of handle IDs in the COM-Stack.		
Multiplicity	1		
Type	Reference to Pdu		
Post-Build Variant Value	true		
Value Configuration Class	Pre-compile time	X	VARIANT-PRE-COMPILE
	Link time	X	VARIANT-LINK-TIME
	Post-build time	X	VARIANT-POST-BUILD
Scope / Dependency	scope: local		

No Included Containers

10.2.23 DoIPRoutingActivation

SWS Item	[ECUC_DoIP_00030]
Container Name	DoIPRoutingActivation
Parent Container	DoIPInterface

▽

△

Description	This container describes the routing activation possibilities by representing for each container a possible routing activation request message to the DoIP entity and the according references to the activated diagnostic messages.
Post-Build Variant Multiplicity	false
Configuration Parameters	

SWS Item	**[ECUC_DoIP_00033]**		
Parameter Name	DoIPRoutingActivationNumber		
Parent Container	DoIPRoutingActivation		
Description	Identifies the Routing activation Number which is received for a DoIP routing activation request message.		
Multiplicity	1		
Type	EcucIntegerParamDef		
Range	0 .. 255		
Default value	–		
Post-Build Variant Value	true		
Value Configuration Class	Pre-compile time	X	VARIANT-PRE-COMPILE
	Link time	X	VARIANT-LINK-TIME
	Post-build time	X	VARIANT-POST-BUILD
Scope / Dependency	scope: local		

SWS Item	**[ECUC_DoIP_00096]**
Parameter Name	DoIPRoutingActivationSecurityRequired
Parent Container	DoIPRoutingActivation
Description	Indicates if a routing activation requires a secure TCP connection
Multiplicity	0..1
Type	EcucBooleanParamDef
Default value	false
Scope / Dependency	scope: local

SWS Item	**[ECUC_DoIP_00034]**		
Parameter Name	DoIPTargetAddressRef		
Parent Container	DoIPRoutingActivation		
Description	Reference to all DoIPTargetAddress which are activated on this Routing activation.		
Multiplicity	1..65535		
Type	Reference to DoIPTargetAddress		
Post-Build Variant Multiplicity	true		
Post-Build Variant Value	true		
Multiplicity Configuration Class	Pre-compile time	X	VARIANT-PRE-COMPILE
	Link time	X	VARIANT-LINK-TIME
	Post-build time	X	VARIANT-POST-BUILD
Value Configuration Class	Pre-compile time	X	VARIANT-PRE-COMPILE
	Link time	X	VARIANT-LINK-TIME
	Post-build time	X	VARIANT-POST-BUILD
Scope / Dependency	scope: local		

Included Containers

Container Name	Multiplicity	Scope / Dependency
DoIPRoutingActivation AuthenticationCallback	0..1	Container describes the Callbackfunction to call on a Routing Activation Request for Authentication. If this container is configured but the DoIPRoutingActivationAuthenticationFunc parameter is not present, the DoIP module will use an RPort of ServiceInterface <RoutingActivation>_RoutingActivation with the name "CB<RoutingActivation>RoutingActivation". <Routing Activation> is the ShortName of the DoIPRoutingActiviation container.
DoIPRoutingActivation ConfirmationCallback	0..1	Container describes the Callbackfunction to call on a Routing Activation Request for Confirmation. If this container is configured but the DoIPRoutingActivationConfirmationFunc parameter is not present the DoIP module will use an RPort of ServiceInterface <RoutingActivation>_RoutingActivation with the name "CB<RoutingActivation>RoutingActivation". <Routing Activation> is the ShortName of the DoIPRoutingActiviation container.

Figure 10.7: DoIPRoutingActivation

10.2.24 DoIPRoutingActivationAuthenticationCallback

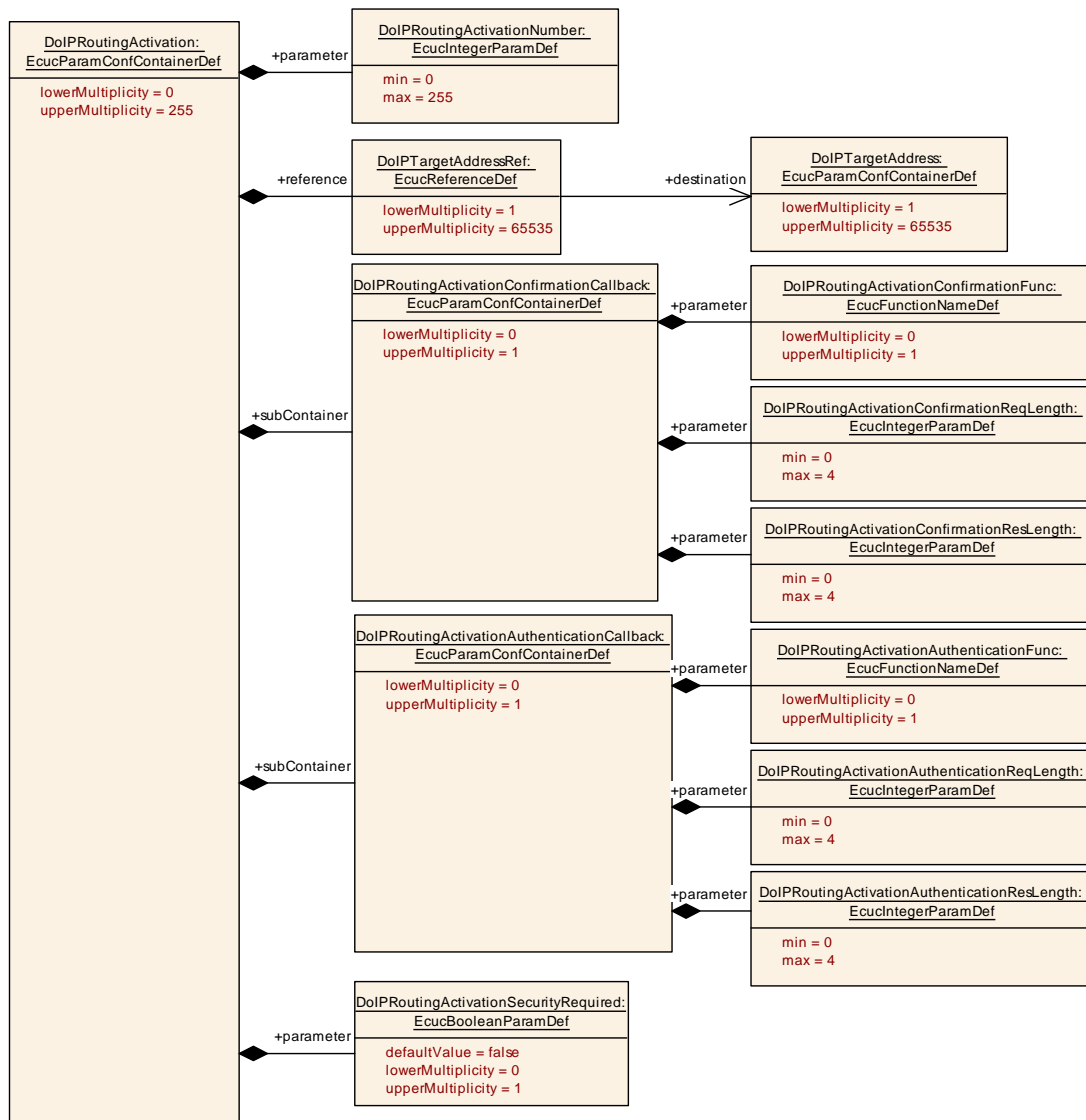| SWS Item	[ECUC_DoIP_00035]
Container Name	DoIPRoutingActivationAuthenticationCallback
Parent Container	DoIPRoutingActivation
Description	Container describes the Callbackfunction to call on a Routing Activation Request for Authentication. If this container is configured but the DoIPRoutingActivation AuthenticationFunc parameter is not present, the DoIP module will use an RPort of ServiceInterface <RoutingActivation>_RoutingActivation with the name "CB<Routing Activation>RoutingActivation". <RoutingActivation> is the ShortName of the Do IPRoutingActiviation container.
Configuration Parameters	

SWS Item	[ECUC_DoIP_00039]		
Parameter Name	DoIPRoutingActivationAuthenticationFunc		
Parent Container	DoIPRoutingActivationAuthenticationCallback		
Description	Direct C Callback function to trigger the authentication function for routing activation. If the DoIPRoutingActivationAuthenticationFunc parameter is present, the DoIP module will not use an RPort of ServiceInterface <RoutingActivation>_RoutingActivation but call the configured function.		
Multiplicity	0..1		
Type	EcucFunctionNameDef		
Default value	–		
Regular Expression	–		
Post-Build Variant Multiplicity	false		
Post-Build Variant Value	false		
Multiplicity Configuration Class	Pre-compile time	X	VARIANT-PRE-COMPILE
	Link time	X	VARIANT-LINK-TIME, VARIANT-POST-BUILD
	Post-build time	–	
Value Configuration Class	Pre-compile time	X	VARIANT-PRE-COMPILE
	Link time	X	VARIANT-LINK-TIME, VARIANT-POST-BUILD
	Post-build time	–	
Scope / Dependency	scope: local		

SWS Item	[ECUC_DoIP_00040]		
Parameter Name	DoIPRoutingActivationAuthenticationReqLength		
Parent Container	DoIPRoutingActivationAuthenticationCallback		
Description	Describes the amount of bytes used to handle to the authentication function on routing activation. If 0 is configured as length the parameter AuthenticationReqData will not be handled to the API.		
Multiplicity	1		
Type	EcucIntegerParamDef		
Range	0 .. 4		
Default value	–		
Post-Build Variant Value	false		
Value Configuration Class	Pre-compile time	X	VARIANT-PRE-COMPILE
	Link time	X	VARIANT-LINK-TIME, VARIANT-POST-BUILD
	Post-build time	–	

▽

△

Scope / Dependency	scope: local

SWS Item	**[ECUC_DoIP_00041]**		
Parameter Name	DoIPRoutingActivationAuthenticationResLength		
Parent Container	DoIPRoutingActivationAuthenticationCallback		
Description	Describes the amount of bytes used to read by the authentication function on routing activation. If 0 is configured as length the parameter AuthenticationResData will not be fetched via the API.		
Multiplicity	1		
Type	EcucIntegerParamDef		
Range	0 .. 4		
Default value	–		
Post-Build Variant Value	false		
Value Configuration Class	**Pre-compile time**	X	VARIANT-PRE-COMPILE
	Link time	X	VARIANT-LINK-TIME, VARIANT-POST-BUILD
	Post-build time	–	
Scope / Dependency	scope: local		

No Included Containers

10.2.25   DoIPRoutingActivationConfirmationCallback

SWS Item	**[ECUC_DoIP_00061]**
Container Name	DoIPRoutingActivationConfirmationCallback
Parent Container	DoIPRoutingActivation
Description	Container describes the Callbackfunction to call on a Routing Activation Request for Confirmation. If this container is configured but the DoIPRoutingActivationConfirmation Func parameter is not present the DoIP module will use an RPort of ServiceInterface <RoutingActivation>_RoutingActivation with the name "CB<RoutingActivation>Routing Activation". <RoutingActivation> is the ShortName of the DoIPRoutingActiviation container.
Configuration Parameters	

SWS Item	**[ECUC_DoIP_00036]**
Parameter Name	DoIPRoutingActivationConfirmationFunc
Parent Container	DoIPRoutingActivationConfirmationCallback
Description	Direct C Callback function to trigger the confirmation function for routing activation. If the DoIPRoutingActivationConfirmationFunc parameter is present the DoIP module will not use an RPort of ServiceInterface <RoutingActivation>_RoutingActivation but call the configured function.
Multiplicity	0..1
Type	EcucFunctionNameDef
Default value	–
Regular Expression	–
Post-Build Variant Multiplicity	false
Post-Build Variant Value	false

▽

△

Multiplicity Configuration Class	Pre-compile time	X	VARIANT-PRE-COMPILE
	Link time	X	VARIANT-LINK-TIME, VARIANT-POST-BUILD
	Post-build time	–	
Value Configuration Class	Pre-compile time	X	VARIANT-PRE-COMPILE
	Link time	X	VARIANT-LINK-TIME, VARIANT-POST-BUILD
	Post-build time	–	
Scope / Dependency	scope: local		

SWS Item	[ECUC_DoIP_00037]		
Parameter Name	DoIPRoutingActivationConfirmationReqLength		
Parent Container	DoIPRoutingActivationConfirmationCallback		
Description	Describes the amount of bytes used to handle to the confirmation function on routing activation. If 0 is configured as length the parameter ConfirmedReqData will not be handled to the API.		
Multiplicity	1		
Type	EcucIntegerParamDef		
Range	0 .. 4		
Default value	–		
Post-Build Variant Value	false		
Value Configuration Class	Pre-compile time	X	VARIANT-PRE-COMPILE
	Link time	X	VARIANT-LINK-TIME, VARIANT-POST-BUILD
	Post-build time	–	
Scope / Dependency	scope: local		

SWS Item	[ECUC_DoIP_00038]		
Parameter Name	DoIPRoutingActivationConfirmationResLength		
Parent Container	DoIPRoutingActivationConfirmationCallback		
Description	Describes the amount of bytes used to read by the confirmation function on routing activation. If 0 is configured as length the parameter ConfirmedResData will not be fetched via the API.		
Multiplicity	1		
Type	EcucIntegerParamDef		
Range	0 .. 4		
Default value	–		
Post-Build Variant Value	false		
Value Configuration Class	Pre-compile time	X	VARIANT-PRE-COMPILE
	Link time	X	VARIANT-LINK-TIME, VARIANT-POST-BUILD
	Post-build time	–	
Scope / Dependency	scope: local		

No Included Containers

10.2.26 DoIPTester

SWS Item	**[ECUC_DoIP_00031]**
Container Name	DoIPTester
Parent Container	DoIPInterface
Description	This container describes the properties of the possible connectable Tester for the DoIP entity.
Post-Build Variant Multiplicity	false
Configuration Parameters	

SWS Item	**[ECUC_DoIP_00042]**		
Parameter Name	DoIPNumByteDiagAckNack		
Parent Container	DoIPTester		
Description	Specifies the number of original Diagnostic request bytes the DoIP entity responses on a NACK of a diagnostic response message to the Tester.		
Multiplicity	1		
Type	EcucIntegerParamDef		
Range	0 .. 4294967295		
Default value	–		
Post-Build Variant Value	true		
Value Configuration Class	Pre-compile time	X	VARIANT-PRE-COMPILE
	Link time	X	VARIANT-LINK-TIME
	Post-build time	X	VARIANT-POST-BUILD
Scope / Dependency	scope: local		

SWS Item	**[ECUC_DoIP_00043]**		
Parameter Name	DoIPTesterSA		
Parent Container	DoIPTester		
Description	Source Address of the Tester sent via routing activation or diagnostic message.		
Multiplicity	1		
Type	EcucIntegerParamDef		
Range	0 .. 65535		
Default value	–		
Post-Build Variant Value	true		
Value Configuration Class	Pre-compile time	X	VARIANT-PRE-COMPILE
	Link time	X	VARIANT-LINK-TIME
	Post-build time	X	VARIANT-POST-BUILD
Scope / Dependency	scope: local		

SWS Item	**[ECUC_DoIP_00062]**
Parameter Name	DoIPRoutingActivationRef
Parent Container	DoIPTester
Description	Reference to a DoIPRoutingActivation describing the possible routing activations of the DoIPTester
Multiplicity	1..255
Type	Reference to DoIPRoutingActivation
Post-Build Variant Multiplicity	true
Post-Build Variant Value	true

▽

△

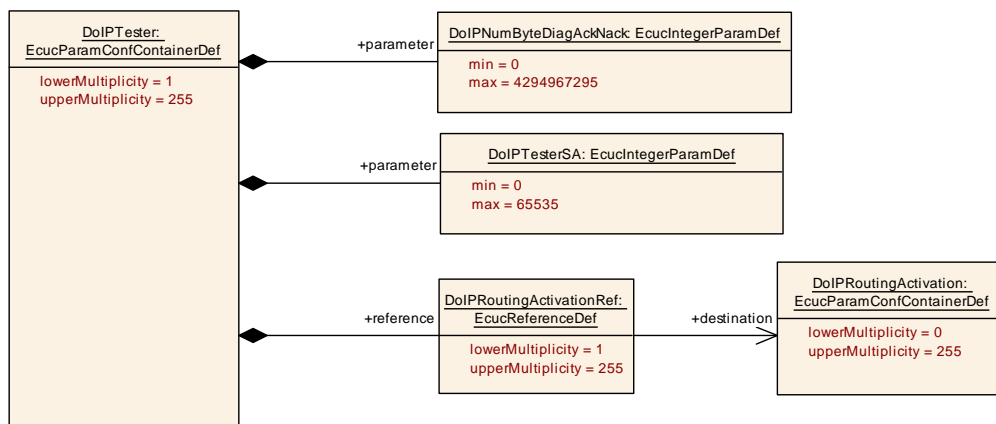|				
Multiplicity Configuration Class	**Pre-compile time**	X	VARIANT-PRE-COMPILE
	Link time	X	VARIANT-LINK-TIME
	Post-build time	X	VARIANT-POST-BUILD
Value Configuration Class	**Pre-compile time**	X	VARIANT-PRE-COMPILE
	Link time	X	VARIANT-LINK-TIME
	Post-build time	X	VARIANT-POST-BUILD
Scope / Dependency	scope: local		

No Included Containers

Figure 10.8: DoIPTester

10.3 Published Information

For details refer to the chapter 10.3 "Published Information" in SWS_BSWGeneral [1].