

FCC 47 CFR Part 15 Subpart B

TEST REPORT

For

RV1126B Core Board

MODEL NUMBER: ATK-CLRV1126B/BI

REPORT NUMBER: E04A25121152F00201

ISSUE DATE: January 5, 2026

Prepared for

**Guangzhou Xingyi Electronic Technology Co., Ltd
The fourth and sixteenth floors of Building 2, Yudong Science and Technology
Park, No. 3, Ketai 1st Road, Guangzhou Private Science and Technology Park,
Baiyun District, Guangzhou**

Prepared by

Guangdong Global Testing Technology Co., Ltd.

**Room 101-105, 203-210, Building 1, No.2, Keji 8 Road, Songshan Lake Park,
Dongguan city, Guangdong, People's Republic of China, 523808**

**This report is based on a single evaluation of the submitted sample(s) of the above
mentioned product, it does not imply an assessment of the production of the products.
This report shall not be reproduced, except in full, without the written approval of
Guangdong Global Testing Technology Co., Ltd.**

Revision History

Rev.	Issue Date	Revisions	Revised By
V0	January 5, 2026	Initial Issue	

Summary of Test Results

Emission			
Standard	Test Item	Limit	Result
FCC 47 CFR Part 15 Subpart B	Conducted emissions	FCC Part 15.107	Pass
	Radiated emissions below 1GHz	FCC Part 15.109	Pass
	Radiated emissions above 1GHz	FCC Part 15.109	Pass

*This test report is only published to and used by the applicant, and it is not for evidence purpose in China.

*The measurement result for the sample received is <Pass> according to <FCC 47 CFR Part 15 Subpart B> when <Accuracy Method> decision rule is applied.

CONTENTS

1. ATTESTATION OF TEST RESULTS.....	5
2. TEST METHODOLOGY.....	6
3. FACILITIES AND ACCREDITATION.....	6
4. CALIBRATION AND UNCERTAINTY	7
4.1. <i>MEASURING INSTRUMENT CALIBRATION</i>	<i>7</i>
4.2. <i>MEASUREMENT UNCERTAINTY.....</i>	<i>7</i>
5. EQUIPMENT UNDER TEST	8
5.1. <i>DESCRIPTION OF EUT</i>	<i>8</i>
5.2. <i>TEST MODE.....</i>	<i>8</i>
5.3. <i>SUPPORT UNITS FOR SYSTEM TEST</i>	<i>8</i>
6. MEASURING EQUIPMENT AND SOFTWARE USED.....	9
7. EMISSION TEST	10
7.1. <i>Conducted emissions.....</i>	<i>10</i>
7.2. <i>Radiated emissions below 1GHz</i>	<i>14</i>
7.3. <i>Radiated emissions above 1GHz</i>	<i>18</i>
APPENDIX: PHOTOGRAPHS OF TEST CONFIGURATION	22
APPENDIX: PHOTOGRAPHS OF THE EUT	24

1. ATTESTATION OF TEST RESULTS

Applicant Information

Company Name: Guangzhou Xingyi Electronic Technology Co., Ltd
Address: The fourth and sixteenth floors of Building 2, Yudong Science and Technology Park, No. 3, Ketai 1st Road, Guangzhou Private Science and Technology Park, Baiyun District, Guangzhou

Manufacturer Information

Company Name: Guangzhou Xingyi Electronic Technology Co., Ltd
Address: The fourth and sixteenth floors of Building 2, Yudong Science and Technology Park, No. 3, Ketai 1st Road, Guangzhou Private Science and Technology Park, Baiyun District, Guangzhou

Factory Information

Company Name: Dongguan Zhichen Electronic Technology Co., Ltd
Address: 301, Building 1, No. 16 Xingui Road, Lincun, Tangxia Town, Dongguan City, Guangdong Province

EUT Information

Product Description: RV1126B Core Board
Model: ATK-CLRV1126B/BI
Brand: ALIENTEK
Sample Received Date: 23 December 2025
Sample ID: A25121152 001
Date of Tested: December 23, 2025 to December 25, 2025

APPLICABLE STANDARDS	
STANDARD	TEST RESULTS
FCC 47 CFR Part 15 Subpart B	Pass

Prepared By:

Jansen Lin

Jansen Lin
Project Engineer

Checked By:

Alan He

Alan He
Laboratory Leader

Approved By:

Shawn Wen

Shawn Wen
Laboratory Manager



2. TEST METHODOLOGY

All tests were performed in accordance with the standard FCC 47 CFR Part 15 Subpart B

3. FACILITIES AND ACCREDITATION

Accreditation Certificate	A2LA (Certificate No.: 6947.01) Guangdong Global Testing Technology Co., Ltd. has been assessed and proved to be in compliance with A2LA. FCC (FCC Designation No.: CN1343) Guangdong Global Testing Technology Co., Ltd. has been recognized to perform compliance testing on equipment subject to Supplier's Declaration of Conformity (SDoC) and Certification rules ISED (Company No.: 30714) Guangdong Global Testing Technology Co., Ltd. has been registered and fully described in a report filed with ISED. The Company Number is 30714 and the test lab Conformity Assessment Body Identifier (CABID) is CN0148.
---------------------------	--

Note: All tests measurement facilities use to collect the measurement data are located at Room 101-105, 203-210, Building 1, No.2, Keji 8 Road, Songshan Lake Park, Dongguan city, Guangdong, People's Republic of China, 523808

4. CALIBRATION AND UNCERTAINTY

4.1. MEASURING INSTRUMENT CALIBRATION

The measuring equipment utilized to perform the tests documented in this report has been calibrated in accordance with the manufacturer's recommendations and is traceable to recognized national standards.

4.2. MEASUREMENT UNCERTAINTY

Where relevant, the following measurement uncertainty levels have been estimated for tests performed on the apparatus:

Test Item	Measurement Frequency Range	K	U(dB)
Conducted emissions	0.009 MHz - 30 MHz	2	3.35
Radiated emissions below 1GHz	30 MHz -1 GHz	2	3.83
Radiated emissions above 1GHz	1 GHz - 18 GHz	2	5.65
Note1: This uncertainty represents an expanded uncertainty expressed at approximately the 95 % confidence level using a coverage factor of k=2.			
Note 2: According to the standard CISPR 16-4-2, the MU for the Conducted emissions from the AC mains power ports using AMN should not exceed 3.8 in range of 9kHz to 150kHz and 3.4 in range of 150kHz to 30MHz. We have considered the test results containing the value of U _{lab} (in dB) for the measurement instrumentation actually used for the measurements.			

5. EQUIPMENT UNDER TEST

5.1. DESCRIPTION OF EUT

EUT Name		RV1126B Core Board
Model		ATK-CLRV1126B/BI
EUT Classification		Class B
Internal Frequency		above 108MHz
Ratings		Input:DC5V 1A
Power Supply	DC	DC5V from host unit

5.2. TEST MODE

Test Mode	Description
M01	Normal Working: Operate according to the user manual

5.3. SUPPORT UNITS FOR SYSTEM TEST

The EUT has been tested as an independent unit

6. MEASURING EQUIPMENT AND SOFTWARE USED

Test Equipment of Conducted emissions					
Equipment	Manufacturer	Model No.	Serial No.	Last Cal.	Due Date
Shielding Room 1	CHENG YU	8*5*4	N/A	8/23/2025	8/22/2028
LISN	R&S	ENV216	102843	8/23/2025	8/22/2026
EMI Test Receiver	R&S	ESR3	102647	8/23/2025	8/22/2026
LISN	Schwarzbeck	NNLK 8129 RC	5046	8/23/2025	8/22/2026
8-Wire ISN CAT6	Schwarzbeck	NTFM 8158	#237	8/22/2025	8/21/2026
CURRENT PROBE	R&S	EZ-17	101602	8/22/2025	8/21/2026
Test Software for CE	Farad	EZ-EMC	V1.1.4.2	N/A	N/A

Test Equipment of Radiated emissions below 1GHz					
Equipment	Manufacturer	Model No.	Serial No.	Last Cal.	Due Date
Chamber	ETS	9*6*6	Q2146	8/22/2025	8/21/2026
Receiver	R&S	ESCI3	101409	8/22/2025	8/21/2026
Loop Antenna	ETS	6502	243668	2/22/2025	2/21/2028
Pre-Amplifier	HzEMC	HPA-9K0130	HYP A21001	8/23/2025	8/22/2026
Biconilog Antenna	Schwarzbeck	VULB 9168	1315	9/20/2025	9/19/2028
Biconilog Antenna	ETS	3142E	243651	2/22/2025	2/21/2028
Test Software for RE	Farad	EZ-EMC	V1.1.4.2	N/A	N/A

Test Equipment of Radiated emissions above 1GHz					
Equipment	Manufacturer	Model No.	Serial No.	Last Cal.	Due Date
Spectrum Analyzer	R&S	FSV40	101413	8/23/2025	8/22/2026
Pre-Amplifier	HzEMC	HPA-1G1850	HYP A21003	8/23/2025	8/22/2026
Horn antenna	ETS	3117	246069	2/22/2025	2/21/2028
Pre-Amplifier	HzEMC	HPA-184057	HYP A21004	8/23/2025	8/22/2026
Horn antenna	ETS	3116C	246265	2/22/2025	2/21/2028
Test Software for RE	Farad	EZ-EMC	V1.1.4.2	N/A	N/A

7. EMISSION TEST

7.1. CONDUCTED EMISSIONS

LIMITS

CFR 47 FCC Part15 Subpart B				
FREQUENCY (MHz)	Class A (dBμV)		Class B (dBμV)	
	Quasi-peak	Average	Quasi-peak	Average
0.15 -0.5	79.00	66.00	66 - 56 *	56 - 46*
0.50 -5.0	73.00	60.00	56.00	46.00
5.0 -30.0	73.00	60.00	60.00	50.00

Note:

- (1) The tighter limit applies at the band edges.
- (2) The limit of " * " marked band means the limitation decreases linearly with the logarithm of the frequency in the range.


The following table is the setting of the receiver

Receiver Parameters	Setting
Attenuation	10 dB
Start Frequency	0.15 MHz
Stop Frequency	30 MHz
IF Bandwidth	9 kHz

TEST PROCEDURE

1. The testing follows the guidelines in ANSI C63.4-2014.
2. The EUT was placed on the top of a rotating table 0.8 meters above the horizontal ground plane and being connected to the power mains through a line impedance stabilization network (LISN). All other support equipment powered from additional LISN(s). The LISN provide 50 ohm/ 50uH of coupling impedance for the measuring instrument.
3. Interconnecting cables that hang closer than 40 cm to the ground plane shall be folded back and forth in the center forming a bundle 30 to 40 cm long.
4. I/O cables that are not connected to a peripheral shall be bundled in the center. The end of the cable may be terminated, if required, using the correct terminating impedance. The overall length shall not exceed 1 m.
5. Cables of hand-operated devices, such as keyboards and mice, shall be placed as for normal used.
6. LISN at least 80 cm from nearest part of EUT chassis.
7. Conducted emissions from the EUT measured in the frequency range between 0.15 MHz and 30MHz using CISPR Quasi-Peak and average detector mode.

TEST SETUP

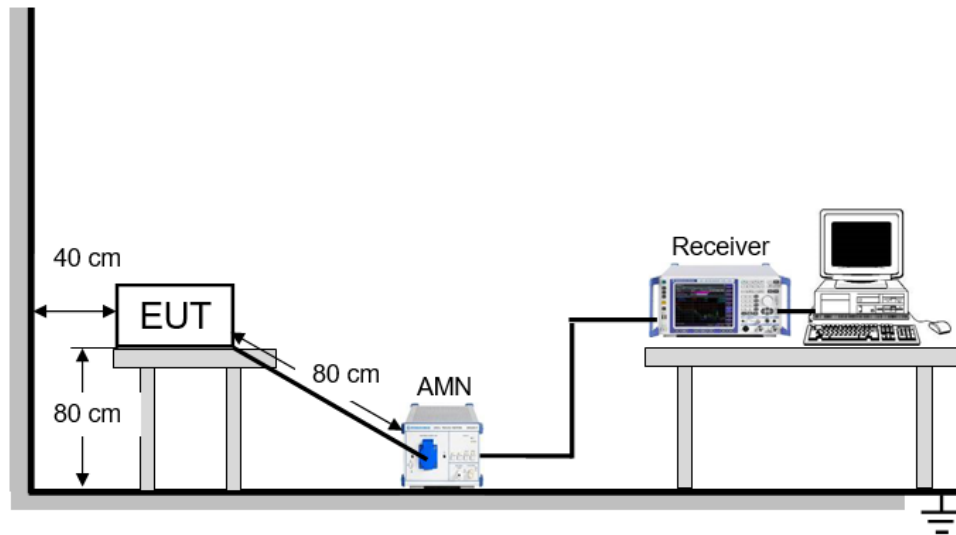


TEST ENVIRONMENT

Temperature	23.4°C	Relative Humidity	54%
Atmosphere Pressure	101kPa		

TEST MODE

Pre-test Mode:	M01 ~ M01
Final Test Mode:	M01


Note: All test modes had been tested, but only the worst data recorded in the report.

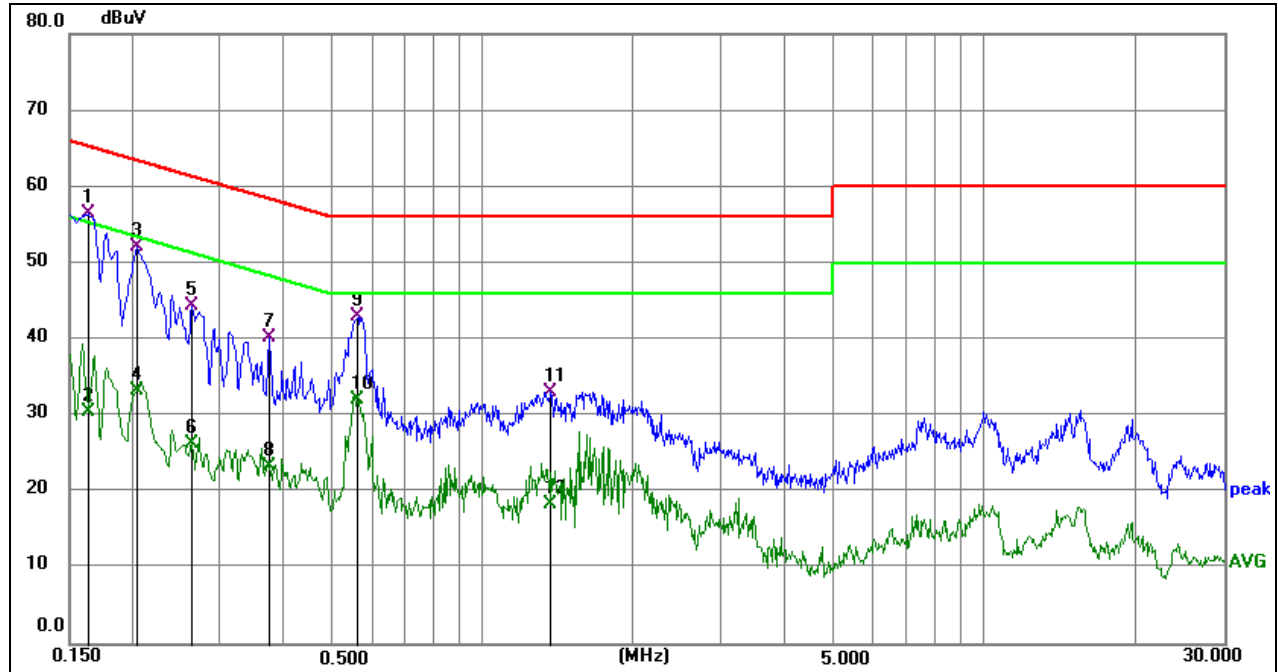TEST RESULTS

Phase: N

Mode: M01

No.	Frequency (MHz)	Reading (dBuV)	Correct (dB)	Result (dBuV)	Limit (dBuV)	Margin (dB)	Remark
1	0.1635	46.80	9.59	56.39	65.28	-8.89	QP
2	0.1635	20.96	9.59	30.55	55.28	-24.73	AVG
3	0.2040	42.44	9.59	52.03	63.45	-11.42	QP
4	0.2040	23.60	9.59	33.19	53.45	-20.26	AVG
5	0.2625	34.89	9.53	44.42	61.35	-16.93	QP
6	0.2625	16.82	9.53	26.35	51.35	-25.00	AVG
7	0.3750	30.63	9.56	40.19	58.39	-18.20	QP
8	0.3750	13.86	9.56	23.42	48.39	-24.97	AVG
9	0.5639	33.46	9.58	43.04	56.00	-12.96	QP
10	0.5639	22.47	9.58	32.05	46.00	-13.95	AVG
11	1.3693	23.51	9.61	33.12	56.00	-22.88	QP
12	1.3693	8.76	9.61	18.37	46.00	-27.63	AVG

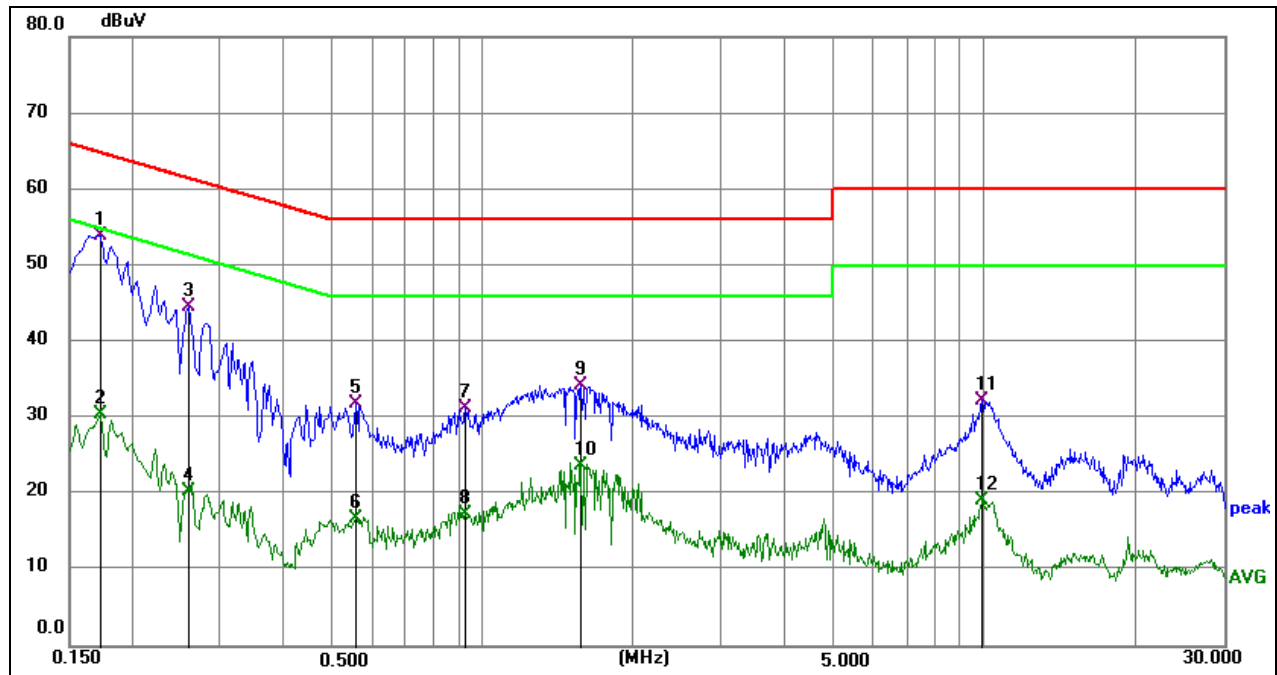

Phase: L1

Mode: M01

No.	Frequency (MHz)	Reading (dBuV)	Correct (dB)	Result (dBuV)	Limit (dBuV)	Margin (dB)	Remark
1	0.1725	44.49	9.48	53.97	64.84	-10.87	QP
2	0.1725	20.96	9.48	30.44	54.84	-24.40	AVG
3	0.2580	35.07	9.59	44.66	61.50	-16.84	QP
4	0.2580	10.69	9.59	20.28	51.50	-31.22	AVG
5	0.5595	22.22	9.61	31.83	56.00	-24.17	QP
6	0.5595	7.18	9.61	16.79	46.00	-29.21	AVG
7	0.9240	21.75	9.52	31.27	56.00	-24.73	QP
8	0.9240	7.94	9.52	17.46	46.00	-28.54	AVG
9	1.5720	24.66	9.59	34.25	56.00	-21.75	QP
10	1.5720	14.09	9.59	23.68	46.00	-22.32	AVG
11	9.9015	22.47	9.70	32.17	60.00	-27.83	QP
12	9.9015	9.45	9.70	19.15	50.00	-30.85	AVG

Remark: Result = Reading +Correct (Insertion Loss + Cable Loss + Attenuator Factor)

Margin = Result - Limit

7.2. RADIATED EMISSIONS BELOW 1GHZ

LIMITS

Below 1 GHz

CFR 47 FCC Part 15 Subpart B		
Frequency (MHz)	Class A	Class B
	Field strength (dBuV/m) (at 3 m)	Field strength (dBuV/m) (at 3 m)
30 - 88	49.5	40
88 - 216	53.9	43.5
216 - 960	56.9	46
Above 960	60	54

Test Frequency Range of Radiated Disturbance Measurement

Highest frequency generated or Upper frequency of measurement used in the device or on which the device operates or tunes (MHz)	Range (MHz)
Below 1.705	30
1.705 - 108	1000
108 - 500	2000
500 - 1000	5000
Above 1000	5 th harmonic of the highest frequency or 40 GHz, whichever is lower

NOTE:

- (1) The limit for radiated test was performed according to FCC Part 15, Subpart B;
- (2) The tighter limit applies at the band edges;
- (3) Emission level (dBuV/m) = 20log Emission level (uV/m),
3m Emission level = 10 m Emission level + 20log(10 m/3 m);

TEST PROCEDURE

Below 1 GHz and above 30 MHz


The setting of the spectrum analyser

RBW	120 kHz
VBW	300 kHz
Sweep	Auto
Detector	Peak and QP
Trace	Max hold

1. The testing follows the guidelines in ANSI C63.4-2014.
2. The EUT was arranged to its worst case and then tune the antenna tower (from 1 m to 4 m) and turntable (from 0 degree to 360 degrees) to find the maximum reading. A pre-amp was used for the test in order to get better signal level. Both horizontal and vertical polarizations of the antenna are set to make the measurement.

3. The EUT was placed on a turntable with 80 cm above ground.
4. Interconnecting cables that hang closer than 40 cm to the ground plane shall be folded back and forth in the center forming a bundle 30 to 40 cm long.
5. I/O cables that are not connected to a peripheral shall be bundled in the center. The end of the cable may be terminated, if required, using the correct terminating impedance. The overall length shall not exceed 1 m.
6. Cables of hand-operated devices, such as keyboards and mice, shall be placed as for normal used.
7. The EUT was set 3 meters from the interference receiving antenna, which was mounted on the top of a variable height antenna tower.
8. For measurement below 1 GHz, the initial step in collecting conducted emission data is a spectrum analyzer peak detector mode pre-scanning the measurement frequency range. Significant peaks are then marked and then Quasi Peak detector mode re-measured.

TEST SETUP

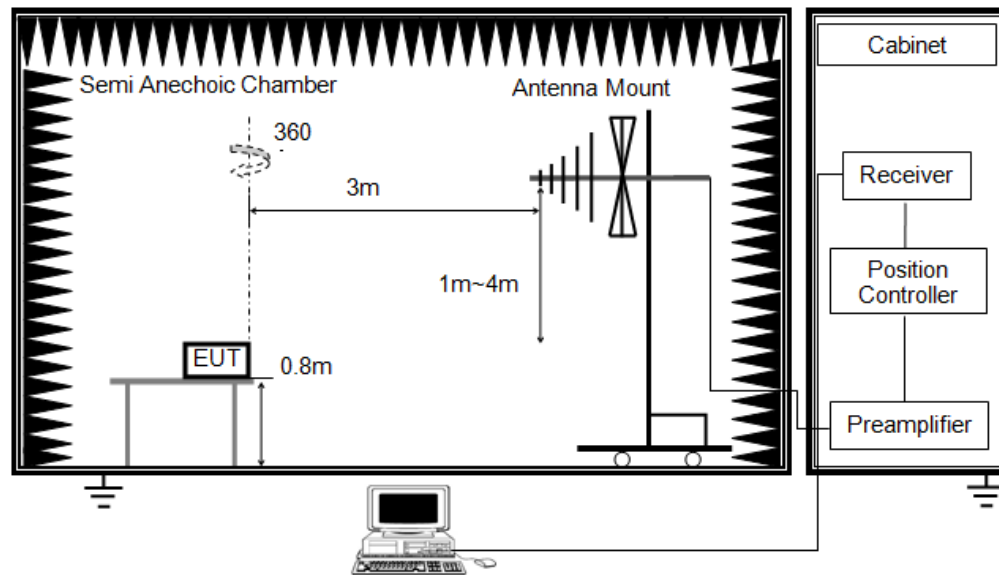


TEST ENVIRONMENT

Temperature	23.2°C	Relative Humidity	50%
Atmosphere Pressure	101kPa		

TEST MODE

Pre-test Mode:	M01 ~ M01
Final Test Mode:	M01


Note: All test modes had been tested, but only the worst data recorded in the report.

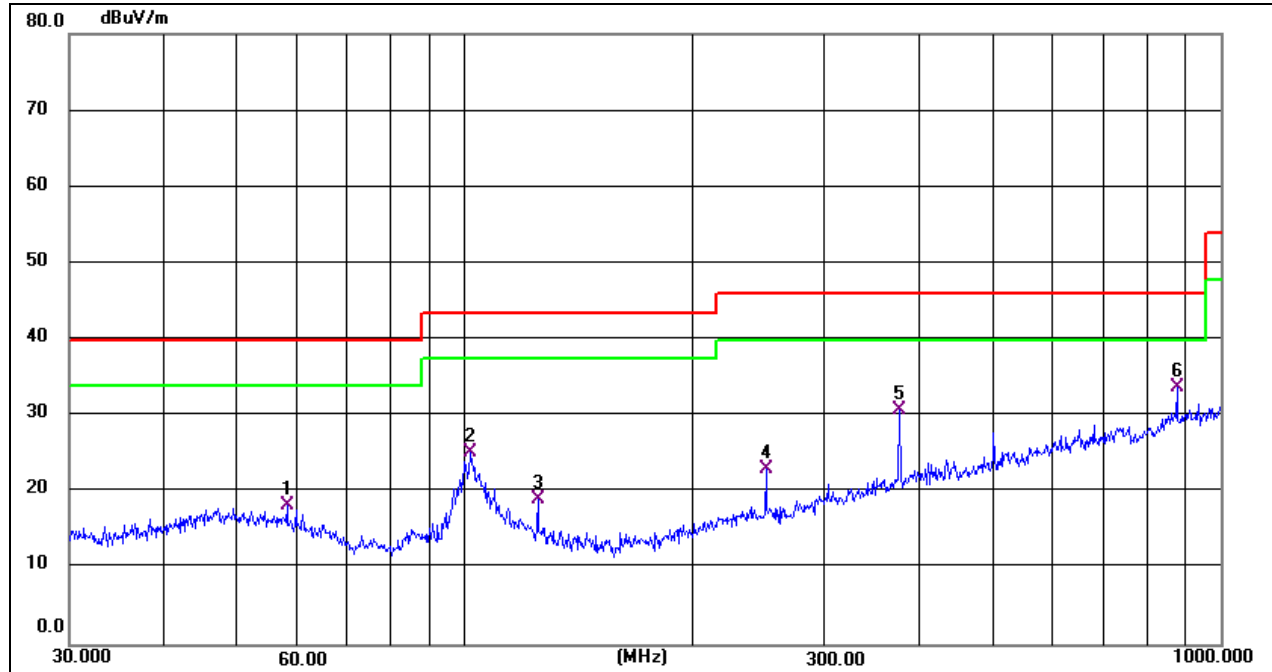TEST RESULTS

Antenna:Horizontal

Mode: M01

No .	Frequenc y (MHz)	Reading Level(dBuV)	Correct Factor(dB/m)	Measure- ment(dBuV/m)	Limit (dBuV/m)	Over (dB)	Detect or	Commen t
1	58.2030	28.61	-10.25	18.36	40.00	-21.64	QP	
2	101.6443	35.53	-10.35	25.18	43.50	-18.32	QP	
3	125.0066	31.76	-12.64	19.12	43.50	-24.38	QP	
4	250.3012	32.35	-9.28	23.07	46.00	-22.93	QP	
5	375.9385	36.35	-5.62	30.73	46.00	-15.27	QP	
6 *	875.2470	31.98	1.84	33.82	46.00	-12.18	QP	

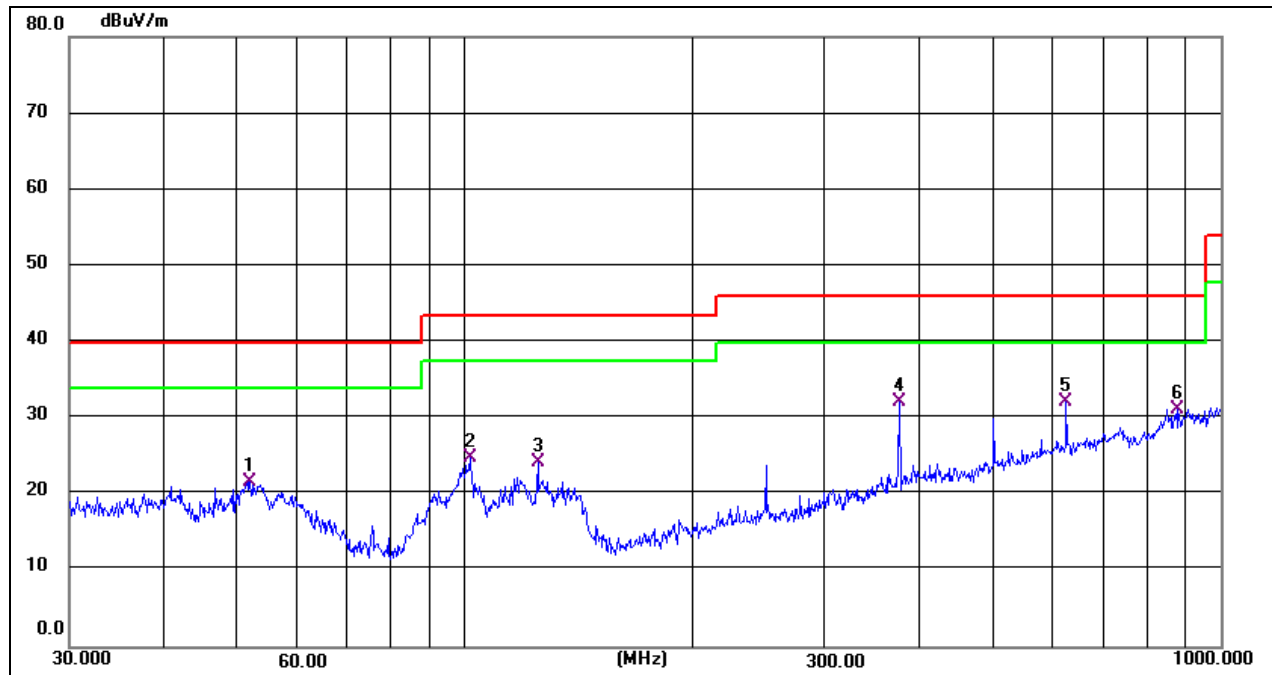

Antenna: Vertical

Mode: M01

No .	Frequenc y (MHz)	Reading Level(dBuV)	Correct Factor(dB/m)	Measure- ment(dBuV/m)	Limit (dBuV/m)	Over (dB)	De tec tor	Commen t
1	52.0251	31.56	-9.80	21.76	40.00	-18.24	QP	
2	101.6443	35.21	-10.35	24.86	43.50	-18.64	QP	
3	125.0066	36.92	-12.64	24.28	43.50	-19.22	QP	
4	375.9385	37.75	-5.62	32.13	46.00	-13.87	QP	
5 *	625.0780	33.31	-1.10	32.21	46.00	-13.79	QP	
6	875.2470	29.41	1.84	31.25	46.00	-14.75	QP	

Remark: 1. Result = Reading +Correct (Amplifier Factor + Cable Loss + Antenna Factor)

2. Margin = Result - Limit

7.3. RADIATED EMISSIONS ABOVE 1GHZ

LIMITS

Above 1 GHz

CFR 47 FCC Part 15 Subpart B				
Frequency (MHz)	Class A		Class B	
	(dBuV/m) (at 3 m)		(dBuV/m) (at 3 m)	
	Peak	Average	Peak	Average
Above 1000	80	60	74	54

Test Frequency Range of Radiated Disturbance Measurement

Highest frequency generated or Upper frequency of measurement used in the device or on which the device operates or tunes (MHz)	Range (MHz)
Below 1.705	30
1.705 - 108	1000
108 - 500	2000
500 - 1000	5000
Above 1000	5 th harmonic of the highest frequency or 40 GHz, whichever is lower

NOTE:

- (1) The limit for radiated test was performed according to FCC Part 15, Subpart B;
- (2) The tighter limit applies at the band edges;
- (3) Emission level (dBuV/m) = 20log Emission level (uV/m),
3m Emission level = 10 m Emission level + 20log(10 m/3 m);

TEST PROCEDURE

Above 1 GHz

The setting of the spectrum analyser

RBW	1 MHz
VBW	3 MHz
Sweep	Auto
Detector	Peak: Peak AVG: RMS
Trace	Max hold

1. The testing follows the guidelines in ANSI C63.4-2014.
2. The EUT was arranged to its worst case and then tune the antenna tower (from 1 m to 4 m) and turntable (from 0 degree to 360 degrees) to find the maximum reading. A pre-amp and a high pass filter are used for the test in order to get better signal level. Both horizontal and vertical polarizations of the antenna are set to make the measurement.
3. The EUT was placed on a turntable with 80 cm above ground.
4. Interconnecting cables that hang closer than 40 cm to the ground plane shall be folded back and forth in the center forming a bundle 30 to 40 cm long.

5. I/O cables that are not connected to a peripheral shall be bundled in the center. The end of the cable may be terminated, if required, using the correct terminating impedance. The overall length shall not exceed 1 m.


6. Cables of hand-operated devices, such as keyboards and mice, shall be placed as for normal used.

7. The EUT was set 3 meters from the interference receiving antenna, which was mounted on the top of a variable height antenna tower.

8. For measurement above 1 GHz, the peak emission measurement will be measured by the peak detector. This peak level, once corrected, must comply with the peak limit specified in Section 15.109. If peak result complies with average limit, average result is deemed to comply with average limit.

9. The average emission measurement will be measured by the RMS detector and must comply with the average limit specified in Section 15.109.

TEST SETUP

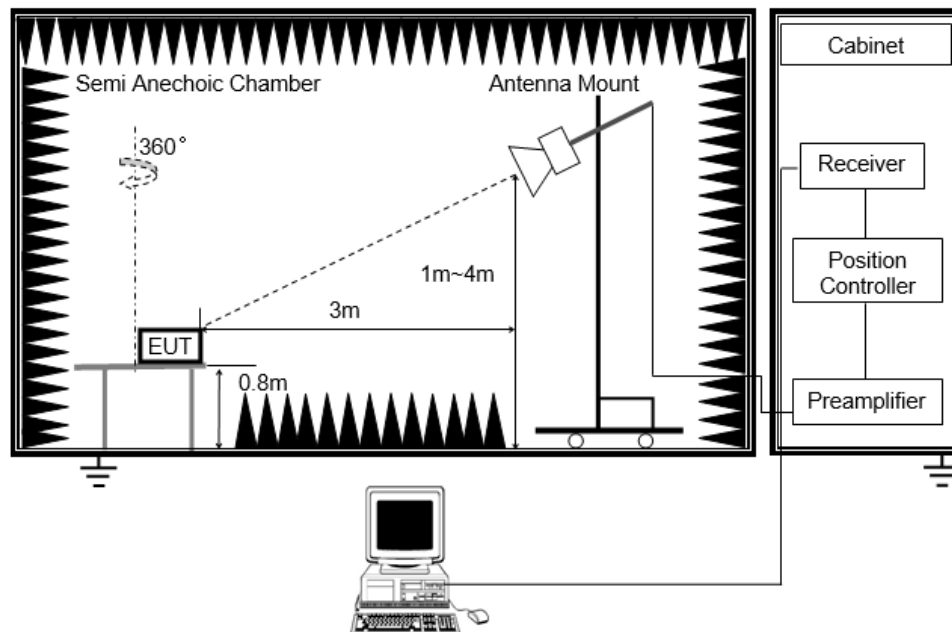


TEST ENVIRONMENT

Temperature	23.2°C	Relative Humidity	50%
Atmosphere Pressure	101kPa		

TEST MODE

Pre-test Mode:	M01 ~ M01
Final Test Mode:	M01


Note: All test modes had been tested, but only the worst data recorded in the report.

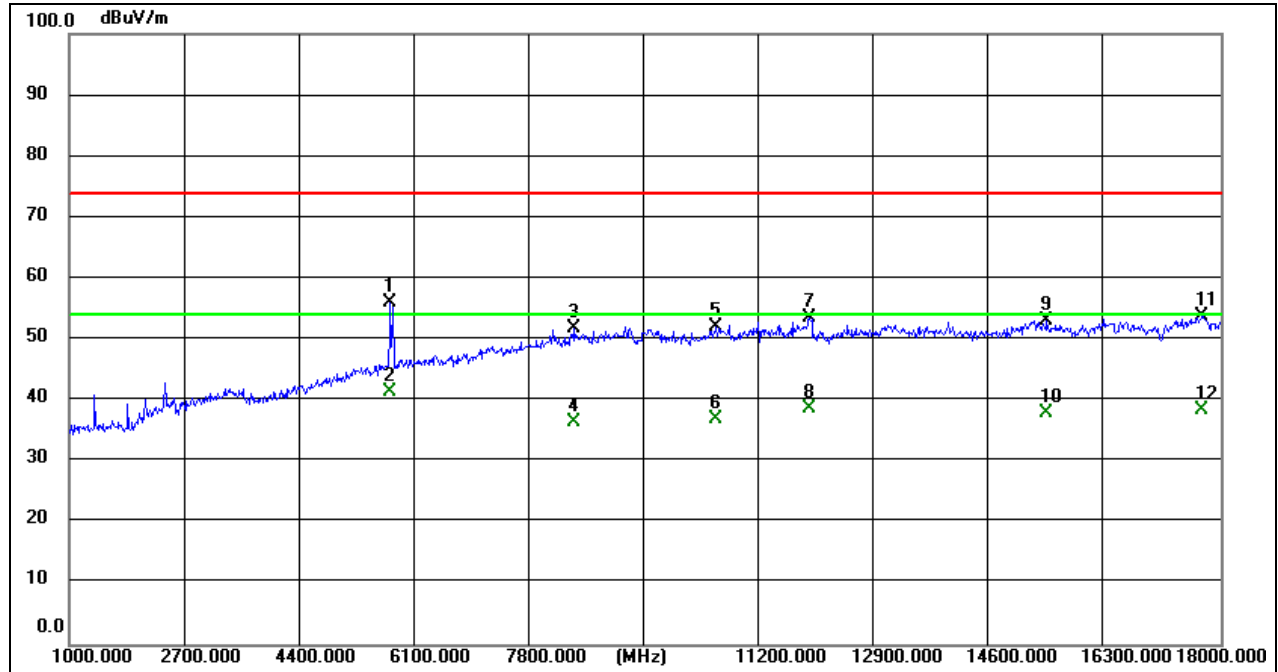TEST RESULTS

Antenna:Horizontal

Mode: M01

No .	Frequenc y (MHz)	Reading Level(dBuV)	Correct Factor(dB/m)	Measure- ment(dBuV/m)	Limit (dBuV/m)	Over (dB)	Detect or	Commen t
1	5751.500	54.34	1.69	56.03	74.00	-17.97	peak	
2 *	5751.500	39.67	1.69	41.36	54.00	-12.64	AVG	
3	8473.200	46.28	5.64	51.92	74.00	-22.08	peak	
4	8473.200	30.92	5.64	36.56	54.00	-17.44	AVG	
5	10562.500	43.83	8.29	52.12	74.00	-21.88	peak	
6	10562.500	28.81	8.29	37.10	54.00	-16.90	AVG	
7	11937.800	44.20	9.39	53.59	74.00	-20.41	peak	
8	11937.800	29.27	9.39	38.66	54.00	-15.34	AVG	
9	15436.400	40.74	12.43	53.17	74.00	-20.83	peak	
10	15436.400	25.62	12.43	38.05	54.00	-15.95	AVG	
11	17733.100	37.10	16.70	53.80	74.00	-20.20	peak	
12	17733.100	21.79	16.70	38.49	54.00	-15.51	AVG	

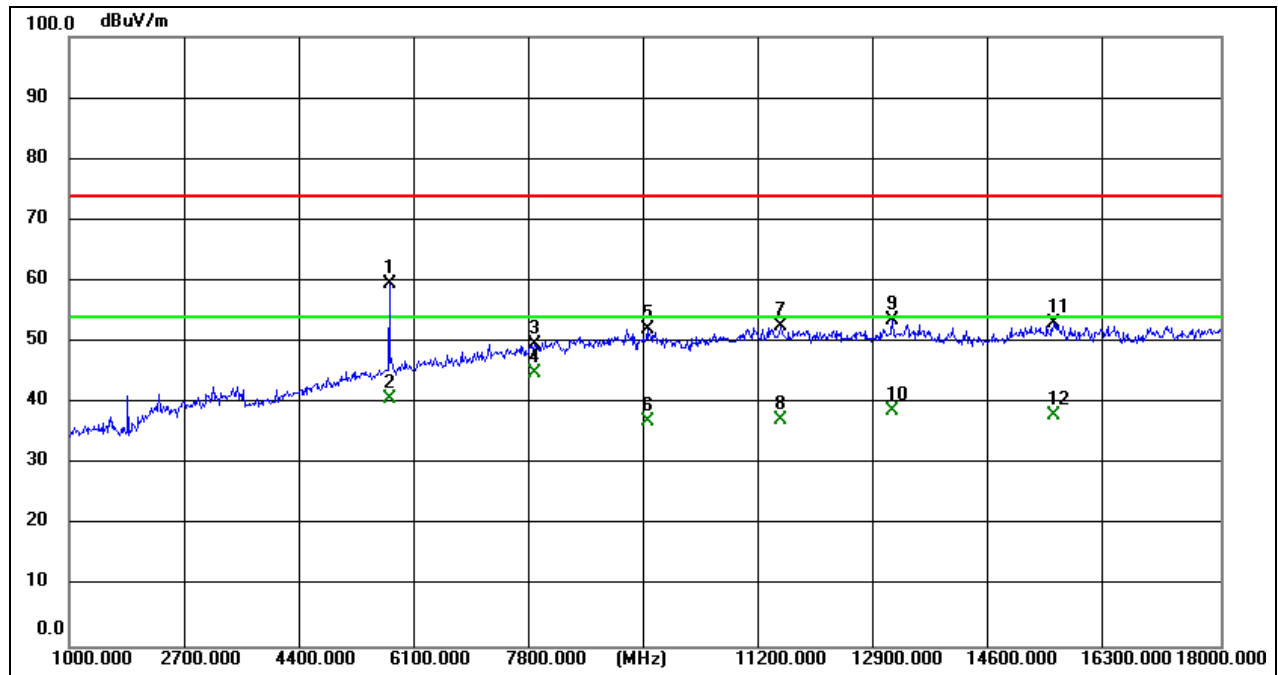

Antenna: Vertical

Mode: M01


No .	Frequenc y (MHz)	Reading Level(dBuV)	Correct Factor(dB/m)	Measure- ment(dBuV/m)	Limit (dBuV/m)	Over (dB)	Dete ctor	Commen t
1	5737.900	57.88	1.65	59.53	74.00	-14.47	peak	
2	5737.900	39.04	1.65	40.69	54.00	-13.31	AVG	
3	7868.000	44.72	4.83	49.55	74.00	-24.45	peak	
4 *	7868.000	39.99	4.83	44.82	54.00	-9.18	AVG	
5	9539.100	44.88	7.16	52.04	74.00	-21.96	peak	
6	9539.100	29.79	7.16	36.95	54.00	-17.05	AVG	
7	11511.100	43.56	8.94	52.50	74.00	-21.50	peak	
8	11511.100	28.26	8.94	37.20	54.00	-16.80	AVG	
9	13158.400	42.91	10.65	53.56	74.00	-20.44	peak	
10	13158.400	28.01	10.65	38.66	54.00	-15.34	AVG	
11	15535.000	40.59	12.61	53.20	74.00	-20.80	peak	
12	15535.000	25.49	12.61	38.10	54.00	-15.90	AVG	

Remark: 1. Result = Reading +Correct (Amplifier Factor + Cable Loss + Antenna Factor)


2. Margin = Result - Limit

APPENDIX: PHOTOGRAPHS OF TEST CONFIGURATION


Conducted emissions


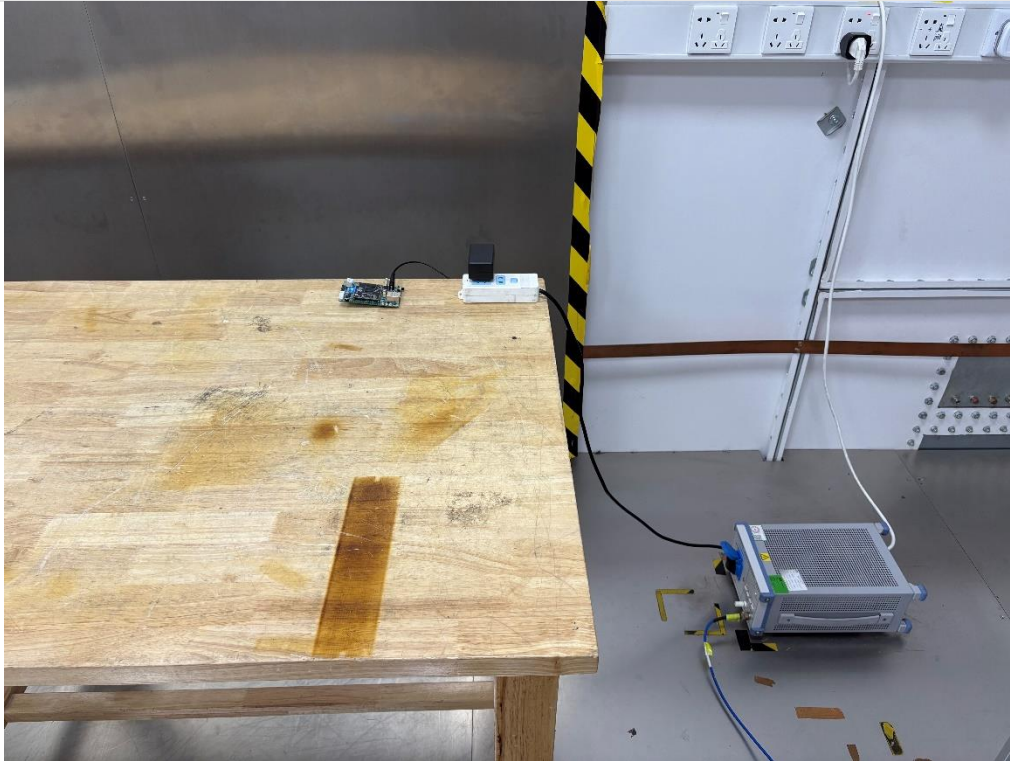



Radiated emissions below 1GHz

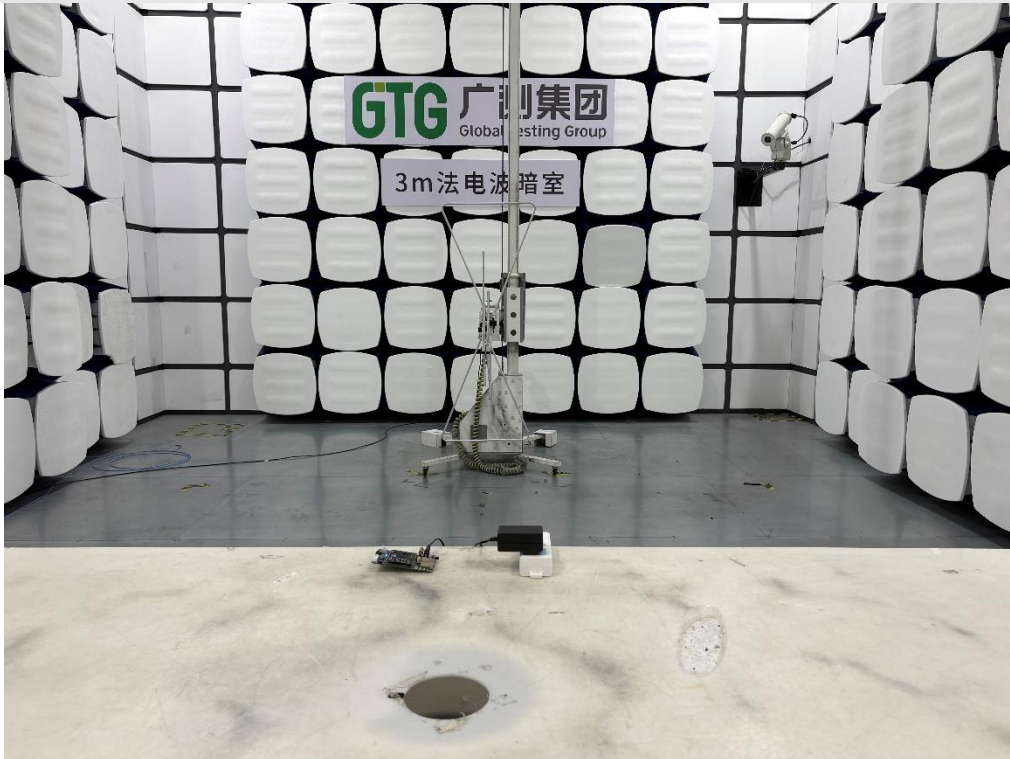

Radiated emissions above 1GHz

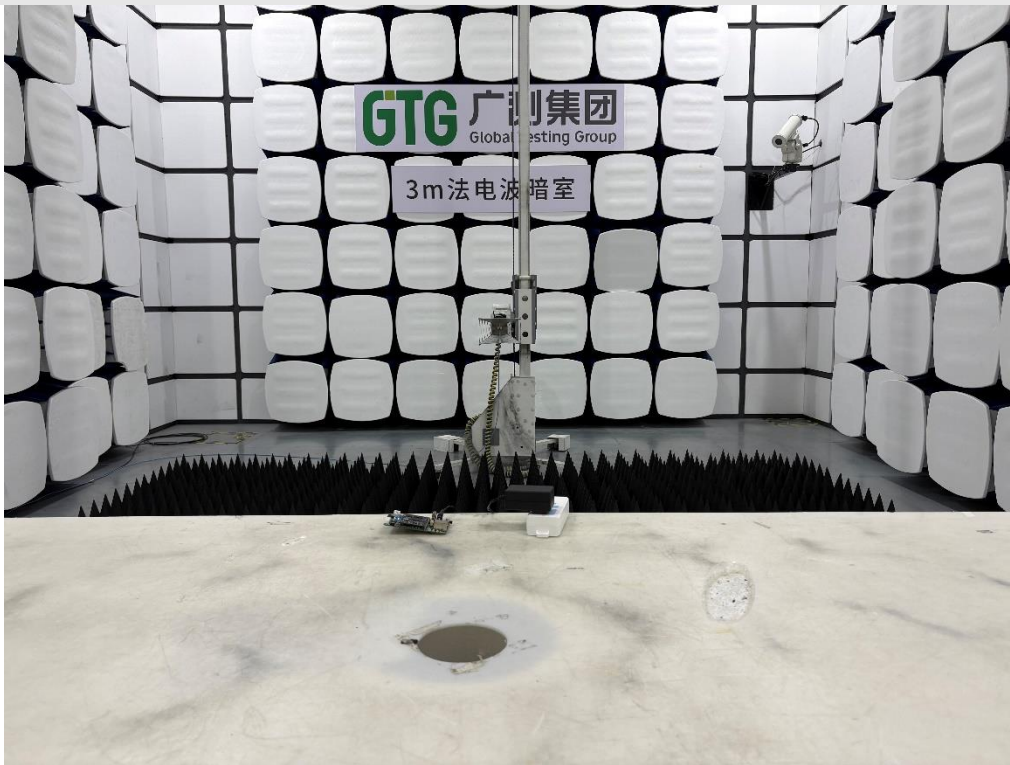

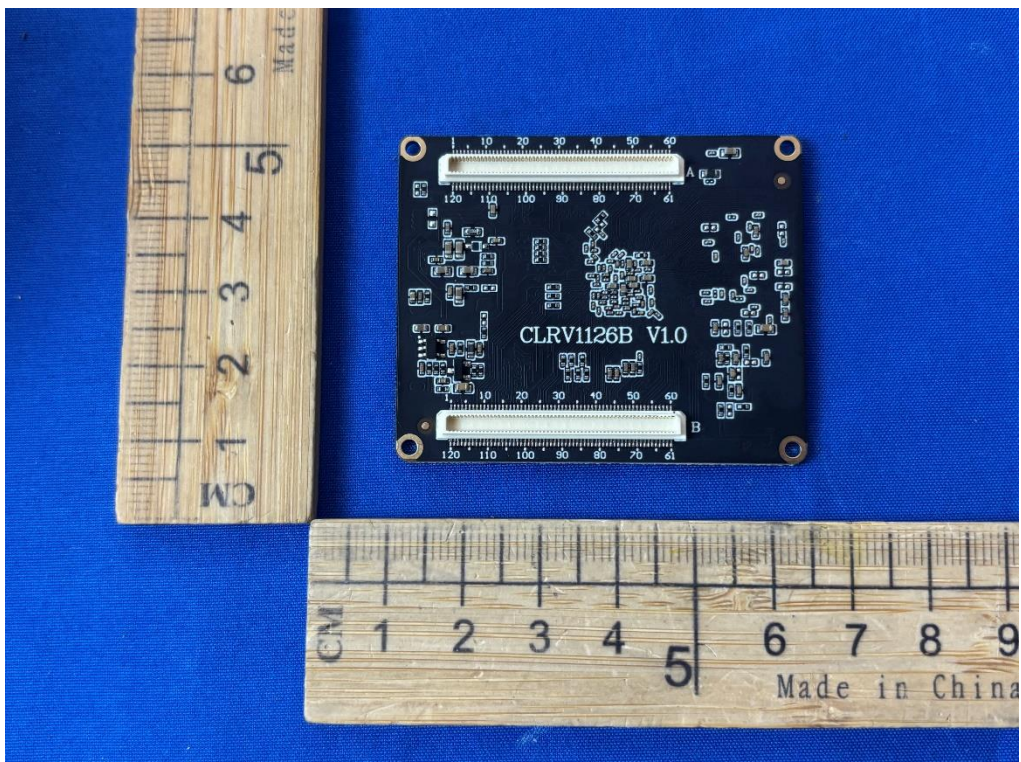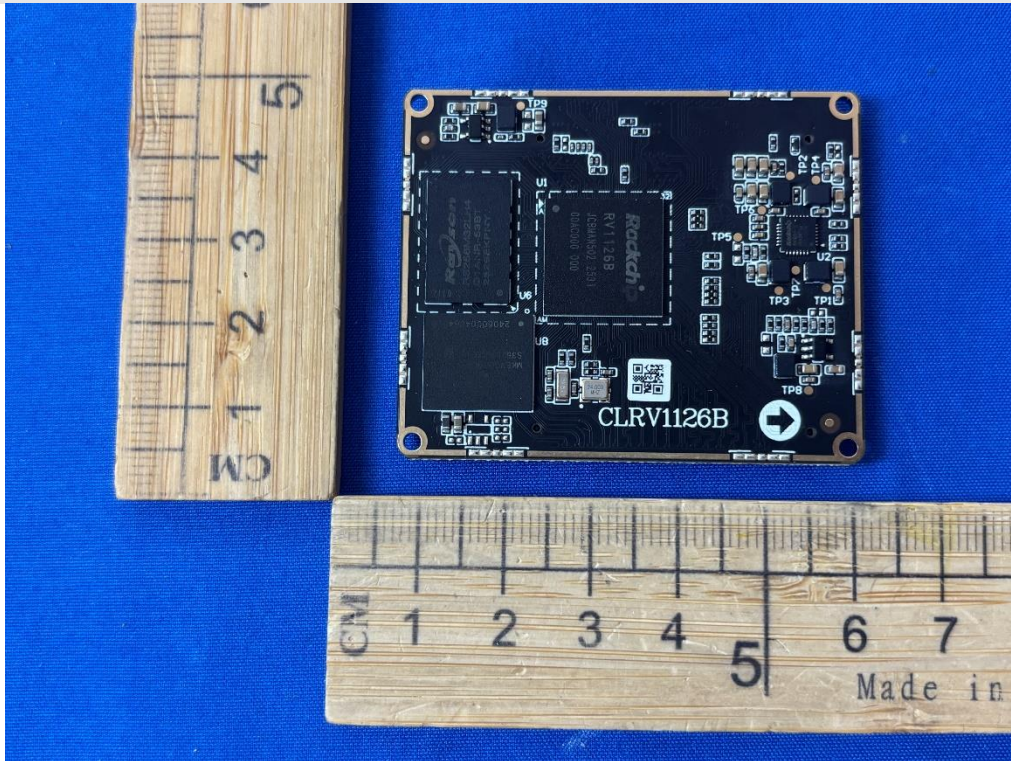APPENDIX: PHOTOGRAPHS OF THE EUT**External**

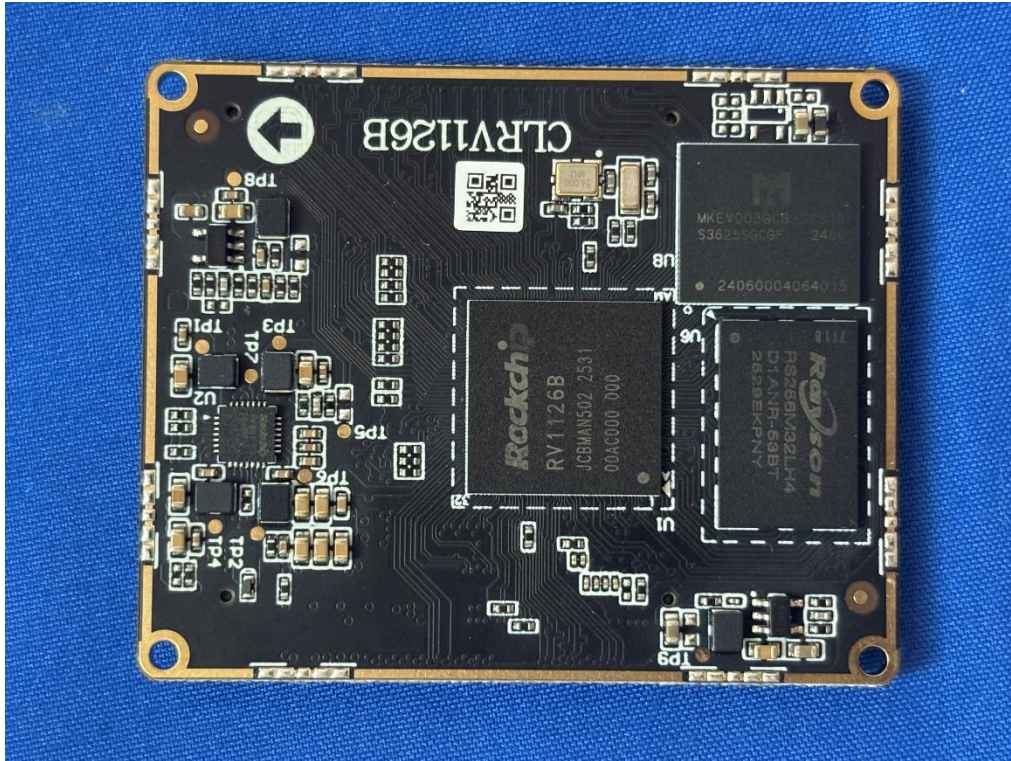

END OF REPORT