



Pipeline activations: rail and node-local Clos

64 endpoints · 400 Gbit/s · 64 KiB per pipeline hop


A Hop latency vs. depth

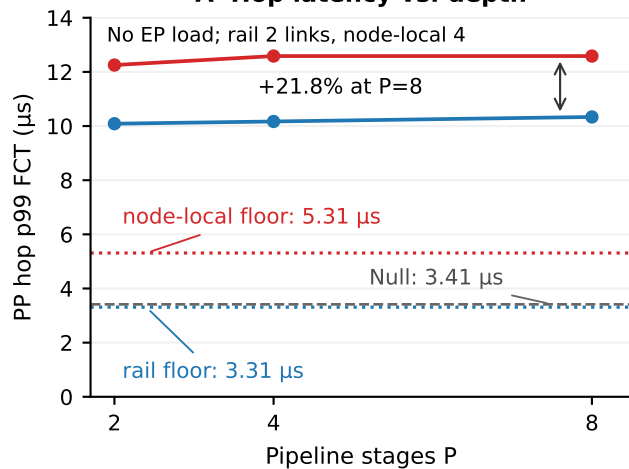


B Hop latency vs. EP load

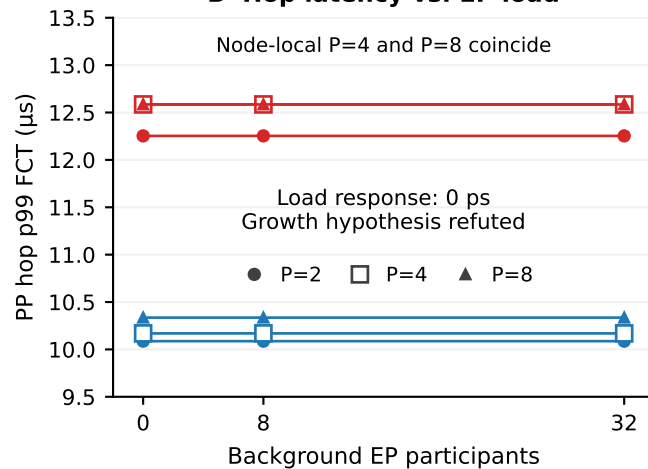

C Serial step completion

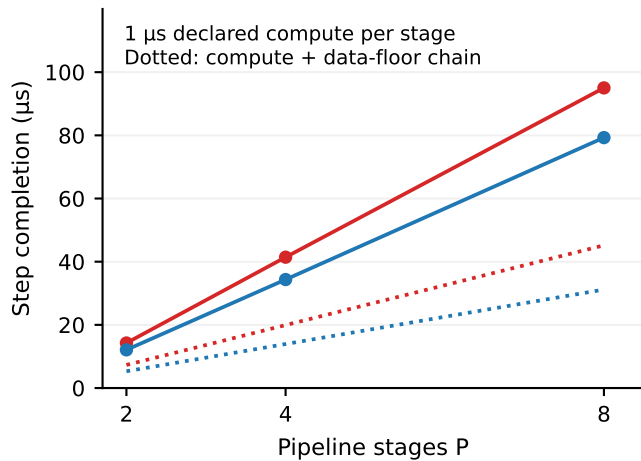

D Background EP phase

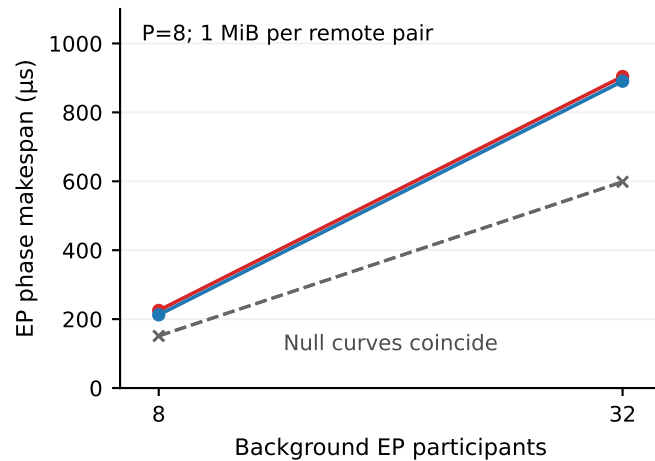

— Physical: node-local — Physical: rail - - - Null: both fabrics

Physical = rnic-cn; null = rnic-nn (topology-free)