


Introduction

HIVIEW offers a video network encoding board designed with Huawei Hisilicon chip HI3516DV300.


You can use this board to develop HD network cameras. We will provide software services and hardware services.

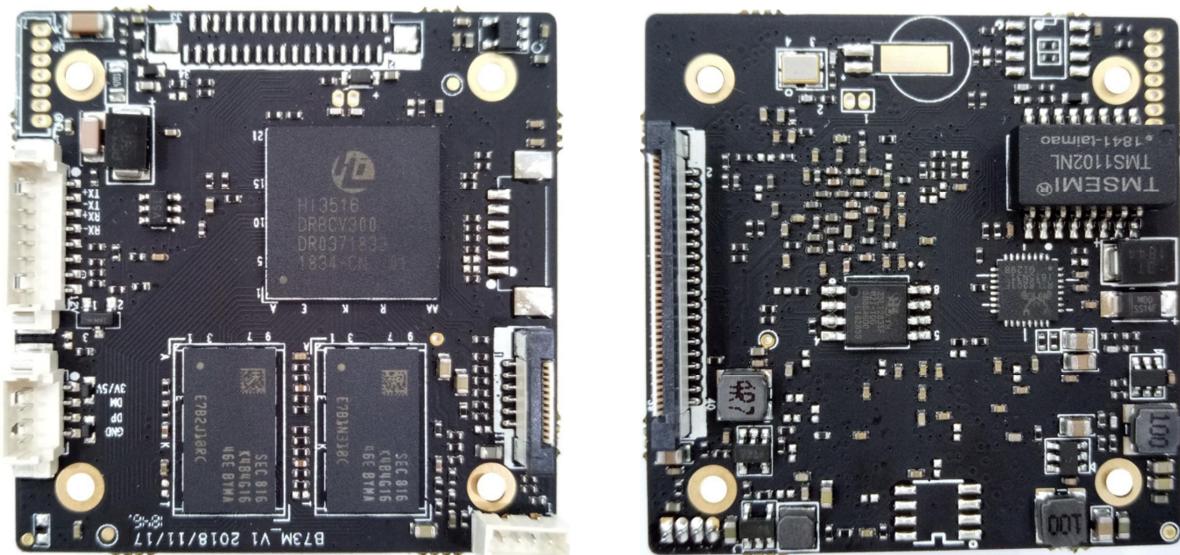


General specifications





| | |
|--------------------|---|
| SoC | Hi3516DV300 |
| DDR | 2*4Gbits DDR3 |
| FLASH | 16MB(default) |
| Dimensions | 45*45mm |
| Hardware interface | 1x Ethernet connector (100M) 1x UART0 1x USB2.0 1x AUDIO_IN 1x AUDIO_OUT 1x RESET 1x RTC 1x RS485 or 1x UART1 5x IO 12PIN FPC, Extended TF card storage, 1x alarm input and 1x alarm output 40PIN FPC, Extended sensor board(Support IMX291,IMX290,IMX385,AR0221,IMX123,OV4689) 34PIN FPC,Extended BT1120/10bit VI/4Lane DSI |
| Power | DC12V |


Interface description

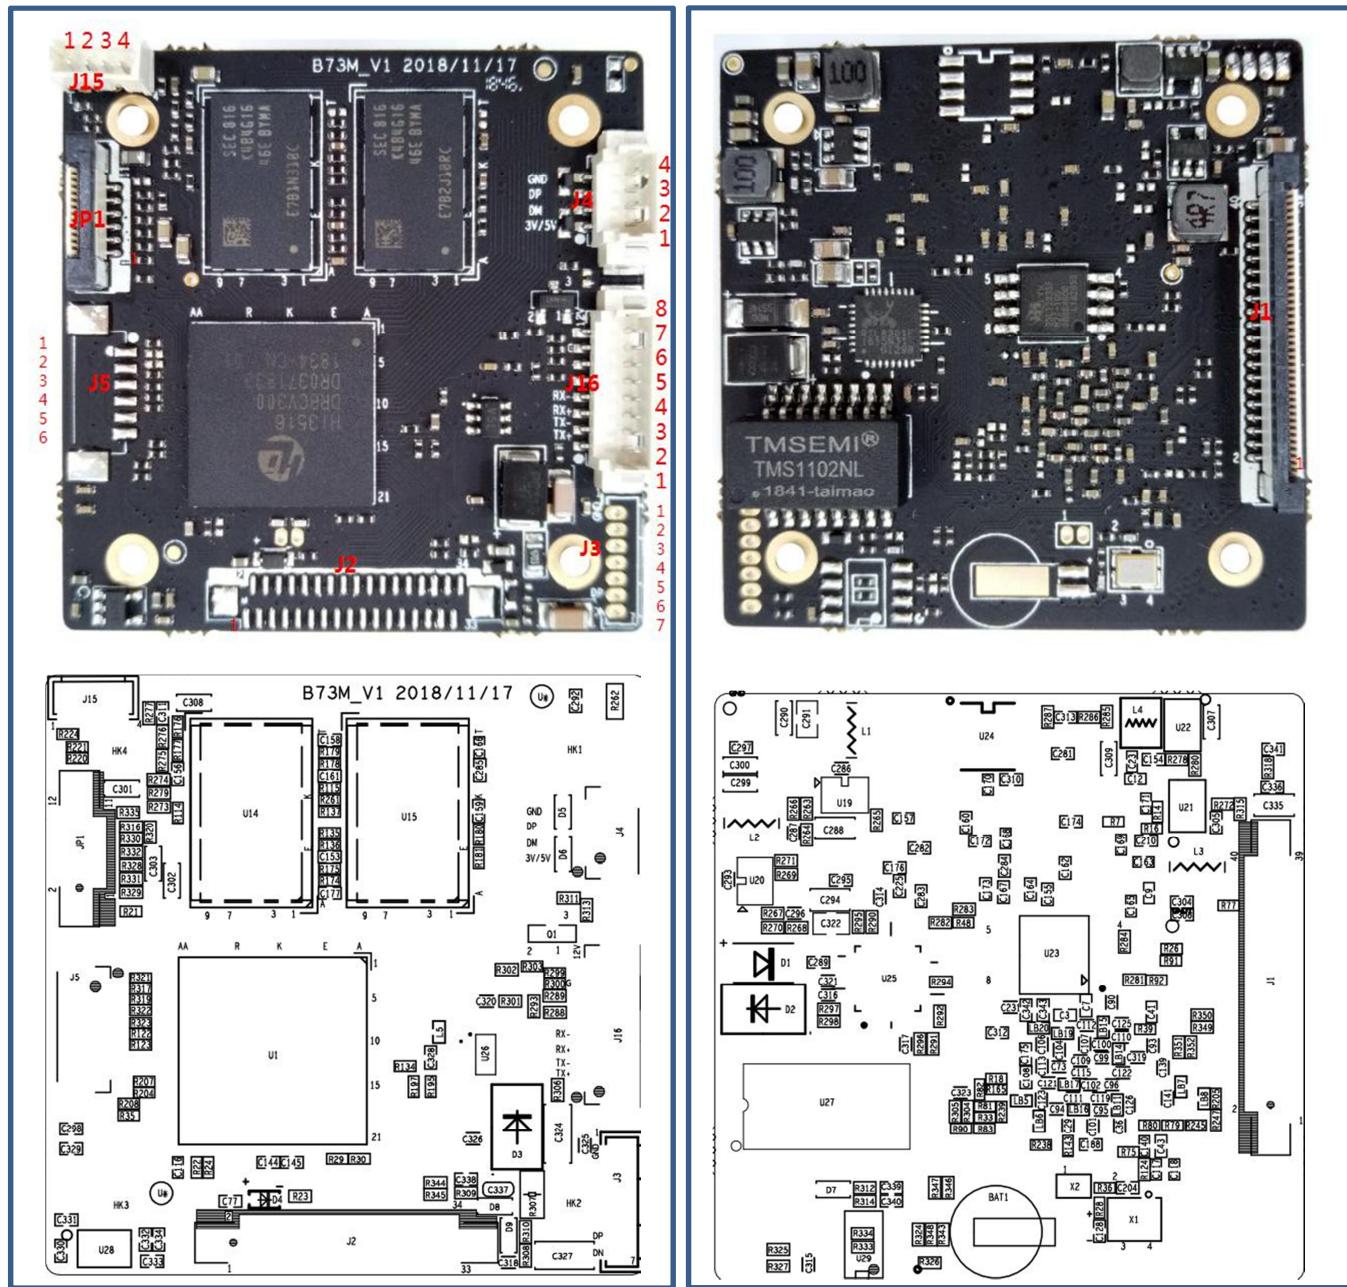

Functional interface circuit

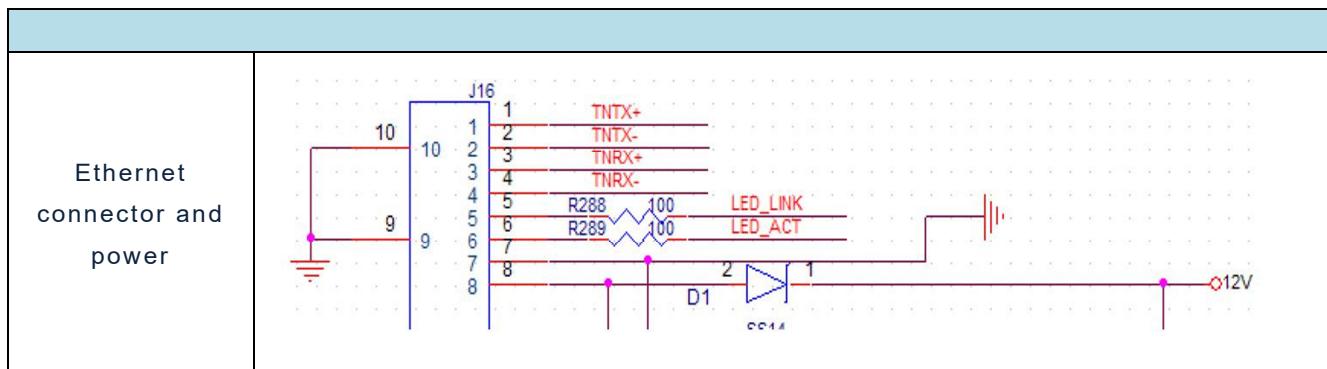

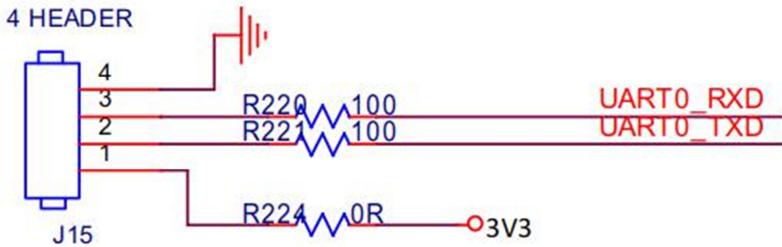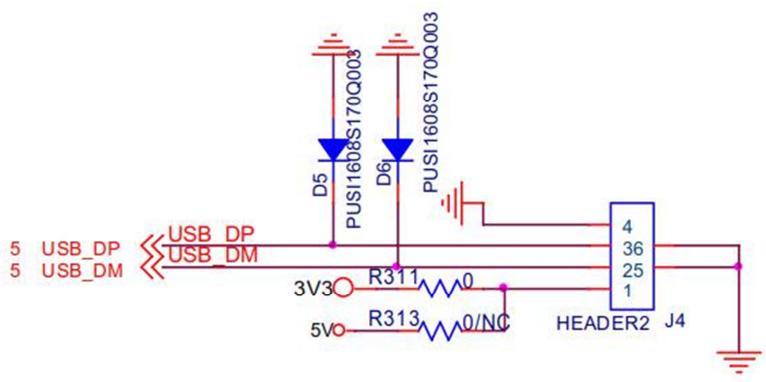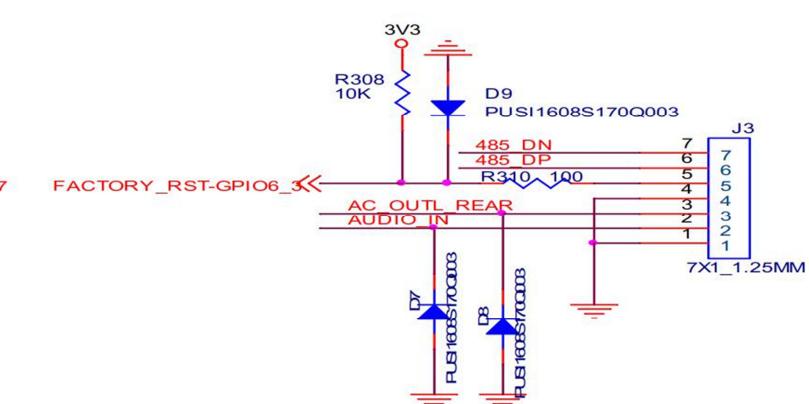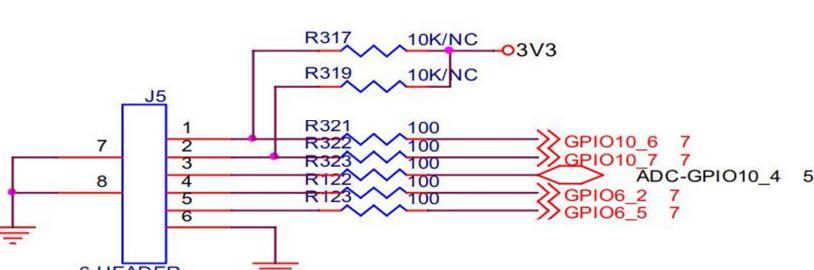
| | |
|--------------------------|---|
| Debug |  <p>4 HEADER J15</p> <p>UART0_RXD UART0_TXD 3V3</p> |
| USB |  <p>5 USB_DP 5 USB_DM 3V3 5V HEADER2 J4</p> |
| AUDIO and RESET,RS485 |  <p>3V3 R308 10K D9 PUSI1608S170Q003 485 DN 485 DP R310 100 AC_OUTL REAR AUDIO_IN D7 PUSI1608S170Q003 D8 PUSI1608S170Q003 J3 7X1_1.25MM</p> |
| GPIO |  <p>J5 6 HEADER</p> <p>3V3 R317 10K/NC R319 10K/NC R321 100 R322 100 R122 100 R123 100 GPIO10_6 7 GPIO10_7 7 ADC-GPIO10_4 5 GPIO6_2 7 GPIO6_5 7</p> |

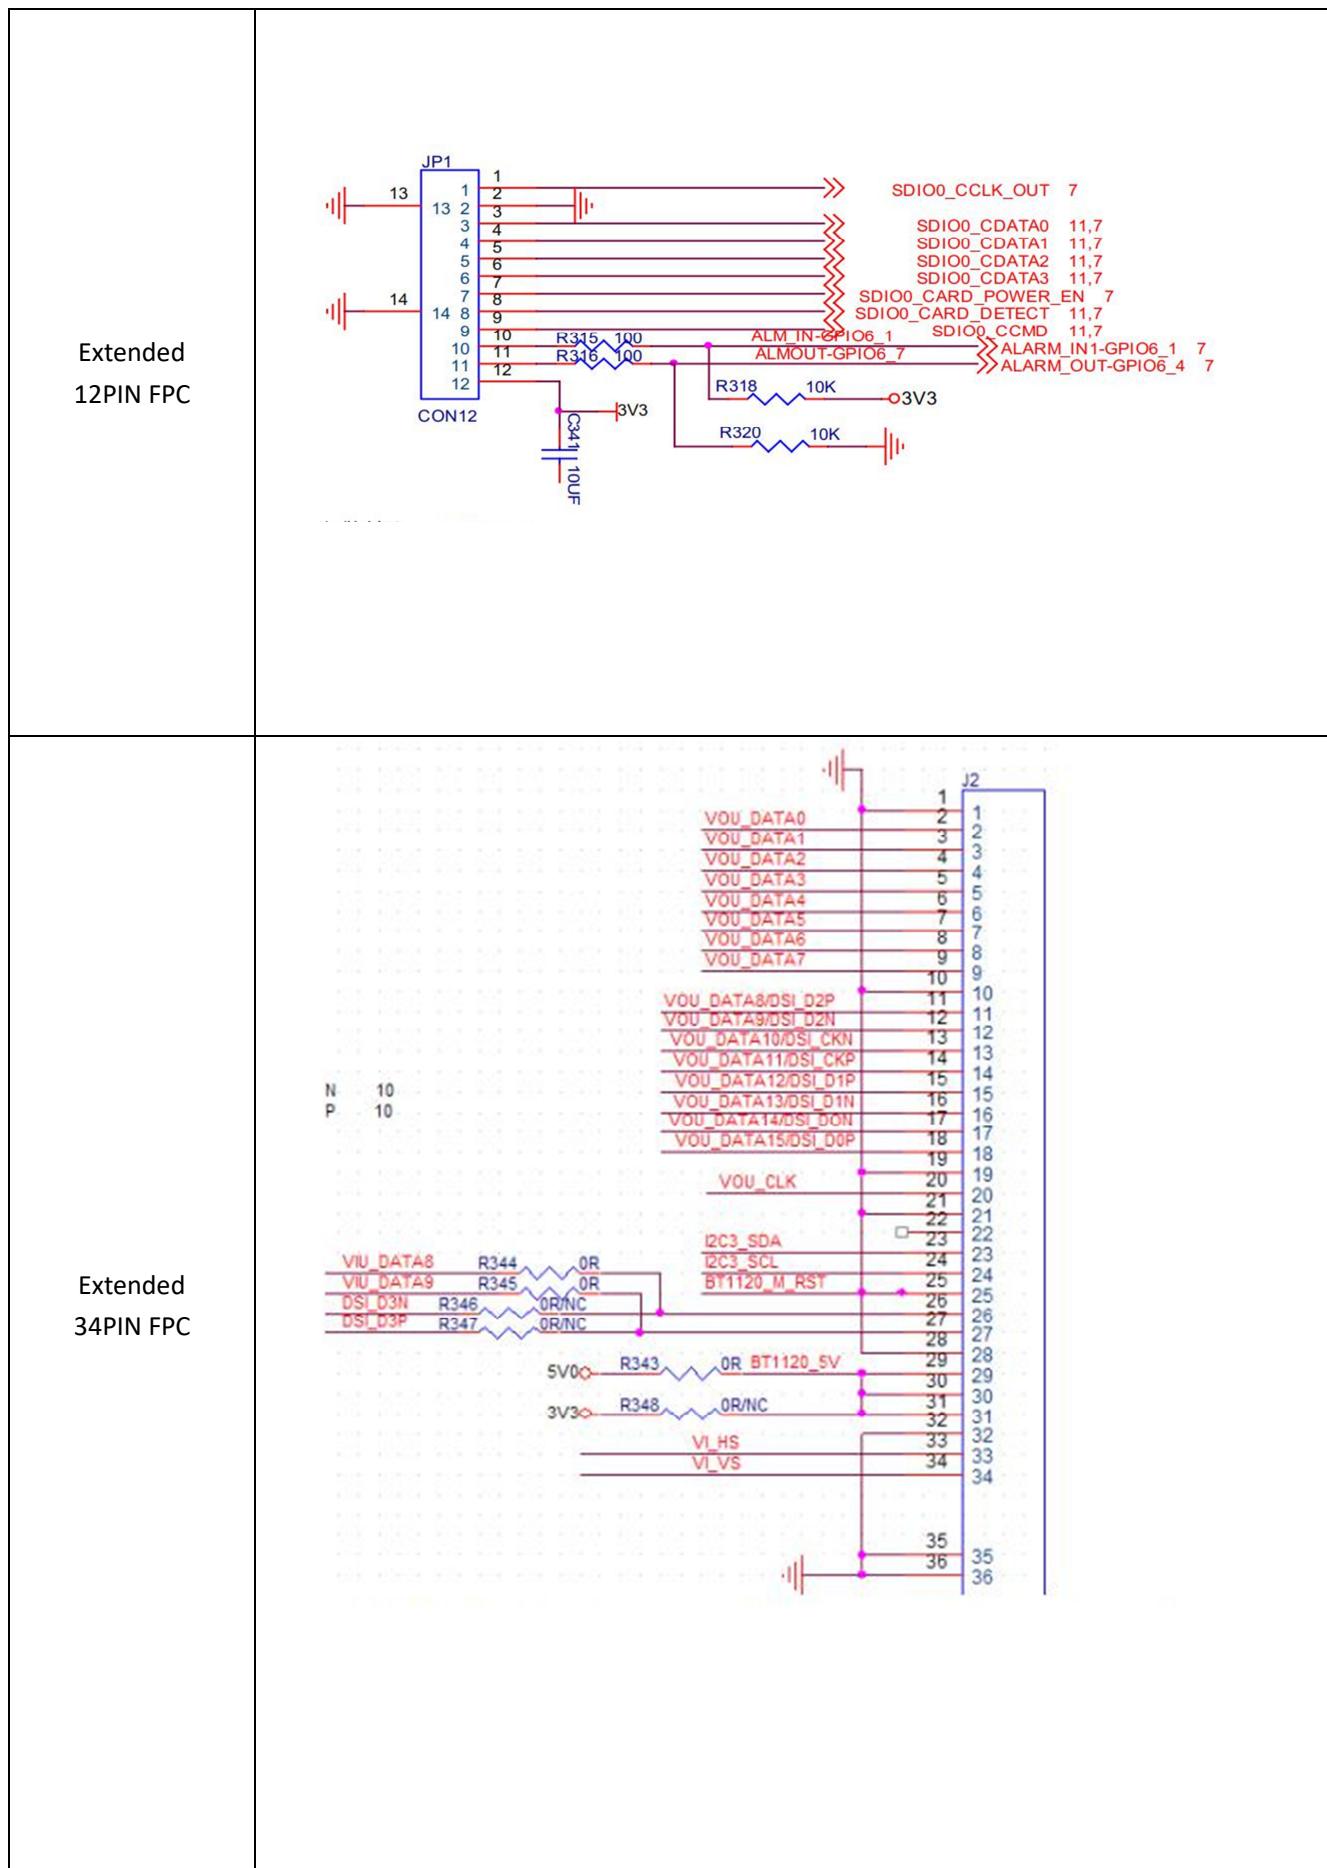



Extended
40PIN FPC

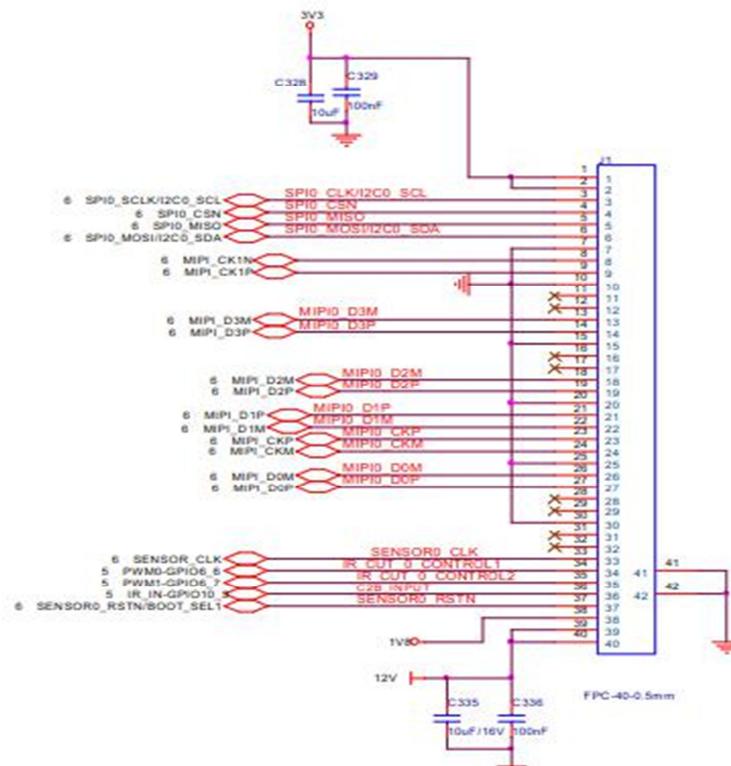



Hi3516D V300 Professional Smart IP Camera SoC

Key Specifications

Processor Core

- Dual-core ARM Cortex-A7@ 900 MHz, 32 KB I-cache, 32 KB D-cache, 256 KB L2 cache
- Neon acceleration and integrated FPU

VEDU

- H.264 BP/MP/HP
- H.265 MP
- I-/P-frames and SmartP reference.
- MJPEG/JPEG baseline

VEDU Performance

- Up to 2688-pixel wide and 2688 x 1944 resolution for H.264/H.265 encoding and decoding. Only the decoding of self-encoded streams is supported..
- Real-time multi-stream H.264/H.265 encoding and decoding:
 - 2688 x 1536@30 fps encoding + 720 x 480@30 fps encoding + 360 x 240@30 fps encoding
 - 2688 x 1944@20 fps encoding + 720 x 480@20 fps encoding + 360 x 240@20 fps encoding
 - 1920 x 1080@30 fps encoding + 720 x 480@30 fps encoding + 1920 x 1080@30 fps decoding
- JPEG encoding and decoding performance: 16M (4608 x 3456) @10 fps
- Five bit rate control modes (CBR, VBR, FixQp, AVBR, and QpMap)
- Up to 50 Mbit/s output bit rate
- Up to 8-ROI encoding

Smart Video Analysis

- Neural network acceleration engine with processing performance up to 1.0 TOPS
- Smart computing acceleration engine (including tracking and face image correction)

Video and Graphics Processing

- 3DNR, image enhancement, and DCI
- Anti-flicker processing for video and graphics output
- 1/15–16x video and graphics scaling
- Video graphics overlay
- 90°, 180°, and 270° image rotation
- Image mirroring and flipping
- Up to 8-region OSD overlay before encoding

ISP

- 3A functions (AE, AF, and AWB), supporting third-party 3A algorithms
- FPN removal and DPC
- LSC, LDC, and purple fringing correction
- Direction-adaptive demosaic
- Gamma correction, DCI, and color management and enhancement
- Region-adaptive dehaze
- Multi-level NR (including BayerNR and 3DNR), detail enhancement, and sharpening enhancement

- Local tone mapping
- Sensor built-in WDR and 2F WDR (line-based/frame-based/DCG)
- Video-/Gyro-based 6-DoF IS
- ISP tuning tools for the PC

Audio Encoding and Decoding

- Multi-protocol audio encoding and decoding (G.711, G.726, and ADPCM) by using software
- Audio 3A functions (AEC, ANR, and ALC)

Security

- Secure boot
- Hardware-based memory isolation
- Hardware-based encryption and decryption algorithms (including AES, DES, 3DES, and RSA)
- Hardware-based HASH algorithms (SHA1/SHA256/HMAC_SHA/HMAC_SHA256)
- Hardware random number generator
- 8-kbit OTP storage space

Video Interface

- VI
 - 2-channel VI
Up to 2688-pixel wide and 2688 x 1944 resolution for input of the first channel
Up to 2048-pixel wide and 2048 x 1536 resolution for input of the second channel
 - 8-/10-/12-/14-bit RGB Bayer DC timing VI
 - BT.601, BT.656, and BT.1120 VI interfaces
 - MIPI, LVDS/sub-LVDS, and HiSPi
 - Compatibility with mainstream HD CMOS sensors provided by vendors such as Sony, ON, OmniVision, and Panasonic
 - Compatibility with the electrical specifications of parallel and differential interfaces of various sensors
 - Programmable sensor clock output
- VO
 - One BT.656/BT.1120 VO interface
 - 6-/8-bit RGB serial LCD VO and 16-/18-/24-bit RGB parallel LCD VO
 - 4-lane MIPI-DSI VO
 - HDMI 1.4 output with a maximum resolution of 1080p60

Audio Interface

- Audio codec, supporting 16-bit input and output
- Mono-channel differential MIC input for background NR
- Single-end dual-channel input
- I²S interface for connecting to external audio codec

Peripheral Interface

- POR
- High-precision RTC
- 2-channel LSADC
- I²C interfaces, SPIs, and UART interfaces
- Three PWM interfaces
- Two SDIO 3.0 interfaces, supporting the 3.3 V/1.8 V level



Hi3516D V300 Professional Smart IP Camera SoC

- SD 3.0 card supported over one SDIO 3.0 interface
- One USB 2.0 host/device interface
- RMII mode, TSO network acceleration, 10/100 Mbit/s full-duplex or half-duplex mode, and PHY clock output

External Memory Interface

- SDRAM interface
 - 32-bit DDR3(L)/DDR4 SDRAM, supporting a maximum capacity of 16 Gbits
 - Up to 1800 Mbit/s rate
- SPI NOR flash interface
 - 1-/2-/4-line mode
 - Maximum capacity of 256 MB
- SPI NAND flash interface
 - Up to 24 bit/1 KB ECC performance
 - Maximum capacity of 1 GB
- eMMC 4.5 interface
 - 4-bit data width

Startup

Booting from the SPI NOR flash, SPI NAND flash, or eMMC

SDK

- Linux-4.9-based SDK
- High-performance H.264 PC decoding library
- High-performance H.265 PC, Android, and iOS decoding libraries

Physical Specifications

- Power consumption
Typical power consumption at 4M (2688 x 1536)P30 fps:
TBD
- Operating voltage
 - 0.9 V core voltage
 - 3.3 V I/O voltage ($\pm 10\%$)
 - 1.5 (1.35) V/1.2 V DDR3(L)/4 SDRAM interface voltage
- Package



Hi3516D V300 Professional Smart IP Camera SoC

Hi3516D V300 HD IP Camera Solution

