

BattMo - Battery Modelling Toolbox

Xavier Raynaud¹✉, Halvor Møll Nilsen¹, August Johansson¹, Eibar Flores², Lorena Hendrix², Francesca Watson¹, Sridevi Krishnamurthi², Olav Møyner¹, and Simon Clark²

¹ SINTEF Digital, Dept. of Mathematics and Cybernetics, Oslo, Norway ² SINTEF Industry, Dept. of Sustainable Energy Technology, Trondheim, Norway ✉ Corresponding author

DOI: [10.xxxxxx/draft](https://doi.org/10.xxxxxx/draft)

Software

- [Review](#) ↗
- [Repository](#) ↗
- [Archive](#) ↗

Editor: [Mojtaba Barzegari](#) ↗ 

Reviewers:

- [@ElektrikAkar](#)
- [@yuefan98](#)

Submitted: 10 December 2025

Published: unpublished

License

Authors of papers retain copyright and release the work under a Creative Commons Attribution 4.0 International License ([CC BY 4.0](#))

Summary

This paper presents the Battery Modelling Toolbox (BattMo), a flexible finite volume continuum modelling framework in MATLAB® ([The MathWorks Inc., 2025](#)) for simulating the performance of electro-chemical cells. BattMo can quickly set up and solve models for a variety of battery chemistries, even considering 3D designs such as cylindrical and prismatic cells.

The simulation input parameters, including the material parameters and geometric descriptions, are specified through JSON schemas. In this respect, we follow the guidelines of the Battery Interface Ontology (BattINFO) to support semantic interoperability in accordance with the FAIR principles ([Wilkinson et al., 2016](#)).

The Doyle-Fuller-Newman (DFN) ([Doyle et al., 1993](#)) approach is used as a base model. We include fully coupled thermal simulations. It is possible to include degradation mechanisms such as SEI layer growth, and the use of composite material, such as a mixture of silicon and graphite.

The models are set up in a hierarchical way, for clarity and modularity. Each model corresponds to a computational graph, which introduces a set of variables (the nodes) and functional relationships (the edges). This design enables the flexibility for changing and designing new models.

The solver in BattMo uses automatic differentiation and supports adjoint computation. We can therefore compute the derivative of objective functions with respect to all parameters efficiently. Gradient-based optimization routines can be used to calibrate parameters from experimental data.

Statement of need

New high-performance electro-chemical systems such as Li-ion and post-Li-ion batteries are essential to achieve the goals of the electric energy transition. Developing rigorous digital workflows can help industrial and research institutions reduce the need for physical prototyping and derive greater insight and knowledge from their data.

BattMo extends this effort by supporting fully 3D geometry and the possibility to easily modify the underlying equations. We provide a library of standard parameterized battery geometries. Design optimization can also be done on the geometry, which is an essential part of the design. BattMo is useful for both experienced battery designers, wanting to optimize and virtually test different designs, research software developers integrating simulation tools in electro-chemical system workflows as well as beginners wanting to understand fundamental processes.

A challenge for physics-based models for batteries and other electro-chemical systems is the

40 difficulty to calibrate the parameters. With an adjoint-based approach, we can effectively
41 calibrate the models from experiments in a reasonable computational time.

42 State of the field

43 Recently, a variety of open-source battery modelling codes have been released including
44 PyBaMM (Sulzer et al., 2021), cideMOD (Ciria Aylagas et al., 2022), LIONSIMBA (Torchio et
45 al., 2016), Dandeliion (Korotkin et al., 2021) and PETLion (Berliner et al., 2021), among others.
46 These open-source frameworks help the community reduce the cost of model development and
47 help ensure the validity and the reproducibility of findings. PyBaMM is, to our knowledge, the
48 most popular option. Unlike BattMo, PyBaMM's electro-chemical models have been primarily
49 P2D with so-called 2+1D model support for improved modeling of current collectors and
50 thermal properties. Recently (2025), 3D thermal FEM is supported, and its 3D functionality
51 is expanding. For calibration and optimization, it is usually recommended to utilize PyBOP
52 (Planden et al., 2025) which is an external package (although coupled tightly to PyBaMM).
53 BattMo's foundation is designed for coupled electro-chemical-thermal simulations in 3D, as well
54 as calibration and optimization. The extensive portfolio of degradation models in PyBaMM is
55 a great strength. In BattMo we are currently allowing for SEI (Safari (Safari et al., 2009) and
56 Bolay (Bolay et al., 2022) models) as well as plating (Hein et al., 2020). Based on FEniCS
57 (Alnæs et al., 2015), cideMOD by design allows for simulations in 3D, but the lack of automatic
58 differentiation means handling complex nonlinear systems and performing design optimization
59 is more challenging. COMSOL (COMSOL AB, 2025) is a commercial, closed-source alternative.
60 In contrast to the aforementioned battery-specific tools, it is a general-purpose multi-physics
61 platform that enables coupling of a wide range of physical phenomena.

62 Software design

63 BattMo builds on the MATLAB Reservoir Simulation Toolbox (Lie, 2019) which provides
64 the foundation for meshing intricate geometries, solving large nonlinear systems of equations,
65 visualizing the results, etc, in addition to fundamental robust, low-order finite volume methods
66 and fully implicit time discretization. Although developed in MATLAB®, we try to provide
67 Octave (Eaton et al., 2025) compatibility. Neither BattMo nor MRST rely on extra MATLAB®
68 packages; the basic license is sufficient. We do recommend using AMG preconditioners from
69 the open-source AMGCL library (Demidov, 2020) for fast, multi-threaded solution of linear
70 systems.

71 Functionality overview

72 The main features of BattMo are summarized in the following list:

- 73 ■ JSON based input with schema
- 74 ■ Library of parameterized battery formats
- 75 ■ Flexible graph-based model design
- 76 ■ Fully coupled electro-chemical-thermal models
- 77 ■ 3D visualization
- 78 ■ Parameter calibration
- 79 ■ Design optimization
- 80 ■ Support for standard protocols such as CC, CV, CCCV, and time series
- 81 ■ SEI layer growth model
- 82 ■ Composite material model
- 83 ■ Silicon swelling model
- 84 ■ Material database for NMC, LCO, LFP, LNMO, SiGr, electrolytes, etc
- 85 ■ Alkaline membrane electrolyser model
- 86 ■ Proton ceramic membrane model

Battery format library

We support coin cells, jelly roll cells and multi-pouch cells with different tab layouts, see [Figure 1](#). The geometries are parameterized and can be modified using a simple set of parameters. 1D and 2D grids for P2D and P3D models can also be generated.

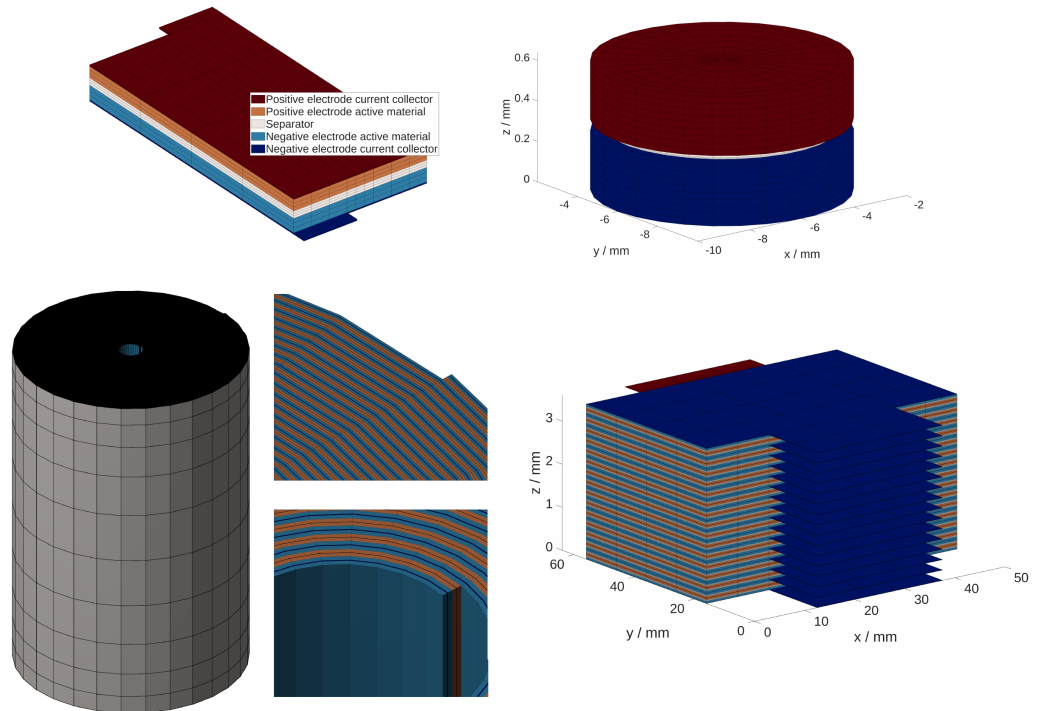


Figure 1: A selection of the parameterized battery geometries available. Clockwise from top left are: A single-layer pouch cell, CR 2016 coin cell, 30-layer pouch cell and jelly roll cylindrical cell.

Graph based model development

BattMo has the ambition to support a variety of electro-chemical systems. The complexity of such models increases rapidly as models are extended or coupled. To manage this, BattMo introduces a computational graph-based model design. Each model is defined as a graph whose nodes represent variables and whose directed edges represent their functional relationships – see [Figure 2](#). A model is ready for simulation when the graph's roots are the governing variables and its leaves the governing equations. Interactive tools are available to explore these graphs.

Model hierarchy is an essential part of the framework. Coupling two models is done by creating a new coupling model that contains both as sub-models. Their graphs become sub-graphs, and new edges are added to represent coupling mechanisms, allowing most sub-models to remain unchanged. For more details, see the [documentation](#).

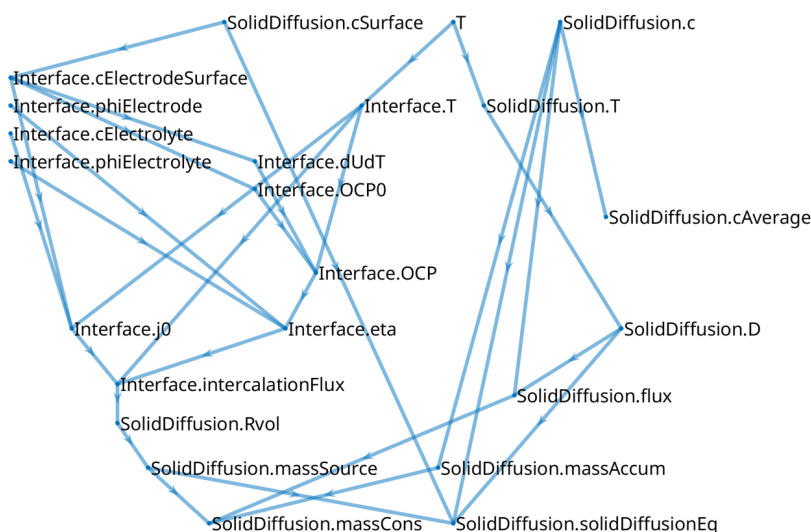


Figure 2: The computational graph of an active material model.

Examples

Numerous documented and tested examples are provided with the code and demonstrate the features listed above. We seek to be cross-compatible, allowing for any chemistry and material combination with any battery format. A selection of the examples are documented at <https://battmo.org/BattMo/>. The complete list of examples are available at <https://github.com/BattMoTeam/BattMo/tree/main/Examples>.

BattMo family

The following software are included in the BattMo family:

Software	Description
BattMo	MATLAB® version presented in this publication
BattMo.jl	Julia version
PyBattMo	Python wrapper around BattMo.jl
BattMoApp	Web-application built on top of BattMo.jl

Research impact statement

By combining a modular modeling framework with documented JSON-based inputs, tutorials, and interfaces such as the Julia bridge, BattMo provides reproducible battery cell development for research and education. BattMo has been used in several commercial and non-commercial projects. Publications include (Clark et al., 2026) and (Schmitt et al., 2026). It has been important for the success of several EU projects, primarily HYDRA (875527) and BATMAX (101104013), where it has been used to model novel LNMO cells, as well as commercial LFP and NMC cells in both 1D and 3D.

AI usage disclosure

Development of BattMo started before AI tools were introduced. Therefore only very minor use of AI tools (ChatGPT from OpenAI and Microsoft Copilot) were used in the development

of this software. AI tools have been used to assist phrasing and conciseness when writing this manuscript. In all instances, the authors have reviewed the suggestions and edited them if necessary.

Acknowledgements

BattMo has mainly been developed and used in projects funded by the European Union. We acknowledge contributions from the European Union, Grant agreements 101069765 (IntelLiGent), 875527 (HYDRA), 957189 (BIG-MAP), 101104013 (BATMAX) and 101103997 (DigiBatt).

References

- Alnæs, M., Blechta, J., Hake, J., Johansson, A., Kehlet, B., Logg, A., Richardson, C., Ring, J., Rognes, M. E., & Wells, G. N. (2015). The FEniCS Project Version 1.5. *Archive of Numerical Software*, Vol 3. <https://doi.org/10.11588/ANS.2015.100.20553>
- Berliner, M. D., Cogswell, D. A., Bazant, M. Z., & Braatz, R. D. (2021). Methods—PETLION: Open-Source Software for Millisecond-Scale Porous Electrode Theory-Based Lithium-Ion Battery Simulations. *Journal of The Electrochemical Society*, 168(9), 090504. <https://doi.org/10.1149/1945-7111/ac201c>
- Bolay, L. J., Schmitt, T., Hein, S., Mendoza-Hernandez, O. S., Hosono, E., Asakura, D., Kinoshita, K., Matsuda, H., Umeda, M., Sone, Y., Latz, A., & Horstmann, B. (2022). Microstructure-resolved degradation simulation of lithium-ion batteries in space applications. *Journal of Power Sources Advances*, 14, 100083. <https://doi.org/10.1016/j.powera.2022.100083>
- Ciria Aylagas, R., Ganuza, C., Parra, R., Yañez, M., & Ayerbe, E. (2022). cideMOD: An Open Source Tool for Battery Cell Inhomogeneous Performance Understanding. *Journal of The Electrochemical Society*, 169(9). <https://doi.org/10.1149/1945-7111/ac91fb>
- Clark, S., Raynaud, X., Møll Nilsen, H., & Johansson, A. (2026). Advanced Coupled Electrochemical-Thermal Simulations of 4680 Cylindrical Cells on a Pseudo-Four-Dimensional Grid. *Journal of The Electrochemical Society*, 173(7), 070503. <https://doi.org/10.1149/1945-7111/ae4896>
- COMSOL AB. (2025). *COMSOL Multiphysics®* (Version 6.4). <http://www.comsol.com>
- Demidov, D. (2020). AMGCL – A C++ library for efficient solution of large sparse linear systems. *Software Impacts*, 6, 100037. <https://doi.org/10.1016/j.simpa.2020.100037>
- Doyle, M., Fuller, T. F., & Newman, J. (1993). Modeling of Galvanostatic Charge and Discharge of the Lithium/Polymer/Insertion Cell. *Journal of The Electrochemical Society*, 140(6), 1526–1533. <https://doi.org/10.1149/1.2221597>
- Eaton, J. W., Bateman, D., Hauberg, S., & Wehbring, R. (2025). *GNU Octave*. <https://octave.org>
- Hein, S., Danner, T., & Latz, A. (2020). An Electrochemical Model of Lithium Plating and Stripping in Lithium Ion Batteries. *ACS Applied Energy Materials*, 3(9), 8519–8531. <https://doi.org/10.1021/acsaem.0c01155>
- Korotkin, I., Sahu, S., O’Kane, S. E. J., Richardson, G., & Foster, J. M. (2021). Dandelion v1: An Extremely Fast Solver for the Newman Model of Lithium-Ion Battery (Dis)charge. *Journal of The Electrochemical Society*, 168(6), 060544. <https://doi.org/10.1149/1945-7111/ac085f>
- Lie, K.-A. (2019). *An Introduction to Reservoir Simulation Using MATLAB/GNU Octave*:

- 166 *User Guide for the MATLAB Reservoir Simulation Toolbox (MRST)*. Cambridge University
167 Press. <https://doi.org/10.1017/9781108591416>
- 168 Planden, B., Courtier, N. E., Robinson, M., Khetarpal, A., Planella, F. B., & Howey, D. A.
169 (2025). PyBOP: A Python package for battery model optimisation and parameterisation.
170 *Journal of Open Source Software*, 10(116), 7874. <https://doi.org/10.21105/joss.07874>
- 171 Safari, M., Morcrette, M., Teyssot, A., & Delacourt, C. (2009). Multimodal Physics-Based
172 Aging Model for Life Prediction of Li-Ion Batteries. *Journal of The Electrochemical Society*,
173 156(3), A145. <https://doi.org/10.1149/1.3043429>
- 174 Schmitt, C., Johansson, A., Raynaud, X., Cedeño, E. J. F., Mugisa, J., Sotta, D., Martin, A.,
175 Schaeffer, N., Debruyne, C., Reynier, Y., Clark, S., & Kopljär, D. (2026). *Comprehensive
176 parameter and electrochemical dataset for a 1 Ah graphite/LNMO battery cell for physical
177 modelling as a blueprint for data reporting in battery research*. arXiv. [https://doi.org/10.
178 48550/ARXIV.2601.10507](https://doi.org/10.48550/ARXIV.2601.10507)
- 179 Sulzer, V., Marquis, S. G., Timms, R., Robinson, M., & Chapman, S. J. (2021). Python
180 battery mathematical modelling (PyBaMM). *Journal of Open Research Software*, 9(1).
181 <https://doi.org/10.5334/jors.309>
- 182 The MathWorks Inc. (2025). *MATLAB*. <https://www.mathworks.com>
- 183 Torchio, M., Magni, L., Gopaluni, R. B., Braatz, R. D., & Raimondo, D. M. (2016).
184 LIONSIMBA: A Matlab Framework Based on a Finite Volume Model Suitable for Li-
185 ion Battery Design, Simulation, and Control. *Journal of The Electrochemical Society*,
186 163(7), A1192. <https://doi.org/10.1149/2.0291607jes>
- 187 Wilkinson, M. D., Dumontier, M., Aalbersberg, I. J., Appleton, G., Axton, M., Baak, A.,
188 Blomberg, N., Boiten, J.-W., Silva Santos, L. B. da, Bourne, P. E., Bouwman, J., Brookes,
189 A. J., Clark, T., Crosas, M., Dillo, I., Dumon, O., Edmunds, S., Evelo, C. T., Finkers,
190 R., ... Mons, B. (2016). The FAIR Guiding Principles for scientific data management and
191 stewardship. *Scientific Data*, 3(1). <https://doi.org/10.1038/sdata.2016.18>