The Journal of Open Source Software

PyPEEC: A 3D Quasi-Magnetostatic Solver using an FFT-Accelerated PEEC Method with Voxelization

Thomas Guillod [1¶] **and Charles R. Sullivan** [1]

1 Dartmouth College, NH, USA ¶ Corresponding author

DOI: 10.xxxxxx/draft

Software

- Review
- Repository
- Archive

Editor: Johanna Bayer

Reviewers:

- @thelfer

Submitted: 20 December 2023
Published: unpublished

License
Authors of papers retain copyright and release the work under a Creative Commons Attribution 4.0 International License (CC BY 4.0).

DRAFT

Summary

The partial element equivalent circuit method (PEEC) is a particularly interesting integral-equation method for electromagnetic problems as it can be easily combined with circuit simulations and does not require a discretization of the free space. This paper introduces PyPEEC, an open-source Python solver targeting 3D quasi-magnetostatic problems such as inductors, transformers, chokes, IPT coils, or busbars. The geometry is described with voxels and the solver uses an FFT-accelerated variant of the PEEC method. The FFT acceleration drastically reduces the computational costs and the memory footprint.

Statement of Need

Quasi-magnetostatic field simulations are widely used for the design and optimization of electrical components (e.g., power electronics, packaging, IC design). Among the existing numerical methods (e.g., FEM, FDTD, PEEC, BEM), the PEEC method features several advantages (Jithesh & Pande, 2003; Ruehli, 1974; Torchio, 2019):

- Only the active materials are discretized (no need to mesh the free space).
- Intuitive understanding of the equation discretization process.
- Straightforward connection of external circuit elements.

The fundamental drawback of the classical PEEC method is that the matrix describing the equation system is not sparse. This means that the computational cost and the memory requirement become problematic for large problems.

This problem can be mitigated if the geometry is represented with voxels (Torchio, Lucchini, et al., 2022; A. C. Yucel et al., 2018). The first advantage of such geometries is that the Green's functions (i.e. the inductance and potential matrices) have analytical solutions, avoiding computationally intensive numerical integrals (Hoer & Love, 1965; Piatek & Baron, 2012). The second advantage is that, due to the regular voxel discretization, many coefficients of the inductance and potential matrices are repeated. The dense matrices are block-Toeplitz Toeplitz-block matrices and feature the following key properties (Lee, 1986; Polimeridis et al., 2014):

- The block-Toeplitz Toeplitz-block matrices can be embedded into circulant tensors reducing the memory requirements from $O(n^2)$ to $O(n)$.
- The matrix-vector multiplications can be done with Fourier transforms. With an FFT algorithm, the computational complexity of matrix-vector multiplications is reduced from $O(n^2)$ to $O(n \log(n))$.

Different variants of the FFT-accelerated PEEC method have been shown to be extremely fast for a large variety of electromagnetic problems such as high-frequency transformers (Torchio, Lucchini, et al., 2022), power inductors (Marconato & Lucchini, 2021), human body field

exposure (Torchio, Arduino, et al., 2022), nuclear fusion devices (Bettini et al., 2020), and PCB layouts (Romano et al., 2023).

An open-source implementation ("FFT-PEEC") of the FFT-accelerated PEEC method already exists (Torchio & Lucchini, 2020, 2021). However, this code can only handle magnetic materials for static simulations (and not in the frequency domain). Moreover, depending on the considered quasi-static problem (e.g. geometries with multiple conductors), the source code requires some adaptations. The open-source tools "VoxHenry" and "MARIE" are also used FFT-accelerated methods but are specialized for full-wave solutions without magnetic materials (Villena et al., 2015; A. Yucel, 2018). Finally, it should be noted that all the aforementioned implementations depend on proprietary programming languages and libraries.

PyPEEC, the tool introduced in this paper, addresses these needs by providing a 3D quasi-magnetostatic implementation of the FFT-accelerated PEEC method (Torchio, Lucchini, et al., 2022). PyPEEC is a fully open-source (MPL 2.0 licence and implemented in Python) and offers a general-purpose solver by allowing the description of arbitrary problems without having to modify the source code.

Capabilities and Workflow

In this paper, the release 4.16 of PyPEEC is considered. PyPEEC solves 3D magnetostatic and quasi-magnetostatic problems with voxel geometries. An arbitrary number of conductive domains, magnetic domains (ideal and/or lossy), and sources (voltage and/or current) can be used. The current density, flux density, potential, loss density, and energy density are computed. The free-space magnetic field (near-field) can also be computed on a point cloud. Additionally, the voltage, current, complex power, and impedance of the different terminals are extracted.

PyPEEC is implemented in pure Python using NumPy, SciPy, Joblib, Rasterio, Shapely, Pillow, Matplotlib, and PyVista. The solver is able to leverage multi-core CPUs and GPUs. Optional HPC libraries are available for accelerating the sparse preconditioner factorization (MKL/PARDISO, UMFPACK, and PyAMG) and the FFT operations (FFTW and CuPy/CUDA). PyPEEC can be used through an API, a command-line tool, or Jupyter notebooks.

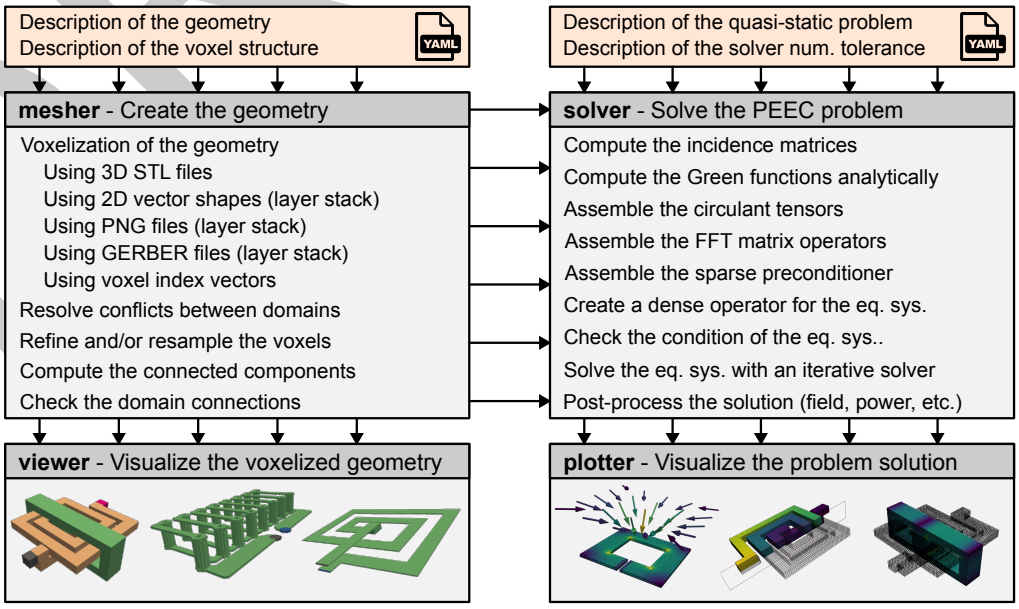

Figure 1: PyPEEC workflow consisting of the *mesher*, *solver*, *viewer*, and *plotter*

DRAFT

Figure 1 depicts the PyPEEC workflow. First the *mesher* builds the geometry (from vector shapes, STL files, PNG files, or GERBER files), performs the voxelization, and checks the validity of the discretization. Afterward, the *solver* creates the FFT-multiplication operators, assembles the equation systems, solves the problem, and post-processes the solution. The *viewer* and the *plotter* are used to visualize the results.

Solver Performance

To demonstrate the performance of the solver, a planar air-core spiral inductor is considered. The inductor has a footprint of 4 mm^2 and is operated in the 40.68 MHz ISM band. Figure 2 shows the ratio between the AC and DC current densities, the relative error on the extracted impedance, and the computational cost. The number of degrees of freedom represents the number of unknowns for the PEEC problem. The computational cost is evaluated with an AMD EPYC 7543 CPU.

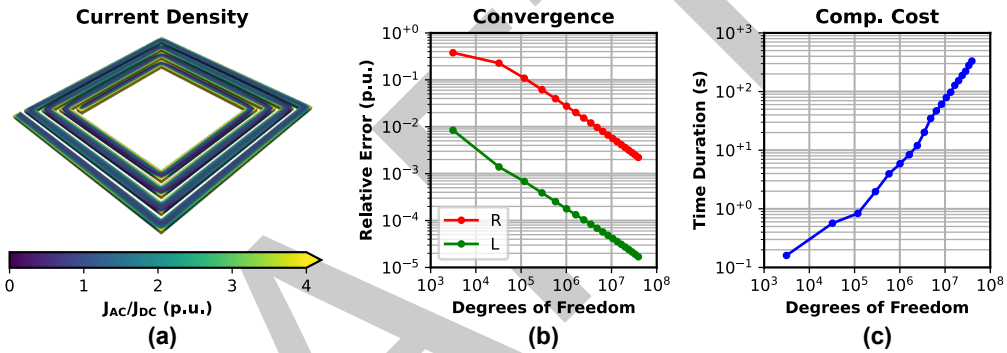

Figure 2: (a) Ratio between the AC and DC current densities. (b) Relative error on the extract equivalent resistance and the inductance. (c) Wall clock time duration for the complete workflow.

As the skin depth is smaller than the dimension of the conductor, the eddy currents are non-negligible. This implies that, with a coarse discretization, the resistance value is less accurate than the inductance value. With a tolerance of 4%, the quasi-static problem is solved in 4 seconds. The FFT acceleration allows dense PEEC problems with 10^7 degrees of freedom to be solved in 80 seconds.

Acknowledgments

This work was supported by the Power Management Integration Center (NSF IUCRC) at Dartmouth College under Grant No. PMIC-062. The authors would like to thank Yue (Will) Wu for discovering and reporting several bugs.

References

Bettini, P., Torchio, R., Lucchini, F., Voltolina, D., & Alotto, P. (2020). Fast Fourier Transform-Volume Integral: a Smart Approach for the Electromagnetic Design of Complex Systems in Large Fusion Devices. *Plasma Physics and Controlled Fusion*, *63*(2), 025010. https://doi.org/10.1088/1361-6587/abce8f

Hoer, C., & Love, Y. (1965). Exact Inductance Equations for Rectangular Conductors with Applications to more Complicated Geometries. *Journal of Research of the National Bureau of Standards*, *69*(2), 127–137. https://nvlpubs.nist.gov/nistpubs/jres/69C/jresv69Cn2p127_A1b.pdf

Jithesh, V., & Pande, D. C. (2003). A Review on Computational EMI Modelling Techniques. *Proc. Of the Int. Conf. On Electromagnetic Interference and Compatibility (INCEMIC)*, 159–166. https://doi.org/10.1109/ICEMIC.2003.1287800

Lee, D. (1986). Fast Multiplication of a Recursive Block Toeplitz Matrix by a Vector and its Application. *Journal of Complexity*, *2*(4), 295–305. https://doi.org/10.1016/0885-064X(86)90007-5

Marconato, N., & Lucchini, F. (2021). Application of FFT-PEEC Method for Nonlinear Inductance Extraction. *Proc. Of the Int. Conf. On Electrical, Computer, Communications and Mechatronics Engineering (ICECCME)*, 1–6. https://doi.org/10.1109/ICECCME52200.2021.9590864

Piatek, Z., & Baron, B. (2012). Exact Closed Form Formula for Self Inductance of Conductor of Rectangular Cross Section. *Progress In Electromagnetics Research*, *26*, 225–236. http://doi.org/10.2528/PIERM12080314

Polimeridis, A. G., Villena, J. F., Daniel, L., & White, J. K. (2014). Stable FFT-JVIE Solvers for Fast Analysis of Highly Inhomogeneous Dielectric Objects. *Journal of Computational Physics*, *269*, 280–296. https://doi.org/10.1016/j.jcp.2014.03.026

Romano, D., Kovacevic-Badstuebner, I., Antonini, G., & Grossner, U. (2023). Efficient PEEC Iterative Solver for Power Electronic Applications. *IEEE Transactions on Electromagnetic Compatibility*, *65*(2), 546–554. https://doi.org/10.1109/TEMC.2023.3238394

Ruehli, A. E. (1974). Equivalent Circuit Models for Three-Dimensional Multiconductor Systems. *IEEE Transactions on Microwave Theory and Techniques*, *22*(3), 216–221. https://doi.org/10.1109/TMTT.1974.1128204

Torchio, R. (2019). A Volume PEEC Formulation Based on the Cell Method for Electromagnetic Problems From Low to High Frequency. *IEEE Transactions on Antennas and Propagation*, *67*(12), 7452–7465. https://doi.org/10.1109/TAP.2019.2927789

Torchio, R., Arduino, A., Zilberti, L., & Bottausci, O. (2022). A Fast Tool for the Parametric Analysis of Human Body Exposed to LF Electromagnetic Fields in Biomedical Applications. *Computer Methods and Programs in Biomedicine*, *214*, 106543. https://doi.org/10.1016/j.cmpb.2021.106543

Torchio, R., Lucchini, F., Schanen, J. L., Chadebec, O., & Meunier, G. (2022). FFT-PEEC: A Fast Tool From CAD to Power Electronics Simulations. *IEEE Transactions on Power Electronics*, *37*(1), 700–713. https://doi.org/10.1109/TPEL.2021.3092431

Torchio, R., & Lucchini, L. (2020). FFT-PEEC. In *GitHub repository*. GitHub. https://github.com/UniPD-DII-ETCOMP/FFT-PEEC

Torchio, R., & Lucchini, L. (2021). FFT-NLIE. In *GitHub repository*. GitHub. https://github.com/UniPD-DII-ETCOMP/FFT-NLIE

Villena, J. F., Polimeridis, A., & Serralles, J. (2015). MARIE. In *GitHub repository*. GitHub. https://github.com/thanospol/MARIE

Yucel, A. (2018). VoxHenry. In *GitHub repository*. GitHub. https://github.com/acyucel/VoxHenry

Yucel, A. C., Georgakis, I. P., Polimeridis, A. G., Bagci, H., & White, J. K. (2018). VoxHenry: FFT-Accelerated Inductance Extraction for Voxelized Geometries. *IEEE Transactions on Microwave Theory and Techniques*, *66*(4), 1723–1735. https://doi.org/10.1109/TMTT.2017.2785842

DRAFT